

AirSched

0.1.4

Generated by Doxygen 1.8.0

Mon May 7 2012 08:25:47

## Contents

<b>1</b>	<b>AirSched Documentation</b>	<b>1</b>
1.1	Getting Started	2
1.2	AirSched at SourceForge	2
1.3	AirSched Development	2
1.4	External Libraries	2
1.5	Support AirSched	3
1.6	About AirSched	3
<b>2</b>	<b>Configuration helper for AirSched programs</b>	<b>3</b>
<b>3</b>	<b>People</b>	<b>4</b>
3.1	Project Admins	4
3.2	Developers	4
3.3	Retired Developers	4
3.4	Contributors	4
3.5	Distribution Maintainers	4
<b>4</b>	<b>Coding Rules</b>	<b>4</b>
4.1	Default Naming Rules for Variables	5
4.2	Default Naming Rules for Functions	5
4.3	Default Naming Rules for Classes and Structures	5
4.4	Default Naming Rules for Files	5
4.5	Default Functionality of Classes	5
<b>5</b>	<b>Copyright and License</b>	<b>5</b>
5.1	GNU LESSER GENERAL PUBLIC LICENSE	5
5.1.1	Version 2.1, February 1999	5
5.2	Preamble	6
5.3	TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION	7
5.3.1	NO WARRANTY	11
5.3.2	END OF TERMS AND CONDITIONS	11
5.4	How to Apply These Terms to Your New Programs	11
<b>6</b>	<b>Documentation Rules</b>	<b>12</b>
6.1	General Rules	12
6.2	File Header	12
6.3	Grouping Various Parts	13
<b>7</b>	<b>Main features</b>	<b>13</b>
7.1	Network generation	13
7.2	Finding travel solutions	13

7.3 Other features . . . . .	13
<b>8 Make a Difference</b>	<b>14</b>
<b>9 Make a new release</b>	<b>14</b>
9.1 Introduction . . . . .	14
9.2 Initialisation . . . . .	14
9.3 Release branch maintenance . . . . .	14
9.4 Commit and publish the release branch . . . . .	15
9.5 Create distribution packages . . . . .	15
9.6 Upload the HTML documentation to SourceForge . . . . .	15
9.7 Generate the RPM packages . . . . .	16
9.8 Update distributed change log . . . . .	16
9.9 Create the binary package, including the documentation . . . . .	16
9.10 Upload the files to SourceForge . . . . .	16
9.11 Make a new post . . . . .	16
9.12 Send an email on the announcement mailing-list . . . . .	16
<b>10 Installation</b>	<b>17</b>
10.1 Table of Contents . . . . .	17
10.2 Fedora/RedHat Linux distributions . . . . .	17
10.3 AirSched Requirements . . . . .	17
10.4 Basic Installation . . . . .	18
10.5 Compilers and Options . . . . .	19
10.6 Compiling For Multiple Architectures . . . . .	19
10.7 Installation Names . . . . .	19
10.8 Optional Features . . . . .	20
10.9 Particular systems . . . . .	20
10.10 Specifying the System Type . . . . .	21
10.11 Sharing Defaults . . . . .	21
10.12 Defining Variables . . . . .	22
10.13 'cmake' Invocation . . . . .	22
<b>11 Linking with AirSched</b>	<b>25</b>
11.1 Table of Contents . . . . .	25
11.2 Introduction . . . . .	26
11.3 Dependencies . . . . .	26
11.3.1 StdAir . . . . .	26
11.4 Using the pkg-config command . . . . .	26
11.5 Using the airsched-config script . . . . .	27
11.6 M4 macro for the GNU Autotools . . . . .	27

11.7 Using AirSched with dynamic linking . . . . .	27
<b>12 Test Rules</b>	<b>27</b>
12.1 The Test File . . . . .	27
12.2 The Reference File . . . . .	28
12.3 Testing IT++ Library . . . . .	28
<b>13 Users Guide</b>	<b>28</b>
13.1 Table of Contents . . . . .	28
13.2 Introduction . . . . .	28
13.3 Get Started . . . . .	29
13.3.1 Get the AirSched library . . . . .	29
13.3.2 Build the AirSched project . . . . .	29
13.3.3 Build and Run the Tests . . . . .	29
13.3.4 Install the AirSched Project (Binaries, Documentation) . . . . .	29
13.4 Input file of AirSched Project . . . . .	30
13.5 The schedule BOM Tree . . . . .	31
13.5.1 Build of the schedule BOM tree . . . . .	31
13.5.2 Display of the schedule BOM tree . . . . .	32
13.6 Exploring the Predefined BOM Tree . . . . .	75
13.6.1 Airline Network BOM Tree . . . . .	75
13.6.2 Airline Schedule BOM Tree . . . . .	75
13.7 Extending the BOM Tree . . . . .	75
13.8 The travel solution calculation procedure . . . . .	75
<b>14 Supported Systems</b>	<b>76</b>
14.1 Table of Contents . . . . .	76
14.2 Introduction . . . . .	76
14.3 AirSched 0.2.x . . . . .	76
14.3.1 Linux Systems . . . . .	76
14.3.2 Windows Systems . . . . .	80
14.3.3 Unix Systems . . . . .	83
<b>15 AirSched Supported Systems (Previous Releases)</b>	<b>83</b>
15.1 AirSched 3.9.1 . . . . .	83
15.2 AirSched 3.9.0 . . . . .	83
15.3 AirSched 3.8.1 . . . . .	83
<b>16 Tutorials</b>	<b>83</b>
16.1 Table of Contents . . . . .	83
16.2 Preparing the AirSched Project for Development . . . . .	84
16.3 Your first networkBuilde . . . . .	84

16.3.1	Summary of the different steps	84
16.3.2	Result of the Batch Program	84
16.4	Network building with an input file	85
16.4.1	How to build a network input file?	85
16.4.2	Building the BOM tree with an input file	86
16.4.3	Result of the Batch Program	86
<b>17</b>	<b>Command-Line Test to Demonstrate How To Test the AirSched Project</b>	<b>87</b>
<b>18</b>	<b>Directory Hierarchy</b>	<b>88</b>
18.1	Directories	88
<b>19</b>	<b>Namespace Index</b>	<b>89</b>
19.1	Namespace List	89
<b>20</b>	<b>Class Index</b>	<b>89</b>
20.1	Class Hierarchy	89
<b>21</b>	<b>Class Index</b>	<b>93</b>
21.1	Class List	93
<b>22</b>	<b>File Index</b>	<b>96</b>
22.1	File List	96
<b>23</b>	<b>Directory Documentation</b>	<b>99</b>
23.1	test/airsched/ Directory Reference	99
23.2	airsched/ Directory Reference	99
23.3	airsched/basic/ Directory Reference	99
23.4	airsched/batches/ Directory Reference	99
23.5	airsched/bom/ Directory Reference	100
23.6	airsched/command/ Directory Reference	100
23.7	airsched/config/ Directory Reference	101
23.8	airsched/factory/ Directory Reference	101
23.9	airsched/service/ Directory Reference	101
23.10	test/ Directory Reference	101
<b>24</b>	<b>Namespace Documentation</b>	<b>101</b>
24.1	airsched Namespace Reference	101
24.1.1	Typedef Documentation	102
24.1.2	Function Documentation	103
24.1.3	Variable Documentation	103
24.2	AIRSCHEM Namespace Reference	104
24.2.1	Typedef Documentation	107

24.2.2	Function Documentation	109
24.2.3	Variable Documentation	110
24.3	AIRSCHEd::OnDParserHelper Namespace Reference	110
24.3.1	Function Documentation	111
24.3.2	Variable Documentation	112
24.4	AIRSCHEd::ScheduleParserHelper Namespace Reference	112
24.4.1	Function Documentation	113
24.4.2	Variable Documentation	114
24.5	boost Namespace Reference	115
24.5.1	Detailed Description	115
24.6	boost::serialization Namespace Reference	115
24.7	stdair Namespace Reference	115
24.7.1	Detailed Description	115
<b>25</b>	<b>Class Documentation</b>	<b>115</b>
25.1	airsched::Airline_T Struct Reference	115
25.1.1	Detailed Description	115
25.1.2	Constructor & Destructor Documentation	116
25.1.3	Member Function Documentation	116
25.1.4	Member Data Documentation	116
25.2	AirlineScheduleTestSuite Class Reference	116
25.2.1	Detailed Description	117
25.2.2	Constructor & Destructor Documentation	117
25.2.3	Member Function Documentation	117
25.2.4	Member Data Documentation	117
25.3	AIRSCHEd::AIRSCHEd_Service Class Reference	117
25.3.1	Detailed Description	118
25.3.2	Constructor & Destructor Documentation	118
25.3.3	Member Function Documentation	119
25.4	AIRSCHEd::AIRSCHEd_ServiceContext Class Reference	120
25.4.1	Detailed Description	121
25.4.2	Friends And Related Function Documentation	121
25.5	BomAbstract Class Reference	121
25.6	AIRSCHEd::BomDisplay Class Reference	121
25.6.1	Detailed Description	122
25.6.2	Member Function Documentation	122
25.7	CmdAbstract Class Reference	122
25.8	airsched::Date_T Struct Reference	123
25.8.1	Detailed Description	123
25.8.2	Constructor & Destructor Documentation	124

25.8.3 Member Function Documentation . . . . .	124
25.8.4 Member Data Documentation . . . . .	124
25.9 AIRSCHED::OnDParserHelper::OnDParser::definition< ScannerT > Struct Template Reference . .	125
25.9.1 Detailed Description . . . . .	125
25.9.2 Constructor & Destructor Documentation . . . . .	125
25.9.3 Member Function Documentation . . . . .	125
25.9.4 Member Data Documentation . . . . .	126
25.10 AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT > Struct Template Reference . . . . .	126
25.10.1 Detailed Description . . . . .	127
25.10.2 Constructor & Destructor Documentation . . . . .	127
25.10.3 Member Function Documentation . . . . .	128
25.10.4 Member Data Documentation . . . . .	128
25.11 airsched::SearchStringParser::definition< ScannerT > Struct Template Reference . . . . .	130
25.11.1 Detailed Description . . . . .	131
25.11.2 Constructor & Destructor Documentation . . . . .	131
25.11.3 Member Function Documentation . . . . .	131
25.11.4 Member Data Documentation . . . . .	131
25.12 AIRSCHED::ScheduleParserHelper::doEndFlight Struct Reference . . . . .	133
25.12.1 Detailed Description . . . . .	133
25.12.2 Constructor & Destructor Documentation . . . . .	133
25.12.3 Member Function Documentation . . . . .	133
25.12.4 Member Data Documentation . . . . .	134
25.13 AIRSCHED::OnDParserHelper::doEndOnD Struct Reference . . . . .	134
25.13.1 Detailed Description . . . . .	135
25.13.2 Constructor & Destructor Documentation . . . . .	135
25.13.3 Member Function Documentation . . . . .	135
25.13.4 Member Data Documentation . . . . .	135
25.14 AIRSCHED::FacAIRSCHEDServiceContext Class Reference . . . . .	135
25.14.1 Detailed Description . . . . .	136
25.14.2 Constructor & Destructor Documentation . . . . .	136
25.14.3 Member Function Documentation . . . . .	136
25.15 AIRSCHED::FacServiceAbstract Class Reference . . . . .	137
25.15.1 Detailed Description . . . . .	137
25.15.2 Member Typedef Documentation . . . . .	138
25.15.3 Constructor & Destructor Documentation . . . . .	138
25.15.4 Member Function Documentation . . . . .	138
25.15.5 Member Data Documentation . . . . .	138
25.16 FacServiceAbstract Class Reference . . . . .	138
25.17 AIRSCHED::FareFamilyStruct Struct Reference . . . . .	139

25.17.1 Detailed Description . . . . .	139
25.17.2 Constructor & Destructor Documentation . . . . .	139
25.17.3 Member Function Documentation . . . . .	139
25.17.4 Member Data Documentation . . . . .	140
25.18FileNotFoundException Class Reference . . . . .	140
25.19AIRSCHED::FlagSaver Struct Reference . . . . .	140
25.19.1 Detailed Description . . . . .	140
25.19.2 Constructor & Destructor Documentation . . . . .	140
25.20AIRSCHED::FlightPeriodFileParser Class Reference . . . . .	141
25.20.1 Detailed Description . . . . .	141
25.20.2 Constructor & Destructor Documentation . . . . .	141
25.20.3 Member Function Documentation . . . . .	141
25.21AIRSCHED::ScheduleParserHelper::FlightPeriodParser Struct Reference . . . . .	142
25.21.1 Detailed Description . . . . .	142
25.21.2 Constructor & Destructor Documentation . . . . .	142
25.21.3 Member Data Documentation . . . . .	143
25.22AIRSCHED::FlightPeriodStruct Struct Reference . . . . .	143
25.22.1 Detailed Description . . . . .	144
25.22.2 Constructor & Destructor Documentation . . . . .	144
25.22.3 Member Function Documentation . . . . .	144
25.22.4 Member Data Documentation . . . . .	146
25.23grammar Class Reference . . . . .	148
25.24AIRSCHED::InventoryGenerator Class Reference . . . . .	149
25.24.1 Detailed Description . . . . .	149
25.24.2 Friends And Related Function Documentation . . . . .	149
25.25KeyAbstract Class Reference . . . . .	150
25.26AIRSCHED::LegCabinStruct Struct Reference . . . . .	150
25.26.1 Detailed Description . . . . .	150
25.26.2 Member Function Documentation . . . . .	150
25.26.3 Member Data Documentation . . . . .	151
25.27AIRSCHED::LegStruct Struct Reference . . . . .	151
25.27.1 Detailed Description . . . . .	152
25.27.2 Constructor & Destructor Documentation . . . . .	152
25.27.3 Member Function Documentation . . . . .	152
25.27.4 Member Data Documentation . . . . .	152
25.28AIRSCHED::OnDInputFileNotFoundException Class Reference . . . . .	153
25.28.1 Detailed Description . . . . .	153
25.28.2 Constructor & Destructor Documentation . . . . .	154
25.29AIRSCHED::OnDParser Class Reference . . . . .	154
25.29.1 Detailed Description . . . . .	154



25.29.2 Member Function Documentation . . . . .	154
25.30AIRSCHED::OnDParserHelper::OnDParser Struct Reference . . . . .	155
25.30.1 Detailed Description . . . . .	155
25.30.2 Constructor & Destructor Documentation . . . . .	155
25.30.3 Member Data Documentation . . . . .	155
25.31AIRSCHED::OnDPeriodFileParser Class Reference . . . . .	156
25.31.1 Detailed Description . . . . .	156
25.31.2 Constructor & Destructor Documentation . . . . .	156
25.31.3 Member Function Documentation . . . . .	156
25.32AIRSCHED::OnDPeriodGenerator Class Reference . . . . .	156
25.32.1 Detailed Description . . . . .	157
25.32.2 Friends And Related Function Documentation . . . . .	157
25.33AIRSCHED::OnDPeriodStruct Struct Reference . . . . .	157
25.33.1 Detailed Description . . . . .	158
25.33.2 Constructor & Destructor Documentation . . . . .	158
25.33.3 Member Function Documentation . . . . .	158
25.33.4 Member Data Documentation . . . . .	159
25.34AIRSCHED::OriginDestinationSet Class Reference . . . . .	161
25.34.1 Detailed Description . . . . .	162
25.34.2 Member Typedef Documentation . . . . .	162
25.34.3 Constructor & Destructor Documentation . . . . .	162
25.34.4 Member Function Documentation . . . . .	163
25.34.5 Friends And Related Function Documentation . . . . .	164
25.34.6 Member Data Documentation . . . . .	164
25.35AIRSCHED::OriginDestinationSetKey Struct Reference . . . . .	165
25.35.1 Detailed Description . . . . .	165
25.35.2 Constructor & Destructor Documentation . . . . .	165
25.35.3 Member Function Documentation . . . . .	166
25.35.4 Friends And Related Function Documentation . . . . .	166
25.36ParserException Class Reference . . . . .	167
25.37AIRSCHED::OnDParserHelper::ParserSemanticAction Struct Reference . . . . .	167
25.37.1 Detailed Description . . . . .	167
25.37.2 Constructor & Destructor Documentation . . . . .	168
25.37.3 Member Data Documentation . . . . .	168
25.38AIRSCHED::ScheduleParserHelper::ParserSemanticAction Struct Reference . . . . .	168
25.38.1 Detailed Description . . . . .	169
25.38.2 Constructor & Destructor Documentation . . . . .	169
25.38.3 Member Data Documentation . . . . .	169
25.39airsched::Passenger_T Struct Reference . . . . .	170
25.39.1 Detailed Description . . . . .	170

25.39.2 Member Enumeration Documentation . . . . .	171
25.39.3 Constructor & Destructor Documentation . . . . .	171
25.39.4 Member Function Documentation . . . . .	171
25.39.5 Member Data Documentation . . . . .	171
25.40airsched::Place_T Struct Reference . . . . .	172
25.40.1 Detailed Description . . . . .	172
25.40.2 Constructor & Destructor Documentation . . . . .	172
25.40.3 Member Function Documentation . . . . .	172
25.40.4 Member Data Documentation . . . . .	172
25.41AIRSCHED::ReachableUniverse Class Reference . . . . .	173
25.41.1 Detailed Description . . . . .	174
25.41.2 Member Typedef Documentation . . . . .	174
25.41.3 Constructor & Destructor Documentation . . . . .	174
25.41.4 Member Function Documentation . . . . .	174
25.41.5 Friends And Related Function Documentation . . . . .	175
25.41.6 Member Data Documentation . . . . .	176
25.42AIRSCHED::ReachableUniverseKey Struct Reference . . . . .	176
25.42.1 Detailed Description . . . . .	177
25.42.2 Constructor & Destructor Documentation . . . . .	177
25.42.3 Member Function Documentation . . . . .	177
25.42.4 Friends And Related Function Documentation . . . . .	178
25.43AIRSCHED::ScheduleInputFileNotFoundException Class Reference . . . . .	178
25.43.1 Detailed Description . . . . .	179
25.43.2 Constructor & Destructor Documentation . . . . .	179
25.44AIRSCHED::ScheduleParser Class Reference . . . . .	179
25.44.1 Detailed Description . . . . .	179
25.44.2 Member Function Documentation . . . . .	180
25.45airsched::SearchString_T Struct Reference . . . . .	180
25.45.1 Detailed Description . . . . .	180
25.45.2 Constructor & Destructor Documentation . . . . .	180
25.45.3 Member Function Documentation . . . . .	181
25.45.4 Member Data Documentation . . . . .	181
25.46airsched::SearchStringParser Struct Reference . . . . .	182
25.46.1 Detailed Description . . . . .	182
25.46.2 Constructor & Destructor Documentation . . . . .	182
25.46.3 Member Data Documentation . . . . .	182
25.47AIRSCHED::SegmentCabinStruct Struct Reference . . . . .	182
25.47.1 Detailed Description . . . . .	183
25.47.2 Member Function Documentation . . . . .	183
25.47.3 Member Data Documentation . . . . .	183

25.48AIRSCHED::SegmentDateNotFoundException Class Reference . . . . .	184
25.48.1 Detailed Description . . . . .	184
25.48.2 Constructor & Destructor Documentation . . . . .	184
25.49AIRSCHED::SegmentPathGenerator Class Reference . . . . .	184
25.49.1 Detailed Description . . . . .	185
25.49.2 Member Function Documentation . . . . .	185
25.50AIRSCHED::SegmentPathPeriod Class Reference . . . . .	185
25.50.1 Detailed Description . . . . .	186
25.50.2 Member Typedef Documentation . . . . .	187
25.50.3 Constructor & Destructor Documentation . . . . .	187
25.50.4 Member Function Documentation . . . . .	187
25.50.5 Friends And Related Function Documentation . . . . .	190
25.50.6 Member Data Documentation . . . . .	190
25.51AIRSCHED::SegmentPathPeriodKey Struct Reference . . . . .	191
25.51.1 Detailed Description . . . . .	192
25.51.2 Constructor & Destructor Documentation . . . . .	192
25.51.3 Member Function Documentation . . . . .	192
25.51.4 Friends And Related Function Documentation . . . . .	194
25.52AIRSCHED::SegmentPathProvider Class Reference . . . . .	195
25.52.1 Detailed Description . . . . .	195
25.52.2 Friends And Related Function Documentation . . . . .	195
25.53AIRSCHED::SegmentPeriodHelper Class Reference . . . . .	195
25.53.1 Detailed Description . . . . .	195
25.53.2 Member Function Documentation . . . . .	196
25.54AIRSCHED::SegmentStruct Struct Reference . . . . .	196
25.54.1 Detailed Description . . . . .	197
25.54.2 Member Function Documentation . . . . .	197
25.54.3 Member Data Documentation . . . . .	197
25.55AIRSCHED::ServiceAbstract Class Reference . . . . .	198
25.55.1 Detailed Description . . . . .	198
25.55.2 Constructor & Destructor Documentation . . . . .	198
25.55.3 Member Function Documentation . . . . .	198
25.56ServiceAbstract Class Reference . . . . .	199
25.57AIRSCHED::Simulator Class Reference . . . . .	199
25.57.1 Detailed Description . . . . .	199
25.57.2 Member Function Documentation . . . . .	200
25.58airsched::store_adult_passenger_type Struct Reference . . . . .	200
25.58.1 Detailed Description . . . . .	200
25.58.2 Constructor & Destructor Documentation . . . . .	200
25.58.3 Member Function Documentation . . . . .	200

25.58.4 Member Data Documentation . . . . .	201
25.59airsched::store_airline_code Struct Reference . . . . .	201
25.59.1 Detailed Description . . . . .	201
25.59.2 Constructor & Destructor Documentation . . . . .	201
25.59.3 Member Function Documentation . . . . .	201
25.59.4 Member Data Documentation . . . . .	201
25.60airsched::store_airline_name Struct Reference . . . . .	202
25.60.1 Detailed Description . . . . .	202
25.60.2 Constructor & Destructor Documentation . . . . .	202
25.60.3 Member Function Documentation . . . . .	202
25.60.4 Member Data Documentation . . . . .	202
25.61airsched::store_airline_sign Struct Reference . . . . .	202
25.61.1 Detailed Description . . . . .	203
25.61.2 Constructor & Destructor Documentation . . . . .	203
25.61.3 Member Function Documentation . . . . .	203
25.61.4 Member Data Documentation . . . . .	203
25.62airsched::store_child_passenger_type Struct Reference . . . . .	203
25.62.1 Detailed Description . . . . .	203
25.62.2 Constructor & Destructor Documentation . . . . .	204
25.62.3 Member Function Documentation . . . . .	204
25.62.4 Member Data Documentation . . . . .	204
25.63airsched::store_date Struct Reference . . . . .	204
25.63.1 Detailed Description . . . . .	204
25.63.2 Constructor & Destructor Documentation . . . . .	204
25.63.3 Member Function Documentation . . . . .	205
25.63.4 Member Data Documentation . . . . .	205
25.64airsched::store_passenger_number Struct Reference . . . . .	205
25.64.1 Detailed Description . . . . .	205
25.64.2 Constructor & Destructor Documentation . . . . .	205
25.64.3 Member Function Documentation . . . . .	205
25.64.4 Member Data Documentation . . . . .	206
25.65airsched::store_pet_passenger_type Struct Reference . . . . .	206
25.65.1 Detailed Description . . . . .	206
25.65.2 Constructor & Destructor Documentation . . . . .	206
25.65.3 Member Function Documentation . . . . .	206
25.65.4 Member Data Documentation . . . . .	206
25.66airsched::store_place_element Struct Reference . . . . .	207
25.66.1 Detailed Description . . . . .	207
25.66.2 Constructor & Destructor Documentation . . . . .	207
25.66.3 Member Function Documentation . . . . .	207

25.66.4 Member Data Documentation . . . . .	207
25.67 AIRSCHED::ScheduleParserHelper::storeAirlineCode Struct Reference . . . . .	207
25.67.1 Detailed Description . . . . .	208
25.67.2 Constructor & Destructor Documentation . . . . .	208
25.67.3 Member Function Documentation . . . . .	208
25.67.4 Member Data Documentation . . . . .	208
25.68 AIRSCHED::OnDParserHelper::storeAirlineCode Struct Reference . . . . .	209
25.68.1 Detailed Description . . . . .	209
25.68.2 Constructor & Destructor Documentation . . . . .	209
25.68.3 Member Function Documentation . . . . .	209
25.68.4 Member Data Documentation . . . . .	210
25.69 AIRSCHED::ScheduleParserHelper::storeBoardingTime Struct Reference . . . . .	210
25.69.1 Detailed Description . . . . .	210
25.69.2 Constructor & Destructor Documentation . . . . .	210
25.69.3 Member Function Documentation . . . . .	211
25.69.4 Member Data Documentation . . . . .	211
25.70 AIRSCHED::ScheduleParserHelper::storeCapacity Struct Reference . . . . .	211
25.70.1 Detailed Description . . . . .	212
25.70.2 Constructor & Destructor Documentation . . . . .	212
25.70.3 Member Function Documentation . . . . .	212
25.70.4 Member Data Documentation . . . . .	212
25.71 AIRSCHED::OnDParserHelper::storeClassCode Struct Reference . . . . .	213
25.71.1 Detailed Description . . . . .	213
25.71.2 Constructor & Destructor Documentation . . . . .	213
25.71.3 Member Function Documentation . . . . .	213
25.71.4 Member Data Documentation . . . . .	213
25.72 AIRSCHED::ScheduleParserHelper::storeClasses Struct Reference . . . . .	214
25.72.1 Detailed Description . . . . .	214
25.72.2 Constructor & Destructor Documentation . . . . .	214
25.72.3 Member Function Documentation . . . . .	214
25.72.4 Member Data Documentation . . . . .	215
25.73 AIRSCHED::ScheduleParserHelper::storeDateRangeEnd Struct Reference . . . . .	215
25.73.1 Detailed Description . . . . .	216
25.73.2 Constructor & Destructor Documentation . . . . .	216
25.73.3 Member Function Documentation . . . . .	216
25.73.4 Member Data Documentation . . . . .	216
25.74 AIRSCHED::OnDParserHelper::storeDateRangeEnd Struct Reference . . . . .	216
25.74.1 Detailed Description . . . . .	217
25.74.2 Constructor & Destructor Documentation . . . . .	217
25.74.3 Member Function Documentation . . . . .	217

25.74.4 Member Data Documentation . . . . .	217
25.75AIRSCHED::OnDParserHelper::storeDateRangeStart Struct Reference . . . . .	218
25.75.1 Detailed Description . . . . .	218
25.75.2 Constructor & Destructor Documentation . . . . .	218
25.75.3 Member Function Documentation . . . . .	218
25.75.4 Member Data Documentation . . . . .	219
25.76AIRSCHED::ScheduleParserHelper::storeDateRangeStart Struct Reference . . . . .	219
25.76.1 Detailed Description . . . . .	219
25.76.2 Constructor & Destructor Documentation . . . . .	219
25.76.3 Member Function Documentation . . . . .	220
25.76.4 Member Data Documentation . . . . .	220
25.77AIRSCHED::OnDParserHelper::storeDestination Struct Reference . . . . .	220
25.77.1 Detailed Description . . . . .	221
25.77.2 Constructor & Destructor Documentation . . . . .	221
25.77.3 Member Function Documentation . . . . .	221
25.77.4 Member Data Documentation . . . . .	221
25.78AIRSCHED::ScheduleParserHelper::storeDow Struct Reference . . . . .	221
25.78.1 Detailed Description . . . . .	222
25.78.2 Constructor & Destructor Documentation . . . . .	222
25.78.3 Member Function Documentation . . . . .	222
25.78.4 Member Data Documentation . . . . .	222
25.79AIRSCHED::ScheduleParserHelper::storeElapsedTime Struct Reference . . . . .	223
25.79.1 Detailed Description . . . . .	223
25.79.2 Constructor & Destructor Documentation . . . . .	223
25.79.3 Member Function Documentation . . . . .	223
25.79.4 Member Data Documentation . . . . .	224
25.80AIRSCHED::OnDParserHelper::storeEndRangeTime Struct Reference . . . . .	224
25.80.1 Detailed Description . . . . .	224
25.80.2 Constructor & Destructor Documentation . . . . .	225
25.80.3 Member Function Documentation . . . . .	225
25.80.4 Member Data Documentation . . . . .	225
25.81AIRSCHED::ScheduleParserHelper::storeFamilyCode Struct Reference . . . . .	225
25.81.1 Detailed Description . . . . .	226
25.81.2 Constructor & Destructor Documentation . . . . .	226
25.81.3 Member Function Documentation . . . . .	226
25.81.4 Member Data Documentation . . . . .	226
25.82AIRSCHED::ScheduleParserHelper::storeFClasses Struct Reference . . . . .	227
25.82.1 Detailed Description . . . . .	227
25.82.2 Constructor & Destructor Documentation . . . . .	227
25.82.3 Member Function Documentation . . . . .	227

25.82.4 Member Data Documentation . . . . .	227
25.83AIRSCHED::ScheduleParserHelper::storeFlightNumber Struct Reference . . . . .	228
25.83.1 Detailed Description . . . . .	228
25.83.2 Constructor & Destructor Documentation . . . . .	228
25.83.3 Member Function Documentation . . . . .	229
25.83.4 Member Data Documentation . . . . .	229
25.84AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint Struct Reference . . . . .	229
25.84.1 Detailed Description . . . . .	230
25.84.2 Constructor & Destructor Documentation . . . . .	230
25.84.3 Member Function Documentation . . . . .	230
25.84.4 Member Data Documentation . . . . .	230
25.85AIRSCHED::ScheduleParserHelper::storeLegCabinCode Struct Reference . . . . .	231
25.85.1 Detailed Description . . . . .	231
25.85.2 Constructor & Destructor Documentation . . . . .	231
25.85.3 Member Function Documentation . . . . .	231
25.85.4 Member Data Documentation . . . . .	231
25.86AIRSCHED::ScheduleParserHelper::storeLegOffPoint Struct Reference . . . . .	232
25.86.1 Detailed Description . . . . .	232
25.86.2 Constructor & Destructor Documentation . . . . .	232
25.86.3 Member Function Documentation . . . . .	233
25.86.4 Member Data Documentation . . . . .	233
25.87AIRSCHED::ScheduleParserHelper::storeOffTime Struct Reference . . . . .	233
25.87.1 Detailed Description . . . . .	234
25.87.2 Constructor & Destructor Documentation . . . . .	234
25.87.3 Member Function Documentation . . . . .	234
25.87.4 Member Data Documentation . . . . .	234
25.88AIRSCHED::OnDParserHelper::storeOrigin Struct Reference . . . . .	235
25.88.1 Detailed Description . . . . .	235
25.88.2 Constructor & Destructor Documentation . . . . .	235
25.88.3 Member Function Documentation . . . . .	235
25.88.4 Member Data Documentation . . . . .	235
25.89AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint Struct Reference . . . . .	236
25.89.1 Detailed Description . . . . .	236
25.89.2 Constructor & Destructor Documentation . . . . .	236
25.89.3 Member Function Documentation . . . . .	236
25.89.4 Member Data Documentation . . . . .	237
25.90AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode Struct Reference . . . . .	237
25.90.1 Detailed Description . . . . .	237
25.90.2 Constructor & Destructor Documentation . . . . .	238
25.90.3 Member Function Documentation . . . . .	238

25.90.4 Member Data Documentation . . . . .	238
25.91 AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint Struct Reference . . . . .	238
25.91.1 Detailed Description . . . . .	239
25.91.2 Constructor & Destructor Documentation . . . . .	239
25.91.3 Member Function Documentation . . . . .	239
25.91.4 Member Data Documentation . . . . .	239
25.92 AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity Struct Reference . . . . .	240
25.92.1 Detailed Description . . . . .	240
25.92.2 Constructor & Destructor Documentation . . . . .	240
25.92.3 Member Function Documentation . . . . .	240
25.92.4 Member Data Documentation . . . . .	241
25.93 AIRSCHED::OnDParserHelper::storeStartRangeTime Struct Reference . . . . .	241
25.93.1 Detailed Description . . . . .	241
25.93.2 Constructor & Destructor Documentation . . . . .	242
25.93.3 Member Function Documentation . . . . .	242
25.93.4 Member Data Documentation . . . . .	242
25.94 StructAbstract Class Reference . . . . .	242
25.95 TestFixture Class Reference . . . . .	242
25.96 AIRSCHED::TravelSolutionParser Class Reference . . . . .	243
25.96.1 Detailed Description . . . . .	243
25.96.2 Member Function Documentation . . . . .	243
<b>26 File Documentation</b>	<b>244</b>
26.1 airsched/AIRSCHED_Service.hpp File Reference . . . . .	244
26.2 AIRSCHED_Service.hpp . . . . .	244
26.3 airsched/AIRSCHED_Types.hpp File Reference . . . . .	245
26.4 AIRSCHED_Types.hpp . . . . .	246
26.5 airsched/basic/BasConst.cpp File Reference . . . . .	246
26.6 BasConst.cpp . . . . .	246
26.7 airsched/basic/BasConst_AIRSCHED_Service.hpp File Reference . . . . .	247
26.8 BasConst_AIRSCHED_Service.hpp . . . . .	247
26.9 airsched/basic/BasConst_General.hpp File Reference . . . . .	247
26.10 BasConst_General.hpp . . . . .	247
26.11 airsched/basic/BasParserTypes.hpp File Reference . . . . .	247
26.12 BasParserTypes.hpp . . . . .	248
26.13 airsched/batches/airsched.cpp File Reference . . . . .	249
26.13.1 Typedef Documentation . . . . .	250
26.13.2 Function Documentation . . . . .	250
26.13.3 Variable Documentation . . . . .	251
26.14 airsched.cpp . . . . .	251



26.15airsched/batches/BookingRequestParser.cpp File Reference . . . . .	256
26.15.1 Define Documentation . . . . .	258
26.15.2 Typedef Documentation . . . . .	258
26.16BookingRequestParser.cpp . . . . .	258
26.17airsched/batches/BookingRequestParser.hpp File Reference . . . . .	262
26.18BookingRequestParser.hpp . . . . .	263
26.19airsched/bom/AirportList.hpp File Reference . . . . .	264
26.20AirportList.hpp . . . . .	265
26.21airsched/bom/BomDisplay.cpp File Reference . . . . .	265
26.22BomDisplay.cpp . . . . .	265
26.23airsched/bom/BomDisplay.hpp File Reference . . . . .	266
26.24BomDisplay.hpp . . . . .	267
26.25airsched/bom/FareFamilyStruct.cpp File Reference . . . . .	267
26.26FareFamilyStruct.cpp . . . . .	267
26.27airsched/bom/FareFamilyStruct.hpp File Reference . . . . .	268
26.28FareFamilyStruct.hpp . . . . .	268
26.29airsched/bom/FlightPeriodStruct.cpp File Reference . . . . .	269
26.30FlightPeriodStruct.cpp . . . . .	269
26.31airsched/bom/FlightPeriodStruct.hpp File Reference . . . . .	272
26.32FlightPeriodStruct.hpp . . . . .	272
26.33airsched/bom/LegCabinStruct.cpp File Reference . . . . .	273
26.34LegCabinStruct.cpp . . . . .	273
26.35airsched/bom/LegCabinStruct.hpp File Reference . . . . .	274
26.36LegCabinStruct.hpp . . . . .	274
26.37airsched/bom/LegStruct.cpp File Reference . . . . .	275
26.38LegStruct.cpp . . . . .	275
26.39airsched/bom/LegStruct.hpp File Reference . . . . .	276
26.40LegStruct.hpp . . . . .	276
26.41airsched/bom/OnDPeriodStruct.cpp File Reference . . . . .	277
26.42OnDPeriodStruct.cpp . . . . .	277
26.43airsched/bom/OnDPeriodStruct.hpp File Reference . . . . .	278
26.44OnDPeriodStruct.hpp . . . . .	278
26.45airsched/bom/OriginDestinationSet.cpp File Reference . . . . .	279
26.46OriginDestinationSet.cpp . . . . .	279
26.47airsched/bom/OriginDestinationSet.hpp File Reference . . . . .	280
26.48OriginDestinationSet.hpp . . . . .	281
26.49airsched/bom/OriginDestinationSetKey.cpp File Reference . . . . .	282
26.50OriginDestinationSetKey.cpp . . . . .	283
26.51airsched/bom/OriginDestinationSetKey.hpp File Reference . . . . .	284
26.52OriginDestinationSetKey.hpp . . . . .	284

26.53airsched/bom/OriginDestinationSetTypes.hpp File Reference . . . . .	285
26.54OriginDestinationSetTypes.hpp . . . . .	285
26.55airsched/bom/ReachableUniverse.cpp File Reference . . . . .	286
26.56ReachableUniverse.cpp . . . . .	286
26.57airsched/bom/ReachableUniverse.hpp File Reference . . . . .	287
26.58ReachableUniverse.hpp . . . . .	288
26.59airsched/bom/ReachableUniverseKey.cpp File Reference . . . . .	289
26.60ReachableUniverseKey.cpp . . . . .	289
26.61airsched/bom/ReachableUniverseKey.hpp File Reference . . . . .	290
26.62ReachableUniverseKey.hpp . . . . .	291
26.63airsched/bom/ReachableUniverseTypes.hpp File Reference . . . . .	292
26.64ReachableUniverseTypes.hpp . . . . .	292
26.65airsched/bom/SegmentCabinStruct.cpp File Reference . . . . .	292
26.66SegmentCabinStruct.cpp . . . . .	293
26.67airsched/bom/SegmentCabinStruct.hpp File Reference . . . . .	293
26.68SegmentCabinStruct.hpp . . . . .	293
26.69airsched/bom/SegmentPathPeriod.cpp File Reference . . . . .	294
26.70SegmentPathPeriod.cpp . . . . .	294
26.71airsched/bom/SegmentPathPeriod.hpp File Reference . . . . .	298
26.72SegmentPathPeriod.hpp . . . . .	299
26.73airsched/bom/SegmentPathPeriodKey.cpp File Reference . . . . .	301
26.74SegmentPathPeriodKey.cpp . . . . .	301
26.75airsched/bom/SegmentPathPeriodKey.hpp File Reference . . . . .	303
26.76SegmentPathPeriodKey.hpp . . . . .	303
26.77airsched/bom/SegmentPathPeriodTypes.hpp File Reference . . . . .	305
26.78SegmentPathPeriodTypes.hpp . . . . .	305
26.79airsched/bom/SegmentPeriodHelper.cpp File Reference . . . . .	306
26.80SegmentPeriodHelper.cpp . . . . .	306
26.81airsched/bom/SegmentPeriodHelper.hpp File Reference . . . . .	307
26.82SegmentPeriodHelper.hpp . . . . .	307
26.83airsched/bom/SegmentStruct.cpp File Reference . . . . .	308
26.84SegmentStruct.cpp . . . . .	308
26.85airsched/bom/SegmentStruct.hpp File Reference . . . . .	308
26.86SegmentStruct.hpp . . . . .	309
26.87airsched/command/InventoryGenerator.cpp File Reference . . . . .	310
26.88InventoryGenerator.cpp . . . . .	310
26.89airsched/command/InventoryGenerator.hpp File Reference . . . . .	311
26.90InventoryGenerator.hpp . . . . .	312
26.91airsched/command/OnDParser.cpp File Reference . . . . .	312
26.92OnDParser.cpp . . . . .	312

26.93	<a href="#">airsched/command/OnDParser.hpp File Reference</a>	313
26.94	<a href="#">OnDParser.hpp</a>	313
26.95	<a href="#">airsched/command/OnDParserHelper.cpp File Reference</a>	314
26.96	<a href="#">OnDParserHelper.cpp</a>	314
26.97	<a href="#">airsched/command/OnDParserHelper.hpp File Reference</a>	319
26.98	<a href="#">OnDParserHelper.hpp</a>	320
26.99	<a href="#">airsched/command/OnDPeriodGenerator.cpp File Reference</a>	321
26.100	<a href="#">OnDPeriodGenerator.cpp</a>	322
26.101	<a href="#">airsched/command/OnDPeriodGenerator.hpp File Reference</a>	322
26.102	<a href="#">OnDPeriodGenerator.hpp</a>	322
26.103	<a href="#">airsched/command/ScheduleParser.cpp File Reference</a>	323
26.104	<a href="#">ScheduleParser.cpp</a>	323
26.105	<a href="#">airsched/command/ScheduleParser.hpp File Reference</a>	324
26.106	<a href="#">ScheduleParser.hpp</a>	324
26.107	<a href="#">airsched/command/ScheduleParserHelper.cpp File Reference</a>	324
26.108	<a href="#">ScheduleParserHelper.cpp</a>	325
26.109	<a href="#">airsched/command/ScheduleParserHelper.hpp File Reference</a>	333
26.110	<a href="#">ScheduleParserHelper.hpp</a>	334
26.111	<a href="#">airsched/command/SegmentPathGenerator.cpp File Reference</a>	336
26.112	<a href="#">SegmentPathGenerator.cpp</a>	337
26.113	<a href="#">airsched/command/SegmentPathGenerator.hpp File Reference</a>	342
26.114	<a href="#">SegmentPathGenerator.hpp</a>	342
26.115	<a href="#">airsched/command/SegmentPathProvider.cpp File Reference</a>	343
26.116	<a href="#">SegmentPathProvider.cpp</a>	343
26.117	<a href="#">airsched/command/SegmentPathProvider.hpp File Reference</a>	345
26.118	<a href="#">SegmentPathProvider.hpp</a>	345
26.119	<a href="#">airsched/command/Simulator.cpp File Reference</a>	346
26.120	<a href="#">Simulator.cpp</a>	346
26.121	<a href="#">airsched/command/Simulator.hpp File Reference</a>	347
26.122	<a href="#">Simulator.hpp</a>	347
26.123	<a href="#">airsched/command/TravelSolutionParser.cpp File Reference</a>	347
26.124	<a href="#">TravelSolutionParser.cpp</a>	348
26.125	<a href="#">airsched/command/TravelSolutionParser.hpp File Reference</a>	349
26.126	<a href="#">TravelSolutionParser.hpp</a>	350
26.127	<a href="#">airsched-paths.hpp</a>	351
26.128	<a href="#">airsched/config/airsched-paths.hpp.in File Reference</a>	351
26.129	<a href="#">airsched-paths.hpp.in</a>	351
26.130	<a href="#">airsched/factory/FacAIRSCHEDServiceContext.cpp File Reference</a>	352
26.131	<a href="#">FacAIRSCHEDServiceContext.cpp</a>	352
26.132	<a href="#">airsched/factory/FacAIRSCHEDServiceContext.hpp File Reference</a>	352

26.138	FacAIRSCHEDServiceContext.hpp	353
26.134	airsched/factory/FacServiceAbstract.cpp File Reference	353
26.135	FacServiceAbstract.cpp	353
26.136	airsched/factory/FacServiceAbstract.hpp File Reference	354
26.137	FacServiceAbstract.hpp	354
26.138	airsched/service/AIRSCHED_Service.cpp File Reference	355
26.139	AIRSCHED_Service.cpp	355
26.140	airsched/service/AIRSCHED_ServiceContext.cpp File Reference	359
26.141	AIRSCHED_ServiceContext.cpp	360
26.142	airsched/service/AIRSCHED_ServiceContext.hpp File Reference	360
26.143	AIRSCHED_ServiceContext.hpp	361
26.144	airsched/service/ServiceAbstract.cpp File Reference	362
26.145	ServiceAbstract.cpp	362
26.146	airsched/service/ServiceAbstract.hpp File Reference	362
26.146	Function Documentation	362
26.147	ServiceAbstract.hpp	363
26.148	doc/local/authors.doc File Reference	363
26.149	doc/local/codingrules.doc File Reference	363
26.150	doc/local/copyright.doc File Reference	363
26.151	doc/local/documentation.doc File Reference	363
26.152	doc/local/features.doc File Reference	364
26.153	doc/local/help_wanted.doc File Reference	364
26.154	doc/local/howto_release.doc File Reference	364
26.155	doc/local/index.doc File Reference	364
26.156	doc/local/installation.doc File Reference	364
26.157	doc/local/linking.doc File Reference	364
26.158	doc/local/test.doc File Reference	364
26.159	doc/local/users_guide.doc File Reference	364
26.160	doc/local/verification.doc File Reference	364
26.161	doc/tutorial/tutorial.doc File Reference	364
26.162	test/airsched/AirlineScheduleTestSuite.cpp File Reference	364
26.163	AirlineScheduleTestSuite.cpp	364
26.164	test/airsched/AirlineScheduleTestSuite.hpp File Reference	366
26.164	Function Documentation	366
26.165	AirlineScheduleTestSuite.hpp	366

## 1 AirSched Documentation

## 1.1 Getting Started

- [Main features](#)
- [Installation](#)
- [Linking with AirSched](#)
- [Users Guide](#)
- [Tutorials](#)
- [Copyright and License](#)
- [Make a Difference](#)
- [Make a new release](#)
- [People](#)

## 1.2 AirSched at SourceForge

- [Project page](#)
- [Download AirSched](#)
- [Open a ticket for a bug or feature](#)
- [Mailing lists](#)
- [Forums](#)
  - [Discuss about Development issues](#)
  - [Ask for Help](#)
  - [Discuss AirSched](#)

## 1.3 AirSched Development

- [Git Repository](#) (Subversion is deprecated)
- [Coding Rules](#)
- [Documentation Rules](#)
- [Test Rules](#)

## 1.4 External Libraries

- [Boost](#) (C++ STL extensions)
- [Python](#)
- [MySQL client](#)
- [SOI](#) (C++ DB API)

## 1.5 Support AirSched

### 1.6 About AirSched

AirSched is a C++ library of classes and functions modeling airline schedules, for instance allowing to retrieve all the flight-based travel solutions corresponding to a given pair of origin and destination points. AirSched mainly targets simulation purposes. [N](#)

AirSched makes an extensive use of existing open-source libraries for increased functionality, speed and accuracy. In particular [Boost](#) (*C++ STL Extensions*) library is used.

The AirSched project originates from the department of Operational Research and Innovation at [Amadeus](#), Sophia Antipolis, France. AirSched is released under the terms of the [GNU Lesser General Public License](#) (LGPLv2.1) for you to enjoy.

AirSched should work on [GNU/Linux](#), [Sun Solaris](#), Microsoft Windows (with [Cygwin](#), [MinGW/MSYS](#), or [Microsoft Visual C++ .NET](#)) and [Mac OS X](#) operating systems.

#### Note

(N) - The AirSched library is **NOT** intended, in any way, to be used by airlines for production systems. If you want to report issue, bug or feature request, or if you just want to give feedback, have a look on the right-hand side of this page for the preferred reporting methods. In any case, please do not contact Amadeus directly for any matter related to AirSched.

## 2 Configuration helper for AirSched programs

```

*/
#ifndef <strong>AIRSCHED_PATHS_HPP</strong>
#define <strong>AIRSCHED_PATHS_HPP</strong>

#define PACKAGE "airsched"
#define PACKAGE_NAME "AIRSCHED"
#define PACKAGE_VERSION "0.1.4"
#define PREFIXDIR "/usr"
#define EXEC_PREFIX "/usr"
#define BINDIR "/usr/bin"
#define LIBDIR "/usr/lib"
#define LIBEXECDIR "/usr/libexec"
#define SBINDIR "/usr/sbin"
#define SYSCONFDIR "/usr/etc"
#define INCLUDEDIR "/usr/include"
#define DATAROOTDIR "/usr/share"
#define DATADIR "/usr/share"
#define DOCDIR "/usr/share/doc/airsched-0.1.4"
#define MANDIR "/usr/share/man"
#define INFODIR "/usr/share/info"
#define HTMLDIR "/usr/share/doc/airsched-0.1.4/html"
#define PDFDIR "/usr/share/doc/airsched-0.1.4/html"
#define STDAIR_SAMPLE_DIR "/usr/share/stdair/samples"

#endif // <strong>AIRSCHED_PATHS_HPP</strong>

/*!

*/
#ifndef <strong>AIRSCHED_PATHS_HPP</strong>
#define <strong>AIRSCHED_PATHS_HPP</strong>

#define PACKAGE "@PACKAGE@"
#define PACKAGE_NAME "@PACKAGE_NAME@"
#define PACKAGE_VERSION "@PACKAGE_VERSION@"
#define PREFIXDIR "@prefix@"
#define EXEC_PREFIX "@exec_prefix@"
#define BINDIR "@bindir@"
#define LIBDIR "@libdir@"
#define LIBEXECDIR "@libexecdir@"
#define SBINDIR "@sbindir@"
#define SYSCONFDIR "@sysconfdir@"
#define INCLUDEDIR "@includedir@"
#define DATAROOTDIR "@datarootdir@"
#define DATADIR "@datadir@"
#define DOCDIR "@docdir@"
#define MANDIR "@mandir@"

```

```
#define INFODIR "@infodir@"
#define HTMLDIR "@htmldir@"
#define PDFDIR "@pdfdir@"
#define STDAIR_SAMPLE_DIR "@sampledir@"

#endif // <strong>AIRSCHED_PATHS_HPP</strong>

/*!
```

## 3 People

### 3.1 Project Admins

- Denis Arnaud [denis\\_arnaud@users.sourceforge.net](#) (N)
- Anh Quan Nguyen [quannaus@users.sourceforge.net](#) (N)

### 3.2 Developers

- Anh Quan Nguyen [quannaus@users.sourceforge.net](#) (N)
- Denis Arnaud [denis\\_arnaud@users.sourceforge.net](#) (N)
- Gabrielle Sabatier [gsabatier@users.sourceforge.net](#) (N)

### 3.3 Retired Developers

- Daniel Perez [daniperez@users.sourceforge.net](#) (N)
- Mehdi Ayouni [mehdi.ayouni@gmail.com](#)
- Son Nguyen Kim [snguyenkim@users.sourceforge.net](#)
- Alexandre Point [apoint@users.sourceforge.net](#)

### 3.4 Contributors

- Emmanuel Bastien [ebastien@users.sourceforge.net](#) (N)
- Christophe Lacombe [ddtof@users.sourceforge.net](#) (N)

### 3.5 Distribution Maintainers

- **Fedora/RedHat**: Denis Arnaud [denis\\_arnaud@users.sourceforge.net](#) (N)
- **Debian**: Emmanuel Bastien [ebastien@users.sourceforge.net](#) (N)

#### Note

(N) - [Amadeus](#) employees.

## 4 Coding Rules

In the following sections we describe the naming conventions which are used for files, classes, structures, local variables, and global variables.

## 4.1 Default Naming Rules for Variables

Variables names follow Java naming conventions. Examples:

- `lNumberOfPassengers`
- `lSeatAvailability`

## 4.2 Default Naming Rules for Functions

Function names follow Java naming conventions. Example:

- `int myFunctionName (const int& a, int b)`

## 4.3 Default Naming Rules for Classes and Structures

Each new word in a class or structure name should always start with a capital letter and the words should be separated with an under-score. Abbreviations are written with capital letters. Examples:

- `MyClassName`
- `MyStructName`

## 4.4 Default Naming Rules for Files

Files are named after the C++ class names.

Source files are named using `.cpp` suffix, whereas header files end with `.hpp` extension. Examples:

- `FlightDate.hpp`
- `SegmentDate.cpp`

## 4.5 Default Functionality of Classes

All classes that are configured by input parameters should include:

- default empty constructor
- one or more additional constructor(s) that takes input parameters and initializes the class instance
- setup function, preferably named `'setup'` or `'set_parameters'`

Explicit destructor functions are not required, unless they are needed. It shall not be possible to use any of the other member functions unless the class has been properly initiated with the input parameters.

# 5 Copyright and License

## 5.1 GNU LESSER GENERAL PUBLIC LICENSE

### 5.1.1 Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.  
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA



Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

## 5.2 Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

### 5.3 TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

1. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has

a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

1. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

1. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

1. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

1. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

- a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)
- b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.
- c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.
- d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.
- e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

1. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.
- b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

- (a) You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library

is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

1. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.
1. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.
1. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

1. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.
1. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

1. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

## 5.3.1 NO WARRANTY

1. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.
1. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

## 5.3.2 END OF TERMS AND CONDITIONS

## 5.4 How to Apply These Terms to Your New Programs

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>
```

```
This library is free software; you can redistribute it and/or
modify it under the terms of the GNU Lesser General Public
License as published by the Free Software Foundation; either
version 2.1 of the License, or (at your option) any later version.
```

```
This library is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU
Lesser General Public License for more details.
```

```
You should have received a copy of the GNU Lesser General Public
License along with this library; if not, write to the Free Software
Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
```

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the
library 'Frob' (a library for tweaking knobs) written by James Random Hacker.
```

```
<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice
```

That's all there is to it!

Source

## 6 Documentation Rules

### 6.1 General Rules

All classes in AirSched should be properly documented with Doxygen comments in include (.hpp) files. Source (.cpp) files should be documented according to a normal standard for well documented C++ code.

An example of how the interface of a class shall be documented in AirSched is shown here:

```

/*!
 * \brief Brief description of MyClass here
 *
 * Detailed description of MyClass here. With example code if needed.
 */
class MyClass {
public:
    /*! Default constructor
    MyClass(void) { setup_done = false; }

    /*!
    * \brief Constructor that initializes the class with parameters
    *
    * Detailed description of the constructor here if needed
    *
    * \param[in] param1 Description of \a param1 here
    * \param[in] param2 Description of \a param2 here
    */
    MyClass(TYPE1 param1, TYPE2 param2) { setup(param1, param2); }

    /*!
    * \brief Setup function for MyClass
    *
    * Detailed description of the setup function here if needed
    *
    * \param[in] param1 Description of \a param1 here
    * \param[in] param2 Description of \a param2 here
    */
    void setup(TYPE1 param1, TYPE2 param2);

    /*!
    * \brief Brief description of memberFunction1
    *
    * Detailed description of memberFunction1 here if needed
    *
    * \param[in] param1 Description of \a param1 here
    * \param[in] param2 Description of \a param2 here
    * \param[in,out] param3 Description of \a param3 here
    * \return Description of the return value here
    */
    TYPE4 memberFunction1(TYPE1 param1, TYPE2 param2, TYPE3 &param3);

private:
    bool _setUpDone;          /*!< Variable that checks if the class is properly
                               initialized with parameters */
    TYPE1 _privateVariable1; /*!< Short description of _privateVariable1 here
    TYPE2 _privateVariable2; /*!< Short description of _privateVariable2 here
};

```

### 6.2 File Header

All files should start with the following header, which include Doxygen's \file, \brief and \author tags, \$Date\$ and \$Revisions\$ CVS tags, and a common copyright note:

```

/*!
 * \file
 * \brief Brief description of the file here
 * \author Names of the authors who contributed to this code

```

```

* \date Date
*
* Detailed description of the file here if needed.
*
* -----
*
* AirSched - C++ Airline Schedule Management Library
*
* Copyright (C) 2009-2010 (\see authors file for a list of contributors)
*
* \see copyright file for license information
*
* -----
*/

```

## 6.3 Grouping Various Parts

All functions must be added to a Doxygen group in order to appear in the documentation. The following code example defines the group 'my\_group':

```

/*!
* \defgroup my_group Brief description of the group here
*
* Detailed description of the group here
*/

```

The following example shows how to document the function `myFunction` and how to add it to the group `my_group`:

```

/*!
* \brief Brief description of myFunction here
* \ingroup my_group
*
* Detailed description of myFunction here
*
* \param[in] param1 Description of \a param1 here
* \param[in] param2 Description of \a param2 here
* \return Description of the return value here
*/
TYPE3 myFunction(TYPE1 param1, TYPE2 &param2);

```

## 7 Main features

A short list of the main features of AirSched is given below sorted in different categories. Many more features and functions exist and for these we refer to the reference documentation.

### 7.1 Network generation

- Network/graph generation

### 7.2 Finding travel solutions

- Matching of travel solutions with user requests

### 7.3 Other features

- CSV input file parsing
- Memory handling



## 8 Make a Difference

**Do not ask what AirSched can do for you. Ask what you can do for AirSched.**

You can help us to develop the AirSched library. There are always a lot of things you can do:

- Start using AirSched
- Tell your friends about AirSched and help them to get started using it
- If you find a bug, report it to us. Without your help we can never hope to produce a bug free code.
- Help us to improve the documentation by providing information about documentation bugs
- Answer support requests in the AirSched discussion forums on SourceForge. If you know the answer to a question, help others to overcome their AirSched problems.
- Help us to improve our algorithms. If you know of a better way (e.g. that is faster or requires less memory) to implement some of our algorithms, then let us know.
- Help us to port AirSched to new platforms. If you manage to compile AirSched on a new platform, then tell us how you did it.
- Send us your code. If you have a good AirSched compatible code, which you can release under the LGPL-2.1, and you think it should be included in AirSched, then send it to us.
- Become an AirSched developer. Send us an e-mail and tell what you can do for AirSched.

## 9 Make a new release

### 9.1 Introduction

This document describes briefly the recommended procedure of releasing a new version of AirSched using a Linux development machine and the SourceForge project site.

The following steps are required to make a release of the distribution package.

### 9.2 Initialisation

Clone locally the full [Git project](#):

```
cd ~
mkdir -p dev/sim
cd ~/dev/sim
git clone git://air-sched.git.sourceforge.net/gitroot/air-sched/air-sched airschedgit
cd airschedgit
git checkout trunk
```

### 9.3 Release branch maintenance

Switch to the release branch, on your local clone, and merge the latest updates from the trunk. Decide about the new version to be released.

```
cd ~/dev/sim/airschedgit
git checkout releases
git merge trunk
```

Update the version in the various build system files, replacing the old version numbers by the correct ones:

```
vi CMakeLists.txt
vi autogen.sh
vi README
```

Update the version, add some news in the NEWS file, add a change-log in the ChangeLog file and in the RPM specification files:

```
vi NEWS
vi ChangeLog
vi airsched.spec
```

## 9.4 Commit and publish the release branch

Commit the new release:

```
cd ~/dev/sim/airschedgit
git add -A
git commit -m "[Release 0.5.0] Release of the 0.5.0 version of AirSched."
git push
```

## 9.5 Create distribution packages

Create the distribution packages using the following command:

```
cd ~/dev/sim/airschedgit
git checkout releases
rm -rf build && mkdir -p build
cd build
export INSTALL_BASEDIR=/home/user/dev/deliveries
export LIBSUFFIX_4_CMAKE="-DLIB_SUFFIX=64"
cmake -DCMAKE_INSTALL_PREFIX=${INSTALL_BASEDIR}/airsched-0.5.0 \
  -DCMAKE_BUILD_TYPE:String=Debug -DINSTALL_DOC:BOOL=ON \
  ${LIBSUFFIX_4_CMAKE} ..
make check && make dist
make install
```

This will configure, compile and check the package. The output packages will be named, for instance, airsched-0.5.0.tar.gz and airsched-0.5.0.tar.bz2.

## 9.6 Upload the HTML documentation to SourceForge

In order to update the Web site files, either:

- **synchronise them with rsync and SSH:** Upload the just generated HTML (and PDF) documentation onto the **SourceForge Web site**.

```
cd ~/dev/sim/airschedgit/build
git checkout releases
rsync -aiv ${INSTALL_BASEDIR}/airsched-0.5.0/share/doc/airsched-0.5.0/html/ \
  your_sf_user,air-sched@web.sourceforge.net:htdocs/
```

where `-aiv` options mean:

- `-a`: archive/mirror mode; equals `-rlptgoD` (no `-H`, `-A`, `-X`)
- `-v`: increase verbosity
- `-i`: output a change-summary for all updates
- Note the trailing slashes (/) at the end of both the source and target directories. It means that the content of the source directory (`doc/html`), rather than the directory itself, has to be copied into the content of the target directory.

- or use the **SourceForge Shell service**.

## 9.7 Generate the RPM packages

Optionally, generate the RPM package (for instance, for [Fedora/RedHat](#)):

```
cd ~/dev/sim/airschedgit/build
git checkout releases
make dist
```

To perform this step, rpm-build, rpmlint and rpmdevtools have to be available on the system.

```
cp ../airsched.spec ~/dev/packages/SPECS \
  && cp airsched-0.5.0.tar.bz2 ~/dev/packages/SOURCES
cd ~/dev/packages/SPECS
rpmbuild -ba airsched.spec
cd ~/dev/packages
rpmlint -i SPECS/airsched.spec SRPMS/airsched-0.5.0-1.fc16.src.rpm \
  RPMS/noarch/airsched-* RPMS/i686/airsched-*
```

## 9.8 Update distributed change log

Update the NEWS and ChangeLog files with appropriate information, including what has changed since the previous release. Then commit and push the changes into the [AirSched's Git repository](#).

## 9.9 Create the binary package, including the documentation

Create the binary package, which includes HTML and PDF documentation, using the following command:

```
cd ~/dev/sim/airschedgit/build
git checkout releases
make package
```

The output binary package will be named, for instance, airsched-0.5.0-Linux.tar.bz2. That package contains both the HTML and PDF documentation. The binary package contains also the executables and shared libraries, as well as C++ header files, but all of those do not interest us for now.

## 9.10 Upload the files to SourceForge

Upload the distribution and documentation packages to the SourceForge server. Check [SourceForge help page on uploading software](#).

## 9.11 Make a new post

- submit a new entry in the [SourceForge project-related news feed](#)
- make a new post on the [SourceForge hosted WordPress blog](#)
- and update, if necessary, [Trac tickets](#).

## 9.12 Send an email on the announcement mailing-list

Finally, you should send an announcement to [airsched-announce@lists.sourceforge.net](mailto:airsched-announce@lists.sourceforge.net) (see <https://lists.sourceforge.net/lists/listinfo/airsched-announce> for the archives)

## 10 Installation

### 10.1 Table of Contents

- [Fedora/RedHat Linux distributions](#)
- [AirSched Requirements](#)
- [Basic Installation](#)
- [Compilers and Options](#)
- [Compiling For Multiple Architectures](#)
- [Installation Names](#)
- [Optional Features](#)
- [Particular systems](#)
- [Specifying the System Type](#)
- [Sharing Defaults](#)
- [Defining Variables](#)
- ['cmake' Invocation](#)

### 10.2 Fedora/RedHat Linux distributions

Note that on [Fedora/RedHat](#) Linux distributions, RPM packages are available and can be installed with your usual package manager. For instance:

```
yum -y install airsched-devel airsched-doc
```

RPM packages can also be available on the [SourceForge download site](#).

### 10.3 AirSched Requirements

AirSched should compile without errors or warnings on most GNU/Linux systems, on UNIX systems like Solaris SunOS, and on POSIX based environments for Microsoft Windows like Cygwin or MinGW with MSYS. It can be also built on Microsoft Windows NT/2000/XP/Vista/7 using Microsoft's Visual C++ .NET, but our support for this compiler is limited. For GNU/Linux, SunOS, Cygwin and MinGW we assume that you have at least the following GNU software installed on your computer:

- GNU Autotools:
  - [autoconf](#),
  - [automake](#),
  - [libtool](#),
  - [make](#), version 3.72.1 or later (check version with ``make --version``)
- [GCC](#) - GNU C++ Compiler (g++), version 4.3.x or later (check version with ``gcc --version``)
- [Boost](#) - C++ STL extensions, version 1.35 or later (check version with ``grep "define BOOST_LIB_VERSION" /usr/include/boost/version.hpp``)
- [MySQL](#) - Database client libraries, version 5.0 or later (check version with ``mysql --version``)
- [SOXI](#) - C++ database client library wrapper, version 3.0.0 or later (check version with ``soci-config --version``)

Optionally, you might need a few additional programs: `Doxygen`, `LaTeX`, `Dvips` and `Ghostscript`, to generate the HTML and PDF documentation.

We strongly recommend that you use recent stable releases of the GCC, if possible. We do not actively work on supporting older versions of the GCC, and they may therefore (without prior notice) become unsupported in future releases of AirSched.

## 10.4 Basic Installation

Briefly, the shell commands `./cmake .. && make install` should configure, build, and install this package. The following more-detailed instructions are generic; see the `README` file for instructions specific to this package. Some packages provide this `INSTALL` file but do not implement all of the features documented below. The lack of an optional feature in a given package is not necessarily a bug. More recommendations for GNU packages can be found in the info page corresponding to "Makefile Conventions: (standards)Makefile Conventions".

The `cmake` shell script attempts to guess correct values for various system-dependent variables used during compilation. It uses those values to create a `Makefile` in each directory of the package. It may also create one or more `.h` files containing system-dependent definitions. Finally, it creates a `CMakeCache.txt` cache file that you can refer to in the future to recreate the current configuration, and a file `CMakeFiles` containing compiler output (useful mainly for debugging `cmake`).

It can also use an optional file (typically called `config.cache` and enabled with `--cache-file=config.cache` or simply `-C`) that saves the results of its tests to speed up reconfiguring. Caching is disabled by default to prevent problems with accidental use of stale cache files.

If you need to do unusual things to compile the package, please try to figure out how `configure` could check whether to do them, and mail diffs or instructions to the address given in the `README` so they can be considered for the next release. If you are using the cache, and at some point `config.cache` contains results you don't want to keep, you may remove or edit it.

The file `CMakeLists.txt` is used to create the `Makefile`

files.

The simplest way to compile this package is:

1. `cd` to the directory containing the package's source code and type `./cmake ..` to configure the package for your system. Running `cmake` is generally fast. While running, it prints some messages telling which features it is checking for.
2. Type `make` to compile the package.
3. Optionally, type `make check` to run any self-tests that come with the package, generally using the just-built uninstalled binaries.
4. Type `make install` to install the programs and any data files and documentation. When installing into a prefix owned by root, it is recommended that the package be configured and built as a regular user, and only the `make install` phase executed with root privileges.
5. You can remove the program binaries and object files from the source code directory by typing `make clean`. To also remove the files that `configure` created (so you can compile the package for a different kind of computer), type `make distclean`. There is also a `make maintainer-clean` target, but that is intended mainly for the package's developers. If you use it, you may have to get all sorts of other programs in order to regenerate files that came with the distribution.
6. Often, you can also type `make uninstall` to remove the installed files again. In practice, not all packages have tested that uninstallation works correctly, even though it is required by the GNU Coding Standards.

## 10.5 Compilers and Options

Some systems require unusual options for compilation or linking that the 'cmake' script does not know about. Run './cmake --help' for details on some of the pertinent environment variables.

You can give 'cmake' initial values for configuration parameters by setting variables in the command line or in the environment. Here is an example:

```
./cmake CC=c99 CFLAGS=-g LIBS=-lposix
```

### See also

[Defining Variables](#) for more details.

## 10.6 Compiling For Multiple Architectures

You can compile the package for more than one kind of computer at the same time, by placing the object files for each architecture in their own directory. To do this, you can use GNU 'make'. 'cd' to the directory where you want the object files and executables to go and run the 'configure' script. 'configure' automatically checks for the source code in the directory that 'configure' is in and in '..'. This is known as a "VPATH" build.

With a non-GNU 'make', it is safer to compile the package for one architecture at a time in the source code directory. After you have installed the package for one architecture, use 'make distclean' before reconfiguring for another architecture.

On MacOS X 10.5 and later systems, you can create libraries and executables that work on multiple system types--known as "fat" or "universal" binaries--by specifying multiple '-arch' options to the compiler but only a single '-arch' option to the preprocessor. Like this:

```
./configure CC="gcc -arch i386 -arch x86_64 -arch ppc -arch ppc64" \
  CXX="g++ -arch i386 -arch x86_64 -arch ppc -arch ppc64" \
  CPP="gcc -E" CXXCPP="g++ -E"
```

This is not guaranteed to produce working output in all cases, you may have to build one architecture at a time and combine the results using the 'lipo' tool if you have problems.

## 10.7 Installation Names

By default, 'make install' installs the package's commands under '/usr/local/bin', include files under '/usr/local/include', etc. You can specify an installation prefix other than '/usr/local' by giving 'configure' the option '--prefix=PREFIX', where PREFIX must be an absolute file name.

You can specify separate installation prefixes for architecture-specific files and architecture-independent files. If you pass the option '--exec-prefix=PREFIX' to 'configure', the package uses PREFIX as the prefix for installing programs and libraries. Documentation and other data files still use the regular prefix.

In addition, if you use an unusual directory layout you can give options like '--bindir=DIR' to specify different values for particular kinds of files. Run 'configure --help' for a list of the directories you can set and what kinds of files go in them. In general, the default for these options

is expressed in terms of `'${prefix}'`, so that specifying just `'--prefix'` will affect all of the other directory specifications that were not explicitly provided.

The most portable way to affect installation locations is to pass the correct locations to `'configure'`; however, many packages provide one or both of the following shortcuts of passing variable assignments to the `'make install'` command line to change installation locations without having to reconfigure or recompile.

The first method involves providing an override variable for each affected directory. For example, `'make install prefix=/alternate/directory'` will choose an alternate location for all directory configuration variables that were expressed in terms of `'${prefix}'`. Any directories that were specified during `'configure'`, but not in terms of `'${prefix}'`, must each be overridden at install time for the entire installation to be relocated. The approach of makefile variable overrides for each directory variable is required by the GNU Coding Standards, and ideally causes no recompilation. However, some platforms have known limitations with the semantics of shared libraries that end up requiring recompilation when using this method, particularly noticeable in packages that use GNU Libtool.

The second method involves providing the `'DESTDIR'` variable. For example, `'make install DESTDIR=/alternate/directory'` will prepend `'/alternate/directory'` before all installation names. The approach of `'DESTDIR'` overrides is not required by the GNU Coding Standards, and does not work on platforms that have drive letters. On the other hand, it does better at avoiding recompilation issues, and works well even when some directory options were not specified in terms of `'${prefix}'` at `'configure'` time.

## 10.8 Optional Features

If the package supports it, you can cause programs to be installed with an extra prefix or suffix on their names by giving `'cmake'` the option `'--program-prefix=PREFIX'` or `'--program-suffix=SUFFIX'`.

Some packages pay attention to `'--enable-FEATURE'` options to `'configure'`, where `FEATURE` indicates an optional part of the package. They may also pay attention to `'--with-PACKAGE'` options, where `PACKAGE` is something like `'gnu-as'` or `'x'` (for the X Window System). The `'README'` should mention any `'--enable-'` and `'--with-'` options that the package recognizes.

For packages that use the X Window System, `'configure'` can usually find the X include and library files automatically, but if it doesn't, you can use the `'configure'` options `'--x-includes=DIR'` and `'--x-libraries=DIR'` to specify their locations.

Some packages offer the ability to configure how verbose the execution of `'make'` will be. For these packages, running `'./configure --enable-silent-rules'` sets the default to minimal output, which can be overridden with `'make V=1'`; while running `'./configure --disable-silent-rules'` sets the default to verbose, which can be overridden with `'make V=0'`.

## 10.9 Particular systems

On HP-UX, the default C compiler is not ANSI C compatible. If GNU CC is not installed, it is recommended to use the following options in order to use an ANSI C compiler:

```
./configure CC="cc -Ae -D_XOPEN_SOURCE=500"
```

and if that doesn't work, install pre-built binaries of GCC for HP-UX.

On OSF/1 a.k.a. Tru64, some versions of the default C compiler cannot parse its '<wchar.h>' header file. The option '-nodtk' can be used as a workaround. If GNU CC is not installed, it is therefore recommended to try

```
./configure CC="cc"
```

and if that doesn't work, try

```
./configure CC="cc -nodtk"
```

On Solaris, don't put '/usr/ucb' early in your 'PATH'. This directory contains several dysfunctional programs; working variants of these programs are available in '/usr/bin'. So, if you need '/usr/ucb' in your 'PATH', put it *after* '/usr/bin'.

On Haiku, software installed for all users goes in '/boot/common', not '/usr/local'. It is recommended to use the following options:

```
./cmake -DCMAKE_INSTALL_PREFIX=/boot/common
```

## 10.10 Specifying the System Type

There may be some features 'configure' cannot figure out automatically, but needs to determine by the type of machine the package will run on. Usually, assuming the package is built to be run on the *same* architectures, 'configure' can figure that out, but if it prints a message saying it cannot guess the machine type, give it the '--build=TYPE' option. TYPE can either be a short name for the system type, such as 'sun4', or a canonical name which has the form CPU-COMPANY-SYSTEM

where SYSTEM can have one of these forms:

- OS
- KERNEL-OS

See the file 'config.sub' for the possible values of each field. If 'config.sub' isn't included in this package, then this package doesn't need to know the machine type.

If you are *building* compiler tools for cross-compiling, you should use the option '--target=TYPE' to select the type of system they will produce code for.

If you want to use a cross compiler, that generates code for a platform different from the build platform, you should specify the "host" platform (i.e., that on which the generated programs will eventually be run) with '--host=TYPE'.

## 10.11 Sharing Defaults

If you want to set default values for 'configure' scripts to share, you can create a site shell script called 'config.site' that gives default values for variables like 'CC', 'cache\_file', and 'prefix'. 'configure' looks for 'PREFIX/share/config.site' if it exists, then 'PREFIX/etc/config.site' if it exists. Or, you can set the 'CONFIG\_SITE' environment variable to the location of the site script. A warning: not all 'configure' scripts look for a site script.



## 10.12 Defining Variables

Variables not defined in a site shell script can be set in the environment passed to 'configure'. However, some packages may run configure again during the build, and the customized values of these variables may be lost. In order to avoid this problem, you should set them in the 'configure' command line, using 'VAR=value'. For example:

```
./configure CC=/usr/local2/bin/gcc
```

causes the specified 'gcc' to be used as the C compiler (unless it is overridden in the site shell script).

Unfortunately, this technique does not work for 'CONFIG\_SHELL' due to an Autoconf bug. Until the bug is fixed you can use this workaround:

```
CONFIG_SHELL=/bin/bash /bin/bash ./configure CONFIG_SHELL=/bin/bash
```

## 10.13 'cmake' Invocation

'cmake' recognizes the following options to control how it operates.

- '--help', '-h' print a summary of all of the options to 'cmake', and exit.
- '--help=short', '--help=recursive' print a summary of the options unique to this package's 'configure', and exit. The 'short' variant lists options used only in the top level, while the 'recursive' variant lists options also present in any nested packages.
- '--version', '-V' print the version of Autoconf used to generate the 'configure' script, and exit.
- '--cache-file=FILE' enable the cache: use and save the results of the tests in FILE, traditionally 'config.cache'. FILE defaults to '/dev/null' to disable caching.
- '--config-cache', '-C' alias for '--cache-file=config.cache'.
- '--quiet', '--silent', '-q' do not print messages saying which checks are being made. To suppress all normal output, redirect it to '/dev/null' (any error messages will still be shown).
- '--srcdir=DIR' look for the package's source code in directory DIR. Usually 'configure' can determine that directory automatically.
- '--prefix=DIR' use DIR as the installation prefix.

See also

[Installation Names](#) for more details, including other options available for fine-tuning the installation locations.

- '--no-create', '-n' run the configure checks, but stop before creating any output files.

'cmake' also accepts some other, not widely useful, options. Run 'cmake' --help' for more details.

The 'cmake' script produces an output like this:

```

-- Requires Git without specifying any version
cmake -DCMAKE_INSTALL_PREFIX=/home/user/dev/deliveries/airsched-99.99.99 -DLIB_SUFFIX=64 -DCMAKE_BUILD_TYPE:ST
-- The C compiler identification is GNU
-- The CXX compiler identification is GNU
-- Check for working C compiler: /usr/lib64/ccache/gcc
-- Check for working C compiler: /usr/lib64/ccache/gcc -- works
-- Detecting C compiler ABI info
-- Detecting C compiler ABI info - done
-- Check for working CXX compiler: /usr/lib64/ccache/c++
-- Check for working CXX compiler: /usr/lib64/ccache/c++ -- works
-- Detecting CXX compiler ABI info
-- Detecting CXX compiler ABI info - done
-- Requires Git without specifying any version
-- Current Git revision name: 6100bb1479e9c72f807a60067138dfelb71cbec7 trunk
-- Requires Boost-1.41
-- Boost version: 1.46.0
-- Found the following Boost libraries:
--   regex
--   program_options
--   date_time
--   iostreams
--   serialization
--   filesystem
--   unit_test_framework
--   python
-- Found Boost version: 1.46.0
-- Found BoostWrapper: /usr/include (Required is at least version "1.41")
-- Requires MySQL without specifying any version
-- Using mysql-config: /usr/bin/mysql_config
-- Found MySQL: /usr/lib64/mysql/libmysqlclient.so
-- Found MySQL version: 5.5.14
-- Requires SOCI-3.0
-- Using soci-config: /usr/bin/soci-config
-- SOCI headers are buried
-- Found SOCI: /usr/lib64/libsoci_core.so (Required is at least version "3.0")
-- Found SOCIMySQL: /usr/lib64/libsoci_mysql.so (Required is at least version "3.0")
-- Found SOCI with MySQL back-end support version: 3.0.0
-- Requires StdAir-0.35
-- Found StdAir version: 0.38.0
-- Requires Doxygen without specifying any version
-- Found Doxygen: /usr/bin/doxygen
-- Found DoxygenWrapper: /usr/bin/doxygen
-- Found Doxygen version: 1.7.4
-- Had to set the linker language for 'airschedlib' to CXX
-- Test 'AirlineScheduleTestSuite' to be built with 'AirlineScheduleTestSuite.cpp'
--
=====
-- ---      Project Information      ---
-- -----
-- PROJECT_NAME ..... : airsched
-- PACKAGE_PRETTY_NAME ..... : AirSched
-- PACKAGE ..... : airsched
-- PACKAGE_NAME ..... : AIRSCHED
-- PACKAGE_BRIEF ..... : C++ Simulated Airline Schedule Manager Library
-- PACKAGE_VERSION ..... : 99.99.99
-- GENERIC_LIB_VERSION ..... : 99.99.99
-- GENERIC_LIB_SOVERSION ..... : 99.99
--
-- ---      Build Configuration      ---
-- -----
-- Modules to build ..... : airsched
-- Libraries to build/install ..... : airschedlib
-- Binaries to build/install ..... : airsched
-- Modules to test ..... : airsched
-- Binaries to test ..... : AirlineScheduleTestSuite
--
-- * Module ..... : airsched
--   + Layers to build ..... : .;basic;bom;factory;command;service
--   + Dependencies on other layers :
--   + Libraries to build/install . : airschedlib
--   + Executables to build/install : airsched

```

```

-- + Tests to perform ..... : AirlineScheduleTestSuitetst
--
-- BUILD_SHARED_LIBS ..... : ON
-- CMAKE_BUILD_TYPE ..... : Debug
-- * CMAKE_C_FLAGS ..... :
-- * CMAKE_CXX_FLAGS ..... : -Wall -Werror
-- * BUILD_FLAGS ..... :
-- * COMPILE_FLAGS ..... :
-- CMAKE_MODULE_PATH ..... : /home/user/dev/sim/airsched/airschedgithub/config/
-- CMAKE_INSTALL_PREFIX ..... : /home/user/dev/deliveries/airsched-99.99.99
--
-- * Doxygen:
-- - DOXYGEN_VERSION ..... : 1.7.4
-- - DOXYGEN_EXECUTABLE ..... : /usr/bin/doxygen
-- - DOXYGEN_DOT_EXECUTABLE ..... : /usr/bin/dot
-- - DOXYGEN_DOT_PATH ..... : /usr/bin
--
-- -----
-- --- Installation Configuration ---
-- -----
-- INSTALL_LIB_DIR ..... : /home/user/dev/deliveries/airsched-99.99.99/lib64
-- INSTALL_BIN_DIR ..... : /home/user/dev/deliveries/airsched-99.99.99/bin
-- INSTALL_INCLUDE_DIR ..... : /home/user/dev/deliveries/airsched-99.99.99/include
-- INSTALL_DATA_DIR ..... : /home/user/dev/deliveries/airsched-99.99.99/share
-- INSTALL_SAMPLE_DIR ..... : /home/user/dev/deliveries/airsched-99.99.99/share/airsched/samples
-- INSTALL_DOC ..... : ON
--
-- -----
-- --- Packaging Configuration ---
-- -----
-- CPACK_PACKAGE_CONTACT ..... : Denis Arnaud <denis_arnaud - at - users dot sourceforge dot net>
-- CPACK_PACKAGE_VENDOR ..... : Denis Arnaud
-- CPACK_PACKAGE_VERSION ..... : 99.99.99
-- CPACK_PACKAGE_DESCRIPTION_FILE . : /home/user/dev/sim/airsched/airschedgithub/README
-- CPACK_RESOURCE_FILE_LICENSE .... : /home/user/dev/sim/airsched/airschedgithub/COPYING
-- CPACK_GENERATOR ..... : TBZ2
-- CPACK_DEBIAN_PACKAGE_DEPENDS ... :
-- CPACK_SOURCE_GENERATOR ..... : TBZ2;TGZ
-- CPACK_SOURCE_PACKAGE_FILE_NAME . : airsched-99.99.99
--
-- -----
-- --- External libraries ---
-- -----
--
-- * Boost:
-- - Boost_VERSION ..... : 104600
-- - Boost_LIB_VERSION ..... : 1_46
-- - Boost_HUMAN_VERSION ..... : 1.46.0
-- - Boost_INCLUDE_DIRS ..... : /usr/include
-- - Boost required components .. : regex;program_options;date_time;iostreams;serialization;filesystem;unit_
-- - Boost required libraries ... : optimized;/usr/lib64/libboost_regex-mt.so;debug;/usr/lib64/libboost_rege
--
-- * MySQL:
-- - MYSQL_VERSION ..... : 5.5.14
-- - MYSQL_INCLUDE_DIR ..... : /usr/include/mysql
-- - MYSQL_LIBRARIES ..... : /usr/lib64/mysql/libmysqlclient.so
--
-- * SOCI:
-- - SOCI_VERSION ..... : 3.0.0
-- - SOCI_INCLUDE_DIR ..... : /usr/include/soci
-- - SOCI_MYSQL_INCLUDE_DIR ..... : /usr/include/soci
-- - SOCI_LIBRARIES ..... : /usr/lib64/libsoci_core.so
-- - SOCI_MYSQL_LIBRARIES ..... : /usr/lib64/libsoci_mysql.so
--
-- * StdAir:
-- - STDAIR_VERSION ..... : 0.38.0
-- - STDAIR_BINARY_DIRS ..... : /home/user/dev/deliveries/stdair-0.38.0/bin
-- - STDAIR_EXECUTABLES ..... : stdair
-- - STDAIR_LIBRARY_DIRS ..... : /home/user/dev/deliveries/stdair-0.38.0/lib64
-- - STDAIR_LIBRARIES ..... : stdairlib;stdairuiclib
-- - STDAIR_INCLUDE_DIRS ..... : /home/user/dev/deliveries/stdair-0.38.0/include
-- - STDAIR_SAMPLE_DIR ..... : /home/user/dev/deliveries/stdair-0.38.0/share/stdair/samples
--

```

```
-- Change a value with: cmake -D<Variable>=<Value>
-- =====
--
-- Configuring done
-- Generating done
-- Build files have been written to: /home/user/dev/sim/airsched/airschedgithub/build
```

It is recommended that you check if your library has been compiled and linked properly and works as expected. To do so, you should execute the testing process 'make check'. As a result, you should obtain a similar report:

```
[ 0%] Built target hdr_cfg_airsched
[ 96%] Built target airschedlib
[100%] Built target AirlineScheduleTestSuitetst
Scanning dependencies of target check_airschedtst
Test project /home/dan/dev/sim/airsched/airschedgithub/build/test/airsched
  Start 1: AirlineScheduleTestSuitetst
1/1 Test #1: AirlineScheduleTestSuitetst ..... Passed    0.15 sec

100% tests passed, 0 tests failed out of 1

Total Test time (real) = 0.40 sec
[100%] Built target check_airschedtst
Scanning dependencies of target check
[100%] Built target check
```

Check if all the executed tests PASSED. If not, please contact us by filling a [bug-report](#).

Finally, you should install the compiled and linked library, include files and (optionally) HTML and PDF documentation by typing:

```
make install
```

Depending on the PREFIX settings during configuration, you might need the root (administrator) access to perform this step.

Eventually, you might invoke the following command

```
make clean
```

to remove all files created during compilation process, or even

```
cd ~/dev/sim/airschedgit
rm -rf build && mkdir build
cd build
```

to remove everything.

## 11 Linking with AirSched

### 11.1 Table of Contents

- [Introduction](#)
- [Dependencies](#)
- [Using the pkg-config command](#)
- [Using the airsched-config script](#)
- [M4 macro for the GNU Autotools](#)
- [Using AirSched with dynamic linking](#)

## 11.2 Introduction

There are two convenient methods of linking your programs with the AirSched library. The first one employs the `'pkg-config'` command (see <http://pkgconfig.freedesktop.org/>), whereas the second one uses `'airsched-config'` script. These methods are shortly described below.

## 11.3 Dependencies

The AirSched library depends on several other C++ components.

### 11.3.1 StdAir

Among them, as for now, only StdAir has been packaged. The support for StdAir is taken in charge by a dedicated M4 macro file (namely, `'stdair.m4'`), from the configuration script (generated thanks to `'configure.ac'`).



Figure 1: AirSched Dependencies

## 11.4 Using the pkg-config command

`'pkg-config'` is a helper tool used when compiling applications and libraries. It helps you insert the correct compiler and linker options. The syntax of the `'pkg-config'` is as follows:

```
pkg-config <options> <library_name>
```

For instance, assuming that you need to compile an AirSched based program `'my_prog.cpp'`, you should use the following command:

```
g++ `pkg-config --cflags airsched` -o my_prog my_prog.cpp `pkg-config --libs  
airsched`
```

For more information see the `'pkg-config'` man pages.

## 11.5 Using the airsched-config script

AirSched provides a shell script called `airsched-config`, which is installed by default in ``$prefix/bin'` (``/usr/local/bin'`) directory. It can be used to simplify compilation and linking of AirSched based programs. The usage of this script is quite similar to the usage of the ``pkg-config'` command.

Assuming that you need to compile the program ``my_prog.cpp'` you can now do that with the following command:

```
g++ `airsched-config --cflags` -o my_prog_opt my_prog.cpp `airsched-config --
    libs`
```

A list of ``airsched-config'` options can be obtained by typing:

```
airsched-config --help
```

If the ``airsched-config'` command is not found by your shell, you should add its location ``$prefix/bin'` to the `PATH` environment variable, e.g.:

```
export PATH=/usr/local/bin:$PATH
```

## 11.6 M4 macro for the GNU Autotools

A M4 macro file is delivered with AirSched, namely ``airsched.m4'`, which can be found in, e.g., ``/usr/share/aclocal'`. When used by a ``configure'` script, thanks to the ``AM_PATH_AirSched'` macro (specified in the M4 macro file), the following Makefile variables are then defined:

- ``AirSched_VERSION'` (e.g., defined to 0.23.0)
- ``AirSched_CFLAGS'` (e.g., defined to ``-I${prefix}/include'`)
- ``AirSched_LIBS'` (e.g., defined to ``-L${prefix}/lib -lairsched'`)

## 11.7 Using AirSched with dynamic linking

When using static linking some of the library routines in AirSched are copied into your executable program. This can lead to unnecessary large executables. To avoid having too large executable files you may use dynamic linking instead. Dynamic linking means that the actual linking is performed when the program is executed. This requires that the system is able to locate the shared AirSched library file during your program execution. If you install the AirSched library using a non-standard prefix, the ``LD_LIBRARY_PATH'` environment variable might be used to inform the linker of the dynamic library location, e.g.:

```
export LD_LIBRARY_PATH=<AirSched installation prefix>/lib:$LD_LIBRARY_PATH
```

# 12 Test Rules

This section describes rules how the functionality of the IT++ library should be verified. In the ``tests'` subdirectory test files are provided. All functionality should be tested using these test files.

## 12.1 The Test File

Each new IT++ module/class should be accompanied with a test file. The test file is an implementation in C++ that tests the functionality of a function/class or a group of functions/classes called modules. The test file should test relevant parameter settings and input/output relations to guarantee correct functionality of the corresponding classes/functions. The test files should be maintained using version control and updated whenever new functionality is added to the IT++ library.

The test file should print relevant data to a standard output that can be used to verify the functionality. All relevant parameter settings should be tested.

The test file should be placed in the `'tests'` subdirectory and should have a name ending with `'_test.cpp'`.

## 12.2 The Reference File

Consider a test file named `'module_test.cpp'`. A reference file named `'module_test.ref'` should accompany the test file. The reference file contains a reference printout of the standard output generated when running the test program. The reference file should be maintained using version control and updated according to the test file.

## 12.3 Testing IT++ Library

One can compile and execute all test programs from `'tests'` subdirectory by typing

```
% make check
```

after successful compilation of the IT++ library.

# 13 Users Guide

## 13.1 Table of Contents

- [Introduction](#)
- [Get Started](#)
  - [Get the AirSched library](#)
  - [Build the AirSched project](#)
  - [Build and Run the Tests](#)
  - [Install the AirSched Project \(Binaries, Documentation\)](#)
- [Input file of AirSched Project](#)
- [The schedule BOM Tree](#)
  - [Build of the schedule BOM tree](#)
  - [Display of the schedule BOM tree](#)
- [Exploring the Predefined BOM Tree](#)
  - [Airline Network BOM Tree](#)
  - [Airline Schedule BOM Tree](#)
- [Extending the BOM Tree](#)
- [The travel solution calculation procedure](#)

## 13.2 Introduction

The `AirSched` library contains classes for airline business management. This document does not cover all the aspects of the `AirSched` library. It does however explain the most important things you need to know in order to start using `AirSched`.

## 13.3 Get Started

### 13.3.1 Get the AirSched library

Clone locally the full [Git project](#):

```
cd ~
mkdir -p dev/sim
cd ~/dev/sim
git clone git://air-sched.git.sourceforge.net/gitroot/air-sched/air-sched airschedgit
cd airschedgit
git checkout trunk
```

### 13.3.2 Build the AirSched project

Link with StdAir, create the distribution package (say, 0.5.0) and compile using the following commands:

```
cd ~/dev/sim/airschedgit
rm -rf build && mkdir -p build
cd build
cmake -DCMAKE_INSTALL_PREFIX=~/dev/deliveries/airsched-0.5.0 \
  -DWITH_STDAIR_PREFIX=~/dev/deliveries/stdair-stable \
  -DCMAKE_BUILD_TYPE:STRING=Debug -DINSTALL_DOC:BOOL=ON ..
make
```

### 13.3.3 Build and Run the Tests

After building the AirSched project, the following commands run the tests:

```
cd ~/dev/sim/airschedgit
cd build
make check
```

As a result, you should obtain a similar report:

```
[ 0%] Built target hdr_cfg_airsched
[ 96%] Built target airschedlib
[100%] Built target AirlineScheduleTestSuitetst
Scanning dependencies of target check_airschedtst
Test project /home/dan/dev/sim/airsched/airschedgithub/build/test/airsched
  Start 1: AirlineScheduleTestSuitetst
1/1 Test #1: AirlineScheduleTestSuitetst ..... Passed    0.15 sec

100% tests passed, 0 tests failed out of 1

Total Test time (real) = 0.40 sec
[100%] Built target check_airschedtst
Scanning dependencies of target check
[100%] Built target check
```

### 13.3.4 Install the AirSched Project (Binaries, Documentation)

After the step [Build the AirSched project](#), to install the library and its header files, type:

```
cd ~/dev/sim/airschedgit
cd build
make install
```

You can check that the executables and other required files have been copied into the given final directory:

```
cd ~/dev/deliveries/airsched-0.5.0
```

To generate the AirSched project documentation, the commands are:



```
cd ~/dev/sim/airschedgit
cd build
make doc
```

The AirSched project documentation is available in the following formats: HTML, LaTeX. Those documents are available in a subdirectory:

```
cd ~/dev/sim/airschedgit
cd build
cd doc
```

## 13.4 Input file of AirSched Project

The schedule input file structure should look like the following sample:

```
// Flights:   AirlineCode; FlightNumber; Date-Range; ; DOW; Legs; Segments;
// Legs:      BoardPoint; OffPoint; BoardTime; ArrivalDateOffset; ArrivalTime;
//            ElapsedTime; LegCabins;
// LegCabins: CabinCode; Capacity;
// Segments:  Specific;
BA; 9; 2007-04-20; 2007-06-30; 0000011; LHR; BKK; 22:00; 15:15 / +1; 11:15; F;
    5; J; 12; W; 20; Y; 300; BKK; SYD; 18:10 / +1; 06:05 / +2; 08:55; F; 5; J; 12; W
    ; 20; Y; 300; 0; F; FA; 1; FA; J; JCIDI; 1; JCIDI; W; WT; 1; WT; Y; YBHKMLSQ; 1;
    YBHKMLSQ;
BA; 9; 2007-04-20; 2007-06-30; 1111100; LHR; BKK; 22:00; 15:15 / +1; 11:15; F;
    5; J; 12; W; 20; Y; 300; BKK; SYD; 18:10 / +1; 06:05 / +2; 08:55; F; 5; J; 12; W
    ; 20; Y; 300; 1; LHR; BKK; F; FA; J; JCIDI; W; WT; Y; YBHKMLSQ; BKK; SYD; F; FA;
    J; JCIDI; W; WT; Y; YBHKMLSQ; LHR; SYD; F; FA; 1; FA; J; JCIDI; 1; JCIDI; W; WT; 1;
    WT; Y; YBHKMLSQ; 1; YBHKMLSQ;
BA; 117; 2007-04-20; 2007-06-30; 1111111; LHR; JFK; 08:20; 11:00; 07:40; F; 5;
    J; 12; W; 20; Y; 300; 0; F; FA; 1; FA; J; JCIDI; 1; JCIDI; W; WT; 1; WT; Y; YBHKM;
    1; YBHKM;
BA; 175; 2007-04-20; 2007-06-30; 1111111; LHR; JFK; 10:55; 13:35; 07:40; F; 5;
    J; 12; W; 20; Y; 300; 0; F; FA; 1; FA; J; JCIDI; 1; JCIDI; W; WT; 1; WT; Y;
    YBHKMRL; 1; YBHKMRL;
BA; 179; 2007-04-20; 2007-06-30; 1111111; LHR; JFK; 18:05; 20:45; 07:40; F; 5;
    J; 12; W; 20; Y; 300; 0; F; FA; 1; FA; J; JCIDI; 1; JCIDI; W; WT; 1; WT; Y;
    YBHKMRVNELSQ; 1; YBHKMRVNELSQ;
BA; 207; 2007-04-20; 2007-06-30; 1111111; LHR; MIA; 09:40; 14:25; 09:45; F; 5;
    J; 12; W; 20; Y; 300; 0; F; FA; 1; FA; J; JCIDI; 1; JCIDI; W; WT; 1; WT; Y;
    YBHKMRVNELSQ; 1; YBHKMRVNELSQ;
BA; 279; 2007-04-20; 2007-06-30; 1111111; LHR; LAX; 10:05; 13:10; 11:05; F; 5;
    J; 12; W; 20; Y; 300; 0; F; FA; 1; FA; J; JCIDI; 1; JCIDI; W; WT; 1; WT; Y;
    YBHKMRVNELSQ; 1; YBHKMRVNELSQ;
```

Each line, beyond the header, represents a schedule entry, i.e., the specification of a given flight-period (see [AIR-SCHED::FlightPeriodStruct](#)). The fields are as follows:

- Flights section
  - AirlineCode (e.g., BA)
  - FlightNumber (e.g., 9)
  - Start of the flight departure period (e.g., 2007-04-20)
  - End of the flight departure period (e.g., 2007-06-30)
  - Day-Of-the-Week for the flight departure period (DOW) (e.g., 0000011)
  - Leg section
  - Segment section
- Leg section
  - BoardPoint (e.g., LHR)
  - OffPoint (e.g., BKK)
  - BoardTime (e.g., 22:00)
  - ArrivalTime (e.g., 15:15)

- `ArrivalDateOffset` (e.g., +1)
- `ElapsedTime` (e.g., 11:15)
- Leg-cabin section
- Leg-cabin section
  - Cabin code (e.g., F, J, W or Y)
  - Capacity (e.g., respectively 5, 12, 20 or 300)
- Segment section
  - Specificity flag:
    - \* 0 means that all the segments behave the same way, i.e., have got the same dressing (distribution and order of the booking classes per cabin)
    - \* 1 means that each segment behave differently. The full specification of each of those segments must therefore be given.
  - Segment-cabin section
  - Fare family section
- Segment-cabin section
  - Cabin code (e.g., F, J, W or Y)
  - List of (one-letter-code) booking classes for the cabin (e.g, respectively FA, JC DI, WT or YBHKMLSQ)
- Fare family section
  - Fare family code (e.g., 1)
  - List of (one-letter-code) booking classes for the fare family (e.g, respectively FA, JC DI, WT or YBHKMLSQ)

Some fare input examples (including the example above named `schedule03.csv`) are given in the `StdAir` project.

## 13.5 The schedule BOM Tree

The schedule-related Business Object Model (BOM) tree is a structure allowing to store all the `AIRSCHEDED::FlightPeriodStruct` objects of the simulation. That is why parsing an input file, containing the specification for all the flight-periods, is more convenient (

### See also

the previous section [Input file of AirSched Project](#)).

As it may be time consuming, and it for sure requires some know-how, to first build such a schedule input file, a small sample BOM tree is provided by default when needed.

### 13.5.1 Build of the schedule BOM tree

First, a BOM root object (i.e., a root for all the classes in the project) is instantiated by the `stdair::STDAIR_ServiceContext` context object, when the `stdair::STDAIR_Service` is itself instantiated (during the instantiation of the `AIRSCHEDED::AIRSCHEDED_Service` object).

The corresponding type (class) `stdair::BomRoot` is defined in the `StdAir` library.

Then, the BOM root can be either constructed thanks to the `AIRSCHEDED::AIRSCHEDED_Service::buildSampleBom()` method:

```
void buildSampleBom();
```

or can be constructed using the schedule input file described above thanks to the `AIRSCHED::AIRSCHED_Service::parseAndLoad` (const stdair::Filename\_T&) method:

```
void parseAndLoad (const stdair::Filename_T& iScheduleInputFilename);
```

### 13.5.2 Display of the schedule BOM tree

#### Note

That feature (of BOM tree display) has not been implemented yet. Do not hesitate to [open a ticket](#) if you would like to have it implemented more quickly.

The schedule BOM tree can be displayed as done in the `batches::airsched.cpp` program:

When the default BOM tree is used (`-b/--builtin` option of the main program `airsched.cpp`), the schedule BOM tree display (for now, corresponding to `schedule01.csv` parsed by `AIRINV::parseInventory`) should look like:

```
=====
BomRoot:  -- ROOT --
=====
+++++
Inventory: SQ
+++++
*****
FlightDate: SQ11, 2010-Jan-15
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
        Elapsed, Distance, Capacity,
SQ11 2010-Jan-15, SIN-BKK, 2010-Jan-15, 08:20:00, 2010-Jan-15, 11:00:00, 07:40:
        00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
        CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Jan-15, SIN-BKK 2010-Jan-15, Y, 300, 300, 0, 0, 0, 0, 0, 0, 2, 298
        , 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Jan-15, SIN-BKK 2010-Jan-15, Y, 1, 0, 0, 0, 2, 298, 0,
SQ11 2010-Jan-15, SIN-BKK 2010-Jan-15, Y, 2, 0, 0, 0, 2, 298, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
        GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SeqAvl,
SQ11 2010-Jan-15, SIN-BKK 2010-Jan-15, Y, 1, Y, 300 (0), 0, 0, 0, 2, 0 (0), 0,
        0, 0, 0, 0, 0,
SQ11 2010-Jan-15, SIN-BKK 2010-Jan-15, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
        0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Jan-16
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
        Elapsed, Distance, Capacity,
SQ11 2010-Jan-16, SIN-BKK, 2010-Jan-16, 08:20:00, 2010-Jan-16, 11:00:00, 07:40:
```

```

00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Jan-16, SIN-BKK 2010-Jan-16, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 1.83244e-319, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Jan-16, SIN-BKK 2010-Jan-16, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Jan-16, SIN-BKK 2010-Jan-16, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Jan-16, SIN-BKK 2010-Jan-16, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Jan-16, SIN-BKK 2010-Jan-16, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Jan-17
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Jan-17, SIN-BKK, 2010-Jan-17, 08:20:00, 2010-Jan-17, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Jan-17, SIN-BKK 2010-Jan-17, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 1.58896e-319, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Jan-17, SIN-BKK 2010-Jan-17, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Jan-17, SIN-BKK 2010-Jan-17, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Jan-17, SIN-BKK 2010-Jan-17, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Jan-17, SIN-BKK 2010-Jan-17, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Jan-18
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Jan-18, SIN-BKK, 2010-Jan-18, 08:20:00, 2010-Jan-18, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----

```

```

Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Jan-18, SIN-BKK 2010-Jan-18, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Jan-18, SIN-BKK 2010-Jan-18, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Jan-18, SIN-BKK 2010-Jan-18, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Jan-18, SIN-BKK 2010-Jan-18, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Jan-18, SIN-BKK 2010-Jan-18, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Jan-19
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Jan-19, SIN-BKK, 2010-Jan-19, 08:20:00, 2010-Jan-19, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Jan-19, SIN-BKK 2010-Jan-19, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Jan-19, SIN-BKK 2010-Jan-19, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Jan-19, SIN-BKK 2010-Jan-19, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Jan-19, SIN-BKK 2010-Jan-19, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Jan-19, SIN-BKK 2010-Jan-19, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Jan-20
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Jan-20, SIN-BKK, 2010-Jan-20, 08:20:00, 2010-Jan-20, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Jan-20, SIN-BKK 2010-Jan-20, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****

```

```
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Jan-20, SIN-BKK 2010-Jan-20, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Jan-20, SIN-BKK 2010-Jan-20, Y, 2, 0, 0, 0, 0, 300, 0,
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
      GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Jan-20, SIN-BKK 2010-Jan-20, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
SQ11 2010-Jan-20, SIN-BKK 2010-Jan-20, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
*****
FlightDate: SQ11, 2010-Jan-21
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
      Elapsed, Distance, Capacity,
SQ11 2010-Jan-21, SIN-BKK, 2010-Jan-21, 08:20:00, 2010-Jan-21, 11:00:00, 07:40:
      00, 0, -05:00:00, 6300, 0,
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
      CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Jan-21, SIN-BKK 2010-Jan-21, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 300
      , 9, 0, 0, 0, 0, 0,
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Jan-21, SIN-BKK 2010-Jan-21, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Jan-21, SIN-BKK 2010-Jan-21, Y, 2, 0, 0, 0, 0, 300, 0,
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
      GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Jan-21, SIN-BKK 2010-Jan-21, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
SQ11 2010-Jan-21, SIN-BKK 2010-Jan-21, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
*****
FlightDate: SQ11, 2010-Jan-22
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
      Elapsed, Distance, Capacity,
SQ11 2010-Jan-22, SIN-BKK, 2010-Jan-22, 08:20:00, 2010-Jan-22, 11:00:00, 07:40:
      00, 0, -05:00:00, 6300, 0,
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
      CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Jan-22, SIN-BKK 2010-Jan-22, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 300
      , 9, 0, 0, 0, 0, 0,
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
```

```

*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Jan-22, SIN-BKK 2010-Jan-22, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Jan-22, SIN-BKK 2010-Jan-22, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
      GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Jan-22, SIN-BKK 2010-Jan-22, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
SQ11 2010-Jan-22, SIN-BKK 2010-Jan-22, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Jan-23
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
      Elapsed, Distance, Capacity,
SQ11 2010-Jan-23, SIN-BKK, 2010-Jan-23, 08:20:00, 2010-Jan-23, 11:00:00, 07:40:
      00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
      CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Jan-23, SIN-BKK 2010-Jan-23, Y, 300, 300, 0, 0, 0, 0, 0, 0, 6.64029e-
      319, 0, 300, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Jan-23, SIN-BKK 2010-Jan-23, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Jan-23, SIN-BKK 2010-Jan-23, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
      GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Jan-23, SIN-BKK 2010-Jan-23, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
SQ11 2010-Jan-23, SIN-BKK 2010-Jan-23, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Jan-24
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
      Elapsed, Distance, Capacity,
SQ11 2010-Jan-24, SIN-BKK, 2010-Jan-24, 08:20:00, 2010-Jan-24, 11:00:00, 07:40:
      00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
      CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Jan-24, SIN-BKK 2010-Jan-24, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
      , 9, 0, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Jan-24, SIN-BKK 2010-Jan-24, Y, 1, 0, 0, 0, 0, 300, 0,

```

```
SQL1 2010-Jan-24, SIN-BKK 2010-Jan-24, Y, 2, 0, 0, 0, 0, 300, 0,
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
  GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQL1 2010-Jan-24, SIN-BKK 2010-Jan-24, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
  0, 0, 0, 0, 0,
SQL1 2010-Jan-24, SIN-BKK 2010-Jan-24, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
  0, 0, 0, 0, 0,
*****
FlightDate: SQL1, 2010-Jan-25
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
  Elapsed, Distance, Capacity,
SQL1 2010-Jan-25, SIN-BKK, 2010-Jan-25, 08:20:00, 2010-Jan-25, 11:00:00, 07:40:
  00, 0, -05:00:00, 6300, 0,
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
  CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQL1 2010-Jan-25, SIN-BKK 2010-Jan-25, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
  , 9, 0, 0, 0, 0, 0,
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQL1 2010-Jan-25, SIN-BKK 2010-Jan-25, Y, 1, 0, 0, 0, 0, 300, 0,
SQL1 2010-Jan-25, SIN-BKK 2010-Jan-25, Y, 2, 0, 0, 0, 0, 300, 0,
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
  GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQL1 2010-Jan-25, SIN-BKK 2010-Jan-25, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
  0, 0, 0, 0, 0,
SQL1 2010-Jan-25, SIN-BKK 2010-Jan-25, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
  0, 0, 0, 0, 0,
*****
FlightDate: SQL1, 2010-Jan-26
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
  Elapsed, Distance, Capacity,
SQL1 2010-Jan-26, SIN-BKK, 2010-Jan-26, 08:20:00, 2010-Jan-26, 11:00:00, 07:40:
  00, 0, -05:00:00, 6300, 0,
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
  CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQL1 2010-Jan-26, SIN-BKK 2010-Jan-26, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
  , 9, 0, 0, 0, 0, 0,
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQL1 2010-Jan-26, SIN-BKK 2010-Jan-26, Y, 1, 0, 0, 0, 0, 300, 0,
SQL1 2010-Jan-26, SIN-BKK 2010-Jan-26, Y, 2, 0, 0, 0, 0, 300, 0,
*****
Subclasses:
-----
```



```
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
  GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Jan-26, SIN-BKK 2010-Jan-26, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Jan-26, SIN-BKK 2010-Jan-26, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Jan-27
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Jan-27, SIN-BKK, 2010-Jan-27, 08:20:00, 2010-Jan-27, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Jan-27, SIN-BKK 2010-Jan-27, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Jan-27, SIN-BKK 2010-Jan-27, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Jan-27, SIN-BKK 2010-Jan-27, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
  GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Jan-27, SIN-BKK 2010-Jan-27, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Jan-27, SIN-BKK 2010-Jan-27, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Jan-28
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Jan-28, SIN-BKK, 2010-Jan-28, 08:20:00, 2010-Jan-28, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Jan-28, SIN-BKK 2010-Jan-28, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Jan-28, SIN-BKK 2010-Jan-28, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Jan-28, SIN-BKK 2010-Jan-28, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
  GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Jan-28, SIN-BKK 2010-Jan-28, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Jan-28, SIN-BKK 2010-Jan-28, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
```

```

0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Jan-29
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Jan-29, SIN-BKK, 2010-Jan-29, 08:20:00, 2010-Jan-29, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Jan-29, SIN-BKK 2010-Jan-29, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Jan-29, SIN-BKK 2010-Jan-29, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Jan-29, SIN-BKK 2010-Jan-29, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Jan-29, SIN-BKK 2010-Jan-29, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Jan-29, SIN-BKK 2010-Jan-29, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Jan-30
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Jan-30, SIN-BKK, 2010-Jan-30, 08:20:00, 2010-Jan-30, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Jan-30, SIN-BKK 2010-Jan-30, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Jan-30, SIN-BKK 2010-Jan-30, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Jan-30, SIN-BKK 2010-Jan-30, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Jan-30, SIN-BKK 2010-Jan-30, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Jan-30, SIN-BKK 2010-Jan-30, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Jan-31
*****
*****

```

```

*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Jan-31, SIN-BKK, 2010-Jan-31, 08:20:00, 2010-Jan-31, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Jan-31, SIN-BKK 2010-Jan-31, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Jan-31, SIN-BKK 2010-Jan-31, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Jan-31, SIN-BKK 2010-Jan-31, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Jan-31, SIN-BKK 2010-Jan-31, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Jan-31, SIN-BKK 2010-Jan-31, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-01
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Feb-01, SIN-BKK, 2010-Feb-01, 08:20:00, 2010-Feb-01, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-01, SIN-BKK 2010-Feb-01, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-01, SIN-BKK 2010-Feb-01, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-01, SIN-BKK 2010-Feb-01, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-01, SIN-BKK 2010-Feb-01, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Feb-01, SIN-BKK 2010-Feb-01, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-02
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,

```

```
SQL1 2010-Feb-02, SIN-BKK, 2010-Feb-02, 08:20:00, 2010-Feb-02, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQL1 2010-Feb-02, SIN-BKK 2010-Feb-02, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQL1 2010-Feb-02, SIN-BKK 2010-Feb-02, Y, 1, 0, 0, 0, 0, 300, 0,
SQL1 2010-Feb-02, SIN-BKK 2010-Feb-02, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQL1 2010-Feb-02, SIN-BKK 2010-Feb-02, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQL1 2010-Feb-02, SIN-BKK 2010-Feb-02, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQL1, 2010-Feb-03
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQL1 2010-Feb-03, SIN-BKK, 2010-Feb-03, 08:20:00, 2010-Feb-03, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQL1 2010-Feb-03, SIN-BKK 2010-Feb-03, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQL1 2010-Feb-03, SIN-BKK 2010-Feb-03, Y, 1, 0, 0, 0, 0, 300, 0,
SQL1 2010-Feb-03, SIN-BKK 2010-Feb-03, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQL1 2010-Feb-03, SIN-BKK 2010-Feb-03, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQL1 2010-Feb-03, SIN-BKK 2010-Feb-03, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQL1, 2010-Feb-04
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQL1 2010-Feb-04, SIN-BKK, 2010-Feb-04, 08:20:00, 2010-Feb-04, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
```

```
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-04, SIN-BKK 2010-Feb-04, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-04, SIN-BKK 2010-Feb-04, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-04, SIN-BKK 2010-Feb-04, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-04, SIN-BKK 2010-Feb-04, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Feb-04, SIN-BKK 2010-Feb-04, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-05
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Feb-05, SIN-BKK, 2010-Feb-05, 08:20:00, 2010-Feb-05, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-05, SIN-BKK 2010-Feb-05, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-05, SIN-BKK 2010-Feb-05, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-05, SIN-BKK 2010-Feb-05, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-05, SIN-BKK 2010-Feb-05, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Feb-05, SIN-BKK 2010-Feb-05, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-06
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Feb-06, SIN-BKK, 2010-Feb-06, 08:20:00, 2010-Feb-06, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-06, SIN-BKK 2010-Feb-06, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
```

```
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-06, SIN-BKK 2010-Feb-06, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-06, SIN-BKK 2010-Feb-06, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-06, SIN-BKK 2010-Feb-06, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Feb-06, SIN-BKK 2010-Feb-06, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-07
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Feb-07, SIN-BKK, 2010-Feb-07, 08:20:00, 2010-Feb-07, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-07, SIN-BKK 2010-Feb-07, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-07, SIN-BKK 2010-Feb-07, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-07, SIN-BKK 2010-Feb-07, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-07, SIN-BKK 2010-Feb-07, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Feb-07, SIN-BKK 2010-Feb-07, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-08
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Feb-08, SIN-BKK, 2010-Feb-08, 08:20:00, 2010-Feb-08, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-08, SIN-BKK 2010-Feb-08, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
```

```

*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-08, SIN-BKK 2010-Feb-08, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-08, SIN-BKK 2010-Feb-08, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-08, SIN-BKK 2010-Feb-08, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Feb-08, SIN-BKK 2010-Feb-08, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-09
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Feb-09, SIN-BKK, 2010-Feb-09, 08:20:00, 2010-Feb-09, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-09, SIN-BKK 2010-Feb-09, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-09, SIN-BKK 2010-Feb-09, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-09, SIN-BKK 2010-Feb-09, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-09, SIN-BKK 2010-Feb-09, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Feb-09, SIN-BKK 2010-Feb-09, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-10
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Feb-10, SIN-BKK, 2010-Feb-10, 08:20:00, 2010-Feb-10, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-10, SIN-BKK 2010-Feb-10, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,

```

```

SQ11 2010-Feb-10, SIN-BKK 2010-Feb-10, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-10, SIN-BKK 2010-Feb-10, Y, 2, 0, 0, 0, 0, 300, 0,
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
      GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-10, SIN-BKK 2010-Feb-10, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
SQ11 2010-Feb-10, SIN-BKK 2010-Feb-10, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-11
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
      Elapsed, Distance, Capacity,
SQ11 2010-Feb-11, SIN-BKK, 2010-Feb-11, 08:20:00, 2010-Feb-11, 11:00:00, 07:40:
      00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
      CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-11, SIN-BKK 2010-Feb-11, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 300
      , 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-11, SIN-BKK 2010-Feb-11, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-11, SIN-BKK 2010-Feb-11, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
      GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-11, SIN-BKK 2010-Feb-11, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
SQ11 2010-Feb-11, SIN-BKK 2010-Feb-11, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-12
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
      Elapsed, Distance, Capacity,
SQ11 2010-Feb-12, SIN-BKK, 2010-Feb-12, 08:20:00, 2010-Feb-12, 11:00:00, 07:40:
      00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
      CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-12, SIN-BKK 2010-Feb-12, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 300
      , 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-12, SIN-BKK 2010-Feb-12, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-12, SIN-BKK 2010-Feb-12, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:

```



```
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
    GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-12, SIN-BKK 2010-Feb-12, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
    0, 0, 0, 0, 0,
SQ11 2010-Feb-12, SIN-BKK 2010-Feb-12, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
    0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-13
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
    Elapsed, Distance, Capacity,
SQ11 2010-Feb-13, SIN-BKK, 2010-Feb-13, 08:20:00, 2010-Feb-13, 11:00:00, 07:40:
    00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
    CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-13, SIN-BKK 2010-Feb-13, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
    , 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-13, SIN-BKK 2010-Feb-13, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-13, SIN-BKK 2010-Feb-13, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
    GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-13, SIN-BKK 2010-Feb-13, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
    0, 0, 0, 0, 0,
SQ11 2010-Feb-13, SIN-BKK 2010-Feb-13, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
    0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-14
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
    Elapsed, Distance, Capacity,
SQ11 2010-Feb-14, SIN-BKK, 2010-Feb-14, 08:20:00, 2010-Feb-14, 11:00:00, 07:40:
    00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
    CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-14, SIN-BKK 2010-Feb-14, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 300
    , 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-14, SIN-BKK 2010-Feb-14, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-14, SIN-BKK 2010-Feb-14, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
    GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-14, SIN-BKK 2010-Feb-14, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
    0, 0, 0, 0, 0,
```

```

SQ11 2010-Feb-14, SIN-BKK 2010-Feb-14, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-15
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Feb-15, SIN-BKK, 2010-Feb-15, 08:20:00, 2010-Feb-15, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-15, SIN-BKK 2010-Feb-15, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-15, SIN-BKK 2010-Feb-15, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-15, SIN-BKK 2010-Feb-15, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-15, SIN-BKK 2010-Feb-15, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Feb-15, SIN-BKK 2010-Feb-15, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-16
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Feb-16, SIN-BKK, 2010-Feb-16, 08:20:00, 2010-Feb-16, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-16, SIN-BKK 2010-Feb-16, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-16, SIN-BKK 2010-Feb-16, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-16, SIN-BKK 2010-Feb-16, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-16, SIN-BKK 2010-Feb-16, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Feb-16, SIN-BKK 2010-Feb-16, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-17

```

```
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Feb-17, SIN-BKK, 2010-Feb-17, 08:20:00, 2010-Feb-17, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-17, SIN-BKK 2010-Feb-17, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-17, SIN-BKK 2010-Feb-17, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-17, SIN-BKK 2010-Feb-17, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-17, SIN-BKK 2010-Feb-17, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Feb-17, SIN-BKK 2010-Feb-17, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-18
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Feb-18, SIN-BKK, 2010-Feb-18, 08:20:00, 2010-Feb-18, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-18, SIN-BKK 2010-Feb-18, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-18, SIN-BKK 2010-Feb-18, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-18, SIN-BKK 2010-Feb-18, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-18, SIN-BKK 2010-Feb-18, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Feb-18, SIN-BKK 2010-Feb-18, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-19
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
```

```

    Elapsed, Distance, Capacity,
SQ11 2010-Feb-19, SIN-BKK, 2010-Feb-19, 08:20:00, 2010-Feb-19, 11:00:00, 07:40:
    00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-19, SIN-BKK 2010-Feb-19, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
    , 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-19, SIN-BKK 2010-Feb-19, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-19, SIN-BKK 2010-Feb-19, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
    GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-19, SIN-BKK 2010-Feb-19, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
    0, 0, 0, 0, 0,
SQ11 2010-Feb-19, SIN-BKK 2010-Feb-19, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
    0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-20
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
    Elapsed, Distance, Capacity,
SQ11 2010-Feb-20, SIN-BKK, 2010-Feb-20, 08:20:00, 2010-Feb-20, 11:00:00, 07:40:
    00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-20, SIN-BKK 2010-Feb-20, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 300
    , 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-20, SIN-BKK 2010-Feb-20, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-20, SIN-BKK 2010-Feb-20, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
    GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-20, SIN-BKK 2010-Feb-20, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
    0, 0, 0, 0, 0,
SQ11 2010-Feb-20, SIN-BKK 2010-Feb-20, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
    0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-21
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
    Elapsed, Distance, Capacity,
SQ11 2010-Feb-21, SIN-BKK, 2010-Feb-21, 08:20:00, 2010-Feb-21, 11:00:00, 07:40:
    00, 0, -05:00:00, 6300, 0,
*****
*****

```

```

LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-21, SIN-BKK 2010-Feb-21, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-21, SIN-BKK 2010-Feb-21, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-21, SIN-BKK 2010-Feb-21, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-21, SIN-BKK 2010-Feb-21, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Feb-21, SIN-BKK 2010-Feb-21, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-22
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Feb-22, SIN-BKK, 2010-Feb-22, 08:20:00, 2010-Feb-22, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-22, SIN-BKK 2010-Feb-22, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-22, SIN-BKK 2010-Feb-22, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-22, SIN-BKK 2010-Feb-22, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-22, SIN-BKK 2010-Feb-22, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ11 2010-Feb-22, SIN-BKK 2010-Feb-22, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-23
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ11 2010-Feb-23, SIN-BKK, 2010-Feb-23, 08:20:00, 2010-Feb-23, 11:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-23, SIN-BKK 2010-Feb-23, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300

```

```

, 9, 0, 0, 0, 0, 0,
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-23, SIN-BKK 2010-Feb-23, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-23, SIN-BKK 2010-Feb-23, Y, 2, 0, 0, 0, 0, 300, 0,
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
  GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-23, SIN-BKK 2010-Feb-23, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
  0, 0, 0, 0, 0,
SQ11 2010-Feb-23, SIN-BKK 2010-Feb-23, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
  0, 0, 0, 0, 0,
*****
FlightDate: SQ11, 2010-Feb-24
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
  Elapsed, Distance, Capacity,
SQ11 2010-Feb-24, SIN-BKK, 2010-Feb-24, 08:20:00, 2010-Feb-24, 11:00:00, 07:40:
  00, 0, -05:00:00, 6300, 0,
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
  CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-24, SIN-BKK 2010-Feb-24, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
  , 9, 0, 0, 0, 0, 0,
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-24, SIN-BKK 2010-Feb-24, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-24, SIN-BKK 2010-Feb-24, Y, 2, 0, 0, 0, 0, 300, 0,
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
  GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-24, SIN-BKK 2010-Feb-24, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
  0, 0, 0, 0, 0,
SQ11 2010-Feb-24, SIN-BKK 2010-Feb-24, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
  0, 0, 0, 0, 0,
*****
FlightDate: SQ11, 2010-Feb-25
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
  Elapsed, Distance, Capacity,
SQ11 2010-Feb-25, SIN-BKK, 2010-Feb-25, 08:20:00, 2010-Feb-25, 11:00:00, 07:40:
  00, 0, -05:00:00, 6300, 0,
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
  CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-25, SIN-BKK 2010-Feb-25, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
  , 9, 0, 0, 0, 0, 0,
*****
Buckets:
-----

```

```
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-25, SIN-BKK 2010-Feb-25, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-25, SIN-BKK 2010-Feb-25, Y, 2, 0, 0, 0, 0, 300, 0,
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
      GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-25, SIN-BKK 2010-Feb-25, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
SQ11 2010-Feb-25, SIN-BKK 2010-Feb-25, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
*****
FlightDate: SQ11, 2010-Feb-26
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
      Elapsed, Distance, Capacity,
SQ11 2010-Feb-26, SIN-BKK, 2010-Feb-26, 08:20:00, 2010-Feb-26, 11:00:00, 07:40:
      00, 0, -05:00:00, 6300, 0,
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
      CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-26, SIN-BKK 2010-Feb-26, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 300
      , 9, 0, 0, 0, 0, 0,
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-26, SIN-BKK 2010-Feb-26, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-26, SIN-BKK 2010-Feb-26, Y, 2, 0, 0, 0, 0, 300, 0,
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
      GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-26, SIN-BKK 2010-Feb-26, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
SQ11 2010-Feb-26, SIN-BKK 2010-Feb-26, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
*****
FlightDate: SQ11, 2010-Feb-27
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
      Elapsed, Distance, Capacity,
SQ11 2010-Feb-27, SIN-BKK, 2010-Feb-27, 08:20:00, 2010-Feb-27, 11:00:00, 07:40:
      00, 0, -05:00:00, 6300, 0,
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
      CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-27, SIN-BKK 2010-Feb-27, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 300
      , 9, 0, 0, 0, 0, 0,
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
SegmentCabins:
-----
```

```

Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-27, SIN-BKK 2010-Feb-27, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-27, SIN-BKK 2010-Feb-27, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
    GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-27, SIN-BKK 2010-Feb-27, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
    0, 0, 0, 0, 0,
SQ11 2010-Feb-27, SIN-BKK 2010-Feb-27, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
    0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ11, 2010-Feb-28
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
    Elapsed, Distance, Capacity,
SQ11 2010-Feb-28, SIN-BKK, 2010-Feb-28, 08:20:00, 2010-Feb-28, 11:00:00, 07:40:
    00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
    CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ11 2010-Feb-28, SIN-BKK 2010-Feb-28, Y, 300, 300, 0, 0, 0, 0, 0, 0, 0, 0, 300
    , 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ11 2010-Feb-28, SIN-BKK 2010-Feb-28, Y, 1, 0, 0, 0, 0, 300, 0,
SQ11 2010-Feb-28, SIN-BKK 2010-Feb-28, Y, 2, 0, 0, 0, 0, 300, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
    GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ11 2010-Feb-28, SIN-BKK 2010-Feb-28, Y, 1, Y, 300 (0), 0, 0, 0, 0, 0 (0), 0,
    0, 0, 0, 0, 0,
SQ11 2010-Feb-28, SIN-BKK 2010-Feb-28, Y, 2, M, 300 (0), 0, 0, 0, 0, 0 (0), 0,
    0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Jan-15
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
    Elapsed, Distance, Capacity,
SQ12 2010-Jan-15, SIN-HND, 2010-Jan-15, 09:20:00, 2010-Jan-15, 12:00:00, 07:40:
    00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
    CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Jan-15, SIN-HND 2010-Jan-15, Y, 200, 200, 2.082e+121, 5.53287e-48, 5.
    20268e-90, 0, 1.31346e-47, 1.05119e-153, 2.78986e+179, 0, 200, 9, 3.66962e-62, 1
    .0854e-71, 6.74783e-67, 6.9835e-77, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Jan-15, SIN-HND 2010-Jan-15, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Jan-15, SIN-HND 2010-Jan-15, Y, 2, 0, 0, 0, 0, 200, 0,
*****

```



```
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
    GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Jan-15, SIN-HND 2010-Jan-15, Y, 1, Y13856, 200 (0), 0, 0, 0, 0, 0 (0)
    , 0, 0, 0, 0, 0, 0,
SQ12 2010-Jan-15, SIN-HND 2010-Jan-15, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
    0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Jan-16
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
    Elapsed, Distance, Capacity,
SQ12 2010-Jan-16, SIN-HND, 2010-Jan-16, 09:20:00, 2010-Jan-16, 12:00:00, 07:40:
    00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
    CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Jan-16, SIN-HND 2010-Jan-16, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
    , 9, 2.63638e-319, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Jan-16, SIN-HND 2010-Jan-16, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Jan-16, SIN-HND 2010-Jan-16, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
    GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Jan-16, SIN-HND 2010-Jan-16, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
    0, 0, 0, 0, 0,
SQ12 2010-Jan-16, SIN-HND 2010-Jan-16, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
    0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Jan-17
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
    Elapsed, Distance, Capacity,
SQ12 2010-Jan-17, SIN-HND, 2010-Jan-17, 09:20:00, 2010-Jan-17, 12:00:00, 07:40:
    00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
    CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Jan-17, SIN-HND 2010-Jan-17, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 0, 200
    , 9, 2.39291e-319, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Jan-17, SIN-HND 2010-Jan-17, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Jan-17, SIN-HND 2010-Jan-17, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
    GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
```

```

SQ12 2010-Jan-17, SIN-HND 2010-Jan-17, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Jan-17, SIN-HND 2010-Jan-17, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Jan-18
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Jan-18, SIN-HND, 2010-Jan-18, 09:20:00, 2010-Jan-18, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Jan-18, SIN-HND 2010-Jan-18, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 2.14469e-319, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Jan-18, SIN-HND 2010-Jan-18, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Jan-18, SIN-HND 2010-Jan-18, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Jan-18, SIN-HND 2010-Jan-18, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Jan-18, SIN-HND 2010-Jan-18, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Jan-19
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Jan-19, SIN-HND, 2010-Jan-19, 09:20:00, 2010-Jan-19, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Jan-19, SIN-HND 2010-Jan-19, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Jan-19, SIN-HND 2010-Jan-19, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Jan-19, SIN-HND 2010-Jan-19, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Jan-19, SIN-HND 2010-Jan-19, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Jan-19, SIN-HND 2010-Jan-19, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****

```

```

*****
FlightDate: SQ12, 2010-Jan-20
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Jan-20, SIN-HND, 2010-Jan-20, 09:20:00, 2010-Jan-20, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Jan-20, SIN-HND 2010-Jan-20, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Jan-20, SIN-HND 2010-Jan-20, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Jan-20, SIN-HND 2010-Jan-20, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Jan-20, SIN-HND 2010-Jan-20, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Jan-20, SIN-HND 2010-Jan-20, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Jan-21
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Jan-21, SIN-HND, 2010-Jan-21, 09:20:00, 2010-Jan-21, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Jan-21, SIN-HND 2010-Jan-21, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Jan-21, SIN-HND 2010-Jan-21, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Jan-21, SIN-HND 2010-Jan-21, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Jan-22
*****
*****
Leg-Dates:

```

```
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Jan-22, SIN-HND, 2010-Jan-22, 09:20:00, 2010-Jan-22, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Jan-22, SIN-HND 2010-Jan-22, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Jan-22, SIN-HND 2010-Jan-22, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Jan-22, SIN-HND 2010-Jan-22, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Jan-22, SIN-HND 2010-Jan-22, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Jan-22, SIN-HND 2010-Jan-22, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Jan-23
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Jan-23, SIN-HND, 2010-Jan-23, 09:20:00, 2010-Jan-23, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Jan-23, SIN-HND 2010-Jan-23, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Jan-23, SIN-HND 2010-Jan-23, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Jan-23, SIN-HND 2010-Jan-23, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Jan-23, SIN-HND 2010-Jan-23, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Jan-23, SIN-HND 2010-Jan-23, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Jan-24
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Jan-24, SIN-HND, 2010-Jan-24, 09:20:00, 2010-Jan-24, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
```

```
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Jan-24, SIN-HND 2010-Jan-24, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Jan-24, SIN-HND 2010-Jan-24, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Jan-24, SIN-HND 2010-Jan-24, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Jan-24, SIN-HND 2010-Jan-24, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Jan-24, SIN-HND 2010-Jan-24, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Jan-25
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Jan-25, SIN-HND, 2010-Jan-25, 09:20:00, 2010-Jan-25, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Jan-25, SIN-HND 2010-Jan-25, Y, 200, 200, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Jan-25, SIN-HND 2010-Jan-25, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Jan-25, SIN-HND 2010-Jan-25, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Jan-25, SIN-HND 2010-Jan-25, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Jan-25, SIN-HND 2010-Jan-25, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Jan-26
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Jan-26, SIN-HND, 2010-Jan-26, 09:20:00, 2010-Jan-26, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
```

```
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Jan-26, SIN-HND 2010-Jan-26, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Jan-26, SIN-HND 2010-Jan-26, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Jan-26, SIN-HND 2010-Jan-26, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Jan-26, SIN-HND 2010-Jan-26, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Jan-26, SIN-HND 2010-Jan-26, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Jan-27
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Jan-27, SIN-HND, 2010-Jan-27, 09:20:00, 2010-Jan-27, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Jan-27, SIN-HND 2010-Jan-27, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Jan-27, SIN-HND 2010-Jan-27, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Jan-27, SIN-HND 2010-Jan-27, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Jan-27, SIN-HND 2010-Jan-27, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Jan-27, SIN-HND 2010-Jan-27, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Jan-28
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Jan-28, SIN-HND, 2010-Jan-28, 09:20:00, 2010-Jan-28, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Jan-28, SIN-HND 2010-Jan-28, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
```

```
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Jan-28, SIN-HND 2010-Jan-28, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Jan-28, SIN-HND 2010-Jan-28, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
  GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Jan-28, SIN-HND 2010-Jan-28, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
  0, 0, 0, 0, 0,
SQ12 2010-Jan-28, SIN-HND 2010-Jan-28, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
  0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Jan-29
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
  Elapsed, Distance, Capacity,
SQ12 2010-Jan-29, SIN-HND, 2010-Jan-29, 09:20:00, 2010-Jan-29, 12:00:00, 07:40:
  00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
  CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Jan-29, SIN-HND 2010-Jan-29, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 0, 200
  , 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Jan-29, SIN-HND 2010-Jan-29, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Jan-29, SIN-HND 2010-Jan-29, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
  GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Jan-29, SIN-HND 2010-Jan-29, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
  0, 0, 0, 0, 0,
SQ12 2010-Jan-29, SIN-HND 2010-Jan-29, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
  0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Jan-30
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
  Elapsed, Distance, Capacity,
SQ12 2010-Jan-30, SIN-HND, 2010-Jan-30, 09:20:00, 2010-Jan-30, 12:00:00, 07:40:
  00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
  CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Jan-30, SIN-HND 2010-Jan-30, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 0, 200
  , 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
```

```
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Jan-30, SIN-HND 2010-Jan-30, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Jan-30, SIN-HND 2010-Jan-30, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
      GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Jan-30, SIN-HND 2010-Jan-30, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
SQ12 2010-Jan-30, SIN-HND 2010-Jan-30, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Jan-31
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
      Elapsed, Distance, Capacity,
SQ12 2010-Jan-31, SIN-HND, 2010-Jan-31, 09:20:00, 2010-Jan-31, 12:00:00, 07:40:
      00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
      CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Jan-31, SIN-HND 2010-Jan-31, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
      , 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Jan-31, SIN-HND 2010-Jan-31, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Jan-31, SIN-HND 2010-Jan-31, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
      GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Jan-31, SIN-HND 2010-Jan-31, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
SQ12 2010-Jan-31, SIN-HND 2010-Jan-31, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Feb-01
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
      Elapsed, Distance, Capacity,
SQ12 2010-Feb-01, SIN-HND, 2010-Feb-01, 09:20:00, 2010-Feb-01, 12:00:00, 07:40:
      00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
      CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-01, SIN-HND 2010-Feb-01, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
      , 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-01, SIN-HND 2010-Feb-01, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-01, SIN-HND 2010-Feb-01, Y, 2, 0, 0, 0, 0, 200, 0,
```



```

*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
    GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-01, SIN-HND 2010-Feb-01, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
    0, 0, 0, 0, 0,
SQ12 2010-Feb-01, SIN-HND 2010-Feb-01, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
    0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Feb-02
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
    Elapsed, Distance, Capacity,
SQ12 2010-Feb-02, SIN-HND, 2010-Feb-02, 09:20:00, 2010-Feb-02, 12:00:00, 07:40:
    00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
    CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-02, SIN-HND 2010-Feb-02, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 0, 200
    , 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-02, SIN-HND 2010-Feb-02, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-02, SIN-HND 2010-Feb-02, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
    GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-02, SIN-HND 2010-Feb-02, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
    0, 0, 0, 0, 0,
SQ12 2010-Feb-02, SIN-HND 2010-Feb-02, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
    0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Feb-03
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
    Elapsed, Distance, Capacity,
SQ12 2010-Feb-03, SIN-HND, 2010-Feb-03, 09:20:00, 2010-Feb-03, 12:00:00, 07:40:
    00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
    CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-03, SIN-HND 2010-Feb-03, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
    , 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-03, SIN-HND 2010-Feb-03, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-03, SIN-HND 2010-Feb-03, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,

```

```

      GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-03, SIN-HND 2010-Feb-03, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
SQ12 2010-Feb-03, SIN-HND 2010-Feb-03, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Feb-04
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
      Elapsed, Distance, Capacity,
SQ12 2010-Feb-04, SIN-HND, 2010-Feb-04, 09:20:00, 2010-Feb-04, 12:00:00, 07:40:
      00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
      CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-04, SIN-HND 2010-Feb-04, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 0, 200
      , 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-04, SIN-HND 2010-Feb-04, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-04, SIN-HND 2010-Feb-04, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
      GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-04, SIN-HND 2010-Feb-04, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
SQ12 2010-Feb-04, SIN-HND 2010-Feb-04, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Feb-05
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
      Elapsed, Distance, Capacity,
SQ12 2010-Feb-05, SIN-HND, 2010-Feb-05, 09:20:00, 2010-Feb-05, 12:00:00, 07:40:
      00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
      CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-05, SIN-HND 2010-Feb-05, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 0, 200
      , 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
      GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-05, SIN-HND 2010-Feb-05, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
SQ12 2010-Feb-05, SIN-HND 2010-Feb-05, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,

```

```
*****
*****
FlightDate: SQ12, 2010-Feb-06
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Feb-06, SIN-HND, 2010-Feb-06, 09:20:00, 2010-Feb-06, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-06, SIN-HND 2010-Feb-06, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-06, SIN-HND 2010-Feb-06, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-06, SIN-HND 2010-Feb-06, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-06, SIN-HND 2010-Feb-06, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Feb-06, SIN-HND 2010-Feb-06, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Feb-07
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Feb-07, SIN-HND, 2010-Feb-07, 09:20:00, 2010-Feb-07, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-07, SIN-HND 2010-Feb-07, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-07, SIN-HND 2010-Feb-07, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-07, SIN-HND 2010-Feb-07, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-07, SIN-HND 2010-Feb-07, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Feb-07, SIN-HND 2010-Feb-07, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Feb-08
*****
*****
```

```
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Feb-08, SIN-HND, 2010-Feb-08, 09:20:00, 2010-Feb-08, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-08, SIN-HND 2010-Feb-08, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-08, SIN-HND 2010-Feb-08, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-08, SIN-HND 2010-Feb-08, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-08, SIN-HND 2010-Feb-08, Y, 1, Y, 200 (0), 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Feb-08, SIN-HND 2010-Feb-08, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Feb-09
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Feb-09, SIN-HND, 2010-Feb-09, 09:20:00, 2010-Feb-09, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-09, SIN-HND 2010-Feb-09, Y, 200, 200, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-09, SIN-HND 2010-Feb-09, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-09, SIN-HND 2010-Feb-09, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-09, SIN-HND 2010-Feb-09, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Feb-09, SIN-HND 2010-Feb-09, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Feb-10
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Feb-10, SIN-HND, 2010-Feb-10, 09:20:00, 2010-Feb-10, 12:00:00, 07:40:
```

```

00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-10, SIN-HND 2010-Feb-10, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-10, SIN-HND 2010-Feb-10, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-10, SIN-HND 2010-Feb-10, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-10, SIN-HND 2010-Feb-10, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Feb-10, SIN-HND 2010-Feb-10, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Feb-11
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Feb-11, SIN-HND, 2010-Feb-11, 09:20:00, 2010-Feb-11, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-11, SIN-HND 2010-Feb-11, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-11, SIN-HND 2010-Feb-11, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-11, SIN-HND 2010-Feb-11, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-11, SIN-HND 2010-Feb-11, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Feb-11, SIN-HND 2010-Feb-11, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Feb-12
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Feb-12, SIN-HND, 2010-Feb-12, 09:20:00, 2010-Feb-12, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----

```

```

Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-12, SIN-HND 2010-Feb-12, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-12, SIN-HND 2010-Feb-12, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-12, SIN-HND 2010-Feb-12, Y, 2, 0, 0, 0, 0, 200, 0,
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-12, SIN-HND 2010-Feb-12, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Feb-12, SIN-HND 2010-Feb-12, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
FlightDate: SQ12, 2010-Feb-13
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Feb-13, SIN-HND, 2010-Feb-13, 09:20:00, 2010-Feb-13, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-13, SIN-HND 2010-Feb-13, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-13, SIN-HND 2010-Feb-13, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-13, SIN-HND 2010-Feb-13, Y, 2, 0, 0, 0, 0, 200, 0,
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-13, SIN-HND 2010-Feb-13, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Feb-13, SIN-HND 2010-Feb-13, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
FlightDate: SQ12, 2010-Feb-14
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Feb-14, SIN-HND, 2010-Feb-14, 09:20:00, 2010-Feb-14, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-14, SIN-HND 2010-Feb-14, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****

```

```
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-14, SIN-HND 2010-Feb-14, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-14, SIN-HND 2010-Feb-14, Y, 2, 0, 0, 0, 0, 200, 0,
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
      GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-14, SIN-HND 2010-Feb-14, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
SQ12 2010-Feb-14, SIN-HND 2010-Feb-14, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Feb-15
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
      Elapsed, Distance, Capacity,
SQ12 2010-Feb-15, SIN-HND, 2010-Feb-15, 09:20:00, 2010-Feb-15, 12:00:00, 07:40:
      00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
      CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-15, SIN-HND 2010-Feb-15, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
      , 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-15, SIN-HND 2010-Feb-15, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-15, SIN-HND 2010-Feb-15, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
      GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-15, SIN-HND 2010-Feb-15, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
SQ12 2010-Feb-15, SIN-HND 2010-Feb-15, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Feb-16
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
      Elapsed, Distance, Capacity,
SQ12 2010-Feb-16, SIN-HND, 2010-Feb-16, 09:20:00, 2010-Feb-16, 12:00:00, 07:40:
      00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
      CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-16, SIN-HND 2010-Feb-16, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
      , 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
```

```

*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-16, SIN-HND 2010-Feb-16, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-16, SIN-HND 2010-Feb-16, Y, 2, 0, 0, 0, 0, 200, 0,
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
      GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-16, SIN-HND 2010-Feb-16, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
SQ12 2010-Feb-16, SIN-HND 2010-Feb-16, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
*****
FlightDate: SQ12, 2010-Feb-17
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
      Elapsed, Distance, Capacity,
SQ12 2010-Feb-17, SIN-HND, 2010-Feb-17, 09:20:00, 2010-Feb-17, 12:00:00, 07:40:
      00, 0, -05:00:00, 6300, 0,
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
      CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-17, SIN-HND 2010-Feb-17, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 0, 200
      , 9, 0, 0, 0, 0, 0,
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-17, SIN-HND 2010-Feb-17, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-17, SIN-HND 2010-Feb-17, Y, 2, 0, 0, 0, 0, 200, 0,
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
      GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-17, SIN-HND 2010-Feb-17, Y, 1, Y, 200 (0), 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
SQ12 2010-Feb-17, SIN-HND 2010-Feb-17, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
      0, 0, 0, 0, 0,
*****
FlightDate: SQ12, 2010-Feb-18
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
      Elapsed, Distance, Capacity,
SQ12 2010-Feb-18, SIN-HND, 2010-Feb-18, 09:20:00, 2010-Feb-18, 12:00:00, 07:40:
      00, 0, -05:00:00, 6300, 0,
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
      CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-18, SIN-HND 2010-Feb-18, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 0, 200
      , 9, 0, 0, 0, 0, 0,
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-18, SIN-HND 2010-Feb-18, Y, 1, 0, 0, 0, 0, 200, 0,

```



```
SQL2 2010-Feb-18, SIN-HND 2010-Feb-18, Y, 2, 0, 0, 0, 0, 200, 0,
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
  GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQL2 2010-Feb-18, SIN-HND 2010-Feb-18, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
  0, 0, 0, 0, 0,
SQL2 2010-Feb-18, SIN-HND 2010-Feb-18, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
  0, 0, 0, 0, 0,
*****
*****
FlightDate: SQL2, 2010-Feb-19
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
  Elapsed, Distance, Capacity,
SQL2 2010-Feb-19, SIN-HND, 2010-Feb-19, 09:20:00, 2010-Feb-19, 12:00:00, 07:40:
  00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
  CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQL2 2010-Feb-19, SIN-HND 2010-Feb-19, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 0, 200
  , 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQL2 2010-Feb-19, SIN-HND 2010-Feb-19, Y, 1, 0, 0, 0, 0, 200, 0,
SQL2 2010-Feb-19, SIN-HND 2010-Feb-19, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
  GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQL2 2010-Feb-19, SIN-HND 2010-Feb-19, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
  0, 0, 0, 0, 0,
SQL2 2010-Feb-19, SIN-HND 2010-Feb-19, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
  0, 0, 0, 0, 0,
*****
*****
FlightDate: SQL2, 2010-Feb-20
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
  Elapsed, Distance, Capacity,
SQL2 2010-Feb-20, SIN-HND, 2010-Feb-20, 09:20:00, 2010-Feb-20, 12:00:00, 07:40:
  00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
  CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQL2 2010-Feb-20, SIN-HND 2010-Feb-20, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 0, 200
  , 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQL2 2010-Feb-20, SIN-HND 2010-Feb-20, Y, 1, 0, 0, 0, 0, 200, 0,
SQL2 2010-Feb-20, SIN-HND 2010-Feb-20, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
```

```
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
  GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-20, SIN-HND 2010-Feb-20, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Feb-20, SIN-HND 2010-Feb-20, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Feb-21
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
  Elapsed, Distance, Capacity,
SQ12 2010-Feb-21, SIN-HND, 2010-Feb-21, 09:20:00, 2010-Feb-21, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
  CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-21, SIN-HND 2010-Feb-21, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-21, SIN-HND 2010-Feb-21, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-21, SIN-HND 2010-Feb-21, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
  GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-21, SIN-HND 2010-Feb-21, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Feb-21, SIN-HND 2010-Feb-21, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Feb-22
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
  Elapsed, Distance, Capacity,
SQ12 2010-Feb-22, SIN-HND, 2010-Feb-22, 09:20:00, 2010-Feb-22, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
  CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-22, SIN-HND 2010-Feb-22, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-22, SIN-HND 2010-Feb-22, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-22, SIN-HND 2010-Feb-22, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
  GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-22, SIN-HND 2010-Feb-22, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Feb-22, SIN-HND 2010-Feb-22, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
```

```
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Feb-23
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Feb-23, SIN-HND, 2010-Feb-23, 09:20:00, 2010-Feb-23, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-23, SIN-HND 2010-Feb-23, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-23, SIN-HND 2010-Feb-23, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-23, SIN-HND 2010-Feb-23, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-23, SIN-HND 2010-Feb-23, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Feb-23, SIN-HND 2010-Feb-23, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Feb-24
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Feb-24, SIN-HND, 2010-Feb-24, 09:20:00, 2010-Feb-24, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhyCAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-24, SIN-HND 2010-Feb-24, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-24, SIN-HND 2010-Feb-24, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-24, SIN-HND 2010-Feb-24, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-24, SIN-HND 2010-Feb-24, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Feb-24, SIN-HND 2010-Feb-24, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Feb-25
*****
*****
```

```

*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Feb-25, SIN-HND, 2010-Feb-25, 09:20:00, 2010-Feb-25, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-25, SIN-HND 2010-Feb-25, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-25, SIN-HND 2010-Feb-25, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-25, SIN-HND 2010-Feb-25, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-25, SIN-HND 2010-Feb-25, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Feb-25, SIN-HND 2010-Feb-25, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Feb-26
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQ12 2010-Feb-26, SIN-HND, 2010-Feb-26, 09:20:00, 2010-Feb-26, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQ12 2010-Feb-26, SIN-HND 2010-Feb-26, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQ12 2010-Feb-26, SIN-HND 2010-Feb-26, Y, 1, 0, 0, 0, 0, 200, 0,
SQ12 2010-Feb-26, SIN-HND 2010-Feb-26, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQ12 2010-Feb-26, SIN-HND 2010-Feb-26, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQ12 2010-Feb-26, SIN-HND 2010-Feb-26, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQ12, 2010-Feb-27
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,

```

```
SQL2 2010-Feb-27, SIN-HND, 2010-Feb-27, 09:20:00, 2010-Feb-27, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQL2 2010-Feb-27, SIN-HND 2010-Feb-27, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQL2 2010-Feb-27, SIN-HND 2010-Feb-27, Y, 1, 0, 0, 0, 0, 200, 0,
SQL2 2010-Feb-27, SIN-HND 2010-Feb-27, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQL2 2010-Feb-27, SIN-HND 2010-Feb-27, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQL2 2010-Feb-27, SIN-HND 2010-Feb-27, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
FlightDate: SQL2, 2010-Feb-28
*****
*****
Leg-Dates:
-----
Flight, Leg, BoardDate, BoardTime, OffDate, OffTime, Date Offset, Time Offset,
Elapsed, Distance, Capacity,
SQL2 2010-Feb-28, SIN-HND, 2010-Feb-28, 09:20:00, 2010-Feb-28, 12:00:00, 07:40:
00, 0, -05:00:00, 6300, 0,
*****
*****
LegCabins:
-----
Flight, Leg, Cabin, OffedCAP, PhycAP, RgdADJ, AU, UPR, SS, Staff, WL, Group,
CommSpace, AvPool, Avl, NAV, GAV, ACP, ETB, BidPrice,
SQL2 2010-Feb-28, SIN-HND 2010-Feb-28, Y, 200, 200, 0, 0, 0, 0, 0, 0, 0, 200
, 9, 0, 0, 0, 0, 0,
*****
*****
Buckets:
-----
Flight, Leg, Cabin, Yield, AU/SI, SS, AV,
*****
*****
SegmentCabins:
-----
Flight, Segment, Cabin, FF, Bkgs, MIN, UPR, CommSpace, AvPool, BP,
SQL2 2010-Feb-28, SIN-HND 2010-Feb-28, Y, 1, 0, 0, 0, 0, 200, 0,
SQL2 2010-Feb-28, SIN-HND 2010-Feb-28, Y, 2, 0, 0, 0, 0, 200, 0,
*****
*****
Subclasses:
-----
Flight, Segment, Cabin, FF, Subclass, MIN/AU (Prot), Nego, NS%, OB%, Bkgs,
GrpBks (pdg), StfBkgs, WLBkgs, ETB, ClassAvl, RevAvl, SegAvl,
SQL2 2010-Feb-28, SIN-HND 2010-Feb-28, Y, 1, Y, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
SQL2 2010-Feb-28, SIN-HND 2010-Feb-28, Y, 2, M, 200 (0), 0, 0, 0, 0, 0 (0), 0,
0, 0, 0, 0, 0,
*****
*****
```

## 13.6 Exploring the Predefined BOM Tree

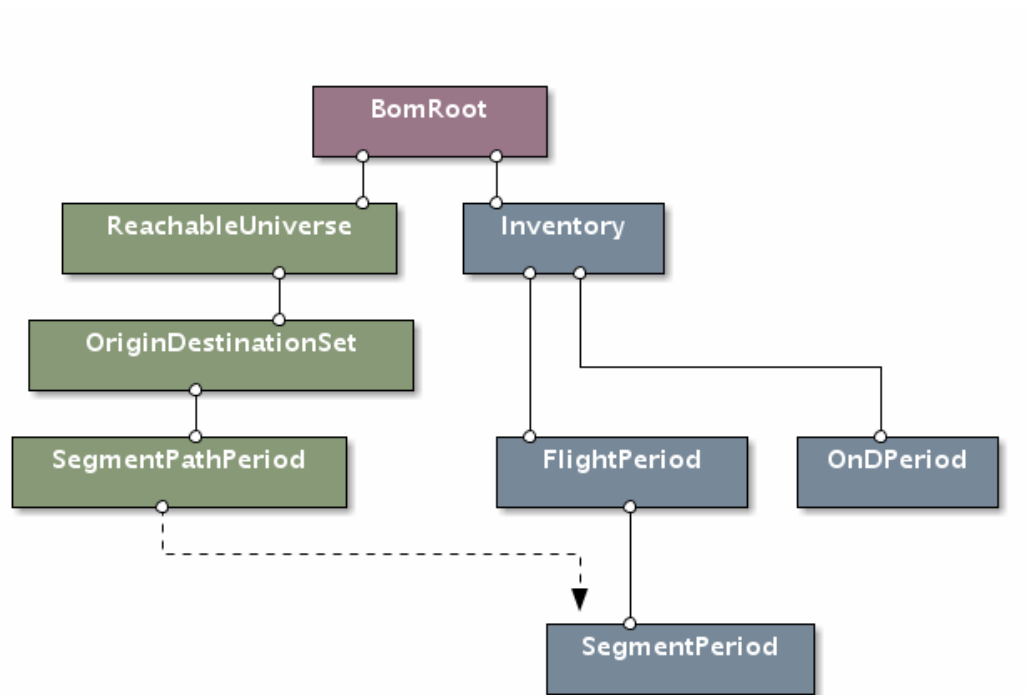


Figure 2: AirSched BOM tree

AirSched predefines a BOM (Business Object Model) tree specific to the airline IT arena.

### 13.6.1 Airline Network BOM Tree

- `AIRSCHEd::ReachableUniverse`
- `AIRSCHEd::OriginDestinationSet`
- `AIRSCHEd::SegmentPathPeriod`

### 13.6.2 Airline Schedule BOM Tree

- `stdair::Inventory`
- `stdair::FlightPeriod`
- `stdair::SegmentPeriod`
- `stdair::OnDPeriod`

## 13.7 Extending the BOM Tree

## 13.8 The travel solution calculation procedure

The project AirSched aims at calculating a list of **travel solutions** for every incoming **booking request**.

## 14 Supported Systems

### 14.1 Table of Contents

- [Introduction](#)
- [AirSched 0.2.x](#)
  - [Linux Systems](#)
    - \* [Fedora Core 4 with ATLAS](#)
    - \* [Gentoo Linux with ACML](#)
    - \* [Gentoo Linux with ATLAS](#)
    - \* [Gentoo Linux with MKL](#)
    - \* [Gentoo Linux with NetLib's BLAS and LAPACK](#)
    - \* [Red Hat Enterprise Linux with AirSched External](#)
    - \* [SUSE Linux 10.0 with NetLib's BLAS and LAPACK](#)
    - \* [SUSE Linux 10.0 with MKL](#)
  - [Windows Systems](#)
    - \* [Microsoft Windows XP with Cygwin](#)
    - \* [Microsoft Windows XP with Cygwin and ATLAS](#)
    - \* [Microsoft Windows XP with Cygwin and ACML](#)
    - \* [Microsoft Windows XP with MinGW, MSYS and ACML](#)
    - \* [Microsoft Windows XP with MinGW, MSYS and AirSched External](#)
    - \* [Microsoft Windows XP with MS Visual C++ and Intel MKL](#)
  - [Unix Systems](#)
    - \* [SunOS 5.9 with AirSched External](#)
- [AirSched 3.9.1](#)
- [AirSched 3.9.0](#)
- [AirSched 3.8.1](#)

### 14.2 Introduction

This page is intended to provide a list of AirSched supported systems, i.e. the systems on which configuration, installation and testing process of the AirSched library has been successful. Results are grouped based on minor release number. Therefore, only the latest tests for bug-fix releases are included. Besides, the information on this page is divided into sections dependent on the operating system.

Where necessary, some extra information is given for each tested configuration, e.g. external libraries installed, configuration commands used, etc.

If you manage to compile, install and test the AirSched library on a system not mentioned below, please let us know, so we could update this database.

### 14.3 AirSched 0.2.x

#### 14.3.1 Linux Systems

##### 14.3.1.1 Fedora Core 4 with ATLAS

- **Platform:** Intel Pentium 4
- **Operating System:** Fedora Core 4 (x86)

- **Compiler:** g++ (GCC) 4.0.2 20051125
- **AirSched release:** 0.2.0
- **External Libraries:** From FC4 distribution:
  - fftw3.i386-3.0.1-3
  - fftw3-devel.i386-3.0.1-3
  - atlas-sse2.i386-3.6.0-8.fc4
  - atlas-sse2-devel.i386-3.6.0-8.fc4
  - blas.i386-3.0-35.fc4
  - lapack.i386-3.0-35.fc4
- **Tests Status:** All tests PASSED
- **Comments:** AirSched configured with:
 

```
% CXXFLAGS="-O3 -pipe -march=pentium4" ./configure
```
- **Date:** March 7, 2006
- **Tester:** Tony Ottosson

#### 14.3.1.2 Gentoo Linux with ACML

- **Platform:** AMD Sempron 3000+
- **Operating System:** Gentoo Linux 2006.0 (x86 arch)
- **Compiler(s):** g++ (GCC) 3.4.5
- **AirSched release:** 0.2.1
- **External Libraries:** Compiled and installed from portage tree:
  - sci-libs/acml-3.0.0
- **Tests Status:** All tests PASSED
- **Comments:** BLAS and LAPACK libs set by using the following system commands:
 

```
% eselect blas set ACML
% eselect lapack set ACML
```

AirSched configured with:

```
% export CPPFLAGS="-I/usr/include/acml"
% ./configure --with-blas="-lblas"
```
- **Date:** March 31, 2006
- **Tester:** Adam Piatyszek (ediap)



## 14.3.1.3 Gentoo Linux with ATLAS

- **Platform:** Intel Pentium M Centrino
- **Operating System:** Gentoo Linux 2006.0 (x86)
- **Compiler:** g++ (GCC) 3.4.5
- **AirSched release:** 0.2.1
- **External Libraries:** Compiled and installed from portage tree:
  - sci-libs/fftw-3.1
  - sci-libs/blas-atlas-3.6.0-r1
  - sci-libs/lapack-atlas-3.6.0
- **Tests Status:** All tests PASSED
- **Comments:** BLAS and LAPACK libs set by using the following system commands:

```
% eselect blas set ATLAS
% eselect lapack set ATLAS
```

AirSched configured with:

```
% ./configure --with-blas="-lblas"
```

- **Date:** March 31, 2006
- **Tester:** Adam Piatyszek (ediap)

## 14.3.1.4 Gentoo Linux with MKL

- **Platform:** Intel Pentium M Centrino
- **Operating System:** Gentoo Linux 2006.0 (x86 arch)
- **Compiler:** g++ (GCC) 3.4.5
- **AirSched release:** 0.2.0
- **External Libraries:** Intel Math Kernel Library (MKL) 8.0.1 installed manually in the following directory:  
/opt/intel/mkl/8.0.1
- **Tests Status:** All tests PASSED
- **Comments:** AirSched configured using the following commands:

```
% export LDFLAGS="-L/opt/intel/mkl/8.0.1/lib/32"
% export CPPFLAGS="-I/opt/intel/mkl/8.0.1/include"
% ./configure
```

- **Date:** February 28, 2006
- **Tester:** Adam Piatyszek (ediap)

## 14.3.1.5 Gentoo Linux with NetLib's BLAS and LAPACK

- **Platform:** Intel Pentium M Centrino
- **Operating System:** Gentoo Linux 2006.0 (x86)
- **Compiler:** g++ (GCC) 3.4.5
- **AirSched release:** 0.2.1
- **External Libraries:** Compiled and installed from portage tree:
  - sci-libs/fftw-3.1
  - sci-libs/blas-reference-19940131-r2
  - sci-libs/cblas-reference-20030223
  - sci-libs/lapack-reference-3.0-r2
- **Tests Status:** All tests PASSED
- **Comments:** BLAS and LAPACK libs set by using the following system commands:

```
% blas-config reference
% lapack-config reference
```

AirSched configured with:

```
% ./configure --with-blas="-lblas"
```

- **Date:** March 31, 2006
- **Tester:** Adam Piatyszek (ediap)

## 14.3.1.6 Red Hat Enterprise Linux with AirSched External

- **Platform:** Intel Pentium 4
- **Operating System:** Red Hat Enterprise Linux AS release 4 (Nahant Update 2)
- **Compiler:** g++ (GCC) 3.4.4 20050721 (Red Hat 3.4.4-2)
- **AirSched release:** 0.2.0
- **External Libraries:** BLAS, CBLAS, LAPACK and FFTW libraries from AirSched External 2.1.1 package
- **Tests Status:** All tests PASSED
- **Date:** March 7, 2006
- **Tester:** Erik G. Larsson

## 14.3.1.7 SUSE Linux 10.0 with NetLib's BLAS and LAPACK

- **Platform:** Intel Pentium 4 CPU 3.20GHz (64-bit)
- **Operating System:** SUSE Linux 10.0 (x86\_64)
- **Compiler(s):** g++ (GCC) 4.0.2
- **AirSched release:** 0.2.0
- **External Libraries:** BLAS, LAPACK and FFTW libraries installed from OpenSuse 10.0 RPM repository:
  - blas-3.0-926
  - lapack-3.0-926
  - fftw3-3.0.1-114

- fftw3-threads-3.0.1-114
- fftw3-devel-3.0.1-114

- **Tests Status:** All tests PASSED
- **Comments:** AirSched configured with:

```
% export CXXFLAGS="-m64 -march=nocona -O3 -pipe"
% ./configure --with-lapack="/usr/lib64/liblapack.so.3"
```

- **Date:** March 1, 2006
- **Tester:** Adam Piatyszek (ediap)

#### 14.3.1.8 SUSE Linux 10.0 with MKL

- **Platform:** Intel Pentium 4 CPU 3.20GHz (64-bit)
- **Operating System:** SUSE Linux 10.0 (x86\_64)
- **Compiler(s):** g++ (GCC) 4.0.2
- **AirSched release:** 0.2.0
- **External Libraries:** Intel Math Kernel Library (MKL) 8.0.1 installed manually in the following directory:  
/opt/intel/mkl/8.0.1
- **Tests Status:** All tests PASSED
- **Comments:** AirSched configured with:

```
% export CXXFLAGS="-m64 -march=nocona -O3 -pipe"
% export LDFLAGS="-L/opt/intel/mkl/8.0.1/lib/em64t"
% export CPPFLAGS="-I/opt/intel/mkl/8.0.1/include"
% ./configure
```

- **Date:** March 1, 2006
- **Tester:** Adam Piatyszek (ediap)

#### 14.3.2 Windows Systems

##### 14.3.2.1 Microsoft Windows XP with Cygwin

- **Platform:** AMD Sempron 3000+
- **Operating System:** Microsoft Windows XP SP2, Cygwin 1.5.19-4
- **Compiler(s):** g++ (GCC) 3.4.4 (cygming special)
- **AirSched release:** 0.2.1
- **External Libraries:** Installed from Cygwin's repository:
  - fftw-3.0.1-2
  - fftw-dev-3.0.1-1
  - lapack-3.0-4
- **Tests Status:** All tests PASSED
- **Comments:** Only static library can be built. AirSched configured with:

```
% ./configure
```

- **Date:** March 31, 2006
- **Tester:** Adam Piatyszek (ediap)

## 14.3.2.2 Microsoft Windows XP with Cygwin and ATLAS

- **Platform:** AMD Sempron 3000+
- **Operating System:** Microsoft Windows XP SP2, Cygwin 1.5.19-4
- **Compiler(s):** g++ (GCC) 3.4.4 (cygming special)
- **AirSched release:** 0.2.1
- **External Libraries:** Installed from Cygwin's repository:
  - fftw-3.0.1-2
  - fftw-dev-3.0.1-1

ATLAS BLAS and LAPACK libraries from AirSched External 2.1.1 package configured using:

```
% ./configure --enable-atlas --disable-fftw
```

- **Tests Status:** All tests PASSED
- **Comments:** Only static library can be built. AirSched configured with:

```
% export LDFLAGS="-L/usr/local/lib"  
% ./configure
```

- **Date:** March 31, 2006
- **Tester:** Adam Piatyszek (ediap)

## 14.3.2.3 Microsoft Windows XP with Cygwin and ACML

- **Platform:** AMD Sempron 3000+
- **Operating System:** Microsoft Windows XP SP2, Cygwin 1.5.19-4
- **Compiler(s):** g++ (GCC) 3.4.4 (cygming special)
- **AirSched release:** 0.2.2
- **External Libraries:** ACML version 3.1.0 (acml3.1.0-32-win32-g77.exe) installed into a default directory, i.e. "c:\Program Files\AMD\acml3.1.0"
- **Tests Status:** All tests PASSED
- **Comments:** Only static library can be built. AirSched configured with:

```
% export LDFLAGS="-L/cygdrive/c/Progra~1/AMD/acml3.1.0/gnu32/lib"  
% export CPPFLAGS="-I/cygdrive/c/Progra~1/AMD/acml3.1.0/gnu32/include"  
% ./configure --enable-debug
```

- **Date:** May 15, 2006
- **Tester:** Adam Piatyszek (ediap)

## 14.3.2.4 Microsoft Windows XP with MinGW, MSYS and ACML

- **Platform:** AMD Sempron 3000+
- **Operating System:** Microsoft Windows XP SP2, MinGW 5.0.2, MSYS 1.0.10
- **Compiler(s):** g++ (GCC) 3.4.4 (mingw special)
- **AirSched release:** 0.2.2
- **External Libraries:** ACML version 3.1.0 (acml3.1.0-32-win32-g77.exe) installed into a default directory, i.e. "c:\Program Files\AMD\acml3.1.0"
- **Tests Status:** All tests PASSED
- **Comments:** Only static library can be built. AirSched configured with:

```
% export LDFLAGS="-L/c/Program Files/AMD/acml3.1.0/gnu32/lib"
% export CPPFLAGS="-I/c/Program Files/AMD/acml3.1.0/gnu32/include"
% ./configure --enable-debug
```

- **Date:** May 15, 2006
- **Tester:** Adam Piatyszek (ediap)

## 14.3.2.5 Microsoft Windows XP with MinGW, MSYS and AirSched External

- **Platform:** AMD Sempron 3000+
- **Operating System:** Microsoft Windows XP SP2, MinGW 5.0.2, MSYS 1.0.10
- **Compiler(s):** g++ (GCC) 3.4.4 (mingw special)
- **AirSched release:** 0.2.5
- **External Libraries:** BLAS, CBLAS, LAPACK and FFTW libraries from AirSched External 2.2.0 package
- **Tests Status:** All tests PASSED
- **Comments:** Only static library can be built. AirSched configured with:

```
% export LDFLAGS="-L/usr/local/lib"
% export CPPFLAGS="-I/usr/local/include"
% export CXXFLAGS="-Wall -O3 -march=athlon-tbird -pipe"
% ./configure --disable-html-doc
```

- **Date:** August 11, 2006
- **Tester:** Adam Piatyszek (ediap)

## 14.3.2.6 Microsoft Windows XP with MS Visual C++ and Intel MKL

- **Platform:** AMD Sempron 3000+
- **Operating System:** Microsoft Windows XP SP2
- **Compiler(s):** Microsoft Visual C++ 2005 .NET
- **AirSched release:** 0.2.5
- **External Libraries:** Intel Math Kernel Library (MKL) 8.1 installed manually in the following directory: "C:\Program Files\Intel\MKL\8.1"
- **Tests Status:** Not fully tested. Some AirSched based programs compiled and run with success.
- **Comments:** Only static library can be built. AirSched built by opening the "win32\airsched.vcproj" project file in MSVC++ and executing "Build -> Build Solution" command from menu.
- **Date:** August 11, 2006
- **Tester:** Adam Piatyszek (ediap)

### 14.3.3 Unix Systems

#### 14.3.3.1 SunOS 5.9 with AirSched External

- **Platform:** SUNW, Sun-Blade-100 (SPARC)
- **Operating System:** SunOS 5.9 Generic\_112233-10
- **Compiler(s):** g++ (GCC) 3.4.5
- **AirSched release:** 0.2.2
- **External Libraries:** BLAS, CBLAS, LAPACK and FFTW libraries from AirSched External 2.1.1 package. The following configuration command has been used:

```
% export CFLAGS="-mcpu=ultrasparc -O2 -pipe -funroll-all-loops"  
% ./configure
```

- **Tests Status:** All tests PASSED
- **Comments:** AirSched configured with:

```
% export LDFLAGS="-L/usr/local/lib"  
% export CPPFLAGS="-I/usr/local/include"  
% export CXXFLAGS="-mcpu=ultrasparc -O2 -pipe"  
% ./configure --enable-debug
```

- **Date:** May 15, 2006
- **Tester:** Adam Piatyszek (ediap)

## 15 AirSched Supported Systems (Previous Releases)

### 15.1 AirSched 3.9.1

### 15.2 AirSched 3.9.0

### 15.3 AirSched 3.8.1

## 16 Tutorials

### 16.1 Table of Contents

- [Preparing the AirSched Project for Development](#)
- [Your first networkBuilde](#)
  - [Summary of the different steps](#)
  - [Result of the Batch Program](#)
- [Network building with an input file](#)
  - [How to build a network input file?](#)
  - [Building the BOM tree with an input file](#)
  - [Result of the Batch Program](#)

## 16.2 Preparing the AirSched Project for Development

The source code for these examples can be found in the `batches` and `test/airsched` directories. They are compiled along with the rest of the `AirSched` project. See the [Users Guide](#) for more details on how to build the `AirSched` project.

### 16.3 Your first networkBuild

#### 16.3.1 Summary of the different steps

All the steps below can be found in the same order in the batch `AirSched.cpp` program.

First, we instantiate the `AIRSCHEM_Service` object:

Then, we construct a default sample list of travel solutions and a default booking request (as mentioned in `ug_procedure_bookingrequest` and `ug_procedure_travelsolution` parts):

```
stdair::TravelSolutionList_T lTravelSolutionList;  
airschedService.buildSegmentPathList (lTravelSolutionList, lBookingRequest);
```

For basic use, the default BOM tree can be built using:

The main step is the network building (see [The travel solution calculation procedure](#)):

#### 16.3.2 Result of the Batch Program

When the `AirSched.cpp` program is run (with the `-b` option), the log output file should look like:

What is interesting is to compare the travel solution list (here reduced to a single travel solution) displayed before:

and after the network building:

Between the two groups of dashes, we can see that a network option structure has been added by the network builder: the price is 450 EUR for the Y class, the ticket is refundable but there are exchange fees and the customer must stay over on Saturday night.

Let's return to our default BOM tree display: the only network rule stored was a match for the travel solution into consideration (same origin airport, same destination airport, flight date included in the network rule date range, same airline "BA", ...).

By looking at the network rule trip type "RT", we can guess we face a round trip network: that means the price given in the default bom tree construction in `stdair::CmdBomManager.hpp` has been divided by 2 because we are considering either an inbound trip or an outbound one.

## 16.4 Network building with an input file

### 16.4.1 How to build a network input file?

The objective here is to build a network input file to network build the default travel solution list built using:

This travel solution list, reduced to a singleton, can be displayed as done before:

We deduce:

- we need a network rule whose origin-destination couple is "LHR, SYD".
- the date range must include the date "2011-06-10".
- the time range must include the time "21:45".
- the airline operating is "BA", so it must be the airline pricing.

We can deduce a part of our network rule file :

```
// Fares: fare ID; OriginCity; DestinationCity; TripType; DateRangeStart;
    DateRangeEnd; DepartureTimeRangeStart; DepartureTimeRangeEnd; POS; CabinCode;
    Channel; AdvancePurchase; SaturdayNight; ChangeFees; NonRefundable; MinimumStay; Price;
    nb Segments
// Segment: AirlineCode; Class;
1; LHR; SYD; ??; 2011-01-01; 2011-12-31; 00:00; 23:59; ???; ?; ??; ?; ?; ?; ?;
    ?; ???; BA; ?;
```

We have no information about stay duration and advance purchase (such information are contained into the booking request): so let us put "0" to embrace all the requests possible.

No information for the point-of-sale and the channel too: let us consider all the channels ("IN", "DN", "IF" and "DF") and all the points of sale (the origin "LHR", the destination "SYD" and the rest-of-the-world "ROW") existing. To access this information, we could look into the default booking request.

The input file is now:

```
// Fares: fare ID; OriginCity; DestinationCity; TripType; DateRangeStart;
    DateRangeEnd; DepartureTimeRangeStart; DepartureTimeRangeEnd; POS; CabinCode;
    Channel; AdvancePurchase; SaturdayNight; ChangeFees; NonRefundable; MinimumStay; Price;
    nb Segments
// Segment: AirlineCode; Class;
1; LHR; SYD; ??; 2011-01-01; 2011-12-31; 00:00; 23:59; LHR; ?; IN; 0; ?; ?; ?;
    0; ???; BA; ?;
2; LHR; SYD; ??; 2011-01-01; 2011-12-31; 00:00; 23:59; LHR; ?; IF; 0; ?; ?; ?;
    0; ???; BA; ?;
3; LHR; SYD; ??; 2011-01-01; 2011-12-31; 00:00; 23:59; LHR; ?; DN; 0; ?; ?; ?;
    0; ???; BA; ?;
4; LHR; SYD; ??; 2011-01-01; 2011-12-31; 00:00; 23:59; LHR; ?; DF; 0; ?; ?; ?;
    0; ???; BA; ?;
5; LHR; SYD; ??; 2011-01-01; 2011-12-31; 00:00; 23:59; SYD; ?; IN; 0; ?; ?; ?;
    0; ???; BA; ?;
6; LHR; SYD; ??; 2011-01-01; 2011-12-31; 00:00; 23:59; SYD; ?; IF; 0; ?; ?; ?;
    0; ???; BA; ?;
7; LHR; SYD; ??; 2011-01-01; 2011-12-31; 00:00; 23:59; SYD; ?; DN; 0; ?; ?; ?;
    0; ???; BA; ?;
8; LHR; SYD; ??; 2011-01-01; 2011-12-31; 00:00; 23:59; SYD; ?; DF; 0; ?; ?; ?;
    0; ???; BA; ?;
9; LHR; SYD; ??; 2011-01-01; 2011-12-31; 00:00; 23:59; ROW; ?; IN; 0; ?; ?; ?;
    0; ???; BA; ?;
10; LHR; SYD; ??; 2011-01-01; 2011-12-31; 00:00; 23:59; ROW; ?; IF; 0; ?; ?; ?;
    0; ???; BA; ?;
11; LHR; SYD; ??; 2011-01-01; 2011-12-31; 00:00; 23:59; ROW; ?; DN; 0; ?; ?; ?;
    0; ???; BA; ?;
12; LHR; SYD; ??; 2011-01-01; 2011-12-31; 00:00; 23:59; ROW; ?; DF; 0; ?; ?; ?;
    0; ???; BA; ?;
```



Let us say we have just the Economy cabin "Y" and British Airways prices ticket for class "Y".

No information about the trip type, so we duplicate all the network rules for both type: one-way "OW" and round-trip "RT" (to access this information, we could look to the default booking request).

The network options are all set to a default value "T" (meaning true) and the network values are chosen to be all distinct.

We obtain:

```
// Fares: fare ID; OriginCity; DestinationCity; TripType; DateRangeStart;
//         DateRangeEnd; DepartureTimeRangeStart; DepartureTimeRangeEnd; POS; CabinCode;
//         Channel; AdvancePurchase; SaturdayNight; ChangeFees; NonRefundable; MinimumStay; Price;
//         nb Segments
// Segment: AirlineCode; Class;
1; LHR; SYD; OW; 2011-01-01; 2011-12-31; 00:00; 23:59; LHR; Y; IN; 0; T; T; T;
   0; 50; BA; Y;
2; LHR; SYD; OW; 2011-01-01; 2011-12-31; 00:00; 23:59; LHR; Y; IF; 0; T; T; T;
   0; 150; BA; Y;
3; LHR; SYD; OW; 2011-01-01; 2011-12-31; 00:00; 23:59; LHR; Y; DN; 0; T; T; T;
   0; 250; BA; Y;
4; LHR; SYD; OW; 2011-01-01; 2011-12-31; 00:00; 23:59; LHR; Y; DF; 0; T; T; T;
   0; 350; BA; Y;
5; LHR; SYD; OW; 2011-01-01; 2011-12-31; 00:00; 23:59; SYD; Y; IN; 0; T; T; T;
   0; 450; BA; Y;
6; LHR; SYD; OW; 2011-01-01; 2011-12-31; 00:00; 23:59; SYD; Y; IF; 0; T; T; T;
   0; 550; BA; Y;
7; LHR; SYD; OW; 2011-01-01; 2011-12-31; 00:00; 23:59; SYD; Y; DN; 0; T; T; T;
   0; 650; BA; Y;
8; LHR; SYD; OW; 2011-01-01; 2011-12-31; 00:00; 23:59; SYD; Y; DF; 0; T; T; T;
   0; 750; BA; Y;
9; LHR; SYD; OW; 2011-01-01; 2011-12-31; 00:00; 23:59; ROW; Y; IN; 0; T; T; T;
   0; 850; BA; Y;
10; LHR; SYD; OW; 2011-01-01; 2011-12-31; 00:00; 23:59; ROW; Y; IF; 0; T; T; T;
   0; 950; BA; Y;
11; LHR; SYD; OW; 2011-01-01; 2011-12-31; 00:00; 23:59; ROW; Y; DN; 0; T; T; T;
   0; 1050; BA; Y;
12; LHR; SYD; OW; 2011-01-01; 2011-12-31; 00:00; 23:59; ROW; Y; DF; 0; T; T; T;
   0; 1150; BA; Y;
13; LHR; SYD; RT; 2011-01-01; 2011-12-31; 00:00; 23:59; LHR; Y; IN; 0; T; T; T;
   0; 90; BA; Y;
14; LHR; SYD; RT; 2011-01-01; 2011-12-31; 00:00; 23:59; LHR; Y; IF; 0; T; T; T;
   0; 190; BA; Y;
15; LHR; SYD; RT; 2011-01-01; 2011-12-31; 00:00; 23:59; LHR; Y; DN; 0; T; T; T;
   0; 290; BA; Y;
16; LHR; SYD; RT; 2011-01-01; 2011-12-31; 00:00; 23:59; LHR; Y; DF; 0; T; T; T;
   0; 390; BA; Y;
17; LHR; SYD; RT; 2011-01-01; 2011-12-31; 00:00; 23:59; SYD; Y; IN; 0; T; T; T;
   0; 490; BA; Y;
18; LHR; SYD; RT; 2011-01-01; 2011-12-31; 00:00; 23:59; SYD; Y; IF; 0; T; T; T;
   0; 590; BA; Y;
19; LHR; SYD; RT; 2011-01-01; 2011-12-31; 00:00; 23:59; SYD; Y; DN; 0; T; T; T;
   0; 690; BA; Y;
20; LHR; SYD; RT; 2011-01-01; 2011-12-31; 00:00; 23:59; SYD; Y; DF; 0; T; T; T;
   0; 790; BA; Y;
21; LHR; SYD; RT; 2011-01-01; 2011-12-31; 00:00; 23:59; ROW; Y; IN; 0; T; T; T;
   0; 890; BA; Y;
22; LHR; SYD; RT; 2011-01-01; 2011-12-31; 00:00; 23:59; ROW; Y; IF; 0; T; T; T;
   0; 990; BA; Y;
23; LHR; SYD; RT; 2011-01-01; 2011-12-31; 00:00; 23:59; ROW; Y; DN; 0; T; T; T;
   0; 1090; BA; Y;
24; LHR; SYD; RT; 2011-01-01; 2011-12-31; 00:00; 23:59; ROW; Y; DF; 0; T; T; T;
   0; 1190; BA; Y;
```

#### 16.4.2 Building the BOM tree with an input file

The steps are the same as before [Summary of the different steps](#) except the bom tree must be built using the network input file :

#### 16.4.3 Result of the Batch Program

When the `AirSched.cpp` program is run with the `-f` option linking with the file built just above:

```
~/AirSched -f ~/<YourFileName>.csv
```

the last lines of the log output should look like:

```
[D]~/AirSchedgit/AirSched/batches/AirSched.cpp:223: Travel solutions:
[0] [0] BA, 9, 2011-06-10, LHR, SYD, 21:45 --- Y, 145, 1 1 1 ---
```

We have just one network option added to the travel solution. We can deduce from the price value 145 that the network builder used the network rule number 15 to price the travel solution. We have an inbound or outbound trip of a round trip: the total price 290 has been divided by 2.

## 17 Command-Line Test to Demonstrate How To Test the AirSched Project

```
*/
// //////////////////////////////////////
// Import section
// //////////////////////////////////////
// STL
#include <sstream>
#include <fstream>
#include <string>
// Boost Unit Test Framework (UTF)
#define BOOST_TEST_DYN_LINK
#define BOOST_TEST_MAIN
#define BOOST_TEST_MODULE InventoryTestSuite
#include <boost/test/unit_test.hpp>
// StdAir
#include <stdair/basic/BasLogParams.hpp>
#include <stdair/basic/BasDBParams.hpp>
#include <stdair/basic/BasFileMgr.hpp>
#include <stdair/bom/TravelSolutionStruct.hpp>
#include <stdair/bom/BookingRequestStruct.hpp>
#include <stdair/service/Logger.hpp>
// AirSched
#include <airsched/AIRSCHEM_Service.hpp>
#include <airsched/config/airsched-paths.hpp>

namespace boost_utf = boost::unit_test;

// (Boost) Unit Test XML Report
std::ofstream utfReportStream ("AirlineScheduleTestSuite_utfresults.xml");

struct UnitTestConfig {
    UnitTestConfig() {
        boost_utf::unit_test_log.set_stream (utfReportStream);
        boost_utf::unit_test_log.set_format (boost_utf::XML);
        boost_utf::unit_test_log.set_threshold_level (boost_utf::log_test_units);
        //boost_utf::unit_test_log.set_threshold_level
        (boost_utf::log_successful_tests);
    }

    ~UnitTestConfig() {
    }
};

// ////////////////////////////////// Main: Unit Test Suite //////////////////////////////////

// Set the UTF configuration (re-direct the output to a specific file)
BOOST_GLOBAL_FIXTURE (UnitTestConfig);

// Start the test suite
BOOST_AUTO_TEST_SUITE (master_test_suite)

BOOST_AUTO_TEST_CASE (airsched_simple_inventory_sell) {

    // Input file name
    const stdair::Filename_T lScheduleInputFilename (STDAIR_SAMPLE_DIR
                                                    "/schedule03.csv");

    // Output log File
    const stdair::Filename_T lLogFilename ("AirlineScheduleTestSuite.log");

    // Check that the file path given as input corresponds to an actual file
    bool doesExistAndIsReadable =
        stdair::BasFileMgr::doesExistAndIsReadable (lScheduleInputFilename);
    BOOST_CHECK_MESSAGE (doesExistAndIsReadable == true,
        "The ' " << lScheduleInputFilename
        << "' input file can not be open and read");

    // Set the log parameters
```

```

std::ofstream logOutputFile;
// Open and clean the log outputfile
logOutputFile.open (lLogFilename.c_str());
logOutputFile.clear();

// Instantiate the AirSched service
const stdair::BasLogParams lLogParams (stdair::LOG::DEBUG, logOutputFile);
AIRSCHEDED::AIRSCHEDED_Service airschedService (lLogParams);

// Build the BOM tree from parsing input files
airschedService.parseAndLoad (lScheduleInputFilename);

// Create an empty booking request structure
// \todo: fill the booking request structure from the input parameters
const stdair::AirportCode_T lOrigin ("NCE");
const stdair::AirportCode_T lDestination ("BKK");
const stdair::AirportCode_T lPOS ("NCE");
const stdair::Date_T lPreferredDepartureDate(2007, boost::gregorian::Apr, 21)
;
const stdair::Date_T lRequestDate (2007, boost::gregorian::Mar, 21);
const stdair::Duration_T lRequestTime (boost::posix_time::hours(8));
const stdair::DateTime_T lRequestDateTime (lRequestDate, lRequestTime);
const stdair::CabinCode_T lPreferredCabin ("Bus");
const stdair::PartySize_T lPartySize (3);
const stdair::ChannelLabel_T lChannel ("DF");
const stdair::TripType_T lTripType ("RO");
const stdair::DayDuration_T lStayDuration (5);
const stdair::FrequentFlyer_T lFrequentFlyerType ("NONE");
const stdair::Duration_T lPreferredDepartureTime (boost::posix_time::hours(10
));
const stdair::WTP_T lWTP (2000.0);
const stdair::PriceValue_T lValueOfTime (20.0);
const stdair::BookingRequestStruct lBookingRequest (lOrigin, lDestination,
lPOS,
lPreferredDepartureDate,
lRequestDateTime,
lPreferredCabin,
lPartySize, lChannel,
lTripType, lStayDuration,
lFrequentFlyerType,
lPreferredDepartureTime,
lWTP, lValueOfTime);

//
stdair::TravelSolutionList_T lTravelSolutionList;
airschedService.buildSegmentPathList (lTravelSolutionList, lBookingRequest);
const unsigned int lNbOfTravelSolutions = lTravelSolutionList.size();

// \todo: change the expected number of travel solutions to the actual number
const unsigned int lExpectedNbOfTravelSolutions = 4;

// DEBUG
STDAIR_LOG_DEBUG ("Number of travel solutions for the booking request '"
<< lBookingRequest.describe() << "': "
<< lNbOfTravelSolutions << ". It is expected to be "
<< lExpectedNbOfTravelSolutions << ".");

BOOST_CHECK_EQUAL (lNbOfTravelSolutions, lExpectedNbOfTravelSolutions);

BOOST_CHECK_MESSAGE(lNbOfTravelSolutions == lExpectedNbOfTravelSolutions,
"The number of travel solutions for the booking request '"
"
<< lBookingRequest.describe() << "' is equal to "
<< lNbOfTravelSolutions << ", but it should be equal to "
<< lExpectedNbOfTravelSolutions);

// Close the Log outputFile
logOutputFile.close();
}

// End the test suite
BOOST_AUTO_TEST_SUITE_END()

/*!

```

## 18 Directory Hierarchy

### 18.1 Directories

This directory hierarchy is sorted roughly, but not completely, alphabetically:

<b>airsched</b>	<b>99</b>
<b>basic</b>	<b>99</b>
<b>batches</b>	<b>99</b>
<b>bom</b>	<b>100</b>
<b>command</b>	<b>100</b>
<b>config</b>	<b>101</b>
<b>factory</b>	<b>101</b>
<b>service</b>	<b>101</b>
<b>test</b>	<b>101</b>
<b>airsched</b>	<b>99</b>

## 19 Namespace Index

### 19.1 Namespace List

Here is a list of all namespaces with brief descriptions:

<b>airsched</b>	<b>101</b>
<b>AIRSCHED</b>	<b>104</b>
<b>AIRSCHED::OnDParserHelper</b>	<b>110</b>
<b>AIRSCHED::ScheduleParserHelper</b>	<b>112</b>
<b>boost</b>	
<b>Forward declarations</b>	<b>115</b>
<b>boost::serialization</b>	<b>115</b>
<b>stdair</b>	
<b>Forward declarations</b>	<b>115</b>

## 20 Class Index

### 20.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

<b>airsched::Airline_T</b>	<b>115</b>
<b>AIRSCHED::AIRSCHED_Service</b>	<b>117</b>
std::basic_fstream< char >	
std::basic_fstream< wchar_t >	
std::basic_ifstream< char >	
std::basic_ifstream< wchar_t >	
std::basic_ios< char >	
std::basic_ios< wchar_t >	

std::basic_istream< char >	
std::basic_istream< wchar_t >	
std::basic_istream< char >	
std::basic_istream< wchar_t >	
std::basic_istream< char >	
std::basic_istream< wchar_t >	
std::basic_ofstream< char >	
std::basic_ofstream< wchar_t >	
std::basic_ofstream< char >	
std::basic_ofstream< wchar_t >	
std::basic_ostringstream< char >	
std::basic_ostringstream< wchar_t >	
std::basic_string< char >	
std::basic_string< wchar_t >	
std::basic_stringstream< char >	
std::basic_stringstream< wchar_t >	
<b>BomAbstract</b>	<b>121</b>
<b>AIRSCHEd::OriginDestinationSet</b>	<b>161</b>
<b>AIRSCHEd::ReachableUniverse</b>	<b>173</b>
<b>AIRSCHEd::SegmentPathPeriod</b>	<b>185</b>
<b>AIRSCHEd::BomDisplay</b>	<b>121</b>
<b>CmdAbstract</b>	<b>122</b>
<b>AIRSCHEd::FlightPeriodFileParser</b>	<b>141</b>
<b>AIRSCHEd::InventoryGenerator</b>	<b>149</b>
<b>AIRSCHEd::OnDParser</b>	<b>154</b>
<b>AIRSCHEd::OnDPeriodFileParser</b>	<b>156</b>
<b>AIRSCHEd::OnDPeriodGenerator</b>	<b>156</b>
<b>AIRSCHEd::ScheduleParser</b>	<b>179</b>
<b>AIRSCHEd::SegmentPathGenerator</b>	<b>184</b>
<b>AIRSCHEd::SegmentPathProvider</b>	<b>195</b>
<b>AIRSCHEd::Simulator</b>	<b>199</b>
<b>AIRSCHEd::TravelSolutionParser</b>	<b>243</b>
<b>airsched::Date_T</b>	<b>123</b>
<b>AIRSCHEd::OnDParserHelper::OnDParser::definition&lt; ScannerT &gt;</b>	<b>125</b>
<b>AIRSCHEd::ScheduleParserHelper::FlightPeriodParser::definition&lt; ScannerT &gt;</b>	<b>126</b>
<b>airsched::SearchStringParser::definition&lt; ScannerT &gt;</b>	<b>130</b>
<b>AIRSCHEd::FacServiceAbstract</b>	<b>137</b>
<b>FacServiceAbstract</b>	<b>138</b>
<b>AIRSCHEd::FacAIRSCHEdServiceContext</b>	<b>135</b>

<b>FileNotFoundException</b>	<b>140</b>
<b>AIRSCHEd::OnDInputFileNotFoundException</b>	<b>153</b>
<b>AIRSCHEd::ScheduleInputFileNotFoundException</b>	<b>178</b>
<b>AIRSCHEd::FlagSaver</b>	<b>140</b>
<b>grammar</b>	<b>148</b>
<b>AIRSCHEd::OnDParserHelper::OnDParser</b>	<b>155</b>
<b>AIRSCHEd::ScheduleParserHelper::FlightPeriodParser</b>	<b>142</b>
<b>airsched::SearchStringParser</b>	<b>182</b>
<b>KeyAbstract</b>	<b>150</b>
<b>AIRSCHEd::OriginDestinationSetKey</b>	<b>165</b>
<b>AIRSCHEd::ReachableUniverseKey</b>	<b>176</b>
<b>AIRSCHEd::SegmentPathPeriodKey</b>	<b>191</b>
<b>ParserException</b>	<b>167</b>
<b>AIRSCHEd::SegmentDateNotFoundException</b>	<b>184</b>
<b>AIRSCHEd::OnDParserHelper::ParserSemanticAction</b>	<b>167</b>
<b>AIRSCHEd::OnDParserHelper::doEndOnD</b>	<b>134</b>
<b>AIRSCHEd::OnDParserHelper::storeAirlineCode</b>	<b>209</b>
<b>AIRSCHEd::OnDParserHelper::storeClassCode</b>	<b>213</b>
<b>AIRSCHEd::OnDParserHelper::storeDateRangeEnd</b>	<b>216</b>
<b>AIRSCHEd::OnDParserHelper::storeDateRangeStart</b>	<b>218</b>
<b>AIRSCHEd::OnDParserHelper::storeDestination</b>	<b>220</b>
<b>AIRSCHEd::OnDParserHelper::storeEndRangeTime</b>	<b>224</b>
<b>AIRSCHEd::OnDParserHelper::storeOrigin</b>	<b>235</b>
<b>AIRSCHEd::OnDParserHelper::storeStartRangeTime</b>	<b>241</b>
<b>AIRSCHEd::ScheduleParserHelper::ParserSemanticAction</b>	<b>168</b>
<b>AIRSCHEd::ScheduleParserHelper::doEndFlight</b>	<b>133</b>
<b>AIRSCHEd::ScheduleParserHelper::storeAirlineCode</b>	<b>207</b>
<b>AIRSCHEd::ScheduleParserHelper::storeBoardingTime</b>	<b>210</b>
<b>AIRSCHEd::ScheduleParserHelper::storeCapacity</b>	<b>211</b>
<b>AIRSCHEd::ScheduleParserHelper::storeClasses</b>	<b>214</b>
<b>AIRSCHEd::ScheduleParserHelper::storeDateRangeEnd</b>	<b>215</b>
<b>AIRSCHEd::ScheduleParserHelper::storeDateRangeStart</b>	<b>219</b>

<b>AIRSCHEd::ScheduleParserHelper::storeDow</b>	<b>221</b>
<b>AIRSCHEd::ScheduleParserHelper::storeElapsedTime</b>	<b>223</b>
<b>AIRSCHEd::ScheduleParserHelper::storeFamilyCode</b>	<b>225</b>
<b>AIRSCHEd::ScheduleParserHelper::storeFClasses</b>	<b>227</b>
<b>AIRSCHEd::ScheduleParserHelper::storeFlightNumber</b>	<b>228</b>
<b>AIRSCHEd::ScheduleParserHelper::storeLegBoardingPoint</b>	<b>229</b>
<b>AIRSCHEd::ScheduleParserHelper::storeLegCabinCode</b>	<b>231</b>
<b>AIRSCHEd::ScheduleParserHelper::storeLegOffPoint</b>	<b>232</b>
<b>AIRSCHEd::ScheduleParserHelper::storeOffTime</b>	<b>233</b>
<b>AIRSCHEd::ScheduleParserHelper::storeSegmentBoardingPoint</b>	<b>236</b>
<b>AIRSCHEd::ScheduleParserHelper::storeSegmentCabinCode</b>	<b>237</b>
<b>AIRSCHEd::ScheduleParserHelper::storeSegmentOffPoint</b>	<b>238</b>
<b>AIRSCHEd::ScheduleParserHelper::storeSegmentSpecificity</b>	<b>240</b>
<b>airsched::Passenger_T</b>	<b>170</b>
<b>airsched::Place_T</b>	<b>172</b>
<b>airsched::SearchString_T</b>	<b>180</b>
<b>AIRSCHEd::SegmentPeriodHelper</b>	<b>195</b>
<b>AIRSCHEd::ServiceAbstract</b>	<b>198</b>
<b>ServiceAbstract</b>	<b>199</b>
<b>AIRSCHEd::AIRSCHEd_ServiceContext</b>	<b>120</b>
<b>airsched::store_adult_passenger_type</b>	<b>200</b>
<b>airsched::store_airline_code</b>	<b>201</b>
<b>airsched::store_airline_name</b>	<b>202</b>
<b>airsched::store_airline_sign</b>	<b>202</b>
<b>airsched::store_child_passenger_type</b>	<b>203</b>
<b>airsched::store_date</b>	<b>204</b>
<b>airsched::store_passenger_number</b>	<b>205</b>
<b>airsched::store_pet_passenger_type</b>	<b>206</b>
<b>airsched::store_place_element</b>	<b>207</b>
<b>StructAbstract</b>	<b>242</b>
<b>AIRSCHEd::FareFamilyStruct</b>	<b>139</b>
<b>AIRSCHEd::FlightPeriodStruct</b>	<b>143</b>

<b>AIRSCHED::LegCabinStruct</b>	<b>150</b>
<b>AIRSCHED::LegStruct</b>	<b>151</b>
<b>AIRSCHED::OnDPeriodStruct</b>	<b>157</b>
<b>AIRSCHED::SegmentCabinStruct</b>	<b>182</b>
<b>AIRSCHED::SegmentStruct</b>	<b>196</b>
<b>TestFixture</b>	<b>242</b>
<b>AirlineScheduleTestSuite</b>	<b>116</b>

## 21 Class Index

### 21.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

<b>airsched::Airline_T</b>	<b>115</b>
<b>AirlineScheduleTestSuite</b>	<b>116</b>
<b>AIRSCHED::AIRSCHED_Service</b> Interface for the AirSched Services	<b>117</b>
<b>AIRSCHED::AIRSCHED_ServiceContext</b> Class holding the context of the AirSched services	<b>120</b>
<b>BomAbstract</b>	<b>121</b>
<b>AIRSCHED::BomDisplay</b> Utility class to display AirSched objects with a pretty format	<b>121</b>
<b>CmdAbstract</b>	<b>122</b>
<b>airsched::Date_T</b>	<b>123</b>
<b>AIRSCHED::OnDParserHelper::OnDParser::definition&lt; ScannerT &gt;</b>	<b>125</b>
<b>AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition&lt; ScannerT &gt;</b>	<b>126</b>
<b>airsched::SearchStringParser::definition&lt; ScannerT &gt;</b>	<b>130</b>
<b>AIRSCHED::ScheduleParserHelper::doEndFlight</b>	<b>133</b>
<b>AIRSCHED::OnDParserHelper::doEndOnD</b>	<b>134</b>
<b>AIRSCHED::FacAIRSCHEDServiceContext</b> Factory for the service context	<b>135</b>
<b>AIRSCHED::FacServiceAbstract</b>	<b>137</b>
<b>FacServiceAbstract</b>	<b>138</b>
<b>AIRSCHED::FareFamilyStruct</b>	<b>139</b>
<b>FileNotFoundException</b>	<b>140</b>



<a href="#">AIRSCHED::FlagSaver</a>	140
<a href="#">AIRSCHED::FlightPeriodFileParser</a>	141
<a href="#">AIRSCHED::ScheduleParserHelper::FlightPeriodParser</a>	142
<a href="#">AIRSCHED::FlightPeriodStruct</a>	143
<a href="#">grammar</a>	148
<a href="#">AIRSCHED::InventoryGenerator</a>	149
<a href="#">KeyAbstract</a>	150
<a href="#">AIRSCHED::LegCabinStruct</a>	150
<a href="#">AIRSCHED::LegStruct</a>	151
<a href="#">AIRSCHED::OnDInputFileNotFoundException</a>	153
<a href="#">AIRSCHED::OnDParser</a>	
Class wrapping the parser entry point	154
<a href="#">AIRSCHED::OnDParserHelper::OnDParser</a>	155
<a href="#">AIRSCHED::OnDPeriodFileParser</a>	156
<a href="#">AIRSCHED::OnDPeriodGenerator</a>	
Class handling the generation / instantiation of the O&D-Period BOM	156
<a href="#">AIRSCHED::OnDPeriodStruct</a>	157
<a href="#">AIRSCHED::OriginDestinationSet</a>	
Class representing a simple sub-network	161
<a href="#">AIRSCHED::OriginDestinationSetKey</a>	
Structure representing the key of a sub-network	165
<a href="#">ParserException</a>	167
<a href="#">AIRSCHED::OnDParserHelper::ParserSemanticAction</a>	167
<a href="#">AIRSCHED::ScheduleParserHelper::ParserSemanticAction</a>	168
<a href="#">airsched::Passenger_T</a>	170
<a href="#">airsched::Place_T</a>	172
<a href="#">AIRSCHED::ReachableUniverse</a>	
Class representing the root of the schedule-related BOM tree	173
<a href="#">AIRSCHED::ReachableUniverseKey</a>	
Structure representing the key of the schedule-related BOM tree root	176
<a href="#">AIRSCHED::ScheduleInputFileNotFoundException</a>	178
<a href="#">AIRSCHED::ScheduleParser</a>	179
<a href="#">airsched::SearchString_T</a>	180
<a href="#">airsched::SearchStringParser</a>	182
<a href="#">AIRSCHED::SegmentCabinStruct</a>	182

<a href="#">AIRSCHED::SegmentDateNotFoundException</a>	184
<a href="#">AIRSCHED::SegmentPathGenerator</a>	
Class handling the generation / instantiation of the network BOM	184
<a href="#">AIRSCHED::SegmentPathPeriod</a>	
Class representing a segment/path	185
<a href="#">AIRSCHED::SegmentPathPeriodKey</a>	
Structure representing the key of a segment/path	191
<a href="#">AIRSCHED::SegmentPathProvider</a>	
Class building the travel solutions from airline schedules	195
<a href="#">AIRSCHED::SegmentPeriodHelper</a>	195
<a href="#">AIRSCHED::SegmentStruct</a>	196
<a href="#">AIRSCHED::ServiceAbstract</a>	198
<a href="#">ServiceAbstract</a>	199
<a href="#">AIRSCHED::Simulator</a>	199
<a href="#">airsched::store_adult_passenger_type</a>	200
<a href="#">airsched::store_airline_code</a>	201
<a href="#">airsched::store_airline_name</a>	202
<a href="#">airsched::store_airline_sign</a>	202
<a href="#">airsched::store_child_passenger_type</a>	203
<a href="#">airsched::store_date</a>	204
<a href="#">airsched::store_passenger_number</a>	205
<a href="#">airsched::store_pet_passenger_type</a>	206
<a href="#">airsched::store_place_element</a>	207
<a href="#">AIRSCHED::ScheduleParserHelper::storeAirlineCode</a>	207
<a href="#">AIRSCHED::OnDParserHelper::storeAirlineCode</a>	209
<a href="#">AIRSCHED::ScheduleParserHelper::storeBoardingTime</a>	210
<a href="#">AIRSCHED::ScheduleParserHelper::storeCapacity</a>	211
<a href="#">AIRSCHED::OnDParserHelper::storeClassCode</a>	213
<a href="#">AIRSCHED::ScheduleParserHelper::storeClasses</a>	214
<a href="#">AIRSCHED::ScheduleParserHelper::storeDateRangeEnd</a>	215
<a href="#">AIRSCHED::OnDParserHelper::storeDateRangeEnd</a>	216
<a href="#">AIRSCHED::OnDParserHelper::storeDateRangeStart</a>	218
<a href="#">AIRSCHED::ScheduleParserHelper::storeDateRangeStart</a>	219
<a href="#">AIRSCHED::OnDParserHelper::storeDestination</a>	220

<a href="#">AIRSCHED::ScheduleParserHelper::storeDow</a>	221
<a href="#">AIRSCHED::ScheduleParserHelper::storeElapsedTime</a>	223
<a href="#">AIRSCHED::OnDParserHelper::storeEndRangeTime</a>	224
<a href="#">AIRSCHED::ScheduleParserHelper::storeFamilyCode</a>	225
<a href="#">AIRSCHED::ScheduleParserHelper::storeFClasses</a>	227
<a href="#">AIRSCHED::ScheduleParserHelper::storeFlightNumber</a>	228
<a href="#">AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint</a>	229
<a href="#">AIRSCHED::ScheduleParserHelper::storeLegCabinCode</a>	231
<a href="#">AIRSCHED::ScheduleParserHelper::storeLegOffPoint</a>	232
<a href="#">AIRSCHED::ScheduleParserHelper::storeOffTime</a>	233
<a href="#">AIRSCHED::OnDParserHelper::storeOrigin</a>	235
<a href="#">AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint</a>	236
<a href="#">AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode</a>	237
<a href="#">AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint</a>	238
<a href="#">AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity</a>	240
<a href="#">AIRSCHED::OnDParserHelper::storeStartRangeTime</a>	241
<a href="#">StructAbstract</a>	242
<a href="#">TestFixture</a>	242
<a href="#">AIRSCHED::TravelSolutionParser</a>	
Class filling the TravelSolutionHolder structure (representing a list of classes/travelSolutions) from a given input file	243

## 22 File Index

### 22.1 File List

Here is a list of all files with brief descriptions:

<a href="#">airsched/AIRSCHED_Service.hpp</a>	244
<a href="#">airsched/AIRSCHED_Types.hpp</a>	246
<a href="#">airsched/basic/BasConst.cpp</a>	246
<a href="#">airsched/basic/BasConst_AIRSCHED_Service.hpp</a>	247
<a href="#">airsched/basic/BasConst_General.hpp</a>	247
<a href="#">airsched/basic/BasParserTypes.hpp</a>	248
<a href="#">airsched/batches/airsched.cpp</a>	251

airsched/batches/BookingRequestParser.cpp	258
airsched/batches/BookingRequestParser.hpp	263
airsched/bom/AirportList.hpp	265
airsched/bom/BomDisplay.cpp	265
airsched/bom/BomDisplay.hpp	267
airsched/bom/FareFamilyStruct.cpp	267
airsched/bom/FareFamilyStruct.hpp	268
airsched/bom/FlightPeriodStruct.cpp	269
airsched/bom/FlightPeriodStruct.hpp	272
airsched/bom/LegCabinStruct.cpp	273
airsched/bom/LegCabinStruct.hpp	274
airsched/bom/LegStruct.cpp	275
airsched/bom/LegStruct.hpp	276
airsched/bom/OnDPeriodStruct.cpp	277
airsched/bom/OnDPeriodStruct.hpp	278
airsched/bom/OriginDestinationSet.cpp	279
airsched/bom/OriginDestinationSet.hpp	281
airsched/bom/OriginDestinationSetKey.cpp	283
airsched/bom/OriginDestinationSetKey.hpp	284
airsched/bom/OriginDestinationSetTypes.hpp	285
airsched/bom/ReachableUniverse.cpp	286
airsched/bom/ReachableUniverse.hpp	288
airsched/bom/ReachableUniverseKey.cpp	289
airsched/bom/ReachableUniverseKey.hpp	291
airsched/bom/ReachableUniverseTypes.hpp	292
airsched/bom/SegmentCabinStruct.cpp	293
airsched/bom/SegmentCabinStruct.hpp	293
airsched/bom/SegmentPathPeriod.cpp	294
airsched/bom/SegmentPathPeriod.hpp	299
airsched/bom/SegmentPathPeriodKey.cpp	301
airsched/bom/SegmentPathPeriodKey.hpp	303
airsched/bom/SegmentPathPeriodTypes.hpp	305

airsched/bom/SegmentPeriodHelper.cpp	306
airsched/bom/SegmentPeriodHelper.hpp	307
airsched/bom/SegmentStruct.cpp	308
airsched/bom/SegmentStruct.hpp	309
airsched/command/InventoryGenerator.cpp	310
airsched/command/InventoryGenerator.hpp	312
airsched/command/OnDParser.cpp	312
airsched/command/OnDParser.hpp	313
airsched/command/OnDParserHelper.cpp	314
airsched/command/OnDParserHelper.hpp	320
airsched/command/OnDPeriodGenerator.cpp	322
airsched/command/OnDPeriodGenerator.hpp	322
airsched/command/ScheduleParser.cpp	323
airsched/command/ScheduleParser.hpp	324
airsched/command/ScheduleParserHelper.cpp	325
airsched/command/ScheduleParserHelper.hpp	334
airsched/command/SegmentPathGenerator.cpp	337
airsched/command/SegmentPathGenerator.hpp	342
airsched/command/SegmentPathProvider.cpp	343
airsched/command/SegmentPathProvider.hpp	345
airsched/command/Simulator.cpp	346
airsched/command/Simulator.hpp	347
airsched/command/TravelSolutionParser.cpp	348
airsched/command/TravelSolutionParser.hpp	350
airsched/config/airsched-paths.hpp	351
airsched/config/airsched-paths.hpp.in	351
airsched/factory/FacAIRSCHEDServiceContext.cpp	352
airsched/factory/FacAIRSCHEDServiceContext.hpp	353
airsched/factory/FacServiceAbstract.cpp	353
airsched/factory/FacServiceAbstract.hpp	354
airsched/service/AIRSCHED_Service.cpp	355
airsched/service/AIRSCHED_ServiceContext.cpp	360

<a href="#">airsched/service/AIRSCHEd_ServiceContext.hpp</a>	361
<a href="#">airsched/service/ServiceAbstract.cpp</a>	362
<a href="#">airsched/service/ServiceAbstract.hpp</a>	363
<a href="#">test/airsched/AirlineScheduleTestSuite.cpp</a>	364
<a href="#">test/airsched/AirlineScheduleTestSuite.hpp</a>	366

## 23 Directory Documentation

### 23.1 test/airsched/ Directory Reference

#### Files

- file [AirlineScheduleTestSuite.cpp](#)
- file [AirlineScheduleTestSuite.hpp](#)

### 23.2 airsched/ Directory Reference

#### Directories

- directory [basic](#)
- directory [batches](#)
- directory [bom](#)
- directory [command](#)
- directory [config](#)
- directory [factory](#)
- directory [service](#)

#### Files

- file [AIRSCHEd\\_Service.hpp](#)
- file [AIRSCHEd\\_Types.hpp](#)

### 23.3 airsched/basic/ Directory Reference

#### Files

- file [BasConst.cpp](#)
- file [BasConst\\_AIRSCHEd\\_Service.hpp](#)
- file [BasConst\\_General.hpp](#)
- file [BasParserTypes.hpp](#)

### 23.4 airsched/batches/ Directory Reference

#### Files

- file [airsched.cpp](#)
- file [BookingRequestParser.cpp](#)
- file [BookingRequestParser.hpp](#)

## 23.5 airsched/bom/ Directory Reference

### Files

- file [AirportList.hpp](#)
- file [BomDisplay.cpp](#)
- file [BomDisplay.hpp](#)
- file [FareFamilyStruct.cpp](#)
- file [FareFamilyStruct.hpp](#)
- file [FlightPeriodStruct.cpp](#)
- file [FlightPeriodStruct.hpp](#)
- file [LegCabinStruct.cpp](#)
- file [LegCabinStruct.hpp](#)
- file [LegStruct.cpp](#)
- file [LegStruct.hpp](#)
- file [OnDPeriodStruct.cpp](#)
- file [OnDPeriodStruct.hpp](#)
- file [OriginDestinationSet.cpp](#)
- file [OriginDestinationSet.hpp](#)
- file [OriginDestinationSetKey.cpp](#)
- file [OriginDestinationSetKey.hpp](#)
- file [OriginDestinationSetTypes.hpp](#)
- file [ReachableUniverse.cpp](#)
- file [ReachableUniverse.hpp](#)
- file [ReachableUniverseKey.cpp](#)
- file [ReachableUniverseKey.hpp](#)
- file [ReachableUniverseTypes.hpp](#)
- file [SegmentCabinStruct.cpp](#)
- file [SegmentCabinStruct.hpp](#)
- file [SegmentPathPeriod.cpp](#)
- file [SegmentPathPeriod.hpp](#)
- file [SegmentPathPeriodKey.cpp](#)
- file [SegmentPathPeriodKey.hpp](#)
- file [SegmentPathPeriodTypes.hpp](#)
- file [SegmentPeriodHelper.cpp](#)
- file [SegmentPeriodHelper.hpp](#)
- file [SegmentStruct.cpp](#)
- file [SegmentStruct.hpp](#)

## 23.6 airsched/command/ Directory Reference

### Files

- file [InventoryGenerator.cpp](#)
- file [InventoryGenerator.hpp](#)
- file [OnDParser.cpp](#)
- file [OnDParser.hpp](#)
- file [OnDParserHelper.cpp](#)
- file [OnDParserHelper.hpp](#)
- file [OnDPeriodGenerator.cpp](#)
- file [OnDPeriodGenerator.hpp](#)
- file [ScheduleParser.cpp](#)
- file [ScheduleParser.hpp](#)
- file [ScheduleParserHelper.cpp](#)

- file [ScheduleParserHelper.hpp](#)
- file [SegmentPathGenerator.cpp](#)
- file [SegmentPathGenerator.hpp](#)
- file [SegmentPathProvider.cpp](#)
- file [SegmentPathProvider.hpp](#)
- file [Simulator.cpp](#)
- file [Simulator.hpp](#)
- file [TravelSolutionParser.cpp](#)
- file [TravelSolutionParser.hpp](#)

## 23.7 airsched/config/ Directory Reference

### Files

- file [airsched-paths.hpp](#)
- file [airsched-paths.hpp.in](#)

## 23.8 airsched/factory/ Directory Reference

### Files

- file [FacAIRSCHEDServiceContext.cpp](#)
- file [FacAIRSCHEDServiceContext.hpp](#)
- file [FacServiceAbstract.cpp](#)
- file [FacServiceAbstract.hpp](#)

## 23.9 airsched/service/ Directory Reference

### Files

- file [AIRSCHED\\_Service.cpp](#)
- file [AIRSCHED\\_ServiceContext.cpp](#)
- file [AIRSCHED\\_ServiceContext.hpp](#)
- file [ServiceAbstract.cpp](#)
- file [ServiceAbstract.hpp](#)

## 23.10 test/ Directory Reference

### Directories

- directory [airsched](#)

# 24 Namespace Documentation

## 24.1 airsched Namespace Reference

### Classes

- struct [store\\_place\\_element](#)
- struct [store\\_date](#)
- struct [store\\_airline\\_sign](#)
- struct [store\\_airline\\_code](#)



- struct [store\\_airline\\_name](#)
- struct [store\\_passenger\\_number](#)
- struct [store\\_adult\\_passenger\\_type](#)
- struct [store\\_child\\_passenger\\_type](#)
- struct [store\\_pet\\_passenger\\_type](#)
- struct [SearchStringParser](#)
- struct [Place\\_T](#)
- struct [Date\\_T](#)
- struct [Airline\\_T](#)
- struct [Passenger\\_T](#)
- struct [SearchString\\_T](#)

### Typedefs

- typedef std::vector< [Place\\_T](#) > [PlaceList\\_T](#)
- typedef std::vector< [Date\\_T](#) > [DateList\\_T](#)
- typedef std::vector< [Airline\\_T](#) > [AirlineList\\_T](#)
- typedef std::vector< [Passenger\\_T](#) > [PassengerList\\_T](#)

### Functions

- [SearchString\\_T parseBookingRequest](#) (const std::string &iSearchString)

### Variables

- boost::spirit::classic::int\_parser  
< unsigned int, 10, 1, 1 > [int1\\_p](#)
- boost::spirit::classic::uint\_parser  
< unsigned int, 10, 1, 1 > [uint1\\_p](#)
- boost::spirit::classic::uint\_parser  
< unsigned int, 10, 1, 2 > [uint1\\_2\\_p](#)
- boost::spirit::classic::uint\_parser  
< int, 10, 2, 2 > [uint2\\_p](#)
- boost::spirit::classic::uint\_parser  
< int, 10, 2, 4 > [uint2\\_4\\_p](#)
- boost::spirit::classic::uint\_parser  
< int, 10, 4, 4 > [uint4\\_p](#)
- boost::spirit::classic::uint\_parser  
< int, 10, 1, 4 > [uint1\\_4\\_p](#)

#### 24.1.1 Typedef Documentation

##### 24.1.1.1 typedef std::vector<Place\_T> airsched::PlaceList\_T

List of Place strucutres.

Definition at line 24 of file [BookingRequestParser.hpp](#).

##### 24.1.1.2 typedef std::vector<Date\_T> airsched::DateList\_T

List of Date strucutres.

Definition at line 49 of file [BookingRequestParser.hpp](#).

### 24.1.1.3 typedef std::vector<Airline\_T> airsched::AirlineList\_T

List of Airline strucutres.

Definition at line 68 of file [BookingRequestParser.hpp](#).

### 24.1.1.4 typedef std::vector<Passenger\_T> airsched::PassengerList\_T

List of Passenger strucutres.

Definition at line 91 of file [BookingRequestParser.hpp](#).

## 24.1.2 Function Documentation

### 24.1.2.1 SearchString\_T airsched::parseBookingRequest ( const std::string & iSearchString )

Parse the booking request.

```
Sample
guadeloupe rio de janeiro 07/22/2009 +aa -ua 2 adults 1 dog

Grammar:
search_string      ::= places
[dates]
```

(preferred\_airlines) (passengers) dates ::= board\_date [off\_date] places ::= [board\_place] off\_place board\_place ::= place\_elements off\_place ::= place\_elements place\_elements ::= country | city | airport country ::= country\_code | country\_name city ::= city\_code | city\_name airport ::= airport\_code | airport\_name preferred\_airlines ::= [+|-] airline\_code | airline\_name passengers ::= adult\_number adult\_description [child\_number child\_description] [pet\_number pet\_description] adult\_description ::= 'adult' | 'adults' | 'pax' | 'passengers' child\_description ::= 'child' | 'children' | 'kid' | 'kids' pet\_description ::= 'dog' | 'dogs' | 'cat' | 'cats'

Definition at line 373 of file [BookingRequestParser.cpp](#).

## 24.1.3 Variable Documentation

### 24.1.3.1 boost::spirit::classic::int\_parser<unsigned int, 10, 1, 1> airsched::int1\_p

1-digit-integer parser

Definition at line 203 of file [BookingRequestParser.cpp](#).

### 24.1.3.2 boost::spirit::classic::uint\_parser<unsigned int, 10, 1, 1> airsched::uint1\_p

1-digit-integer parser

Definition at line 205 of file [BookingRequestParser.cpp](#).

Referenced by [airsched::SearchStringParser::definition< ScannerT >::definition\(\)](#).

### 24.1.3.3 boost::spirit::classic::uint\_parser<unsigned int, 10, 1, 2> airsched::uint1\_2\_p

Up-to-2-digit-integer parser

Definition at line 207 of file [BookingRequestParser.cpp](#).

Referenced by [airsched::SearchStringParser::definition< ScannerT >::definition\(\)](#).

### 24.1.3.4 boost::spirit::classic::uint\_parser<int, 10, 2, 2> airsched::uint2\_p

2-digit-integer parser

Definition at line 209 of file [BookingRequestParser.cpp](#).

Referenced by [airsched::SearchStringParser::definition< ScannerT >::definition\(\)](#).

24.1.3.5 `boost::spirit::classic::uint_parser<int, 10, 2, 4> airsched::uint2_4_p`

Up-to-4-digit-integer parser

Definition at line 211 of file [BookingRequestParser.cpp](#).

24.1.3.6 `boost::spirit::classic::uint_parser<int, 10, 4, 4> airsched::uint4_p`

4-digit-integer parser

Definition at line 213 of file [BookingRequestParser.cpp](#).

Referenced by [airsched::SearchStringParser::definition< ScannerT >::definition\(\)](#).

24.1.3.7 `boost::spirit::classic::uint_parser<int, 10, 1, 4> airsched::uint1_4_p`

Up-to-4-digit-integer parser

Definition at line 215 of file [BookingRequestParser.cpp](#).

## 24.2 AIRSCHED Namespace Reference

### Namespaces

- namespace [ScheduleParserHelper](#)
- namespace [OnDParserHelper](#)

### Classes

- class [AIRSCHED\\_Service](#)  
*Interface for the AirSched Services.*
- class [SegmentDateNotFoundException](#)
- class [OnDInputFileNotFoundException](#)
- class [ScheduleInputFileNotFoundException](#)
- struct [FlagSaver](#)
- class [BomDisplay](#)  
*Utility class to display AirSched objects with a pretty format.*
- struct [FareFamilyStruct](#)
- struct [FlightPeriodStruct](#)
- struct [LegCabinStruct](#)
- struct [LegStruct](#)
- struct [OnDPeriodStruct](#)
- class [OriginDestinationSet](#)  
*Class representing a simple sub-network.*
- struct [OriginDestinationSetKey](#)  
*Structure representing the key of a sub-network.*
- class [ReachableUniverse](#)  
*Class representing the root of the schedule-related BOM tree.*
- struct [ReachableUniverseKey](#)  
*Structure representing the key of the schedule-related BOM tree root.*
- struct [SegmentCabinStruct](#)
- class [SegmentPathPeriod](#)  
*Class representing a segment/path.*
- struct [SegmentPathPeriodKey](#)  
*Structure representing the key of a segment/path.*
- class [SegmentPeriodHelper](#)

- struct [SegmentStruct](#)
- class [InventoryGenerator](#)
- class [OnDParser](#)
  - Class wrapping the parser entry point.*
- class [OnDPeriodFileParser](#)
- class [OnDPeriodGenerator](#)
  - Class handling the generation / instantiation of the O&D-Period BOM.*
- class [ScheduleParser](#)
- class [FlightPeriodFileParser](#)
- class [SegmentPathGenerator](#)
  - Class handling the generation / instantiation of the network BOM.*
- class [SegmentPathProvider](#)
  - Class building the travel solutions from airline schedules.*
- class [Simulator](#)
- class [TravelSolutionParser](#)
  - Class filling the TravelSolutionHolder structure (representing a list of classes/travelSolutions) from a given input file.*
- class [FacAIRSCHEDServiceContext](#)
  - Factory for the service context.*
- class [FacServiceAbstract](#)
- class [AIRSCHED\\_ServiceContext](#)
  - Class holding the context of the AirSched services.*
- class [ServiceAbstract](#)

## Typedefs

- typedef boost::shared\_ptr  
< [AIRSCHED\\_Service](#) > [AIRSCHED\\_ServicePtr\\_T](#)
- typedef char [char\\_t](#)
- typedef  
boost::spirit::classic::file\_iterator  
< [char\\_t](#) > [iterator\\_t](#)
- typedef  
boost::spirit::classic::scanner  
< [iterator\\_t](#) > [scanner\\_t](#)
- typedef  
boost::spirit::classic::rule  
< [scanner\\_t](#) > [rule\\_t](#)
- typedef  
boost::spirit::classic::int\_parser  
< unsigned int, 10, 1, 1 > [int1\\_p\\_t](#)
- typedef  
boost::spirit::classic::uint\_parser  
< unsigned int, 10, 2, 2 > [uint2\\_p\\_t](#)
- typedef  
boost::spirit::classic::uint\_parser  
< unsigned int, 10, 4, 4 > [uint4\\_p\\_t](#)
- typedef  
boost::spirit::classic::uint\_parser  
< unsigned int, 10, 1, 4 > [uint1\\_4\\_p\\_t](#)
- typedef  
boost::spirit::classic::chset  
< [char\\_t](#) > [chset\\_t](#)

- typedef  
boost::spirit::classic::impl::loop\_traits  
< chset\_t, unsigned int,  
unsigned int >::type repeat\_p\_t
- typedef  
boost::spirit::classic::bounded  
< uint2\_p\_t, unsigned int > bounded2\_p\_t
- typedef  
boost::spirit::classic::bounded  
< uint4\_p\_t, unsigned int > bounded4\_p\_t
- typedef  
boost::spirit::classic::bounded  
< uint1\_4\_p\_t, unsigned int > bounded1\_4\_p\_t
- typedef std::set  
< stdair::AirportCode\_T > AirportList\_T
- typedef std::vector  
< stdair::AirportCode\_T > AirportOrderedList\_T
- typedef std::vector  
< FareFamilyStruct > FareFamilyStructList\_T
- typedef std::vector  
< LegCabinStruct > LegCabinStructList\_T
- typedef std::vector< LegStruct > LegStructList\_T
- typedef std::list  
< OriginDestinationSet \* > OriginDestinationSetList\_T
- typedef std::map< const  
stdair::MapKey\_T,  
OriginDestinationSet \* > OriginDestinationSetMap\_T
- typedef std::list  
< ReachableUniverse \* > ReachableUniverseList\_T
- typedef std::map< const  
stdair::MapKey\_T,  
ReachableUniverse \* > ReachableUniverseMap\_T
- typedef std::vector  
< SegmentCabinStruct > SegmentCabinStructList\_T
- typedef std::list  
< SegmentPathPeriod \* > SegmentPathPeriodList\_T
- typedef std::multimap< const  
stdair::MapKey\_T,  
SegmentPathPeriod \* > SegmentPathPeriodMultimap\_T
- typedef std::vector< const  
SegmentPathPeriod \* > SegmentPathPeriodLightList\_T
- typedef std::vector  
< SegmentPathPeriodLightList\_T > SegmentPathPeriodListList\_T
- typedef std::vector  
< stdair::DateOffset\_T > DateOffsetList\_T
- typedef std::vector  
< SegmentStruct > SegmentStructList\_T

## Functions

- template void OriginDestinationSet::serialize< ba::text\_oarchive > (ba::text\_oarchive &, unsigned int)
- template void OriginDestinationSet::serialize< ba::text\_iarchive > (ba::text\_iarchive &, unsigned int)
- template void OriginDestinationSetKey::serialize< ba::text\_oarchive > (ba::text\_oarchive &, unsigned int)
- template void OriginDestinationSetKey::serialize< ba::text\_iarchive > (ba::text\_iarchive &, unsigned int)
- template void ReachableUniverse::serialize< ba::text\_oarchive > (ba::text\_oarchive &, unsigned int)
- template void ReachableUniverse::serialize< ba::text\_iarchive > (ba::text\_iarchive &, unsigned int)

- template void [ReachableUniverseKey::serialize< ba::text\\_oarchive >](#) (ba::text\_oarchive &, unsigned int)
- template void [ReachableUniverseKey::serialize< ba::text\\_iarchive >](#) (ba::text\_iarchive &, unsigned int)
- template void [SegmentPathPeriod::serialize< ba::text\\_oarchive >](#) (ba::text\_oarchive &, unsigned int)
- template void [SegmentPathPeriod::serialize< ba::text\\_iarchive >](#) (ba::text\_iarchive &, unsigned int)
- template void [SegmentPathPeriodKey::serialize< ba::text\\_oarchive >](#) (ba::text\_oarchive &, unsigned int)
- template void [SegmentPathPeriodKey::serialize< ba::text\\_iarchive >](#) (ba::text\_iarchive &, unsigned int)

#### Variables

- const int [DEFAULT\\_NUMBER\\_OF\\_DRAWS\\_FOR\\_MC\\_SIMULATION](#) = 100000

#### 24.2.1 Typedef Documentation

##### 24.2.1.1 typedef boost::shared\_ptr<AIRSCHED\_Service> AIRSCHED::AIRSCHED\_ServicePtr\_T

(Smart) Pointer on the AirSched service handler.

Definition at line 62 of file [AIRSCHED\\_Types.hpp](#).

##### 24.2.1.2 typedef char AIRSCHED::char\_t

Definition at line 31 of file [BasParserTypes.hpp](#).

##### 24.2.1.3 typedef boost::spirit::classic::file\_iterator<char\_t> AIRSCHED::iterator\_t

Definition at line 35 of file [BasParserTypes.hpp](#).

##### 24.2.1.4 typedef boost::spirit::classic::scanner<iterator\_t> AIRSCHED::scanner\_t

Definition at line 36 of file [BasParserTypes.hpp](#).

##### 24.2.1.5 typedef boost::spirit::classic::rule<scanner\_t> AIRSCHED::rule\_t

Definition at line 37 of file [BasParserTypes.hpp](#).

##### 24.2.1.6 typedef boost::spirit::classic::int\_parser<unsigned int, 10, 1, 1> AIRSCHED::int1\_p\_t

1-digit-integer parser

Definition at line 45 of file [BasParserTypes.hpp](#).

##### 24.2.1.7 typedef boost::spirit::classic::uint\_parser<unsigned int, 10, 2, 2> AIRSCHED::uint2\_p\_t

2-digit-integer parser

Definition at line 48 of file [BasParserTypes.hpp](#).

##### 24.2.1.8 typedef boost::spirit::classic::uint\_parser<unsigned int, 10, 4, 4> AIRSCHED::uint4\_p\_t

4-digit-integer parser

Definition at line 51 of file [BasParserTypes.hpp](#).

##### 24.2.1.9 typedef boost::spirit::classic::uint\_parser<unsigned int, 10, 1, 4> AIRSCHED::uint1\_4\_p\_t

Up-to-4-digit-integer parser

Definition at line 54 of file [BasParserTypes.hpp](#).

##### 24.2.1.10 typedef boost::spirit::classic::chset<char\_t> AIRSCHED::chset\_t

character set

Definition at line 57 of file [BasParserTypes.hpp](#).

24.2.1.11 `typedef boost::spirit::classic::impl::loop_traits<chset_t, unsigned int, unsigned int>::type  
AIRSCHED::repeat_p_t`

(Repeating) sequence of a given number of characters: repeat\_p(min, max)

Definition at line 63 of file [BasParserTypes.hpp](#).

24.2.1.12 `typedef boost::spirit::classic::bounded<uint2_p_t, unsigned int> AIRSCHED::bounded2_p_t`

Bounded-number-of-integers parser

Definition at line 66 of file [BasParserTypes.hpp](#).

24.2.1.13 `typedef boost::spirit::classic::bounded<uint4_p_t, unsigned int> AIRSCHED::bounded4_p_t`

Definition at line 67 of file [BasParserTypes.hpp](#).

24.2.1.14 `typedef boost::spirit::classic::bounded<uint1_4_p_t, unsigned int> AIRSCHED::bounded1_4_p_t`

Definition at line 68 of file [BasParserTypes.hpp](#).

24.2.1.15 `typedef std::set<stdair::AirportCode_T> AIRSCHED::AirportList_T`

Define lists of Airport Codes.

Definition at line 16 of file [AirportList.hpp](#).

24.2.1.16 `typedef std::vector<stdair::AirportCode_T> AIRSCHED::AirportOrderedList_T`

Definition at line 17 of file [AirportList.hpp](#).

24.2.1.17 `typedef std::vector<FareFamilyStruct> AIRSCHED::FareFamilyStructList_T`

List of FareFamily-Detail structures.

Definition at line 31 of file [FareFamilyStruct.hpp](#).

24.2.1.18 `typedef std::vector<LegCabinStruct> AIRSCHED::LegCabinStructList_T`

List of LegCabin-Detail structures.

Definition at line 36 of file [LegCabinStruct.hpp](#).

24.2.1.19 `typedef std::vector<LegStruct> AIRSCHED::LegStructList_T`

List of Leg structures.

Definition at line 50 of file [LegStruct.hpp](#).

24.2.1.20 `typedef std::list<OriginDestinationSet*> AIRSCHED::OriginDestinationSetList_T`

Define the [OriginDestinationSet](#) list.

Definition at line 18 of file [OriginDestinationSetTypes.hpp](#).

24.2.1.21 `typedef std::map<const stdair::MapKey_T, OriginDestinationSet*> AIRSCHED::OriginDestinationSet-  
Map_T`

Define the [OriginDestinationSet](#) map.

Definition at line 25 of file [OriginDestinationSetTypes.hpp](#).

24.2.1.22 `typedef std::list<ReachableUniverse*> AIRSCHED::ReachableUniverseList_T`

Define the reachable-universe list.

Definition at line 18 of file [ReachableUniverseTypes.hpp](#).

24.2.1.23 `typedef std::map<const stdair::MapKey_T, ReachableUniverse*> AIRSCHED::ReachableUniverseMap_T`

Define the reachable-universe map.

Definition at line 25 of file [ReachableUniverseTypes.hpp](#).

24.2.1.24 `typedef std::vector<SegmentCabinStruct> AIRSCHED::SegmentCabinStructList_T`

List of SegmentCabin-Detail strucutres.

Definition at line 41 of file [SegmentCabinStruct.hpp](#).

24.2.1.25 `typedef std::list<SegmentPathPeriod*> AIRSCHED::SegmentPathPeriodList_T`

Define the segment path list.

Definition at line 20 of file [SegmentPathPeriodTypes.hpp](#).

24.2.1.26 `typedef std::multimap<const stdair::MapKey_T, SegmentPathPeriod*> AIRSCHED::SegmentPathPeriod-Multimap_T`

Define the segment path map.

Definition at line 27 of file [SegmentPathPeriodTypes.hpp](#).

24.2.1.27 `typedef std::vector<const SegmentPathPeriod*> AIRSCHED::SegmentPathPeriodLightList_T`

Define the (temporary) containers of segment path period.

Definition at line 30 of file [SegmentPathPeriodTypes.hpp](#).

24.2.1.28 `typedef std::vector<SegmentPathPeriodLightList_T> AIRSCHED::SegmentPathPeriodListList_T`

Definition at line 31 of file [SegmentPathPeriodTypes.hpp](#).

24.2.1.29 `typedef std::vector<stdair::DateOffset_T> AIRSCHED::DateOffsetList_T`

Define the vector of boarding date offsets of the member segments of a segment path compare to the boarding date of the first segment.

Definition at line 35 of file [SegmentPathPeriodTypes.hpp](#).

24.2.1.30 `typedef std::vector<SegmentStruct> AIRSCHED::SegmentStructList_T`

List of Segment strucutres.

Definition at line 44 of file [SegmentStruct.hpp](#).

## 24.2.2 Function Documentation

24.2.2.1 `template void AIRSCHED::OriginDestinationSet::serialize< ba::text_oarchive > ( ba::text_oarchive & , unsigned int )`

24.2.2.2 `template void AIRSCHED::OriginDestinationSet::serialize< ba::text_iarchive > ( ba::text_iarchive & , unsigned int )`

24.2.2.3 `template void AIRSCHED::OriginDestinationSetKey::serialize< ba::text_oarchive > ( ba::text_oarchive & , unsigned int )`



- 24.2.2.4 `template void AIRSCHED::OriginDestinationSetKey::serialize< ba::text_iarchive > ( ba::text_iarchive & , unsigned int )`
- 24.2.2.5 `template void AIRSCHED::ReachableUniverse::serialize< ba::text_oarchive > ( ba::text_oarchive & , unsigned int )`
- 24.2.2.6 `template void AIRSCHED::ReachableUniverse::serialize< ba::text_iarchive > ( ba::text_iarchive & , unsigned int )`
- 24.2.2.7 `template void AIRSCHED::ReachableUniverseKey::serialize< ba::text_oarchive > ( ba::text_oarchive & , unsigned int )`
- 24.2.2.8 `template void AIRSCHED::ReachableUniverseKey::serialize< ba::text_iarchive > ( ba::text_iarchive & , unsigned int )`
- 24.2.2.9 `template void AIRSCHED::SegmentPathPeriod::serialize< ba::text_oarchive > ( ba::text_oarchive & , unsigned int )`
- 24.2.2.10 `template void AIRSCHED::SegmentPathPeriod::serialize< ba::text_iarchive > ( ba::text_iarchive & , unsigned int )`
- 24.2.2.11 `template void AIRSCHED::SegmentPathPeriodKey::serialize< ba::text_oarchive > ( ba::text_oarchive & , unsigned int )`
- 24.2.2.12 `template void AIRSCHED::SegmentPathPeriodKey::serialize< ba::text_iarchive > ( ba::text_iarchive & , unsigned int )`

### 24.2.3 Variable Documentation

- 24.2.3.1 `const int AIRSCHED::DEFAULT_NUMBER_OF_DRAWS_FOR_MC_SIMULATION = 100000`

Default value for the number of draws within the Monte-Carlo Integration algorithm.

Definition at line 8 of file [BasConst.cpp](#).

## 24.3 AIRSCHED::OnDParserHelper Namespace Reference

### Classes

- struct [ParserSemanticAction](#)
- struct [storeOrigin](#)
- struct [storeDestination](#)
- struct [storeDateRangeStart](#)
- struct [storeDateRangeEnd](#)
- struct [storeStartRangeTime](#)
- struct [storeEndRangeTime](#)
- struct [storeAirlineCode](#)
- struct [storeClassCode](#)
- struct [doEndOnD](#)
- struct [OnDParser](#)

### Functions

- [chset\\_t alpha\\_cap\\_set\\_p](#) ("A-Z")
- [repeat\\_p\\_t airport\\_p](#) ([chset\\_t](#)("0-9A-Z").derived(), 3, 3)
- [repeat\\_p\\_t airline\\_code\\_p](#) ([alpha\\_cap\\_set\\_p](#).derived(), 2, 3)
- [bounded4\\_p\\_t year\\_p](#) ([uint4\\_p](#).derived(), 2000u, 2099u)
- [bounded2\\_p\\_t month\\_p](#) ([uint2\\_p](#).derived(), 1u, 12u)

- [bounded2\\_p\\_t day\\_p](#) (uint2\_p.derived(), 1u, 31u)
- [bounded2\\_p\\_t hours\\_p](#) (uint2\_p.derived(), 0u, 23u)
- [bounded2\\_p\\_t minutes\\_p](#) (uint2\_p.derived(), 0u, 59u)
- [bounded2\\_p\\_t seconds\\_p](#) (uint2\_p.derived(), 0u, 59u)
- [chset\\_t class\\_code\\_p](#) ("A-Z")

#### Variables

- [uint2\\_p\\_t uint2\\_p](#)
- [uint4\\_p\\_t uint4\\_p](#)
- [uint1\\_4\\_p\\_t uint1\\_4\\_p](#)

#### 24.3.1 Function Documentation

##### 24.3.1.1 [chset\\_t AIRSCHED::OnDParserHelper::alpha\\_cap\\_set\\_p](#) ( "A-Z" )

Sequence of (capital) alphabetic characters: [chset\\_p](#)("A-Z")

##### 24.3.1.2 [repeat\\_p\\_t AIRSCHED::OnDParserHelper::airport\\_p](#) ( [chset\\_t](#)("0-9A-Z").derived(), 3, 3 )

Airport Parser: [repeat\\_p](#)(3)[[chset\\_p](#)("0-9A-Z")]

Referenced by [AIRSCHED::OnDParserHelper::OnDParser::definition< ScannerT >::definition\(\)](#).

##### 24.3.1.3 [repeat\\_p\\_t AIRSCHED::OnDParserHelper::airline\\_code\\_p](#) ( [alpha\\_cap\\_set\\_p](#). derived(), 2, 3 )

Airline Code Parser: [repeat\\_p](#)(2,3)[[chset\\_p](#)("0-9A-Z")]

Referenced by [AIRSCHED::OnDParserHelper::OnDParser::definition< ScannerT >::definition\(\)](#).

##### 24.3.1.4 [bounded4\\_p\\_t AIRSCHED::OnDParserHelper::year\\_p](#) ( [uint4\\_p](#). derived(), 2000u, 2099u )

Year Parser: [limit\\_d](#)(2000u, 2099u)[[uint4\\_p](#)]

Referenced by [AIRSCHED::OnDParserHelper::OnDParser::definition< ScannerT >::definition\(\)](#).

##### 24.3.1.5 [bounded2\\_p\\_t AIRSCHED::OnDParserHelper::month\\_p](#) ( [uint2\\_p](#). derived(), 1u, 12u )

Month Parser: [limit\\_d](#)(1u, 12u)[[uint2\\_p](#)]

Referenced by [AIRSCHED::OnDParserHelper::OnDParser::definition< ScannerT >::definition\(\)](#).

##### 24.3.1.6 [bounded2\\_p\\_t AIRSCHED::OnDParserHelper::day\\_p](#) ( [uint2\\_p](#). derived(), 1u, 31u )

Day Parser: [limit\\_d](#)(1u, 31u)[[uint2\\_p](#)]

Referenced by [AIRSCHED::OnDParserHelper::OnDParser::definition< ScannerT >::definition\(\)](#).

##### 24.3.1.7 [bounded2\\_p\\_t AIRSCHED::OnDParserHelper::hours\\_p](#) ( [uint2\\_p](#). derived(), 0u, 23u )

Hour Parser: [limit\\_d](#)(0u, 23u)[[uint2\\_p](#)]

Referenced by [AIRSCHED::OnDParserHelper::OnDParser::definition< ScannerT >::definition\(\)](#).

##### 24.3.1.8 [bounded2\\_p\\_t AIRSCHED::OnDParserHelper::minutes\\_p](#) ( [uint2\\_p](#). derived(), 0u, 59u )

Minute Parser: [limit\\_d](#)(0u, 59u)[[uint2\\_p](#)]

Referenced by [AIRSCHED::OnDParserHelper::OnDParser::definition< ScannerT >::definition\(\)](#).

##### 24.3.1.9 [bounded2\\_p\\_t AIRSCHED::OnDParserHelper::seconds\\_p](#) ( [uint2\\_p](#). derived(), 0u, 59u )

Second Parser: [limit\\_d](#)(0u, 59u)[[uint2\\_p](#)]

Referenced by [AIRSCHED::OnDParserHelper::OnDParser::definition< ScannerT >::definition\(\)](#).

#### 24.3.1.10 chset\_t AIRSCHED::OnDParserHelper::class\_code\_p ( "A-Z" )

Class Code Parser: chset\_p("A-Z")

Referenced by [AIRSCHED::OnDParserHelper::OnDParser::definition< ScannerT >::definition\(\)](#).

### 24.3.2 Variable Documentation

#### 24.3.2.1 uint2\_p\_t AIRSCHED::OnDParserHelper::uint2\_p

2-digit-integer parser

Definition at line 215 of file [OnDParserHelper.cpp](#).

#### 24.3.2.2 uint4\_p\_t AIRSCHED::OnDParserHelper::uint4\_p

4-digit-integer parser

Definition at line 218 of file [OnDParserHelper.cpp](#).

#### 24.3.2.3 uint1\_4\_p\_t AIRSCHED::OnDParserHelper::uint1\_4\_p

Up-to-4-digit-integer parser

Definition at line 221 of file [OnDParserHelper.cpp](#).

## 24.4 AIRSCHED::ScheduleParserHelper Namespace Reference

### Classes

- struct [ParserSemanticAction](#)
- struct [storeAirlineCode](#)
- struct [storeFlightNumber](#)
- struct [storeDateRangeStart](#)
- struct [storeDateRangeEnd](#)
- struct [storeDow](#)
- struct [storeLegBoardingPoint](#)
- struct [storeLegOffPoint](#)
- struct [storeBoardingTime](#)
- struct [storeOffTime](#)
- struct [storeElapsedTime](#)
- struct [storeLegCabinCode](#)
- struct [storeCapacity](#)
- struct [storeSegmentSpecificity](#)
- struct [storeSegmentBoardingPoint](#)
- struct [storeSegmentOffPoint](#)
- struct [storeSegmentCabinCode](#)
- struct [storeClasses](#)
- struct [storeFamilyCode](#)
- struct [storeFClasses](#)
- struct [doEndFlight](#)
- struct [FlightPeriodParser](#)

## Functions

- [repeat\\_p\\_t airline\\_code\\_p](#) ([chset\\_t](#)("0-9A-Z").[derived\(\)](#), 2, 3)
- [bounded1\\_4\\_p\\_t flight\\_number\\_p](#) ([uint1\\_4\\_p](#).[derived\(\)](#), 0u, 9999u)
- [bounded4\\_p\\_t year\\_p](#) ([uint4\\_p](#).[derived\(\)](#), 2000u, 2099u)
- [bounded2\\_p\\_t month\\_p](#) ([uint2\\_p](#).[derived\(\)](#), 1u, 12u)
- [bounded2\\_p\\_t day\\_p](#) ([uint2\\_p](#).[derived\(\)](#), 1u, 31u)
- [repeat\\_p\\_t dow\\_p](#) ([chset\\_t](#)("0-1").[derived\(\)](#).[derived\(\)](#), 7, 7)
- [repeat\\_p\\_t airport\\_p](#) ([chset\\_t](#)("0-9A-Z").[derived\(\)](#), 3, 3)
- [bounded2\\_p\\_t hours\\_p](#) ([uint2\\_p](#).[derived\(\)](#), 0u, 23u)
- [bounded2\\_p\\_t minutes\\_p](#) ([uint2\\_p](#).[derived\(\)](#), 0u, 59u)
- [bounded2\\_p\\_t seconds\\_p](#) ([uint2\\_p](#).[derived\(\)](#), 0u, 59u)
- [chset\\_t cabin\\_code\\_p](#) ("A-Z")
- [repeat\\_p\\_t class\\_code\\_list\\_p](#) ([chset\\_t](#)("A-Z").[derived\(\)](#), 1, 26)

## Variables

- [int1\\_p\\_t int1\\_p](#)
- [uint2\\_p\\_t uint2\\_p](#)
- [uint4\\_p\\_t uint4\\_p](#)
- [uint1\\_4\\_p\\_t uint1\\_4\\_p](#)
- [int1\\_p\\_t family\\_code\\_p](#)

## 24.4.1 Function Documentation

24.4.1.1 [repeat\\_p\\_t AIRSCHED::ScheduleParserHelper::airline\\_code\\_p](#) ( [chset\\_t](#)("0-9A-Z").[derived\(\)](#) , 2 , 3 )

Airline Code Parser: [repeat\\_p\(2,3\)\[chset\\_p\("0-9A-Z"\)\]](#)

Referenced by [AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::definition\(\)](#).

24.4.1.2 [bounded1\\_4\\_p\\_t AIRSCHED::ScheduleParserHelper::flight\\_number\\_p](#) ( [uint1\\_4\\_p](#). [derived\(\)](#) , 0u , 9999u )

Flight Number Parser: [limit\\_d\(0u, 9999u\)\[uint1\\_4\\_p\]](#)

Referenced by [AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::definition\(\)](#).

24.4.1.3 [bounded4\\_p\\_t AIRSCHED::ScheduleParserHelper::year\\_p](#) ( [uint4\\_p](#). [derived\(\)](#) , 2000u , 2099u )

Year Parser: [limit\\_d\(2000u, 2099u\)\[uint4\\_p\]](#)

Referenced by [AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::definition\(\)](#).

24.4.1.4 [bounded2\\_p\\_t AIRSCHED::ScheduleParserHelper::month\\_p](#) ( [uint2\\_p](#). [derived\(\)](#) , 1u , 12u )

Month Parser: [limit\\_d\(1u, 12u\)\[uint2\\_p\]](#)

Referenced by [AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::definition\(\)](#).

24.4.1.5 [bounded2\\_p\\_t AIRSCHED::ScheduleParserHelper::day\\_p](#) ( [uint2\\_p](#). [derived\(\)](#) , 1u , 31u )

Day Parser: [limit\\_d\(1u, 31u\)\[uint2\\_p\]](#)

Referenced by [AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::definition\(\)](#).

24.4.1.6 [repeat\\_p\\_t AIRSCHED::ScheduleParserHelper::dow\\_p](#) ( [chset\\_t](#)("0-1").[derived\(\)](#).[derived\(\)](#) , 7 , 7 )

DOW (Day-Of-the-Week) Parser: [repeat\\_p\(7\)\[chset\\_p\("0-1"\)\]](#)

Referenced by [AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::definition\(\)](#).

24.4.1.7 **repeat\_p\_t** AIRSCHED::ScheduleParserHelper::airport\_p ( chset\_t("0-9A-Z").derived(), 3, 3 )

Airport Parser: repeat\_p(3)[chset\_p("0-9A-Z")]

Referenced by [AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::definition\(\)](#).

24.4.1.8 **bounded2\_p\_t** AIRSCHED::ScheduleParserHelper::hours\_p ( uint2\_p.derived(), 0u, 23u )

Hour Parser: limit\_d(0u, 23u)[uint2\_p]

Referenced by [AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::definition\(\)](#).

24.4.1.9 **bounded2\_p\_t** AIRSCHED::ScheduleParserHelper::minutes\_p ( uint2\_p.derived(), 0u, 59u )

Minute Parser: limit\_d(0u, 59u)[uint2\_p]

Referenced by [AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::definition\(\)](#).

24.4.1.10 **bounded2\_p\_t** AIRSCHED::ScheduleParserHelper::seconds\_p ( uint2\_p.derived(), 0u, 59u )

Second Parser: limit\_d(0u, 59u)[uint2\_p]

Referenced by [AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::definition\(\)](#).

24.4.1.11 **chset\_t** AIRSCHED::ScheduleParserHelper::cabin\_code\_p ( "A-Z" )

Cabin Code Parser: chset\_p("A-Z")

Referenced by [AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::definition\(\)](#).

24.4.1.12 **repeat\_p\_t** AIRSCHED::ScheduleParserHelper::class\_code\_list\_p ( chset\_t("A-Z").derived(), 1, 26 )

Class Code List Parser: repeat\_p(1,26)[chset\_p("A-Z")]

Referenced by [AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::definition\(\)](#).

## 24.4.2 Variable Documentation

24.4.2.1 **int1\_p\_t** AIRSCHED::ScheduleParserHelper::int1\_p

1-digit-integer parser

Definition at line 408 of file [ScheduleParserHelper.cpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::definition\(\)](#).

24.4.2.2 **uint2\_p\_t** AIRSCHED::ScheduleParserHelper::uint2\_p

2-digit-integer parser

Definition at line 411 of file [ScheduleParserHelper.cpp](#).

24.4.2.3 **uint4\_p\_t** AIRSCHED::ScheduleParserHelper::uint4\_p

4-digit-integer parser

Definition at line 414 of file [ScheduleParserHelper.cpp](#).

24.4.2.4 **uint1\_4\_p\_t** AIRSCHED::ScheduleParserHelper::uint1\_4\_p

Up-to-4-digit-integer parser

Definition at line 417 of file [ScheduleParserHelper.cpp](#).

#### 24.4.2.5 int1\_p\_t AIRSCHED::ScheduleParserHelper::family\_code\_p

Family code parser

Definition at line 453 of file [ScheduleParserHelper.cpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::definition\(\)](#).

## 24.5 boost Namespace Reference

Forward declarations.

### Namespaces

- namespace [serialization](#)

#### 24.5.1 Detailed Description

Forward declarations.

## 24.6 boost::serialization Namespace Reference

## 24.7 stdair Namespace Reference

Forward declarations.

#### 24.7.1 Detailed Description

Forward declarations.

# 25 Class Documentation

## 25.1 airsched::Airline\_T Struct Reference

```
#include <airsched/batches/BookingRequestParser.hpp>
```

### Public Member Functions

- [Airline\\_T](#) ()
- void [display](#) () const

### Public Attributes

- bool [\\_isPreferred](#)
- std::string [\\_name](#)
- std::string [\\_code](#)

#### 25.1.1 Detailed Description

Airline.

Definition at line 52 of file [BookingRequestParser.hpp](#).

## 25.1.2 Constructor &amp; Destructor Documentation

25.1.2.1 `airsched::Airline_T::Airline_T ( ) [inline]`

Constructor.

Definition at line 58 of file [BookingRequestParser.hpp](#).

## 25.1.3 Member Function Documentation

25.1.3.1 `void airschd::Airline_T::display ( ) const [inline]`

Definition at line 60 of file [BookingRequestParser.hpp](#).

References [\\_code](#), [\\_isPreferred](#), and [\\_name](#).

Referenced by [airsched::SearchString\\_T::display\(\)](#).

## 25.1.4 Member Data Documentation

25.1.4.1 `bool airschd::Airline_T::_isPreferred`

Definition at line 54 of file [BookingRequestParser.hpp](#).

Referenced by [display\(\)](#), and [airsched::store\\_airline\\_sign::operator\(\)](#).

25.1.4.2 `std::string airschd::Airline_T::_name`

Definition at line 55 of file [BookingRequestParser.hpp](#).

Referenced by [display\(\)](#), and [airsched::store\\_airline\\_name::operator\(\)](#).

25.1.4.3 `std::string airschd::Airline_T::_code`

Definition at line 56 of file [BookingRequestParser.hpp](#).

Referenced by [display\(\)](#), and [airsched::store\\_airline\\_code::operator\(\)](#).


The documentation for this struct was generated from the following file:

- [airsched/batches/BookingRequestParser.hpp](#)

## 25.2 AirlineScheduleTestSuite Class Reference

```
#include <test/airsched/AirlineScheduleTestSuite.hpp>
```

Inheritance diagram for AirlineScheduleTestSuite:



## Public Member Functions

- void [externalMemoryManagement](#) ()
- void [scheduleParsing](#) ()
- [AirlineScheduleTestSuite](#) ()

## Protected Attributes

- `std::stringstream _describeKey`

## 25.2.1 Detailed Description

Definition at line 6 of file [AirlineScheduleTestSuite.hpp](#).

## 25.2.2 Constructor &amp; Destructor Documentation

## 25.2.2.1 AirlineScheduleTestSuite::AirlineScheduleTestSuite ( )

Constructor.

## 25.2.3 Member Function Documentation

## 25.2.3.1 void AirlineScheduleTestSuite::externalMemoryManagement ( )

Test the Optimisation functionality.

The code is aimed at testing the initialization of airline inventory-related objects which are mainly implemented in the stdair library. That means the memory allocation of these objects will be managed by the calling project and not by the called project.

## 25.2.3.2 void AirlineScheduleTestSuite::scheduleParsing ( )

## 25.2.4 Member Data Documentation

## 25.2.4.1 std::stringstream AirlineScheduleTestSuite::\_describeKey [protected]

Definition at line 26 of file [AirlineScheduleTestSuite.hpp](#).

The documentation for this class was generated from the following file:

- `test/airsched/AirlineScheduleTestSuite.hpp`

## 25.3 AIRSCHED::AIRSCHED\_Service Class Reference

Interface for the AirSched Services.

```
#include <airsched/AIRSCHED_Service.hpp>
```

## Public Member Functions

- [AIRSCHED\\_Service](#) (const stdair::BasLogParams &, const stdair::BasDBParams &)
- [AIRSCHED\\_Service](#) (const stdair::BasLogParams &)
- [AIRSCHED\\_Service](#) (stdair::STDAIR\_ServicePtr\_T ioSTDAIR\_ServicePtr)
- void [parseAndLoad](#) (const stdair::Filename\_T &iScheduleInputFilename)
- void [parseAndLoad](#) (const stdair::Filename\_T &iScheduleFilename, const stdair::Filename\_T &iODInputFilename)
- [~AIRSCHED\\_Service](#) ()
- void [buildSampleBom](#) ()
- void [buildSegmentPathList](#) (stdair::TravelSolutionList\_T &, const stdair::BookingRequestStruct &)
- void [simulate](#) ()
- std::string [jsonExport](#) (const stdair::AirlineCode\_T &, const stdair::FlightNumber\_T &, const stdair::Date\_T &iDepartureDate) const



- std::string [csvDisplay](#) () const
- std::string [csvDisplay](#) (const stdair::AirlineCode\_T &, const stdair::FlightNumber\_T &, const stdair::Date\_T & iDepartureDate) const

### 25.3.1 Detailed Description

Interface for the AirSched Services.

Definition at line 32 of file [AIRSCHED\\_Service.hpp](#).

### 25.3.2 Constructor & Destructor Documentation

#### 25.3.2.1 AIRSCHED::AIRSCHED\_Service::AIRSCHED\_Service ( const stdair::BasLogParams & iLogParams, const stdair::BasDBParams & iDBParams )

Constructor.

The initAirschedService() method is called; see the corresponding documentation for more details.

A reference on an output stream is given, so that log outputs can be directed onto that stream.

Moreover, database connection parameters are given, so that a session can be created on the corresponding database.

#### Parameters

<i>const</i>	stdair::BasLogParams& Parameters for the output log stream.
<i>const</i>	stdair::BasDBParams& Parameters for the database access.

Definition at line 62 of file [AIRSCHED\\_Service.cpp](#).

#### 25.3.2.2 AIRSCHED::AIRSCHED\_Service::AIRSCHED\_Service ( const stdair::BasLogParams & iLogParams )

Constructor.

The initAirschedService() method is called; see the corresponding documentation for more details.

A reference on an output stream is given, so that log outputs can be directed onto that stream.

#### Parameters

<i>const</i>	stdair::BasLogParams& Parameters for the output log stream.
--------------	---

Definition at line 42 of file [AIRSCHED\\_Service.cpp](#).

#### 25.3.2.3 AIRSCHED::AIRSCHED\_Service::AIRSCHED\_Service ( stdair::STDAIR\_ServicePtr\_T ioSTDAIR\_ServicePtr )

Constructor.

The initAirschedService() method is called; see the corresponding documentation for more details.

Moreover, as no reference on any output stream is given, it is assumed that the StdAir log service has already been initialised with the proper log output stream by some other methods in the calling chain (for instance, when the [AIRSCHED\\_Service](#) is itself being initialised by another library service such as [SIMCRS\\_Service](#)).

#### Parameters

<i>stdair::STDAIR_ServicePtr_T</i>	Reference on the STDAIR service.
------------------------------------	----------------------------------

Definition at line 84 of file [AIRSCHED\\_Service.cpp](#).

## 25.3.2.4 AIRSCHED::AIRSCHED\_Service::~~AIRSCHED\_Service ( )

Destructor.

Definition at line 100 of file [AIRSCHED\\_Service.cpp](#).

## 25.3.3 Member Function Documentation

## 25.3.3.1 void AIRSCHED::AIRSCHED\_Service::parseAndLoad ( const stdair::Filename\_T &amp; iScheduleInputFilename )

Parse the schedule input file and load it into memory.

The CSV file, describing the airline schedule for the simulator, is parsed and instantiated in memory accordingly.

## Parameters

<i>const</i>	stdair::Filename_T& Filename of the input schedule file.
--------------	--

Definition at line 178 of file [AIRSCHED\\_Service.cpp](#).

References [AIRSCHED::ScheduleParser::generateInventories\(\)](#).

Referenced by [main\(\)](#), and [parseAndLoad\(\)](#).

## 25.3.3.2 void AIRSCHED::AIRSCHED\_Service::parseAndLoad ( const stdair::Filename\_T &amp; iScheduleFilename, const stdair::Filename\_T &amp; iODInputFilename )

Parse the schedule and O&D input files, and load them into memory.

The CSV files, describing the airline schedule and the O&Ds for the simulator, are parsed and instantiated in memory accordingly.

## Parameters

<i>const</i>	stdair::Filename_T& Filename of the input schedule file.
<i>const</i>	stdair::Filename_T& Filename of the input O&D file.

Definition at line 199 of file [AIRSCHED\\_Service.cpp](#).

References [AIRSCHED::OnDParser::generateOnDPeriods\(\)](#), and [parseAndLoad\(\)](#).

## 25.3.3.3 void AIRSCHED::AIRSCHED\_Service::buildSampleBom ( )

Build a sample BOM tree, and attach it to the BomRoot instance.

The BOM tree is based on two actual inventories (one for BA, another for AF). Each inventory contains one flight. One of those flights has two legs (and therefore three segments).

Definition at line 223 of file [AIRSCHED\\_Service.cpp](#).

References [AIRSCHED::SegmentPathGenerator::createSegmentPathNetwork\(\)](#).

Referenced by [main\(\)](#).

## 25.3.3.4 void AIRSCHED::AIRSCHED\_Service::buildSegmentPathList ( stdair::TravelSolutionList\_T &amp; ioTravelSolutionList, const stdair::BookingRequestStruct &amp; iBookingRequest )

Calculate and return a list of travel solutions corresponding to a given product demand.

Definition at line 369 of file [AIRSCHED\\_Service.cpp](#).

Referenced by [main\(\)](#).

## 25.3.3.5 void AIRSCHED::AIRSCHED\_Service::simulate ( )

Perform a small simulation, which uses the Customer Choice Model (CCM).

Currently, that method does nothing.

Definition at line 341 of file [AIRSCHED\\_Service.cpp](#).

**25.3.3.6** `std::string AIRSCHED::AIRSCHED_Service::jsonExport ( const stdair::AirlineCode_T & iAirlineCode, const stdair::FlightNumber_T & iFlightNumber, const stdair::Date_T & iDepartureDate ) const`

Recursively dump, in the returned string and in JSON format, the flight-period corresponding to the parameters given as input.

#### Parameters

<i>const</i>	stdair::AirlineCode_T& Airline code of the flight to dump.
<i>const</i>	stdair::FlightNumber_T& Flight number of the flight to dump.
<i>const</i>	stdair::Date_T& Departure date of a flight within the flight period to dump.

#### Returns

std::string Output string in which the BOM tree is JSON-ified.

Definition at line 274 of file [AIRSCHED\\_Service.cpp](#).

**25.3.3.7** `std::string AIRSCHED::AIRSCHED_Service::csvDisplay ( ) const`

Recursively display (dump in the returned string) the objects of the BOM tree.

#### Returns

std::string Output string in which the BOM tree is logged/dumped.

Definition at line 297 of file [AIRSCHED\\_Service.cpp](#).

**25.3.3.8** `std::string AIRSCHED::AIRSCHED_Service::csvDisplay ( const stdair::AirlineCode_T & iAirlineCode, const stdair::FlightNumber_T & iFlightNumber, const stdair::Date_T & iDepartureDate ) const`

Recursively display (dump in the returned string) the flight-period corresponding to the parameters given as input.

#### Parameters

<i>const</i>	stdair::AirlineCode_T& Airline code of the flight period to display.
<i>const</i>	stdair::FlightNumber_T& Flight number of the flight to display.
<i>const</i>	stdair::Date_T& Departure date of a flight within the flight-period to display.

#### Returns

std::string Output string in which the BOM tree is logged/dumped.

Definition at line 318 of file [AIRSCHED\\_Service.cpp](#).

The documentation for this class was generated from the following files:


- [airsched/AIRSCHED\\_Service.hpp](#)
- [airsched/service/AIRSCHED\\_Service.cpp](#)

## 25.4 AIRSCHED::AIRSCHED\_ServiceContext Class Reference

Class holding the context of the AirSched services.

```
#include <airsched/service/AIRSCHED_ServiceContext.hpp>
```

Inheritance diagram for AIRSCHED::AIRSCHED\_ServiceContext:



#### Friends

- class [AIRSCHED\\_Service](#)
- class [FacAIRSCHEDServiceContext](#)

#### 25.4.1 Detailed Description

Class holding the context of the AirSched services.

Definition at line 22 of file [AIRSCHED\\_ServiceContext.hpp](#).

#### 25.4.2 Friends And Related Function Documentation

##### 25.4.2.1 friend class AIRSCHED\_Service [friend]

The [AIRSCHED\\_Service](#) class should be the sole class to get access to ServiceContext content: general users do not want to bother with a context interface.

Definition at line 28 of file [AIRSCHED\\_ServiceContext.hpp](#).

##### 25.4.2.2 friend class FacAIRSCHEDServiceContext [friend]


Definition at line 29 of file [AIRSCHED\\_ServiceContext.hpp](#).

The documentation for this class was generated from the following files:

- [airsched/service/AIRSCHED\\_ServiceContext.hpp](#)
- [airsched/service/AIRSCHED\\_ServiceContext.cpp](#)

## 25.5 BomAbstract Class Reference

Inheritance diagram for BomAbstract:

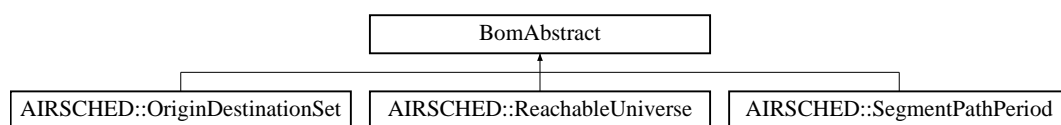

The documentation for this class was generated from the following file:

- [airsched/bom/OriginDestinationSet.hpp](#)

## 25.6 AIRSCHED::BomDisplay Class Reference

Utility class to display AirSched objects with a pretty format.

```
#include <airsched/bom/BomDisplay.hpp>
```

## Static Public Member Functions

- static std::string [csvDisplay](#) (const stdair::BomRoot &)
- static void [csvDisplay](#) (std::ostream &, const [ReachableUniverse](#) &)

## 25.6.1 Detailed Description

Utility class to display AirSched objects with a pretty format.

Definition at line 26 of file [BomDisplay.hpp](#).

## 25.6.2 Member Function Documentation

## 25.6.2.1 std::string AIRSCHED::BomDisplay::csvDisplay ( const stdair::BomRoot &amp; iBomRoot ) [static]

Recursively display (dump in the underlying output log stream) the objects of the BOM tree.

## Parameters

<i>std::ostream&amp;</i>	Output stream in which the BOM tree should be logged/dumped.
<i>const</i>	stdair::EventQueue& Root of the BOM tree to be displayed.

Definition at line 43 of file [BomDisplay.cpp](#).

## 25.6.2.2 void AIRSCHED::BomDisplay::csvDisplay ( std::ostream &amp; oStream, const ReachableUniverse &amp; iReachableUniverse ) [static]

Recursively display (dump in the underlying output log stream) the objects of the BOM tree.

## Parameters

<i>std::ostream&amp;</i>	Output stream in which the BOM tree should be logged/dumped.
<i>const</i>	<a href="#">ReachableUniverse</a> & Root of the BOM tree to be displayed.

Definition at line 81 of file [BomDisplay.cpp](#).


References [AIRSCHED::ReachableUniverse::toString\(\)](#).

The documentation for this class was generated from the following files:

- [airsched/bom/BomDisplay.hpp](#)
- [airsched/bom/BomDisplay.cpp](#)

## 25.7 CmdAbstract Class Reference

Inheritance diagram for CmdAbstract:

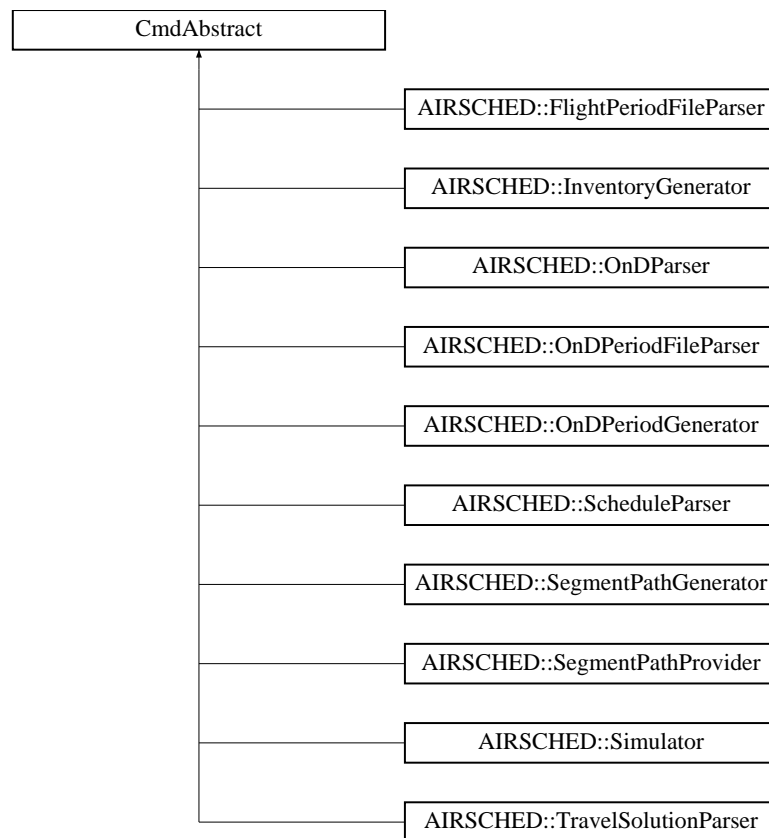

The documentation for this class was generated from the following file:

- [airsched/command/OnDPeriodGenerator.hpp](#)

## 25.8 airsched::Date\_T Struct Reference

```
#include <airsched/batches/BookingRequestParser.hpp>
```

### Public Member Functions

- [Date\\_T](#) ()
- void [display](#) () const
- boost::gregorian::date [getDate](#) () const

### Public Attributes

- boost::gregorian::date [\\_date](#)
- unsigned int [\\_reldays](#)
- unsigned int [\\_day](#)
- unsigned int [\\_month](#)
- unsigned int [\\_year](#)

### 25.8.1 Detailed Description

Date.

Definition at line 27 of file [BookingRequestParser.hpp](#).

### 25.8.2 Constructor & Destructor Documentation

#### 25.8.2.1 airsched::Date\_T::Date\_T( ) [inline]

Constructor.

Definition at line 35 of file [BookingRequestParser.hpp](#).

### 25.8.3 Member Function Documentation

#### 25.8.3.1 void airsched::Date\_T::display( ) const [inline]

Definition at line 37 of file [BookingRequestParser.hpp](#).

References [\\_date](#), [\\_day](#), [\\_month](#), [\\_reldays](#), and [\\_year](#).

Referenced by [airsched::SearchString\\_T::display\(\)](#).

#### 25.8.3.2 boost::gregorian::date airsched::Date\_T::getDate( ) const [inline]

Set the date from the staging details.

Definition at line 43 of file [BookingRequestParser.hpp](#).

References [\\_day](#), [\\_month](#), and [\\_year](#).

Referenced by [airsched::store\\_date::operator\(\)\(\)](#).

### 25.8.4 Member Data Documentation

#### 25.8.4.1 boost::gregorian::date airsched::Date\_T::\_date

Definition at line 29 of file [BookingRequestParser.hpp](#).

Referenced by [display\(\)](#), and [airsched::store\\_date::operator\(\)\(\)](#).

#### 25.8.4.2 unsigned int airsched::Date\_T::\_reldays

Definition at line 30 of file [BookingRequestParser.hpp](#).

Referenced by [display\(\)](#).

#### 25.8.4.3 unsigned int airsched::Date\_T::\_day

Definition at line 31 of file [BookingRequestParser.hpp](#).

Referenced by [display\(\)](#), and [getDate\(\)](#).

#### 25.8.4.4 unsigned int airsched::Date\_T::\_month

Definition at line 32 of file [BookingRequestParser.hpp](#).

Referenced by [display\(\)](#), and [getDate\(\)](#).

#### 25.8.4.5 unsigned int airsched::Date\_T::\_year

Definition at line 33 of file [BookingRequestParser.hpp](#).

Referenced by [display\(\)](#), and [getDate\(\)](#).

The documentation for this struct was generated from the following file:

- [airsched/batches/BookingRequestParser.hpp](#)

## 25.9 AIRSCHED::OnDParserHelper::OnDParser::definition&lt; ScannerT &gt; Struct Template Reference

```
#include <airsched/command/OnDParserHelper.hpp>
```

## Public Member Functions

- [definition](#) ([OnDParser](#) const &self)
- [boost::spirit::classic::rule](#)  
   < ScannerT > const & [start](#) () const

## Public Attributes

- [boost::spirit::classic::rule](#)  
   < ScannerT > [ond\\_list](#)
- [boost::spirit::classic::rule](#)  
   < ScannerT > [ond](#)
- [boost::spirit::classic::rule](#)  
   < ScannerT > [segment](#)
- [boost::spirit::classic::rule](#)  
   < ScannerT > [ond\\_key](#)
- [boost::spirit::classic::rule](#)  
   < ScannerT > [ond\\_end](#)
- [boost::spirit::classic::rule](#)  
   < ScannerT > [date](#)
- [boost::spirit::classic::rule](#)  
   < ScannerT > [time](#)

## 25.9.1 Detailed Description

```
template<typename ScannerT>struct AIRSCHED::OnDParserHelper::OnDParser::definition< ScannerT >
```

Definition at line 133 of file [OnDParserHelper.hpp](#).

## 25.9.2 Constructor &amp; Destructor Documentation

```
25.9.2.1 template<typename ScannerT > AIRSCHED::OnDParserHelper::OnDParser::definition< ScannerT >::definition ( OnDParser const & self )
```

Definition at line 267 of file [OnDParserHelper.cpp](#).

References [AIRSCHED::OnDParserHelper::airline\\_code\\_p\(\)](#), [AIRSCHED::OnDParserHelper::airport\\_p\(\)](#), [AIRSCHED::OnDParserHelper::class\\_code\\_p\(\)](#), [AIRSCHED::OnDParserHelper::day\\_p\(\)](#), [AIRSCHED::OnDParserHelper::hours\\_p\(\)](#), [AIRSCHED::OnDParserHelper::minutes\\_p\(\)](#), [AIRSCHED::OnDParserHelper::month\\_p\(\)](#), [AIRSCHED::OnDParserHelper::seconds\\_p\(\)](#), and [AIRSCHED::OnDParserHelper::year\\_p\(\)](#).

## 25.9.3 Member Function Documentation

```
25.9.3.1 template<typename ScannerT > boost::spirit::classic::rule< ScannerT > const &
AIRSCHED::OnDParserHelper::OnDParser::definition< ScannerT >::start ( ) const
```

Entry point of the parser.

Definition at line 330 of file [OnDParserHelper.cpp](#).



#### 25.9.4 Member Data Documentation

25.9.4.1 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::OnDParserHelper::OnDParser::definition< ScannerT >::ond_list`

Definition at line 137 of file [OnDParserHelper.hpp](#).

25.9.4.2 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::OnDParserHelper::OnDParser::definition< ScannerT >::ond`

Definition at line 137 of file [OnDParserHelper.hpp](#).

25.9.4.3 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::OnDParserHelper::OnDParser::definition< ScannerT >::segment`

Definition at line 137 of file [OnDParserHelper.hpp](#).

25.9.4.4 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::OnDParserHelper::OnDParser::definition< ScannerT >::ond_key`

Definition at line 137 of file [OnDParserHelper.hpp](#).

25.9.4.5 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::OnDParserHelper::OnDParser::definition< ScannerT >::ond_end`

Definition at line 137 of file [OnDParserHelper.hpp](#).

25.9.4.6 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::OnDParserHelper::OnDParser::definition< ScannerT >::date`

Definition at line 137 of file [OnDParserHelper.hpp](#).

25.9.4.7 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::OnDParserHelper::OnDParser::definition< ScannerT >::time`

Definition at line 137 of file [OnDParserHelper.hpp](#).

The documentation for this struct was generated from the following files:

- [airsched/command/OnDParserHelper.hpp](#)
- [airsched/command/OnDParserHelper.cpp](#)

## 25.10 AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT > Struct Template Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

#### Public Member Functions

- [definition](#) ([FlightPeriodParser](#) const &self)
- `boost::spirit::classic::rule< ScannerT > const & start () const`

#### Public Attributes

- `boost::spirit::classic::rule< ScannerT > flight\_period\_list`

- boost::spirit::classic::rule  
< ScannerT > [flight\\_period](#)
- boost::spirit::classic::rule  
< ScannerT > [not\\_to\\_be\\_parsed](#)
- boost::spirit::classic::rule  
< ScannerT > [flight\\_period\\_end](#)
- boost::spirit::classic::rule  
< ScannerT > [flight\\_key](#)
- boost::spirit::classic::rule  
< ScannerT > [airline\\_code](#)
- boost::spirit::classic::rule  
< ScannerT > [flight\\_number](#)
- boost::spirit::classic::rule  
< ScannerT > [date](#)
- boost::spirit::classic::rule  
< ScannerT > [dow](#)
- boost::spirit::classic::rule  
< ScannerT > [time](#)
- boost::spirit::classic::rule  
< ScannerT > [date\\_offset](#)
- boost::spirit::classic::rule  
< ScannerT > [leg](#)
- boost::spirit::classic::rule  
< ScannerT > [leg\\_key](#)
- boost::spirit::classic::rule  
< ScannerT > [leg\\_details](#)
- boost::spirit::classic::rule  
< ScannerT > [leg\\_cabin\\_details](#)
- boost::spirit::classic::rule  
< ScannerT > [segment\\_section](#)
- boost::spirit::classic::rule  
< ScannerT > [segment\\_key](#)
- boost::spirit::classic::rule  
< ScannerT > [full\\_segment\\_cabin\\_details](#)
- boost::spirit::classic::rule  
< ScannerT > [segment\\_cabin\\_details](#)
- boost::spirit::classic::rule  
< ScannerT > [full\\_family\\_cabin\\_details](#)
- boost::spirit::classic::rule  
< ScannerT > [family\\_cabin\\_details](#)
- boost::spirit::classic::rule  
< ScannerT > [generic\\_segment](#)
- boost::spirit::classic::rule  
< ScannerT > [specific\\_segment\\_list](#)

#### 25.10.1 Detailed Description

template<typename ScannerT>struct AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >

Definition at line 255 of file [ScheduleParserHelper.hpp](#).

#### 25.10.2 Constructor & Destructor Documentation

25.10.2.1 `template<typename ScannerT > AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::definition ( FlightPeriodParser const & self )`

Definition at line 474 of file [ScheduleParserHelper.cpp](#).

References [AIRSCHED::ScheduleParserHelper::airline\\_code\\_p\(\)](#), [AIRSCHED::ScheduleParserHelper::airport\\_p\(\)](#), [AIRSCHED::ScheduleParserHelper::cabin\\_code\\_p\(\)](#), [AIRSCHED::ScheduleParserHelper::class\\_code\\_list\\_p\(\)](#), [AIRSCHED::ScheduleParserHelper::day\\_p\(\)](#), [AIRSCHED::ScheduleParserHelper::dow\\_p\(\)](#), [AIRSCHED::ScheduleParserHelper::family\\_code\\_p\(\)](#), [AIRSCHED::ScheduleParserHelper::flight\\_number\\_p\(\)](#), [AIRSCHED::ScheduleParserHelper::hours\\_p\(\)](#), [AIRSCHED::ScheduleParserHelper::int1\\_p\(\)](#), [AIRSCHED::ScheduleParserHelper::minutes\\_p\(\)](#), [AIRSCHED::ScheduleParserHelper::month\\_p\(\)](#), [AIRSCHED::ScheduleParserHelper::seconds\\_p\(\)](#), and [AIRSCHED::ScheduleParserHelper::year\\_p\(\)](#).

### 25.10.3 Member Function Documentation

25.10.3.1 `template<typename ScannerT > bsc::rule< ScannerT > const & AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::start ( ) const`

Entry point of the parser.

Definition at line 621 of file [ScheduleParserHelper.cpp](#).

### 25.10.4 Member Data Documentation

25.10.4.1 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::flight_period_list`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.2 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::flight_period`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.3 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::not_to_be_parsed`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.4 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::flight_period_end`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.5 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::flight_key`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.6 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::airline_code`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.7 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::flight_number`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.8 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::date`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.9 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::dow`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.10 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::time`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.11 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::date_offset`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.12 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::leg`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.13 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::leg_key`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.14 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::leg_details`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.15 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::leg_cabin_details`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.16 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::segment_section`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.17 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::segment_key`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.18 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::full_segment_cabin_details`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.19 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::segment_cabin_details`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.20 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::full_family_cabin_details`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.21 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::family_cabin_details`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.22 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::generic_segment`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

25.10.4.23 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >::specific_segment_list`

Definition at line 259 of file [ScheduleParserHelper.hpp](#).

The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.11 airsched::SearchStringParser::definition< ScannerT > Struct Template Reference

### Public Member Functions

- [definition](#) ([SearchStringParser](#) const &self)
- `boost::spirit::classic::rule< ScannerT > const & start () const`

### Public Attributes

- `boost::spirit::classic::rule< ScannerT > search\_string`
- `boost::spirit::classic::rule< ScannerT > places`
- `boost::spirit::classic::rule< ScannerT > place\_element`
- `boost::spirit::classic::rule< ScannerT > dates`
- `boost::spirit::classic::rule< ScannerT > date`
- `boost::spirit::classic::rule< ScannerT > month`
- `boost::spirit::classic::rule< ScannerT > day`
- `boost::spirit::classic::rule< ScannerT > year`
- `boost::spirit::classic::rule< ScannerT > preferred\_airlines`
- `boost::spirit::classic::rule< ScannerT > airline\_code`
- `boost::spirit::classic::rule< ScannerT > airline\_name`

- `boost::spirit::classic::rule< ScannerT >` [passengers](#)
- `boost::spirit::classic::rule< ScannerT >` [passenger\\_number](#)
- `boost::spirit::classic::rule< ScannerT >` [passenger\\_type](#)
- `boost::spirit::classic::rule< ScannerT >` [passenger\\_adult\\_type](#)
- `boost::spirit::classic::rule< ScannerT >` [passenger\\_child\\_type](#)
- `boost::spirit::classic::rule< ScannerT >` [passenger\\_pet\\_type](#)

#### 25.11.1 Detailed Description

`template<typename ScannerT> struct airsched::SearchStringParser::definition< ScannerT >`

Definition at line 259 of file [BookingRequestParser.cpp](#).

#### 25.11.2 Constructor & Destructor Documentation

25.11.2.1 `template<typename ScannerT > airsched::SearchStringParser::definition< ScannerT >::definition ( SearchStringParser const & self ) [inline]`

Definition at line 260 of file [BookingRequestParser.cpp](#).

References [airsched::uint1\\_2\\_p](#), [airsched::uint1\\_p](#), [airsched::uint2\\_p](#), and [airsched::uint4\\_p](#).

#### 25.11.3 Member Function Documentation

25.11.3.1 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> const& airsched::SearchStringParser::definition< ScannerT >::start ( ) const [inline]`

Definition at line 366 of file [BookingRequestParser.cpp](#).

#### 25.11.4 Member Data Documentation

25.11.4.1 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> airsched::SearchStringParser::definition< ScannerT >::search_string`

Definition at line 360 of file [BookingRequestParser.cpp](#).

25.11.4.2 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> airsched::SearchStringParser::definition< ScannerT >::places`

Definition at line 360 of file [BookingRequestParser.cpp](#).

25.11.4.3 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> airsched::SearchStringParser::definition< ScannerT >::place_element`

Definition at line 360 of file [BookingRequestParser.cpp](#).

25.11.4.4 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> airsched::SearchStringParser::definition< ScannerT >::dates`

Definition at line 360 of file [BookingRequestParser.cpp](#).

25.11.4.5 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> airsched::SearchStringParser::definition< ScannerT >::date`

Definition at line 360 of file [BookingRequestParser.cpp](#).

25.11.4.6 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> airsched::SearchStringParser::definition< ScannerT >::month`

Definition at line 360 of file [BookingRequestParser.cpp](#).

25.11.4.7 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> airsched::SearchStringParser::definition< ScannerT >::day`

Definition at line 360 of file [BookingRequestParser.cpp](#).

25.11.4.8 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> airsched::SearchStringParser::definition< ScannerT >::year`

Definition at line 360 of file [BookingRequestParser.cpp](#).

25.11.4.9 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> airsched::SearchStringParser::definition< ScannerT >::preferred_airlines`

Definition at line 360 of file [BookingRequestParser.cpp](#).

25.11.4.10 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> airsched::SearchStringParser::definition< ScannerT >::airline_code`

Definition at line 360 of file [BookingRequestParser.cpp](#).

25.11.4.11 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> airsched::SearchStringParser::definition< ScannerT >::airline_name`

Definition at line 360 of file [BookingRequestParser.cpp](#).

25.11.4.12 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> airsched::SearchStringParser::definition< ScannerT >::passengers`

Definition at line 360 of file [BookingRequestParser.cpp](#).

25.11.4.13 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> airsched::SearchStringParser::definition< ScannerT >::passenger_number`

Definition at line 360 of file [BookingRequestParser.cpp](#).

25.11.4.14 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> airsched::SearchStringParser::definition< ScannerT >::passenger_type`

Definition at line 360 of file [BookingRequestParser.cpp](#).

25.11.4.15 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> airsched::SearchStringParser::definition< ScannerT >::passenger_adult_type`

Definition at line 360 of file [BookingRequestParser.cpp](#).

25.11.4.16 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> airsched::SearchStringParser::definition< ScannerT >::passenger_child_type`

Definition at line 360 of file [BookingRequestParser.cpp](#).

25.11.4.17 `template<typename ScannerT > boost::spirit::classic::rule<ScannerT> airsched::SearchStringParser-  
::definition< ScannerT >::passenger_pet_type`

Definition at line 360 of file [BookingRequestParser.cpp](#).


The documentation for this struct was generated from the following file:

- [airsched/batches/BookingRequestParser.cpp](#)

## 25.12 AIRSCHED::ScheduleParserHelper::doEndFlight Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::doEndFlight:



### Public Member Functions

- [doEndFlight](#) (stdair::BomRoot &, [FlightPeriodStruct](#) &)
- void [operator\(\)](#) (iterator\_t iStr, iterator\_t iStrEnd) const

### Public Attributes

- stdair::BomRoot & [\\_bomRoot](#)
- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

### 25.12.1 Detailed Description

Mark the end of the flight-period parsing.

Definition at line 192 of file [ScheduleParserHelper.hpp](#).

### 25.12.2 Constructor & Destructor Documentation

25.12.2.1 **AIRSCHED::ScheduleParserHelper::doEndFlight::doEndFlight** ( stdair::BomRoot & *ioBomRoot*, [FlightPeriodStruct](#) & *ioFlightPeriod* )

Actor Constructor.

Definition at line 375 of file [ScheduleParserHelper.cpp](#).

### 25.12.3 Member Function Documentation

25.12.3.1 void AIRSCHED::ScheduleParserHelper::doEndFlight::operator() ( iterator\_t *iStr*, iterator\_t *iStrEnd* ) const

Actor Function (functor).

Definition at line 383 of file [ScheduleParserHelper.cpp](#).

References [\\_bomRoot](#), [AIRSCHED::LegStruct::\\_cabinList](#), [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#), [AIRSCHED::FlightPeriodStruct::\\_itLeg](#), [AIRSCHED::FlightPeriodStruct::\\_legAlreadyDefined](#), [AIRSCHED::FlightPeriodStruct::\\_legList](#), and [AIRSCHED::FlightPeriodStruct::describe\(\)](#).



## 25.12.4 Member Data Documentation

## 25.12.4.1 stdair::BomRoot&amp; AIRSCHED::ScheduleParserHelper::doEndFlight::\_bomRoot

Actor Specific Context.

Definition at line 198 of file [ScheduleParserHelper.hpp](#).

Referenced by [operator\(\)](#).

25.12.4.2 FlightPeriodStruct& AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\_flightPeriod  
[inherited]

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDow::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFCClasses::operator\(\)](#), and [operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.13 AIRSCHED::OnDParserHelper::doEndOnD Struct Reference

```
#include <airsched/command/OnDParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::OnDParserHelper::doEndOnD:



## Public Member Functions

- [doEndOnD](#) (stdair::BomRoot &, [OnDPeriodStruct](#) &)
- void [operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

## Public Attributes

- stdair::BomRoot & [\\_bomRoot](#)
- [OnDPeriodStruct](#) & [\\_onDPeriod](#)

## 25.13.1 Detailed Description

Mark the end of the O&D parsing.

Definition at line 106 of file [OnDParserHelper.hpp](#).

## 25.13.2 Constructor &amp; Destructor Documentation

## 25.13.2.1 AIRSCHED::OnDParserHelper::doEndOnD::doEndOnD ( stdair::BomRoot &amp; ioBomRoot, OnDPeriodStruct &amp; ioOnDPeriod )

Actor Constructor.

Definition at line 193 of file [OnDParserHelper.cpp](#).

## 25.13.3 Member Function Documentation

## 25.13.3.1 void AIRSCHED::OnDParserHelper::doEndOnD::operator() ( iterator\_t iStr, iterator\_t iStrEnd ) const

Actor Function (functor).

Definition at line 199 of file [OnDParserHelper.cpp](#).

References [\\_bomRoot](#), and [AIRSCHED::OnDParserHelper::ParserSemanticAction::\\_onDPeriod](#).

## 25.13.4 Member Data Documentation

## 25.13.4.1 stdair::BomRoot&amp; AIRSCHED::OnDParserHelper::doEndOnD::\_bomRoot

Actor Specific Context.

Definition at line 112 of file [OnDParserHelper.hpp](#).

Referenced by [operator\(\)\(\)](#).

## 25.13.4.2 OnDPeriodStruct&amp; AIRSCHED::OnDParserHelper::ParserSemanticAction::\_onDPeriod [inherited]

Actor Context.

Definition at line 38 of file [OnDParserHelper.hpp](#).

Referenced by [AIRSCHED::OnDParserHelper::storeOrigin::operator\(\)\(\)](#), [AIRSCHED::OnDParserHelper::storeDestination::operator\(\)\(\)](#), [AIRSCHED::OnDParserHelper::storeDateRangeStart::operator\(\)\(\)](#), [AIRSCHED::OnDParserHelper::storeDateRangeEnd::operator\(\)\(\)](#), [AIRSCHED::OnDParserHelper::storeStartRangeTime::operator\(\)\(\)](#), [AIRSCHED::OnDParserHelper::storeEndRangeTime::operator\(\)\(\)](#), [AIRSCHED::OnDParserHelper::storeAirlineCode::operator\(\)\(\)](#), [AIRSCHED::OnDParserHelper::storeClassCode::operator\(\)\(\)](#), and [operator\(\)\(\)](#).

The documentation for this struct was generated from the following files:


- [airsched/command/OnDParserHelper.hpp](#)
- [airsched/command/OnDParserHelper.cpp](#)

## 25.14 AIRSCHED::FacAIRSCHEDServiceContext Class Reference

Factory for the service context.

```
#include <airsched/factory/FacAIRSCHEDServiceContext.hpp>
```

Inheritance diagram for AIRSCHED::FacAIRSCHEDServiceContext:



#### Public Member Functions

- [~FacAIRSCHEDServiceContext\(\)](#)
- [AIRSCHED\\_ServiceContext & create\(\)](#)

#### Static Public Member Functions

- static [FacAIRSCHEDServiceContext & instance\(\)](#)

#### Protected Member Functions

- [FacAIRSCHEDServiceContext\(\)](#)

#### 25.14.1 Detailed Description

Factory for the service context.

Definition at line 19 of file [FacAIRSCHEDServiceContext.hpp](#).

#### 25.14.2 Constructor & Destructor Documentation

##### 25.14.2.1 AIRSCHED::FacAIRSCHEDServiceContext::~~FacAIRSCHEDServiceContext()

Destructor.

The Destruction put the `_instance` to NULL in order to be clean for the next [FacAIRSCHEDServiceContext::instance\(\)](#).

Definition at line 17 of file [FacAIRSCHEDServiceContext.cpp](#).

##### 25.14.2.2 AIRSCHED::FacAIRSCHEDServiceContext::FacAIRSCHEDServiceContext() [inline, protected]

Default Constructor.

This constructor is protected in order to ensure the singleton pattern.

Definition at line 54 of file [FacAIRSCHEDServiceContext.hpp](#).

Referenced by [instance\(\)](#).

#### 25.14.3 Member Function Documentation

##### 25.14.3.1 FacAIRSCHEDServiceContext & AIRSCHED::FacAIRSCHEDServiceContext::instance() [static]

Provide the unique instance.

The singleton is instantiated when first used.

**Returns**

FacServiceContext&

Definition at line 22 of file [FacAIRSCHEDServiceContext.cpp](#).

References [FacAIRSCHEDServiceContext\(\)](#).

**25.14.3.2 AIRSCHED\_ServiceContext & AIRSCHED::FacAIRSCHEDServiceContext::create ( )**

Create a new ServiceContext object.

This new object is added to the list of instantiated objects.

**Returns**

ServiceContext& The newly created object.

Definition at line 34 of file [FacAIRSCHEDServiceContext.cpp](#).

The documentation for this class was generated from the following files:

- [airsched/factory/FacAIRSCHEDServiceContext.hpp](#)
- [airsched/factory/FacAIRSCHEDServiceContext.cpp](#)

**25.15 AIRSCHED::FacServiceAbstract Class Reference**

```
#include <airsched/factory/FacServiceAbstract.hpp>
```

**Public Types**

- typedef std::vector  
  < [ServiceAbstract](#) \* > [ServicePool\\_T](#)

**Public Member Functions**

- virtual [~FacServiceAbstract](#) ()
- void [clean](#) ()

**Protected Member Functions**

- [FacServiceAbstract](#) ()

**Protected Attributes**

- [ServicePool\\_T](#) \_pool

**25.15.1 Detailed Description**

Base class for the (Service) Factory layer.

Definition at line 16 of file [FacServiceAbstract.hpp](#).

### 25.15.2 Member Typedef Documentation

#### 25.15.2.1 `typedef std::vector<ServiceAbstract*> AIRSCHED::FacServiceAbstract::ServicePool_T`

Define the list (pool) of Service objects.

Definition at line 20 of file [FacServiceAbstract.hpp](#).

### 25.15.3 Constructor & Destructor Documentation

#### 25.15.3.1 `AIRSCHED::FacServiceAbstract::~~FacServiceAbstract ( ) [virtual]`

Destructor.

Definition at line 13 of file [FacServiceAbstract.cpp](#).

References [clean\(\)](#).

#### 25.15.3.2 `AIRSCHED::FacServiceAbstract::FacServiceAbstract ( ) [inline, protected]`

Default Constructor.

This constructor is protected to ensure the class is abstract.

Definition at line 31 of file [FacServiceAbstract.hpp](#).

### 25.15.4 Member Function Documentation

#### 25.15.4.1 `void AIRSCHED::FacServiceAbstract::clean ( )`

Destroyed all the object instantiated by this factory.

Definition at line 18 of file [FacServiceAbstract.cpp](#).

References [\\_pool](#).

Referenced by [~FacServiceAbstract\(\)](#).

### 25.15.5 Member Data Documentation

#### 25.15.5.1 `ServicePool_T AIRSCHED::FacServiceAbstract::_pool [protected]`

List of instantiated Business Objects

Definition at line 34 of file [FacServiceAbstract.hpp](#).


Referenced by [clean\(\)](#).

The documentation for this class was generated from the following files:

- [airsched/factory/FacServiceAbstract.hpp](#)
- [airsched/factory/FacServiceAbstract.cpp](#)

## 25.16 FacServiceAbstract Class Reference

Inheritance diagram for FacServiceAbstract:




The documentation for this class was generated from the following file:

- [airsched/factory/FacAIRSCHEDServiceContext.hpp](#)

## 25.17 AIRSCHED::FareFamilyStruct Struct Reference

```
#include <airsched/bom/FareFamilyStruct.hpp>
```

Inheritance diagram for AIRSCHED::FareFamilyStruct:



### Public Member Functions

- [FareFamilyStruct](#) (const stdair::FamilyCode\_T &, const stdair::ClassList\_String\_T &)
- const std::string [describe](#) () const

### Public Attributes

- stdair::FamilyCode\_T [\\_familyCode](#)
- stdair::ClassList\_String\_T [\\_classes](#)

### 25.17.1 Detailed Description

Utility Structure for the parsing of fare family details.

Definition at line 17 of file [FareFamilyStruct.hpp](#).

### 25.17.2 Constructor & Destructor Documentation

**25.17.2.1** `AIRSCHED::FareFamilyStruct::FareFamilyStruct ( const stdair::FamilyCode_T & iFamilyCode, const stdair::ClassList_String_T & iClasses )`

Constructors.

Definition at line 14 of file [FareFamilyStruct.cpp](#).

### 25.17.3 Member Function Documentation

**25.17.3.1** `const std::string AIRSCHED::FareFamilyStruct::describe ( ) const`

Give a description of the structure (for display purposes).

Definition at line 21 of file [FareFamilyStruct.cpp](#).

References [\\_classes](#), and [\\_familyCode](#).

#### 25.17.4 Member Data Documentation

##### 25.17.4.1 stdair::FamilyCode\_T AIRSCHED::FareFamilyStruct::\_familyCode

Definition at line 19 of file [FareFamilyStruct.hpp](#).

Referenced by [describe\(\)](#).

##### 25.17.4.2 stdair::ClassList\_String\_T AIRSCHED::FareFamilyStruct::\_classes

Definition at line 20 of file [FareFamilyStruct.hpp](#).


Referenced by [describe\(\)](#).

The documentation for this struct was generated from the following files:

- [airsched/bom/FareFamilyStruct.hpp](#)
- [airsched/bom/FareFamilyStruct.cpp](#)

## 25.18 FileNotFoundException Class Reference

Inheritance diagram for FileNotFoundException:

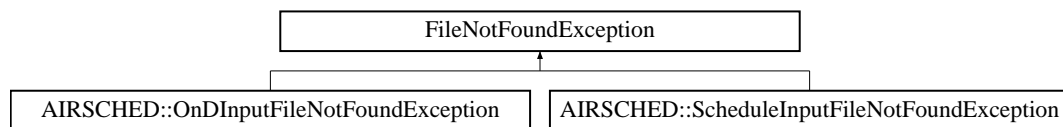

The documentation for this class was generated from the following file:

- [airsched/AIRSCHED\\_Types.hpp](#)

## 25.19 AIRSCHED::FlagSaver Struct Reference

### Public Member Functions

- [FlagSaver](#) (std::ostream &oStream)
- [~FlagSaver](#) ()

#### 25.19.1 Detailed Description

Helper singleton structure to store the current formatting flags of any given output stream. The flags are re-set at the structure destruction.

Definition at line 22 of file [BomDisplay.cpp](#).

#### 25.19.2 Constructor & Destructor Documentation

##### 25.19.2.1 AIRSCHED::FlagSaver::FlagSaver ( std::ostream & oStream ) [inline]

Constructor.

Definition at line 25 of file [BomDisplay.cpp](#).

## 25.19.2.2 AIRSCHED::FlagSaver::~FlagSaver ( ) [inline]

Destructor.

Definition at line 30 of file [BomDisplay.cpp](#).


The documentation for this struct was generated from the following file:

- [airsched/bom/BomDisplay.cpp](#)

## 25.20 AIRSCHED::FlightPeriodFileParser Class Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::FlightPeriodFileParser:



## Public Member Functions

- [FlightPeriodFileParser](#) (stdair::BomRoot &ioBomRoot, const stdair::Filename\_T &iFilename)
- bool [generateInventories](#) ()

## 25.20.1 Detailed Description

## Short Description

Detailed Description. Class wrapping the initialisation and entry point of the parser.

The seemingly redundancy is used to force the instantiation of the actual parser, which is a templatised Boost Spirit grammar. Hence, the actual parser is instantiated within that class object code.

Definition at line 291 of file [ScheduleParserHelper.hpp](#).

## 25.20.2 Constructor &amp; Destructor Documentation

## 25.20.2.1 AIRSCHED::FlightPeriodFileParser::FlightPeriodFileParser ( stdair::BomRoot &amp; ioBomRoot, const stdair::Filename\_T &amp; iFilename )

Constructor.

Definition at line 636 of file [ScheduleParserHelper.cpp](#).

## 25.20.3 Member Function Documentation

## 25.20.3.1 bool AIRSCHED::FlightPeriodFileParser::generateInventories ( )

Parse the input file and generate the Inventories.

Definition at line 673 of file [ScheduleParserHelper.cpp](#).

Referenced by [AIRSCHED::ScheduleParser::generateInventories\(\)](#).

The documentation for this class was generated from the following files:




- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.21 AIRSCHED::ScheduleParserHelper::FlightPeriodParser Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::FlightPeriodParser:



### Classes

- struct [definition](#)

### Public Member Functions

- [FlightPeriodParser](#) (stdair::BomRoot &, [FlightPeriodStruct](#) &)

### Public Attributes

- stdair::BomRoot & [\\_bomRoot](#)
- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

#### 25.21.1 Detailed Description

AirlineCode; FlightNumber; DateRangeStart; DateRangeEnd; DOW; (list) BoardingPoint; OffPoint; BoardingTime; DateOffset; OffTime; ElapsedTime; (list) CabinCode; Capacity; SegmentSpecificity (0 or 1); (list) (optional BoardingPoint; OffPoint); CabinCode; Classes BA; 9; 2007-04-20; 2007-04-30; 0000011; LHR; BKK; 22:00; +1; 15:15; 11:15; C; 12; M; 300; BKK; SYD; 18:10; +1; 06:05; 08:55; C; 20; M; 250; 0; C; CDIU; 1; CD; 2; IU; M; YHBKLMNOPQRSTUVWXYZ; 3; YHBKLMNOPQRSTUVWXYZ BA; 9; 2007-04-20; 2007-04-30; 1111100; LHR; SIN; 22:00; +1; 15:15; 11:15; C; 15; M; 310; SIN; SYD; 18:10; +1; 06:05; 08:55; C; 25; M; 260; 1; LHR; SIN; C; CDIU; 1; CDIU; M; YHBKLMNOPQRSTUVWXYZ; 2; YHBKLMNOPQRSTUVWXYZ SIN; SYD; C; CDIU; 1; CDIU; M; YHBKLMNOPQRSTUVWXYZ; 2; YHBKLMNOPQRSTUVWXYZ LHR; SYD; C; CDIU; 1; CDIU; M; YHBKLMNOPQRSTUVWXYZ; 2; YHBKLMNOPQRSTUVWXYZ

Grammar: DOW ::= int FlightKey ::= AirlineCode ';' FlightNumber ';' DateRangeStart ';' DateRangeEnd ';' DOW  
 LegKey ::= BoardingPoint ';' OffPoint LegDetails ::= BoardingTime ['/ BoardingDateOffset] ';' OffTime ['/ BoardingDateOffset] ';' Elapsed LegCabinDetails ::= CabinCode ';' Capacity Leg ::= LegKey ';' LegDetails (';' CabinDetails)+  
 SegmentKey ::= BoardingPoint ';' OffPoint SegmentCabinDetails ::= CabinCode ';' Classes (';' FamilyCabinDetails)\*  
 FamilyCabinDetails ::= FamilyCode ';' Classes FullSegmentCabinDetails ::= (';' SegmentCabinDetails)+ GenericSegment ::= '0' (';' SegmentCabinDetails)+ SpecificSegments ::= '1' (';' SegmentKey ';' FullSegmentCabinDetails)+  
 SegmentSection ::= GenericSegment | SpecificSegments FlightPeriod ::= FlightKey (';' Leg)+ ';' SegmentSection ';' EndOfFlight EndOfFlight ::= ';' Grammar for the Flight-Period parser.

Definition at line 249 of file [ScheduleParserHelper.hpp](#).

#### 25.21.2 Constructor & Destructor Documentation

25.21.2.1 **AIRSCHED::ScheduleParserHelper::FlightPeriodParser::FlightPeriodParser** ( `stdair::BomRoot & ioBomRoot`, `FlightPeriodStruct & ioFlightPeriod` )

Definition at line 465 of file [ScheduleParserHelper.cpp](#).

### 25.21.3 Member Data Documentation

25.21.3.1 `stdair::BomRoot& AIRSCHED::ScheduleParserHelper::FlightPeriodParser::_bomRoot`

Definition at line 272 of file [ScheduleParserHelper.hpp](#).

25.21.3.2 `FlightPeriodStruct& AIRSCHED::ScheduleParserHelper::FlightPeriodParser::_flightPeriod`

Definition at line 273 of file [ScheduleParserHelper.hpp](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.22 AIRSCHED::FlightPeriodStruct Struct Reference

```
#include <airsched/bom/FlightPeriodStruct.hpp>
```

Inheritance diagram for AIRSCHED::FlightPeriodStruct:

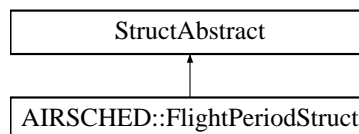

### Public Member Functions

- `stdair::Date_T` [getDate](#) () const
- `stdair::Duration_T` [getTime](#) () const
- `const std::string` [describe](#) () const
- `void` [addAirport](#) (const `stdair::AirportCode_T` &)
- `void` [buildSegments](#) ()
- `void` [addSegmentCabin](#) (const [SegmentStruct](#) &, const [SegmentCabinStruct](#) &)
- `void` [addSegmentCabin](#) (const [SegmentCabinStruct](#) &)
- `void` [addFareFamily](#) (const [SegmentStruct](#) &, const [SegmentCabinStruct](#) &, const [FareFamilyStruct](#) &)
- `void` [addFareFamily](#) (const [SegmentCabinStruct](#) &, const [FareFamilyStruct](#) &)
- [FlightPeriodStruct](#) ()

### Public Attributes

- `stdair::AirlineCode_T` [\\_airlineCode](#)
- `stdair::FlightNumber_T` [\\_flightNumber](#)
- `stdair::DatePeriod_T` [\\_dateRange](#)
- `stdair::DoWStruct` [\\_dow](#)
- [LegStructList\\_T](#) [\\_legList](#)
- [SegmentStructList\\_T](#) [\\_segmentList](#)
- `bool` [\\_legAlreadyDefined](#)
- [LegStruct](#) [\\_itLeg](#)

- [LegCabinStruct \\_itLegCabin](#)
- [stdair::Date\\_T \\_dateRangeStart](#)
- [stdair::Date\\_T \\_dateRangeEnd](#)
- [unsigned int \\_itYear](#)
- [unsigned int \\_itMonth](#)
- [unsigned int \\_itDay](#)
- [int \\_dateOffset](#)
- [long \\_itHours](#)
- [long \\_itMinutes](#)
- [long \\_itSeconds](#)
- [AirportList\\_T \\_airportList](#)
- [AirportOrderedList\\_T \\_airportOrderedList](#)
- [bool \\_areSegmentDefinitionsSpecific](#)
- [SegmentStruct \\_itSegment](#)
- [SegmentCabinStruct \\_itSegmentCabin](#)

### 25.22.1 Detailed Description

Utility Structure for the parsing of Flight-Period structures.

Definition at line 26 of file [FlightPeriodStruct.hpp](#).

### 25.22.2 Constructor & Destructor Documentation

#### 25.22.2.1 AIRSCHED::FlightPeriodStruct::FlightPeriodStruct ( )

Constructor.

Definition at line 17 of file [FlightPeriodStruct.cpp](#).

### 25.22.3 Member Function Documentation

#### 25.22.3.1 stdair::Date\_T AIRSCHED::FlightPeriodStruct::getDate ( ) const

Set the date from the staging details.

Definition at line 24 of file [FlightPeriodStruct.cpp](#).

References [\\_itDay](#), [\\_itMonth](#), and [\\_itYear](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)\(\)](#).

#### 25.22.3.2 stdair::Duration.T AIRSCHED::FlightPeriodStruct::getTime ( ) const

Set the time from the staging details.

Definition at line 29 of file [FlightPeriodStruct.cpp](#).

References [\\_itHours](#), [\\_itMinutes](#), and [\\_itSeconds](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)\(\)](#).

#### 25.22.3.3 const std::string AIRSCHED::FlightPeriodStruct::describe ( ) const

Give a description of the structure (for display purposes).

Definition at line 36 of file [FlightPeriodStruct.cpp](#).

References [\\_airlineCode](#), [\\_dateRange](#), [\\_dow](#), [\\_flightNumber](#), [\\_legList](#), [\\_segmentList](#), [AIRSCHED::SegmentStruct::describe\(\)](#), and [AIRSCHED::LegStruct::describe\(\)](#).

Referenced by [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).

#### 25.22.3.4 void AIRSCHED::FlightPeriodStruct::addAirport ( const stdair::AirportCode\_T & iAirport )

Add the given airport to the internal lists (if not already existing).

Definition at line 62 of file [FlightPeriodStruct.cpp](#).

References [\\_airportList](#), and [\\_airportOrderedList](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#).

#### 25.22.3.5 void AIRSCHED::FlightPeriodStruct::buildSegments ( )

Build the list of [SegmentStruct](#) objects.

Definition at line 78 of file [FlightPeriodStruct.cpp](#).

References [\\_airportList](#), [\\_airportOrderedList](#), [AIRSCHED::SegmentStruct::\\_boardingPoint](#), [AIRSCHED::SegmentStruct::\\_offPoint](#), and [\\_segmentList](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#).

#### 25.22.3.6 void AIRSCHED::FlightPeriodStruct::addSegmentCabin ( const SegmentStruct & iSegment, const SegmentCabinStruct & iCabin )

Add, to the Segment structure whose key corresponds to the given (board point, off point) pair, the specific segment cabin details (mainly, the list of the class codes).

Note that the Segment structure is retrieved from the internal list, already filled by a previous step (the [buildSegments\(\)](#) method).

Definition at line 111 of file [FlightPeriodStruct.cpp](#).

References [AIRSCHED::SegmentStruct::\\_boardingPoint](#), [AIRSCHED::SegmentStruct::\\_cabinList](#), [AIRSCHED::SegmentStruct::\\_offPoint](#), and [\\_segmentList](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#).

#### 25.22.3.7 void AIRSCHED::FlightPeriodStruct::addSegmentCabin ( const SegmentCabinStruct & iCabin )

Add, to all the Segment structures, the general segment cabin details (mainly, the list of the class codes).

Note that the Segment structures are stored within the internal list, already filled by a previous step (the [buildSegments\(\)](#) method).

Definition at line 149 of file [FlightPeriodStruct.cpp](#).

References [AIRSCHED::SegmentStruct::\\_cabinList](#), and [\\_segmentList](#).

#### 25.22.3.8 void AIRSCHED::FlightPeriodStruct::addFareFamily ( const SegmentStruct & iSegment, const SegmentCabinStruct & iCabin, const FareFamilyStruct & iFareFamily )

Add, to the SegmentCabin structure whose key corresponds to the given cabin code, the specific segment fare family details (mainly, the list of the class codes).

Note that the SegmentCabin structure is retrieved from the internal list, already filled by a previous step (the [buildSegmentCabins\(\)](#) method).

Definition at line 162 of file [FlightPeriodStruct.cpp](#).

References [AIRSCHED::SegmentStruct::\\_boardingPoint](#), [AIRSCHED::SegmentCabinStruct::\\_cabinCode](#), [AIRSCHED::SegmentCabinStruct::\\_cabinList](#), [AIRSCHED::SegmentCabinStruct::\\_fareFamilies](#), [AIRSCHED::SegmentStruct::\\_offPoint](#), and [\\_segmentList](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)\(\)](#).

**25.22.3.9 void AIRSCHED::FlightPeriodStruct::addFareFamily ( const SegmentCabinStruct & *iCabin*, const FareFamilyStruct & *iFareFamily* )**

Add, to all the Segment structures, the general fare family sets (list of fare families).

Note that the SegmentCabin structures are stored within the internal list, already filled by a previous step (the buildSegmentCabins() method).

Definition at line 229 of file [FlightPeriodStruct.cpp](#).

References [AIRSCHED::SegmentCabinStruct::\\_cabinCode](#), [AIRSCHED::SegmentStruct::\\_cabinList](#), [AIRSCHED::SegmentCabinStruct::\\_fareFamilies](#), and [\\_segmentList](#).

#### 25.22.4 Member Data Documentation

**25.22.4.1 stdair::AirlineCode\_T AIRSCHED::FlightPeriodStruct::\_airlineCode**

Definition at line 84 of file [FlightPeriodStruct.hpp](#).

Referenced by [describe\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)\(\)](#).

**25.22.4.2 stdair::FlightNumber\_T AIRSCHED::FlightPeriodStruct::\_flightNumber**

Definition at line 85 of file [FlightPeriodStruct.hpp](#).

Referenced by [describe\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)\(\)](#).

**25.22.4.3 stdair::DatePeriod\_T AIRSCHED::FlightPeriodStruct::\_dateRange**

Definition at line 86 of file [FlightPeriodStruct.hpp](#).

Referenced by [describe\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)\(\)](#).

**25.22.4.4 stdair::DoWStruct AIRSCHED::FlightPeriodStruct::\_dow**

Definition at line 87 of file [FlightPeriodStruct.hpp](#).

Referenced by [describe\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeDow::operator\(\)\(\)](#).

**25.22.4.5 LegStructList\_T AIRSCHED::FlightPeriodStruct::\_legList**

Definition at line 88 of file [FlightPeriodStruct.hpp](#).

Referenced by [describe\(\)](#), [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)\(\)](#).

**25.22.4.6 SegmentStructList\_T AIRSCHED::FlightPeriodStruct::\_segmentList**

Definition at line 89 of file [FlightPeriodStruct.hpp](#).

Referenced by [addFareFamily\(\)](#), [addSegmentCabin\(\)](#), [buildSegments\(\)](#), and [describe\(\)](#).

**25.22.4.7 bool AIRSCHED::FlightPeriodStruct::\_legAlreadyDefined**

Staging Leg (resp. Cabin) structure, gathering the result of the iteration on one leg (resp. cabin).

Definition at line 93 of file [FlightPeriodStruct.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)\(\)](#).

#### 25.22.4.8 LegStruct AIRSCHED::FlightPeriodStruct::\_itLeg

Definition at line 94 of file [FlightPeriodStruct.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).

#### 25.22.4.9 LegCabinStruct AIRSCHED::FlightPeriodStruct::\_itLegCabin

Definition at line 95 of file [FlightPeriodStruct.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#).

#### 25.22.4.10 stdair::Date\_T AIRSCHED::FlightPeriodStruct::\_dateRangeStart

Staging Date.

Definition at line 98 of file [FlightPeriodStruct.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#).

#### 25.22.4.11 stdair::Date\_T AIRSCHED::FlightPeriodStruct::\_dateRangeEnd

Definition at line 99 of file [FlightPeriodStruct.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#).

#### 25.22.4.12 unsigned int AIRSCHED::FlightPeriodStruct::\_itYear

Definition at line 100 of file [FlightPeriodStruct.hpp](#).

Referenced by [getDate\(\)](#).

#### 25.22.4.13 unsigned int AIRSCHED::FlightPeriodStruct::\_itMonth

Definition at line 101 of file [FlightPeriodStruct.hpp](#).

Referenced by [getDate\(\)](#).

#### 25.22.4.14 unsigned int AIRSCHED::FlightPeriodStruct::\_itDay

Definition at line 102 of file [FlightPeriodStruct.hpp](#).

Referenced by [getDate\(\)](#).

#### 25.22.4.15 int AIRSCHED::FlightPeriodStruct::\_dateOffset

Definition at line 103 of file [FlightPeriodStruct.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#).

#### 25.22.4.16 long AIRSCHED::FlightPeriodStruct::\_itHours

Staging Time.

Definition at line 106 of file [FlightPeriodStruct.hpp](#).

Referenced by [getTime\(\)](#).

**25.22.4.17 long AIRSCHED::FlightPeriodStruct::\_itMinutes**

Definition at line 107 of file [FlightPeriodStruct.hpp](#).

Referenced by [getTime\(\)](#).

**25.22.4.18 long AIRSCHED::FlightPeriodStruct::\_itSeconds**

Definition at line 108 of file [FlightPeriodStruct.hpp](#).

Referenced by [getTime\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#).

**25.22.4.19 AirportList\_T AIRSCHED::FlightPeriodStruct::\_airportList**

Staging Airport List (helper to derive the list of Segment structures).

Definition at line 112 of file [FlightPeriodStruct.hpp](#).

Referenced by [addAirport\(\)](#), [buildSegments\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#).

**25.22.4.20 AirportOrderedList\_T AIRSCHED::FlightPeriodStruct::\_airportOrderedList**

Definition at line 113 of file [FlightPeriodStruct.hpp](#).

Referenced by [addAirport\(\)](#), [buildSegments\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#).

**25.22.4.21 bool AIRSCHED::FlightPeriodStruct::\_areSegmentDefinitionsSpecific**

Staging Segment-related attributes.

Definition at line 116 of file [FlightPeriodStruct.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)](#).

**25.22.4.22 SegmentStruct AIRSCHED::FlightPeriodStruct::\_itSegment**

Definition at line 117 of file [FlightPeriodStruct.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)](#).

**25.22.4.23 SegmentCabinStruct AIRSCHED::FlightPeriodStruct::\_itSegmentCabin**

Definition at line 118 of file [FlightPeriodStruct.hpp](#).


Referenced by [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)](#).

The documentation for this struct was generated from the following files:

- [airsched/bom/FlightPeriodStruct.hpp](#)
- [airsched/bom/FlightPeriodStruct.cpp](#)

**25.23 grammar Class Reference**

Inheritance diagram for grammar:




The documentation for this class was generated from the following file:

- [airsched/command/OnDParserHelper.hpp](#)

## 25.24 AIRSCHED::InventoryGenerator Class Reference

```
#include <airsched/command/InventoryGenerator.hpp>
```

Inheritance diagram for AIRSCHED::InventoryGenerator:

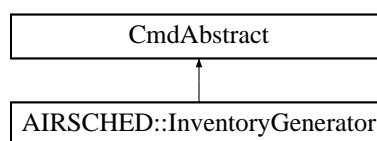

### Friends

- class [FlightPeriodFileParser](#)
- class [FFFlightPeriodFileParser](#)
- struct [ScheduleParserHelper::doEndFlight](#)
- class [ScheduleParser](#)

### 25.24.1 Detailed Description

Class handling the generation / instantiation of the Inventory BOM.

Definition at line 31 of file [InventoryGenerator.hpp](#).

### 25.24.2 Friends And Related Function Documentation

25.24.2.1 friend class **FlightPeriodFileParser** [[friend](#)]

Definition at line 35 of file [InventoryGenerator.hpp](#).

25.24.2.2 friend class **FFFlightPeriodFileParser** [[friend](#)]

Definition at line 36 of file [InventoryGenerator.hpp](#).

25.24.2.3 friend struct **ScheduleParserHelper::doEndFlight** [[friend](#)]

Definition at line 37 of file [InventoryGenerator.hpp](#).

25.24.2.4 friend class **ScheduleParser** [[friend](#)]

Definition at line 38 of file [InventoryGenerator.hpp](#).


The documentation for this class was generated from the following files:

- [airsched/command/InventoryGenerator.hpp](#)
- [airsched/command/InventoryGenerator.cpp](#)



## 25.25 KeyAbstract Class Reference

Inheritance diagram for KeyAbstract:

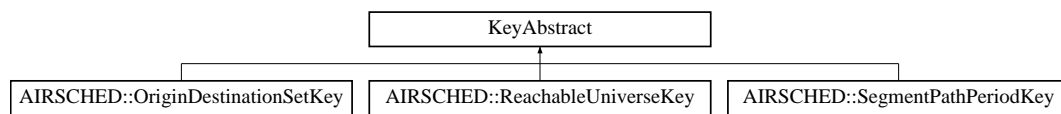


The documentation for this class was generated from the following file:

- [airsched/bom/ReachableUniverseKey.hpp](#)

## 25.26 AIRSCHED::LegCabinStruct Struct Reference

```
#include <airsched/bom/LegCabinStruct.hpp>
```

Inheritance diagram for AIRSCHED::LegCabinStruct:

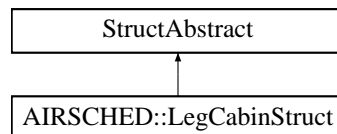

### Public Member Functions

- void [fill](#) (stdair::LegCabin &) const
- const std::string [describe](#) () const

### Public Attributes

- stdair::CabinCode\_T [\\_cabinCode](#)
- stdair::CabinCapacity\_T [\\_capacity](#)

### 25.26.1 Detailed Description

Utility Structure for the parsing of LegCabin details.

Definition at line 22 of file [LegCabinStruct.hpp](#).

### 25.26.2 Member Function Documentation

#### 25.26.2.1 void AIRSCHED::LegCabinStruct::fill ( stdair::LegCabin & *ioLegCabin* ) const

Fill the LegCabin objects with the attributes of the [LegCabinStruct](#).

Definition at line 22 of file [LegCabinStruct.cpp](#).

References [\\_capacity](#).

25.26.2.2 `const std::string AIRSCHED::LegCabinStruct::describe ( ) const`

Give a description of the structure (for display purposes).

Definition at line 15 of file [LegCabinStruct.cpp](#).

References [\\_cabinCode](#), and [\\_capacity](#).

Referenced by [AIRSCHED::LegStruct::describe\(\)](#).

### 25.26.3 Member Data Documentation

25.26.3.1 `stdair::CabinCode_T AIRSCHED::LegCabinStruct::_cabinCode`

Definition at line 24 of file [LegCabinStruct.hpp](#).

Referenced by [describe\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)\(\)](#).

25.26.3.2 `stdair::CabinCapacity_T AIRSCHED::LegCabinStruct::_capacity`

Definition at line 25 of file [LegCabinStruct.hpp](#).

Referenced by [describe\(\)](#), [fill\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/bom/LegCabinStruct.hpp](#)
- [airsched/bom/LegCabinStruct.cpp](#)

## 25.27 AIRSCHED::LegStruct Struct Reference

```
#include <airsched/bom/LegStruct.hpp>
```

Inheritance diagram for AIRSCHED::LegStruct:



### Public Member Functions

- void [fill](#) (const stdair::Date\_T &iRefDate, stdair::LegDate &) const
- const std::string [describe](#) ( ) const
- [LegStruct](#) ( )

### Public Attributes

- stdair::AirportCode\_T [\\_boardingPoint](#)
- stdair::DateOffset\_T [\\_boardingDateOffset](#)
- stdair::Duration\_T [\\_boardingTime](#)
- stdair::AirportCode\_T [\\_offPoint](#)
- stdair::DateOffset\_T [\\_offDateOffset](#)
- stdair::Duration\_T [\\_offTime](#)
- stdair::Duration\_T [\\_elapsed](#)
- [LegCabinStructList\\_T](#) [\\_cabinList](#)

### 25.27.1 Detailed Description

Utility Structure for the parsing of Leg structures.

Definition at line 24 of file [LegStruct.hpp](#).

### 25.27.2 Constructor & Destructor Documentation

#### 25.27.2.1 AIRSCHED::LegStruct::LegStruct ( )

Default Constructor.

Definition at line 16 of file [LegStruct.cpp](#).

### 25.27.3 Member Function Documentation

#### 25.27.3.1 void AIRSCHED::LegStruct::fill ( const stdair::Date\_T & iRefDate, stdair::LegDate & ioLegDate ) const

Fill the LegDate objects with the attributes of the [LegStruct](#).

The given reference date corresponds to the date of the FlightDate. Indeed, each Leg gets date off-sets, when compared to that (reference) flight-date, both for the boarding date and for the off date.

Definition at line 48 of file [LegStruct.cpp](#).

References [\\_boardingDateOffset](#), [\\_boardingTime](#), [\\_elapsed](#), [\\_offDateOffset](#), [\\_offPoint](#), and [\\_offTime](#).

#### 25.27.3.2 const std::string AIRSCHED::LegStruct::describe ( ) const

Give a description of the structure (for display purposes).

Definition at line 22 of file [LegStruct.cpp](#).

References [\\_boardingDateOffset](#), [\\_boardingPoint](#), [\\_boardingTime](#), [\\_cabinList](#), [\\_elapsed](#), [\\_offDateOffset](#), [\\_offPoint](#), [\\_offTime](#), and [AIRSCHED::LegCabinStruct::describe\(\)](#).

Referenced by [AIRSCHED::FlightPeriodStruct::describe\(\)](#).

### 25.27.4 Member Data Documentation

#### 25.27.4.1 stdair::AirportCode\_T AIRSCHED::LegStruct::\_boardingPoint

Definition at line 26 of file [LegStruct.hpp](#).

Referenced by [describe\(\)](#), [AIRSCHED::SegmentPeriodHelper::fill\(\)](#), and [AIRSCHED::ScheduleParserHelper::store-LegBoardingPoint::operator\(\)](#).

#### 25.27.4.2 stdair::DateOffset\_T AIRSCHED::LegStruct::\_boardingDateOffset

Definition at line 27 of file [LegStruct.hpp](#).

Referenced by [describe\(\)](#), [fill\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#).

#### 25.27.4.3 stdair::Duration\_T AIRSCHED::LegStruct::\_boardingTime

Definition at line 28 of file [LegStruct.hpp](#).

Referenced by [describe\(\)](#), [fill\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#).

#### 25.27.4.4 stdair::AirportCode\_T AIRSCHED::LegStruct::\_offPoint

Definition at line 29 of file [LegStruct.hpp](#).

Referenced by [describe\(\)](#), [AIRSCHED::SegmentPeriodHelper::fill\(\)](#), [fill\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#).

#### 25.27.4.5 stdair::DateOffset.T AIRSCHED::LegStruct::\_offDateOffset

Definition at line 30 of file [LegStruct.hpp](#).

Referenced by [describe\(\)](#), [AIRSCHED::SegmentPeriodHelper::fill\(\)](#), [fill\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#).

#### 25.27.4.6 stdair::Duration.T AIRSCHED::LegStruct::\_offTime

Definition at line 31 of file [LegStruct.hpp](#).

Referenced by [describe\(\)](#), [AIRSCHED::SegmentPeriodHelper::fill\(\)](#), [fill\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#).

#### 25.27.4.7 stdair::Duration.T AIRSCHED::LegStruct::\_elapsed

Definition at line 32 of file [LegStruct.hpp](#).

Referenced by [describe\(\)](#), [fill\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#).

#### 25.27.4.8 LegCabinStructList.T AIRSCHED::LegStruct::\_cabinList

Definition at line 33 of file [LegStruct.hpp](#).

Referenced by [describe\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/bom/LegStruct.hpp](#)
- [airsched/bom/LegStruct.cpp](#)

## 25.28 AIRSCHED::OnInputFileNotFoundException Class Reference

```
#include <airsched/AIRSCHED_Types.hpp>
```

Inheritance diagram for AIRSCHED::OnInputFileNotFoundException:



### Public Member Functions

- [OnInputFileNotFoundException](#) (const std::string &iWhat)

#### 25.28.1 Detailed Description

The O&D input file cannot be retrieved.

Definition at line 35 of file [AIRSCHED\\_Types.hpp](#).

## 25.28.2 Constructor &amp; Destructor Documentation

25.28.2.1 AIRSCHED::OnDInputFileNotFoundException::OnDInputFileNotFoundException ( const std::string & *iWhat* ) [inline]

Constructor.

Definition at line 40 of file [AIRSCHED\\_Types.hpp](#).

The documentation for this class was generated from the following file:


- [airsched/AIRSCHED\\_Types.hpp](#)

## 25.29 AIRSCHED::OnDParser Class Reference

Class wrapping the parser entry point.

```
#include <airsched/command/OnDParser.hpp>
```

Inheritance diagram for AIRSCHED::OnDParser:



## Static Public Member Functions

- static void [generateOnDPeriods](#) (const stdair::Filename\_T &, stdair::BomRoot &)

## 25.29.1 Detailed Description

Class wrapping the parser entry point.

Definition at line 23 of file [OnDParser.hpp](#).

## 25.29.2 Member Function Documentation

25.29.2.1 void AIRSCHED::OnDParser::generateOnDPeriods ( const stdair::Filename\_T & *iFilename*, stdair::BomRoot & *ioBomRoot* ) [static]

Parse the CSV file describing the O&D.

## Parameters

<i>const</i>	std::string& The file-name of the CSV-formatted fare input file and the container.
--------------	--

Definition at line 16 of file [OnDParser.cpp](#).

References [AIRSCHED::OnDPeriodFileParser::generateOnDPeriods\(\)](#).

Referenced by [AIRSCHED::AIRSCHED\\_Service::parseAndLoad\(\)](#).


The documentation for this class was generated from the following files:

- [airsched/command/OnDParser.hpp](#)
- [airsched/command/OnDParser.cpp](#)

## 25.30 AIRSCHED::OnDParserHelper::OnDParser Struct Reference

```
#include <airsched/command/OnDParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::OnDParserHelper::OnDParser:



### Classes

- struct [definition](#)

### Public Member Functions

- [OnDParser](#) (stdair::BomRoot &, [OnDPeriodStruct](#) &)

### Public Attributes

- stdair::BomRoot & [\\_bomRoot](#)
- [OnDPeriodStruct](#) & [\\_onDPeriod](#)

#### 25.30.1 Detailed Description

Fares: AirlineCode; OriginCity; DestinationCity; DepartureDate-Range(FirstDate; LastDate); Airline; Class; BA; N-CE; LHR; 2007-01-01; 2007-12-31; BA; Y; BA; Y BA; NCE; LHR; 2007-01-01; 2007-12-31; BA; V; BA; H Grammar for the FareRule parser.

Definition at line [127](#) of file [OnDParserHelper.hpp](#).

#### 25.30.2 Constructor & Destructor Documentation

##### 25.30.2.1 AIRSCHED::OnDParserHelper::OnDParser::OnDParser ( stdair::BomRoot & *ioBomRoot*, [OnDPeriodStruct](#) & *ioOnDPeriod* )

Definition at line [261](#) of file [OnDParserHelper.cpp](#).

#### 25.30.3 Member Data Documentation

##### 25.30.3.1 stdair::BomRoot& AIRSCHED::OnDParserHelper::OnDParser::\_bomRoot

Definition at line [145](#) of file [OnDParserHelper.hpp](#).

##### 25.30.3.2 OnDPeriodStruct& AIRSCHED::OnDParserHelper::OnDParser::\_onDPeriod

Definition at line [146](#) of file [OnDParserHelper.hpp](#).


The documentation for this struct was generated from the following files:

- [airsched/command/OnDParserHelper.hpp](#)
- [airsched/command/OnDParserHelper.cpp](#)

## 25.31 AIRSCHED::OnDPeriodFileParser Class Reference

```
#include <airsched/command/OnDParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::OnDPeriodFileParser:



### Public Member Functions

- [OnDPeriodFileParser](#) (const stdair::Filename\_T &iFilename, stdair::BomRoot &ioBomRoot)
- bool [generateOnDPeriods](#) ()

#### 25.31.1 Detailed Description

Class wrapping the initialisation and entry point of the parser.

The seemingly redundancy is used to force the instantiation of the actual parser, which is a templatised Boost Spirit grammar. Hence, the actual parser is instantiated within that class object code.

Definition at line 161 of file [OnDParserHelper.hpp](#).

#### 25.31.2 Constructor & Destructor Documentation

##### 25.31.2.1 AIRSCHED::OnDPeriodFileParser::OnDPeriodFileParser ( const stdair::Filename\_T &iFilename, stdair::BomRoot &ioBomRoot )

Constructor.

Definition at line 342 of file [OnDParserHelper.cpp](#).

#### 25.31.3 Member Function Documentation

##### 25.31.3.1 bool AIRSCHED::OnDPeriodFileParser::generateOnDPeriods ( )

Parse the input file and generate the O&D-Periods.

Definition at line 378 of file [OnDParserHelper.cpp](#).

Referenced by [AIRSCHED::OnDParser::generateOnDPeriods\(\)](#).

The documentation for this class was generated from the following files:


- [airsched/command/OnDParserHelper.hpp](#)
- [airsched/command/OnDParserHelper.cpp](#)

## 25.32 AIRSCHED::OnDPeriodGenerator Class Reference

Class handling the generation / instantiation of the O&D-Period BOM.

```
#include <airsched/command/OnDPeriodGenerator.hpp>
```

Inheritance diagram for AIRSCHED::OnDPeriodGenerator:



#### Friends

- class [OnDPeriodFileParser](#)
- struct [OnDParserHelper::doEndOnD](#)
- class [OnDParser](#)

#### 25.32.1 Detailed Description

Class handling the generation / instantiation of the O&D-Period BOM.

Definition at line 29 of file [OnDPeriodGenerator.hpp](#).

#### 25.32.2 Friends And Related Function Documentation

##### 25.32.2.1 friend class [OnDPeriodFileParser](#) [friend]

Only the following class may use methods of [OnDPeriodGenerator](#). Indeed, as those methods build the BOM, it is not good to expose them publicly.

Definition at line 35 of file [OnDPeriodGenerator.hpp](#).

##### 25.32.2.2 friend struct [OnDParserHelper::doEndOnD](#) [friend]

Definition at line 36 of file [OnDPeriodGenerator.hpp](#).

##### 25.32.2.3 friend class [OnDParser](#) [friend]

Definition at line 37 of file [OnDPeriodGenerator.hpp](#).


The documentation for this class was generated from the following files:

- [airsched/command/OnDPeriodGenerator.hpp](#)
- [airsched/command/OnDPeriodGenerator.cpp](#)

## 25.33 AIRSCHED::OnDPeriodStruct Struct Reference

```
#include <airsched/bom/OnDPeriodStruct.hpp>
```

Inheritance diagram for AIRSCHED::OnDPeriodStruct:



#### Public Member Functions

- const stdair::AirlineCode\_T & [getFirstAirlineCode](#) () const



- stdair::Date\_T [getDate](#) () const
- stdair::Duration\_T [getTime](#) () const
- const std::string [describe](#) () const
- const std::string [describeTSKey](#) () const
- [OnDPeriodStruct](#) ()

#### Public Attributes

- stdair::AirportCode\_T [\\_origin](#)
- stdair::AirportCode\_T [\\_destination](#)
- stdair::DatePeriod\_T [\\_datePeriod](#)
- stdair::Duration\_T [\\_timeRangeStart](#)
- stdair::Duration\_T [\\_timeRangeEnd](#)
- stdair::NbOfAirlines\_T [\\_nbOfAirlines](#)
- stdair::AirlineCode\_T [\\_airlineCode](#)
- stdair::ClassCode\_T [\\_classCode](#)
- stdair::AirlineCodeList\_T [\\_airlineCodeList](#)
- stdair::ClassCodeList\_T [\\_classCodeList](#)
- stdair::Date\_T [\\_dateRangeStart](#)
- stdair::Date\_T [\\_dateRangeEnd](#)
- unsigned int [\\_itYear](#)
- unsigned int [\\_itMonth](#)
- unsigned int [\\_itDay](#)
- long [\\_itHours](#)
- long [\\_itMinutes](#)
- long [\\_itSeconds](#)

#### 25.33.1 Detailed Description

Utility Structure for the parsing of FareRule structures.

Definition at line 15 of file [OnDPeriodStruct.hpp](#).

#### 25.33.2 Constructor & Destructor Documentation

##### 25.33.2.1 AIRSCHED::OnDPeriodStruct::OnDPeriodStruct ( )

Default constructor.

Definition at line 17 of file [OnDPeriodStruct.cpp](#).

#### 25.33.3 Member Function Documentation

##### 25.33.3.1 const stdair::AirlineCode\_T & AIRSCHED::OnDPeriodStruct::getFirstAirlineCode ( ) const

Get the first airline code.

Definition at line 64 of file [OnDPeriodStruct.cpp](#).

References [\\_airlineCodeList](#).

#### 25.33.3.2 stdair::Date\_T AIRSCHED::OnDPeriodStruct::getDate ( ) const

Get the date from the staging details.

Definition at line 28 of file [OnDPeriodStruct.cpp](#).

References [\\_itDay](#), [\\_itMonth](#), and [\\_itYear](#).

Referenced by [AIRSCHED::OnDParserHelper::storeDateRangeStart::operator\(\)](#), and [AIRSCHED::OnDParserHelper::storeDateRangeEnd::operator\(\)](#).

#### 25.33.3.3 stdair::Duration\_T AIRSCHED::OnDPeriodStruct::getTime ( ) const

Get the time from the staging details.

Definition at line 33 of file [OnDPeriodStruct.cpp](#).

References [\\_itHours](#), [\\_itMinutes](#), and [\\_itSeconds](#).

Referenced by [AIRSCHED::OnDParserHelper::storeStartRangeTime::operator\(\)](#), and [AIRSCHED::OnDParserHelper::storeEndRangeTime::operator\(\)](#).

#### 25.33.3.4 const std::string AIRSCHED::OnDPeriodStruct::describe ( ) const

Give a description of the structure (for display purposes).

Definition at line 40 of file [OnDPeriodStruct.cpp](#).

References [\\_airlineCode](#), [\\_classCode](#), [\\_datePeriod](#), [\\_destination](#), [\\_origin](#), [\\_timeRangeEnd](#), and [\\_timeRangeStart](#).

#### 25.33.3.5 const std::string AIRSCHED::OnDPeriodStruct::describeTSKey ( ) const

Give a short description of the key required in the travel solution object to differentiate fare rule structures.

Definition at line 55 of file [OnDPeriodStruct.cpp](#).

References [\\_airlineCode](#), [\\_classCode](#), [\\_destination](#), and [\\_origin](#).

### 25.33.4 Member Data Documentation

#### 25.33.4.1 stdair::AirportCode\_T AIRSCHED::OnDPeriodStruct::\_origin

Definition at line 41 of file [OnDPeriodStruct.hpp](#).

Referenced by [describe\(\)](#), [describeTSKey\(\)](#), and [AIRSCHED::OnDParserHelper::storeOrigin::operator\(\)](#).

#### 25.33.4.2 stdair::AirportCode\_T AIRSCHED::OnDPeriodStruct::\_destination

Definition at line 42 of file [OnDPeriodStruct.hpp](#).

Referenced by [describe\(\)](#), [describeTSKey\(\)](#), and [AIRSCHED::OnDParserHelper::storeDestination::operator\(\)](#).

#### 25.33.4.3 stdair::DatePeriod\_T AIRSCHED::OnDPeriodStruct::\_datePeriod

Definition at line 43 of file [OnDPeriodStruct.hpp](#).

Referenced by [describe\(\)](#), and [AIRSCHED::OnDParserHelper::storeDateRangeEnd::operator\(\)](#).

#### 25.33.4.4 stdair::Duration\_T AIRSCHED::OnDPeriodStruct::\_timeRangeStart

Definition at line 44 of file [OnDPeriodStruct.hpp](#).

Referenced by [describe\(\)](#), and [AIRSCHED::OnDParserHelper::storeStartRangeTime::operator\(\)](#).

#### 25.33.4.5 stdair::Duration\_T AIRSCHED::OnDPeriodStruct::\_timeRangeEnd

Definition at line 45 of file [OnDPeriodStruct.hpp](#).

Referenced by [describe\(\)](#), and [AIRSCHED::OnDParserHelper::storeEndRangeTime::operator\(\)](#).

#### 25.33.4.6 `stdair::NbOfAirlines_T AIRSCHED::OnDPeriodStruct::_nbOfAirlines`

Definition at line 46 of file [OnDPeriodStruct.hpp](#).

Referenced by [AIRSCHED::OnDParserHelper::storeOrigin::operator\(\)](#), and [AIRSCHED::OnDParserHelper::storeAirlineCode::operator\(\)](#).

#### 25.33.4.7 `stdair::AirlineCode_T AIRSCHED::OnDPeriodStruct::_airlineCode`

Definition at line 47 of file [OnDPeriodStruct.hpp](#).

Referenced by [describe\(\)](#), [describeTSKey\(\)](#), [AIRSCHED::OnDParserHelper::storeOrigin::operator\(\)](#), and [AIRSCHED::OnDParserHelper::storeAirlineCode::operator\(\)](#).

#### 25.33.4.8 `stdair::ClassCode_T AIRSCHED::OnDPeriodStruct::_classCode`

Definition at line 48 of file [OnDPeriodStruct.hpp](#).

Referenced by [describe\(\)](#), [describeTSKey\(\)](#), [AIRSCHED::OnDParserHelper::storeOrigin::operator\(\)](#), and [AIRSCHED::OnDParserHelper::storeClassCode::operator\(\)](#).

#### 25.33.4.9 `stdair::AirlineCodeList_T AIRSCHED::OnDPeriodStruct::_airlineCodeList`

Definition at line 49 of file [OnDPeriodStruct.hpp](#).

Referenced by [getFirstAirlineCode\(\)](#), [AIRSCHED::OnDParserHelper::storeOrigin::operator\(\)](#), and [AIRSCHED::OnDParserHelper::storeAirlineCode::operator\(\)](#).

#### 25.33.4.10 `stdair::ClassCodeList_T AIRSCHED::OnDPeriodStruct::_classCodeList`

Definition at line 50 of file [OnDPeriodStruct.hpp](#).

Referenced by [AIRSCHED::OnDParserHelper::storeOrigin::operator\(\)](#), and [AIRSCHED::OnDParserHelper::storeClassCode::operator\(\)](#).

#### 25.33.4.11 `stdair::Date_T AIRSCHED::OnDPeriodStruct::_dateRangeStart`

Staging Date.

Definition at line 53 of file [OnDPeriodStruct.hpp](#).

Referenced by [AIRSCHED::OnDParserHelper::storeDateRangeStart::operator\(\)](#), and [AIRSCHED::OnDParserHelper::storeDateRangeEnd::operator\(\)](#).

#### 25.33.4.12 `stdair::Date_T AIRSCHED::OnDPeriodStruct::_dateRangeEnd`

Definition at line 54 of file [OnDPeriodStruct.hpp](#).

Referenced by [AIRSCHED::OnDParserHelper::storeDateRangeEnd::operator\(\)](#).

#### 25.33.4.13 `unsigned int AIRSCHED::OnDPeriodStruct::_itYear`

Definition at line 55 of file [OnDPeriodStruct.hpp](#).

Referenced by [getDate\(\)](#).

#### 25.33.4.14 `unsigned int AIRSCHED::OnDPeriodStruct::_itMonth`

Definition at line 56 of file [OnDPeriodStruct.hpp](#).

Referenced by [getDate\(\)](#).

## 25.33.4.15 unsigned int AIRSCHED::OnDPeriodStruct::\_itDay

Definition at line 57 of file [OnDPeriodStruct.hpp](#).

Referenced by [getDate\(\)](#).

## 25.33.4.16 long AIRSCHED::OnDPeriodStruct::\_itHours

Staging Time.

Definition at line 60 of file [OnDPeriodStruct.hpp](#).

Referenced by [getTime\(\)](#).

## 25.33.4.17 long AIRSCHED::OnDPeriodStruct::\_itMinutes

Definition at line 61 of file [OnDPeriodStruct.hpp](#).

Referenced by [getTime\(\)](#).

## 25.33.4.18 long AIRSCHED::OnDPeriodStruct::\_itSeconds

Definition at line 62 of file [OnDPeriodStruct.hpp](#).

Referenced by [getTime\(\)](#), [AIRSCHED::OnDParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeStartRangeTime::operator\(\)](#), and [AIRSCHED::OnDParserHelper::storeEndRangeTime::operator\(\)](#).

The documentation for this struct was generated from the following files:


- [airsched/bom/OnDPeriodStruct.hpp](#)
- [airsched/bom/OnDPeriodStruct.cpp](#)

## 25.34 AIRSCHED::OriginDestinationSet Class Reference

Class representing a simple sub-network.

```
#include <airsched/bom/OriginDestinationSet.hpp>
```

Inheritance diagram for AIRSCHED::OriginDestinationSet:



## Public Types

- typedef [OriginDestinationSetKey](#) Key\_T

## Public Member Functions

- const [Key\\_T](#) & [getKey](#) () const
- const stdair::AirportCode\_T & [getDestination](#) () const
- stdair::BomAbstract \*const [getParent](#) () const
- const stdair::HolderMap\_T & [getHolderMap](#) () const
- void [toStream](#) (std::ostream &ioOut) const
- void [fromStream](#) (std::istream &ioIn)
- std::string [toString](#) () const

- const std::string [describeKey](#) () const
- template<class Archive >  
void [serialize](#) (Archive &ar, const unsigned int iFileVersion)

#### Protected Member Functions

- [OriginDestinationSet](#) (const [Key\\_T](#) &)
- [~OriginDestinationSet](#) ()

#### Protected Attributes

- [Key\\_T \\_key](#)
- stdair::BomAbstract \* [\\_parent](#)
- stdair::HolderMap\_T [\\_holderMap](#)

#### Friends

- class [stdair::FacBom](#)
- class [stdair::FacBomManager](#)
- class [boost::serialization::access](#)

#### 25.34.1 Detailed Description

Class representing a simple sub-network.

That simple sub-network is made of a set of segments ([SegmentPathPeriod](#) objects), from the origin airport specified within [ReachableUniverse](#) (parent object) to the destination specified in the [OriginDestinationSetKey](#) object.

Each segment (composing that [OriginDestinationSet](#) object) corresponds to an actual travel solution from the origin to the destination, that is, a path that a traveller can take with actual scheduled flights.

Definition at line 44 of file [OriginDestinationSet.hpp](#).

#### 25.34.2 Member Typedef Documentation

##### 25.34.2.1 typedef [OriginDestinationSetKey](#) AIRSCHED::OriginDestinationSet::Key\_T

Definition allowing to retrieve the associated BOM key type.

Definition at line 57 of file [OriginDestinationSet.hpp](#).

#### 25.34.3 Constructor & Destructor Documentation

##### 25.34.3.1 AIRSCHED::OriginDestinationSet::OriginDestinationSet ( const [Key\\_T](#) & *iKey* ) [protected]

Main constructor.

Definition at line 31 of file [OriginDestinationSet.cpp](#).

##### 25.34.3.2 AIRSCHED::OriginDestinationSet::~~OriginDestinationSet ( ) [protected]

Destructor.

Definition at line 36 of file [OriginDestinationSet.cpp](#).

## 25.34.4 Member Function Documentation

## 25.34.4.1 const Key\_T&amp; AIRSCHED::OriginDestinationSet::getKey ( ) const [inline]

Get the primary key (destination airport).

Definition at line 65 of file [OriginDestinationSet.hpp](#).

References [\\_key](#).

## 25.34.4.2 const stdair::AirportCode\_T&amp; AIRSCHED::OriginDestinationSet::getDestination ( ) const [inline]

Get the destination airport (i.e., the primary key).

Definition at line 72 of file [OriginDestinationSet.hpp](#).

References [\\_key](#), and [AIRSCHED::OriginDestinationSetKey::getOffPoint\(\)](#).

## 25.34.4.3 stdair::BomAbstract\* const AIRSCHED::OriginDestinationSet::getParent ( ) const [inline]

Get the parent (i.e., [ReachableUniverse](#)) object.

Definition at line 79 of file [OriginDestinationSet.hpp](#).

References [\\_parent](#).

## 25.34.4.4 const stdair::HolderMap\_T&amp; AIRSCHED::OriginDestinationSet::getHolderMap ( ) const [inline]

Get the map of children holders ([SegmentPathPeriod](#) objects).

Definition at line 86 of file [OriginDestinationSet.hpp](#).

References [\\_holderMap](#).

## 25.34.4.5 void AIRSCHED::OriginDestinationSet::toStream ( std::ostream &amp; ioOut ) const [inline]

Dump a Business Object into an output stream.

## Parameters

<i>ostream&amp;</i>	the output stream.
---------------------	--------------------

Definition at line 98 of file [OriginDestinationSet.hpp](#).

References [toString\(\)](#).

## 25.34.4.6 void AIRSCHED::OriginDestinationSet::fromStream ( std::istream &amp; ioIn ) [inline]

Read a Business Object from an input stream.

## Parameters

<i>istream&amp;</i>	the input stream.
---------------------	-------------------

Definition at line 107 of file [OriginDestinationSet.hpp](#).

## 25.34.4.7 std::string AIRSCHED::OriginDestinationSet::toString ( ) const

Get the serialised version of the Business Object.

Definition at line 40 of file [OriginDestinationSet.cpp](#).

References [\\_key](#), and [AIRSCHED::OriginDestinationSetKey::toString\(\)](#).

Referenced by [toStream\(\)](#).

25.34.4.8 `const std::string AIRSCHED::OriginDestinationSet::describeKey ( ) const` `[inline]`

Get a string describing the key.

Definition at line 118 of file [OriginDestinationSet.hpp](#).

References [\\_key](#), and [AIRSCHED::OriginDestinationSetKey::toString\(\)](#).

25.34.4.9 `template<class Archive > void AIRSCHED::OriginDestinationSet::serialize ( Archive & ar, const unsigned int iFileVersion )`

Serialisation.

Definition at line 62 of file [OriginDestinationSet.cpp](#).

References [\\_key](#).

## 25.34.5 Friends And Related Function Documentation

25.34.5.1 `friend class stdair::FacBom` `[friend]`

Friend classes.

Definition at line 48 of file [OriginDestinationSet.hpp](#).

25.34.5.2 `friend class stdair::FacBomManager` `[friend]`

Definition at line 49 of file [OriginDestinationSet.hpp](#).

25.34.5.3 `friend class boost::serialization::access` `[friend]`

Definition at line 50 of file [OriginDestinationSet.hpp](#).

## 25.34.6 Member Data Documentation

25.34.6.1 `Key_T AIRSCHED::OriginDestinationSet::_key` `[protected]`

Primary key (destination airport code).

Definition at line 168 of file [OriginDestinationSet.hpp](#).

Referenced by [describeKey\(\)](#), [getDestination\(\)](#), [getKey\(\)](#), [serialize\(\)](#), and [toString\(\)](#).

25.34.6.2 `stdair::BomAbstract* AIRSCHED::OriginDestinationSet::_parent` `[protected]`

Pointer on the parent ([ReachableUniverse](#)) object.

Definition at line 173 of file [OriginDestinationSet.hpp](#).

Referenced by [getParent\(\)](#).

25.34.6.3 `stdair::HolderMap_T AIRSCHED::OriginDestinationSet::_holderMap` `[protected]`

Map holding the children ([SegmentPathPeriod](#) objects).

Definition at line 178 of file [OriginDestinationSet.hpp](#).

Referenced by [getHolderMap\(\)](#).

The documentation for this class was generated from the following files:


- [airsched/bom/OriginDestinationSet.hpp](#)
- [airsched/bom/OriginDestinationSet.cpp](#)

## 25.35 AIRSCHED::OriginDestinationSetKey Struct Reference

Structure representing the key of a sub-network.

```
#include <airsched/bom/OriginDestinationSetKey.hpp>
```

Inheritance diagram for AIRSCHED::OriginDestinationSetKey:



### Public Member Functions

- [OriginDestinationSetKey](#) (const stdair::AirportCode\_T &iDestination)
- [OriginDestinationSetKey](#) (const [OriginDestinationSetKey](#) &)
- [~OriginDestinationSetKey](#) ()
- const stdair::AirportCode\_T & [getOffPoint](#) () const
- void [toStream](#) (std::ostream &ioOut) const
- void [fromStream](#) (std::istream &ioIn)
- const std::string [toString](#) () const
- template<class Archive >  
void [serialize](#) (Archive &ar, const unsigned int iFileVersion)

### Friends

- class [boost::serialization::access](#)

#### 25.35.1 Detailed Description

Structure representing the key of a sub-network.

As the origin airport code is already part of the [ReachableUniverse](#) (parent) class, that key is only made of the destination airport code.

Definition at line 30 of file [OriginDestinationSetKey.hpp](#).

#### 25.35.2 Constructor & Destructor Documentation

##### 25.35.2.1 AIRSCHED::OriginDestinationSetKey::OriginDestinationSetKey ( const stdair::AirportCode\_T & iDestination )

Constructor.

Definition at line 26 of file [OriginDestinationSetKey.cpp](#).

##### 25.35.2.2 AIRSCHED::OriginDestinationSetKey::OriginDestinationSetKey ( const OriginDestinationSetKey & iKey )

Copy constructor.

Definition at line 32 of file [OriginDestinationSetKey.cpp](#).

##### 25.35.2.3 AIRSCHED::OriginDestinationSetKey::~~OriginDestinationSetKey ( )

Destructor.

Definition at line 37 of file [OriginDestinationSetKey.cpp](#).



## 25.35.3 Member Function Documentation

## 25.35.3.1 const stdair::AirportCode.T&amp; AIRSCHED::OriginDestinationSetKey::getOffPoint ( ) const [inline]

Get the destination airport.

Definition at line 62 of file [OriginDestinationSetKey.hpp](#).

Referenced by [AIRSCHED::OriginDestinationSet::getDestination\(\)](#).

## 25.35.3.2 void AIRSCHED::OriginDestinationSetKey::toStream ( std::ostream &amp; ioOut ) const

Dump a Business Object Key into an output stream.

## Parameters

<i>ostream&amp;</i>	the output stream.
---------------------	--------------------

Definition at line 41 of file [OriginDestinationSetKey.cpp](#).

References [toString\(\)](#).

## 25.35.3.3 void AIRSCHED::OriginDestinationSetKey::fromStream ( std::istream &amp; ioIn )

Read a Business Object Key from an input stream.

## Parameters

<i>istream&amp;</i>	the input stream.
---------------------	-------------------

Definition at line 46 of file [OriginDestinationSetKey.cpp](#).

## 25.35.3.4 const std::string AIRSCHED::OriginDestinationSetKey::toString ( ) const

Get the serialised version of the Business Object Key.

That string is unique, at the level of a given Business Object, when among children of a given parent Business Object.

For instance, "H" and "K" allow to differentiate among two marketing classes for the same segment-date.

Definition at line 50 of file [OriginDestinationSetKey.cpp](#).

Referenced by [AIRSCHED::OriginDestinationSet::describeKey\(\)](#), [toStream\(\)](#), and [AIRSCHED::OriginDestinationSet::toString\(\)](#).

## 25.35.3.5 template&lt;class Archive &gt; void AIRSCHED::OriginDestinationSetKey::serialize ( Archive &amp; ar, const unsigned int iFileVersion )

Serialisation.

Definition at line 72 of file [OriginDestinationSetKey.cpp](#).

## 25.35.4 Friends And Related Function Documentation

## 25.35.4.1 friend class boost::serialization::access [friend]


Definition at line 31 of file [OriginDestinationSetKey.hpp](#).

The documentation for this struct was generated from the following files:

- [airsched/bom/OriginDestinationSetKey.hpp](#)
- [airsched/bom/OriginDestinationSetKey.cpp](#)

## 25.36 ParserException Class Reference

Inheritance diagram for ParserException:




The documentation for this class was generated from the following file:

- [airsched/AIRSCHED\\_Types.hpp](#)

## 25.37 AIRSCHED::OnDParserHelper::ParserSemanticAction Struct Reference

```
#include <airsched/command/OnDParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::OnDParserHelper::ParserSemanticAction:

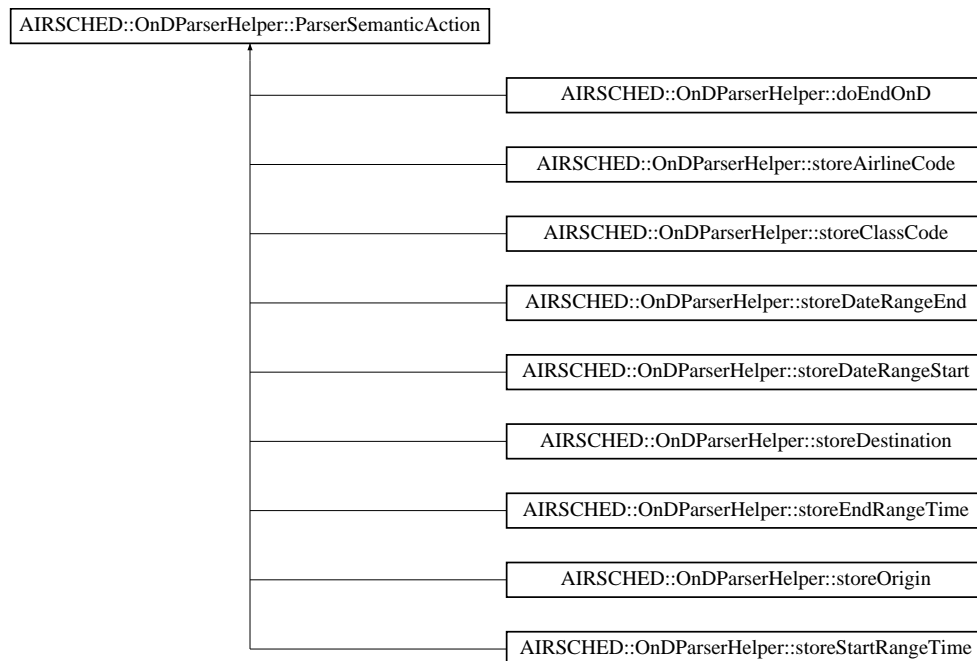

### Public Member Functions

- [ParserSemanticAction](#) ([OnDPeriodStruct](#) &)

### Public Attributes

- [OnDPeriodStruct](#) & [\\_onDPeriod](#)

### 25.37.1 Detailed Description

Generic Semantic Action (Actor / Functor) for the Schedule Parser.

Definition at line 34 of file [OnDParserHelper.hpp](#).

### 25.37.2 Constructor & Destructor Documentation

#### 25.37.2.1 AIRSCHED::OnDParserHelper::ParserSemanticAction::ParserSemanticAction ( OnDPeriodStruct & ioOnDPeriod )

Actor Constructor.

Definition at line 25 of file [OnDParserHelper.cpp](#).

### 25.37.3 Member Data Documentation

#### 25.37.3.1 OnDPeriodStruct& AIRSCHED::OnDParserHelper::ParserSemanticAction::\_onDPeriod

Actor Context.

Definition at line 38 of file [OnDParserHelper.hpp](#).

Referenced by [AIRSCHED::OnDParserHelper::storeOrigin::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDestination::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeStartRangeTime::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeEndRangeTime::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeClassCode::operator\(\)](#), and [AIRSCHED::OnDParserHelper::doEndOnD::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/OnDParserHelper.hpp](#)
- [airsched/command/OnDParserHelper.cpp](#)

## 25.38 AIRSCHED::ScheduleParserHelper::ParserSemanticAction Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::ParserSemanticAction:

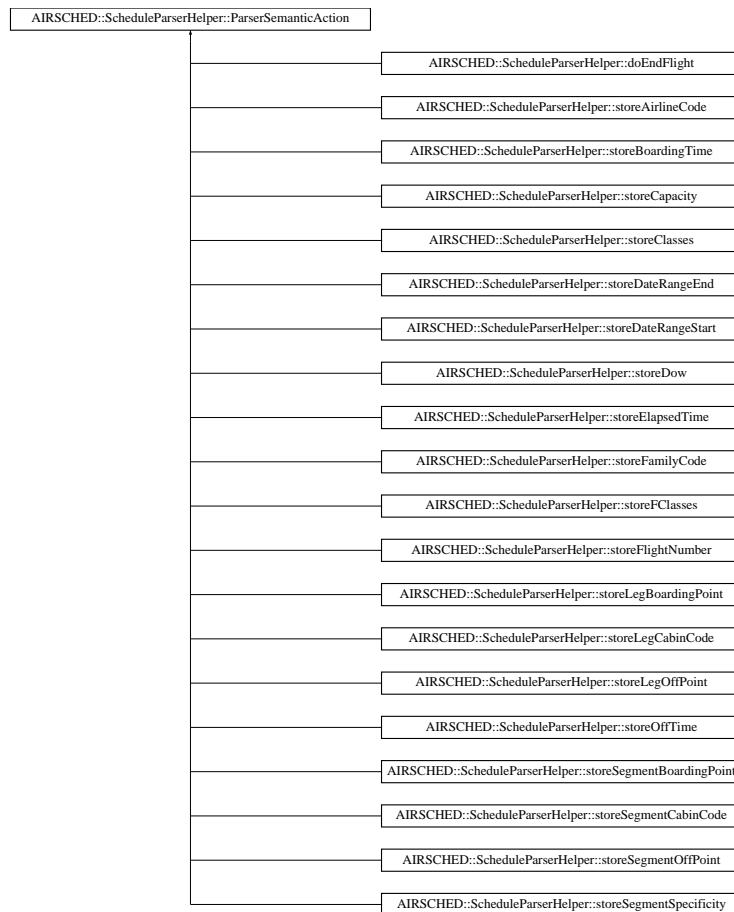

## Public Member Functions

- [ParserSemanticAction](#) ([FlightPeriodStruct](#) &)

## Public Attributes

- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

### 25.38.1 Detailed Description

Generic Semantic Action (Actor / Functor) for the Schedule Parser.

Definition at line 29 of file [ScheduleParserHelper.hpp](#).

### 25.38.2 Constructor & Destructor Documentation

#### 25.38.2.1 AIRSCHED::ScheduleParserHelper::ParserSemanticAction::ParserSemanticAction ( [FlightPeriodStruct](#) & *ioFlightPeriod* )

Actor Constructor.

Definition at line 26 of file [ScheduleParserHelper.cpp](#).

### 25.38.3 Member Data Documentation

## 25.38.3.1 FlightPeriodStruct&amp; AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\_flightPeriod

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDow::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).

The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.39 airsched::Passenger\_T Struct Reference

```
#include <airsched/batches/BookingRequestParser.hpp>
```

## Public Types

- enum [PassengerType\\_T](#) { [ADULT](#) = 0, [CHILD](#), [PET](#), [LAST\\_VALUE](#) }

## Public Member Functions

- [Passenger\\_T](#) ()
- void [display](#) () const

## Public Attributes

- [PassengerType\\_T](#) \_type
- unsigned short [\\_number](#)

## Static Public Attributes

- static const std::string [\\_labels](#) [[LAST\\_VALUE](#)]

## 25.39.1 Detailed Description

Passenger.

Definition at line 71 of file [BookingRequestParser.hpp](#).

### 25.39.2 Member Enumeration Documentation

#### 25.39.2.1 enum airsched::Passenger\_T::PassengerType\_T

Enumerator:

***ADULT***  
***CHILD***  
***PET***  
***LAST\_VALUE***

Definition at line 73 of file [BookingRequestParser.hpp](#).

### 25.39.3 Constructor & Destructor Documentation

#### 25.39.3.1 airsched::Passenger\_T::Passenger\_T( ) [inline]

Constructor.

Definition at line 78 of file [BookingRequestParser.hpp](#).

### 25.39.4 Member Function Documentation

#### 25.39.4.1 void airsched::Passenger\_T::display( ) const [inline]

Definition at line 80 of file [BookingRequestParser.hpp](#).

References [\\_labels](#), [\\_number](#), and [\\_type](#).

Referenced by [airsched::SearchString\\_T::display\(\)](#).

### 25.39.5 Member Data Documentation

#### 25.39.5.1 const std::string airsched::Passenger\_T::\_labels [static]

**Initial value:**

```
{ "Adult", "Child", "Pet" }
```

Passenger type labels.

Definition at line 74 of file [BookingRequestParser.hpp](#).

Referenced by [display\(\)](#).

#### 25.39.5.2 PassengerType\_T airsched::Passenger\_T::\_type

Definition at line 75 of file [BookingRequestParser.hpp](#).

Referenced by [display\(\)](#), [airsched::store\\_adult\\_passenger\\_type::operator\(\)\(\)](#), [airsched::store\\_child\\_passenger\\_type::operator\(\)\(\)](#), and [airsched::store\\_pet\\_passenger\\_type::operator\(\)\(\)](#).

#### 25.39.5.3 unsigned short airsched::Passenger\_T::\_number

Definition at line 76 of file [BookingRequestParser.hpp](#).

Referenced by [display\(\)](#), and [airsched::store\\_passenger\\_number::operator\(\)\(\)](#).

The documentation for this struct was generated from the following file:

- [airsched/batches/BookingRequestParser.hpp](#)

## 25.40 `airsched::Place_T` Struct Reference

```
#include <airsched/batches/BookingRequestParser.hpp>
```

### Public Member Functions

- [Place\\_T](#) ()
- void [display](#) () const

### Public Attributes

- std::string [\\_name](#)
- std::string [\\_code](#)

#### 25.40.1 Detailed Description

Place.

Definition at line 11 of file [BookingRequestParser.hpp](#).

#### 25.40.2 Constructor & Destructor Documentation

##### 25.40.2.1 `airsched::Place_T::Place_T ( )` [inline]

Constructor.

Definition at line 16 of file [BookingRequestParser.hpp](#).

#### 25.40.3 Member Function Documentation

##### 25.40.3.1 `void airschd::Place_T::display ( ) const` [inline]

Definition at line 18 of file [BookingRequestParser.hpp](#).

References [\\_code](#), and [\\_name](#).

Referenced by [airsched::SearchString\\_T::display\(\)](#).

#### 25.40.4 Member Data Documentation

##### 25.40.4.1 `std::string airschd::Place_T::_name`

Definition at line 13 of file [BookingRequestParser.hpp](#).

Referenced by [display\(\)](#), and [airsched::store\\_place\\_element::operator\(\)\(\)](#).

##### 25.40.4.2 `std::string airschd::Place_T::_code`

Definition at line 14 of file [BookingRequestParser.hpp](#).

Referenced by [display\(\)](#).

The documentation for this struct was generated from the following file:


- [airsched/batches/BookingRequestParser.hpp](#)

## 25.41 AIRSCHED::ReachableUniverse Class Reference

Class representing the root of the schedule-related BOM tree.

```
#include <airsched/bom/ReachableUniverse.hpp>
```

Inheritance diagram for AIRSCHED::ReachableUniverse:

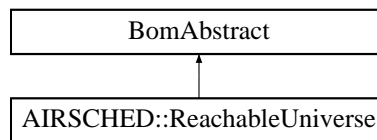

### Public Types

- typedef [ReachableUniverseKey](#) [Key\\_T](#)

### Public Member Functions

- const [Key\\_T](#) & [getKey](#) () const
- const stdair::AirportCode\_T & [getOrigin](#) () const
- stdair::BomAbstract \*const [getParent](#) () const
- const stdair::HolderMap\_T & [getHolderMap](#) () const
- const [SegmentPathPeriodListList\\_T](#) & [getSegmentPathPeriodListList](#) () const
- void [toStream](#) (std::ostream &ioOut) const
- void [fromStream](#) (std::istream &ioIn)
- std::string [toString](#) () const
- const std::string [describeKey](#) () const
- template<class Archive >  
void [serialize](#) (Archive &ar, const unsigned int iFileVersion)

### Protected Member Functions

- [ReachableUniverse](#) (const [Key\\_T](#) &)
- [~ReachableUniverse](#) ()

### Protected Attributes

- [Key\\_T \\_key](#)
- stdair::BomAbstract \* [\\_parent](#)
- stdair::HolderMap\_T [\\_holderMap](#)
- [SegmentPathPeriodListList\\_T \\_segmentPathPeriodListList](#)

### Friends

- class stdair::FacBom
- class stdair::FacBomManager
- class [SegmentPathGenerator](#)
- class boost::serialization::access



### 25.41.1 Detailed Description

Class representing the root of the schedule-related BOM tree.

It is the pending, in the schedule universe, of the `stdair::Inventory` class. It corresponds to all the destinations, which can be reached from a given geographical point. That latter is an airport for now, and its key (airport code) is specified by the [ReachableUniverseKey](#) object.

Definition at line 41 of file [ReachableUniverse.hpp](#).

### 25.41.2 Member Typedef Documentation

#### 25.41.2.1 `typedef ReachableUniverseKey AIRSCHED::ReachableUniverse::Key_T`

Definition allowing to retrieve the associated BOM key type.

Definition at line 55 of file [ReachableUniverse.hpp](#).

### 25.41.3 Constructor & Destructor Documentation

#### 25.41.3.1 `AIRSCHED::ReachableUniverse::ReachableUniverse ( const Key_T & iKey )` `[protected]`

Main constructor.

Definition at line 32 of file [ReachableUniverse.cpp](#).

#### 25.41.3.2 `AIRSCHED::ReachableUniverse::~~ReachableUniverse ( )` `[protected]`

Destructor.

Definition at line 37 of file [ReachableUniverse.cpp](#).

### 25.41.4 Member Function Documentation

#### 25.41.4.1 `const Key_T& AIRSCHED::ReachableUniverse::getKey ( ) const` `[inline]`

Get the universe key (airport code representing the departure point of the "reachable universe").

Definition at line 63 of file [ReachableUniverse.hpp](#).

References [\\_key](#).

#### 25.41.4.2 `const stdair::AirportCode_T& AIRSCHED::ReachableUniverse::getOrigin ( ) const` `[inline]`

Get the (origin) airport (i.e., the primary key).

Definition at line 70 of file [ReachableUniverse.hpp](#).

References [\\_key](#), and [AIRSCHED::ReachableUniverseKey::getBoardingPoint\(\)](#).

#### 25.41.4.3 `stdair::BomAbstract* const AIRSCHED::ReachableUniverse::getParent ( ) const` `[inline]`

Get the parent (i.e., the BomRoot) object.

Definition at line 77 of file [ReachableUniverse.hpp](#).

References [\\_parent](#).

#### 25.41.4.4 `const stdair::HolderMap_T& AIRSCHED::ReachableUniverse::getHolderMap ( ) const` `[inline]`

Get the map of children holders ([OriginDestinationSet](#) objects).

Definition at line 84 of file [ReachableUniverse.hpp](#).

References [\\_holderMap](#).

**25.41.4.5** `const SegmentPathPeriodListList_T& AIRSCHED::ReachableUniverse::getSegmentPathPeriodListList ( ) const` `[inline]`

Get the vector of SegmentPathPeriodLightList objects.

Definition at line 91 of file [ReachableUniverse.hpp](#).

References [\\_segmentPathPeriodListList](#).

**25.41.4.6** `void AIRSCHED::ReachableUniverse::toStream ( std::ostream & ioOut ) const` `[inline]`

Dump a Business Object into an output stream.

Parameters

<i>ostream&amp;</i>	the output stream.
---------------------	--------------------

Definition at line 103 of file [ReachableUniverse.hpp](#).

References [toString\(\)](#).

**25.41.4.7** `void AIRSCHED::ReachableUniverse::fromStream ( std::istream & ioIn )` `[inline]`

Read a Business Object from an input stream.

Parameters

<i>istream&amp;</i>	the input stream.
---------------------	-------------------

Definition at line 112 of file [ReachableUniverse.hpp](#).

**25.41.4.8** `std::string AIRSCHED::ReachableUniverse::toString ( ) const`

Get the serialised version of the Business Object.

Definition at line 41 of file [ReachableUniverse.cpp](#).

References [\\_key](#), and [AIRSCHED::ReachableUniverseKey::toString\(\)](#).

Referenced by [AIRSCHED::BomDisplay::csvDisplay\(\)](#), and [toStream\(\)](#).

**25.41.4.9** `const std::string AIRSCHED::ReachableUniverse::describeKey ( ) const` `[inline]`

Get a string describing the key.

Definition at line 123 of file [ReachableUniverse.hpp](#).

References [\\_key](#), and [AIRSCHED::ReachableUniverseKey::toString\(\)](#).

**25.41.4.10** `template<class Archive > void AIRSCHED::ReachableUniverse::serialize ( Archive & ar, const unsigned int iFileVersion )`

Serialisation.

Definition at line 63 of file [ReachableUniverse.cpp](#).

References [\\_key](#).

## 25.41.5 Friends And Related Function Documentation

**25.41.5.1** `friend class stdair::FacBom` `[friend]`

Friend classes.

Definition at line 45 of file [ReachableUniverse.hpp](#).

25.41.5.2 friend class `stdair::FacBomManager` `[friend]`

Definition at line 46 of file [ReachableUniverse.hpp](#).

25.41.5.3 friend class `SegmentPathGenerator` `[friend]`

Definition at line 47 of file [ReachableUniverse.hpp](#).

25.41.5.4 friend class `boost::serialization::access` `[friend]`

Definition at line 48 of file [ReachableUniverse.hpp](#).

#### 25.41.6 Member Data Documentation

25.41.6.1 `Key_T AIRSCHED::ReachableUniverse::_key` `[protected]`

Primary key (origin airport code).

Definition at line 174 of file [ReachableUniverse.hpp](#).

Referenced by [describeKey\(\)](#), [getKey\(\)](#), [getOrigin\(\)](#), [serialize\(\)](#), and [toString\(\)](#).

25.41.6.2 `stdair::BomAbstract* AIRSCHED::ReachableUniverse::_parent` `[protected]`

Pointer on the parent (BomRoot) object.

Definition at line 179 of file [ReachableUniverse.hpp](#).

Referenced by [getParent\(\)](#).

25.41.6.3 `stdair::HolderMap_T AIRSCHED::ReachableUniverse::_holderMap` `[protected]`

Map holding the children ([OriginDestinationSet](#) objects).

Definition at line 184 of file [ReachableUniverse.hpp](#).

Referenced by [getHolderMap\(\)](#).

25.41.6.4 `SegmentPathPeriodListList_T AIRSCHED::ReachableUniverse::_segmentPathPeriodListList` `[protected]`

The list (actually, a vector) of lists of [SegmentPathPeriods](#), used solely for the construction of the main list of [SegmentPathPeriods](#) within the [ReachableUniverseStructure](#).

Definition at line 191 of file [ReachableUniverse.hpp](#).

Referenced by [getSegmentPathPeriodListList\(\)](#).

The documentation for this class was generated from the following files:


- [airsched/bom/ReachableUniverse.hpp](#)
- [airsched/bom/ReachableUniverse.cpp](#)

## 25.42 AIRSCHED::ReachableUniverseKey Struct Reference

Structure representing the key of the schedule-related BOM tree root.

```
#include <airsched/bom/ReachableUniverseKey.hpp>
```

Inheritance diagram for `AIRSCHED::ReachableUniverseKey`:



### Public Member Functions

- [ReachableUniverseKey](#) (const stdair::AirportCode\_T &iOrigin)
- [ReachableUniverseKey](#) (const [ReachableUniverseKey](#) &)
- [~ReachableUniverseKey](#) ()
- const stdair::AirportCode\_T &[getBoardingPoint](#) () const
- void [toStream](#) (std::ostream &ioOut) const
- void [fromStream](#) (std::istream &ioIn)
- const std::string [toString](#) () const
- template<class Archive >  
void [serialize](#) (Archive &ar, const unsigned int iFileVersion)

### Friends

- class [boost::serialization::access](#)

#### 25.42.1 Detailed Description

Structure representing the key of the schedule-related BOM tree root.

The [ReachableUniverse](#) is the pending, in the schedule universe, of the stdair::Inventory class. It corresponds to all the destinations which can be reached from a given geographical point. That latter is an airport for now, and the present structure specifies its key (i.e., airport code).

Definition at line 33 of file [ReachableUniverseKey.hpp](#).

#### 25.42.2 Constructor & Destructor Documentation

##### 25.42.2.1 AIRSCHED::ReachableUniverseKey::ReachableUniverseKey ( const stdair::AirportCode\_T & iOrigin )

Constructor.

Definition at line 32 of file [ReachableUniverseKey.cpp](#).

##### 25.42.2.2 AIRSCHED::ReachableUniverseKey::ReachableUniverseKey ( const ReachableUniverseKey & iKey )

Copy constructor.

Definition at line 26 of file [ReachableUniverseKey.cpp](#).

##### 25.42.2.3 AIRSCHED::ReachableUniverseKey::~~ReachableUniverseKey ( )

Destructor.

Definition at line 37 of file [ReachableUniverseKey.cpp](#).

#### 25.42.3 Member Function Documentation

##### 25.42.3.1 const stdair::AirportCode\_T& AIRSCHED::ReachableUniverseKey::getBoardingPoint ( ) const [inline]

Get the origin airport (from which the remaining universe may be reached).

Definition at line 66 of file [ReachableUniverseKey.hpp](#).

Referenced by [AIRSCHED::ReachableUniverse::getOrigin\(\)](#).

**25.42.3.2** void AIRSCHED::ReachableUniverseKey::toStream ( std::ostream & *ioOut* ) const

Dump a Business Object Key into an output stream.

Parameters

<i>ostream&amp;</i>	the output stream.
---------------------	--------------------

Definition at line 41 of file [ReachableUniverseKey.cpp](#).

References [toString\(\)](#).

**25.42.3.3** void AIRSCHED::ReachableUniverseKey::fromStream ( std::istream & *ioIn* )

Read a Business Object Key from an input stream.

Parameters

<i>istream&amp;</i>	the input stream.
---------------------	-------------------

Definition at line 46 of file [ReachableUniverseKey.cpp](#).

**25.42.3.4** const std::string AIRSCHED::ReachableUniverseKey::toString ( ) const

Get the serialised version of the Business Object Key.

That string is unique, at the level of a given Business Object, when among children of a given parent Business Object.

For instance, "H" and "K" allow to differentiate among two marketing classes for the same segment-date.

Definition at line 50 of file [ReachableUniverseKey.cpp](#).

Referenced by [AIRSCHED::ReachableUniverse::describeKey\(\)](#), [toStream\(\)](#), and [AIRSCHED::ReachableUniverse::toString\(\)](#).

**25.42.3.5** template<class Archive > void AIRSCHED::ReachableUniverseKey::serialize ( Archive & *ar*, const unsigned int *iFileVersion* )

Serialisation.

Definition at line 72 of file [ReachableUniverseKey.cpp](#).

## 25.42.4 Friends And Related Function Documentation

**25.42.4.1** friend class boost::serialization::access [friend]

Definition at line 34 of file [ReachableUniverseKey.hpp](#).


The documentation for this struct was generated from the following files:

- [airsched/bom/ReachableUniverseKey.hpp](#)
- [airsched/bom/ReachableUniverseKey.cpp](#)

## 25.43 AIRSCHED::ScheduleInputFileNotFoundException Class Reference

```
#include <airsched/AIRSCHED_Types.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleInputFileNotFoundException:

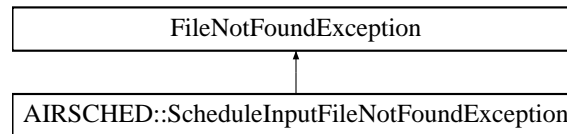

#### Public Member Functions

- [ScheduleInputFileNotFoundException](#) (const std::string &iWhat)

##### 25.43.1 Detailed Description

The schedule input file cannot be retrieved.

Definition at line 47 of file [AIRSCHED\\_Types.hpp](#).

##### 25.43.2 Constructor & Destructor Documentation

**25.43.2.1** `AIRSCHED::ScheduleInputFileNotFoundException::ScheduleInputFileNotFoundException ( const std::string & iWhat ) [inline]`

Constructor.

Definition at line 53 of file [AIRSCHED\\_Types.hpp](#).


The documentation for this class was generated from the following file:

- [airsched/AIRSCHED\\_Types.hpp](#)

## 25.44 AIRSCHED::ScheduleParser Class Reference

```
#include <airsched/command/ScheduleParser.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParser:

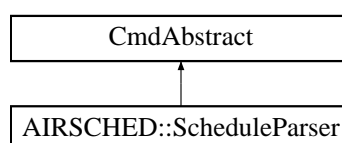

#### Static Public Member Functions

- static void [generateInventories](#) (const stdair::Filename\_T &, stdair::BomRoot &)

##### 25.44.1 Detailed Description

Class wrapping the parser entry point.

Definition at line 21 of file [ScheduleParser.hpp](#).

## 25.44.2 Member Function Documentation

25.44.2.1 `void AIRSCHEDED::ScheduleParser::generateInventories ( const stdair::Filename_T & iFilename, stdair::BomRoot & ioBomRoot ) [static]`

Parse the CSV file describing the airline schedules for the simulator, and generates the inventories accordingly.

## Parameters

<i>const</i>	stdair::Filename_T& The file-name of the CSV-formatted schedule input file.
<i>stdair::Bom-Root&amp;</i>	Root of the BOM tree.

Definition at line 18 of file [ScheduleParser.cpp](#).

References [AIRSCHEDED::SegmentPathGenerator::createSegmentPathNetwork\(\)](#), and [AIRSCHEDED::FlightPeriodFileParser::generateInventories\(\)](#).

Referenced by [AIRSCHEDED::AIRSCHEDED\\_Service::parseAndLoad\(\)](#).

The documentation for this class was generated from the following files:

- [airsched/command/ScheduleParser.hpp](#)
- [airsched/command/ScheduleParser.cpp](#)

25.45 `airsched::SearchString_T` Struct Reference

```
#include <airsched/batches/BookingRequestParser.hpp>
```

## Public Member Functions

- [SearchString\\_T \(\)](#)
- `void display () const`

## Public Attributes

- [PlaceList\\_T \\_placeList](#)
- [DateList\\_T \\_dateList](#)
- [AirlineList\\_T \\_airlineList](#)
- [PassengerList\\_T \\_passengerList](#)
- [Place\\_T \\_tmpPlace](#)
- [Date\\_T \\_tmpDate](#)
- [Airline\\_T \\_tmpAirline](#)
- [Passenger\\_T \\_tmpPassenger](#)

## 25.45.1 Detailed Description

Search string.

Definition at line 94 of file [BookingRequestParser.hpp](#).

## 25.45.2 Constructor &amp; Destructor Documentation

25.45.2.1 `airsched::SearchString_T::SearchString_T ( ) [inline]`

Constructor.

Definition at line 102 of file [BookingRequestParser.hpp](#).

### 25.45.3 Member Function Documentation

#### 25.45.3.1 void airsched::SearchString\_T::display ( ) const [inline]

Definition at line 105 of file [BookingRequestParser.hpp](#).

References [\\_airlineList](#), [\\_dateList](#), [\\_passengerList](#), [\\_placeList](#), [\\_tmpPlace](#), [airsched::Place\\_T::display\(\)](#), [airsched::Date\\_T::display\(\)](#), [airsched::Airline\\_T::display\(\)](#), and [airsched::Passenger\\_T::display\(\)](#).

### 25.45.4 Member Data Documentation

#### 25.45.4.1 PlaceList\_T airsched::SearchString\_T::\_placeList

Definition at line 96 of file [BookingRequestParser.hpp](#).

Referenced by [display\(\)](#).

#### 25.45.4.2 DateList\_T airsched::SearchString\_T::\_dateList

Definition at line 97 of file [BookingRequestParser.hpp](#).

Referenced by [display\(\)](#), and [airsched::store\\_date::operator\(\)\(\)](#).

#### 25.45.4.3 AirlineList\_T airsched::SearchString\_T::\_airlineList

Definition at line 98 of file [BookingRequestParser.hpp](#).

Referenced by [display\(\)](#), [airsched::store\\_airline\\_code::operator\(\)\(\)](#), and [airsched::store\\_airline\\_name::operator\(\)\(\)](#).

#### 25.45.4.4 PassengerList\_T airsched::SearchString\_T::\_passengerList

Definition at line 99 of file [BookingRequestParser.hpp](#).

Referenced by [display\(\)](#), [airsched::store\\_adult\\_passenger\\_type::operator\(\)\(\)](#), [airsched::store\\_child\\_passenger\\_type::operator\(\)\(\)](#), and [airsched::store\\_pet\\_passenger\\_type::operator\(\)\(\)](#).

#### 25.45.4.5 Place\_T airsched::SearchString\_T::\_tmpPlace

Definition at line 137 of file [BookingRequestParser.hpp](#).

Referenced by [display\(\)](#), and [airsched::store\\_place\\_element::operator\(\)\(\)](#).

#### 25.45.4.6 Date\_T airsched::SearchString\_T::\_tmpDate

Definition at line 138 of file [BookingRequestParser.hpp](#).

Referenced by [airsched::store\\_date::operator\(\)\(\)](#).

#### 25.45.4.7 Airline\_T airsched::SearchString\_T::\_tmpAirline

Definition at line 139 of file [BookingRequestParser.hpp](#).

Referenced by [airsched::store\\_airline\\_sign::operator\(\)\(\)](#), [airsched::store\\_airline\\_code::operator\(\)\(\)](#), and [airsched::store\\_airline\\_name::operator\(\)\(\)](#).

#### 25.45.4.8 Passenger\_T airsched::SearchString\_T::\_tmpPassenger

Definition at line 140 of file [BookingRequestParser.hpp](#).

Referenced by [airsched::store\\_passenger\\_number::operator\(\)\(\)](#), [airsched::store\\_adult\\_passenger\\_type::operator\(\)\(\)](#), [airsched::store\\_child\\_passenger\\_type::operator\(\)\(\)](#), and [airsched::store\\_pet\\_passenger\\_type::operator\(\)\(\)](#).


The documentation for this struct was generated from the following file:

- [airsched/batches/BookingRequestParser.hpp](#)



## 25.46 airsched::SearchStringParser Struct Reference

Inheritance diagram for airsched::SearchStringParser:

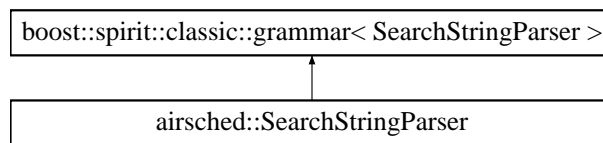

### Classes

- struct [definition](#)

### Public Member Functions

- [SearchStringParser](#) ([SearchString\\_T](#) &ioSearchString)

### Public Attributes

- [SearchString\\_T](#) & [\\_searchString](#)

#### 25.46.1 Detailed Description

Grammar for the search string parser.

Definition at line 251 of file [BookingRequestParser.cpp](#).

#### 25.46.2 Constructor & Destructor Documentation

25.46.2.1 [airsched::SearchStringParser::SearchStringParser \( SearchString\\_T & ioSearchString \)](#) `[inline]`

Definition at line 254 of file [BookingRequestParser.cpp](#).

#### 25.46.3 Member Data Documentation

25.46.3.1 [SearchString\\_T& airsched::SearchStringParser::\\_searchString](#)

Definition at line 369 of file [BookingRequestParser.cpp](#).


The documentation for this struct was generated from the following file:

- [airsched/batches/BookingRequestParser.cpp](#)

## 25.47 AIRSCHED::SegmentCabinStruct Struct Reference

```
#include <airsched/bom/SegmentCabinStruct.hpp>
```

Inheritance diagram for AIRSCHED::SegmentCabinStruct:

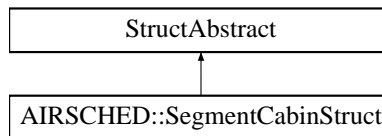

### Public Member Functions

- void [fill](#) (stdair::SegmentCabin &) const
- const std::string [describe](#) () const

### Public Attributes

- stdair::CabinCode\_T [\\_cabinCode](#)
- stdair::ClassList\_String\_T [\\_classes](#)
- stdair::FamilyCode\_T [\\_itFamilyCode](#)
- [FareFamilyStructList\\_T\\_fareFamilies](#)

#### 25.47.1 Detailed Description

Utility Structure for the parsing of SegmentCabin details.

Definition at line 24 of file [SegmentCabinStruct.hpp](#).

#### 25.47.2 Member Function Documentation

##### 25.47.2.1 void AIRSCHED::SegmentCabinStruct::fill ( stdair::SegmentCabin & *ioSegmentCabin* ) const

Fill the SegmentCabin objects with the attributes of the [SegmentCabinStruct](#).

Definition at line 22 of file [SegmentCabinStruct.cpp](#).

##### 25.47.2.2 const std::string AIRSCHED::SegmentCabinStruct::describe ( ) const

Give a description of the structure (for display purposes).

Definition at line 15 of file [SegmentCabinStruct.cpp](#).

References [\\_cabinCode](#), and [\\_classes](#).

Referenced by [AIRSCHED::SegmentStruct::describe\(\)](#).

#### 25.47.3 Member Data Documentation

##### 25.47.3.1 stdair::CabinCode\_T AIRSCHED::SegmentCabinStruct::\_cabinCode

Definition at line 26 of file [SegmentCabinStruct.hpp](#).

Referenced by [AIRSCHED::FlightPeriodStruct::addFareFamily\(\)](#), [describe\(\)](#), [AIRSCHED::SegmentPeriodHelper::fill\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)\(\)](#).

##### 25.47.3.2 stdair::ClassList\_String\_T AIRSCHED::SegmentCabinStruct::\_classes

Definition at line 27 of file [SegmentCabinStruct.hpp](#).

Referenced by [describe\(\)](#), [AIRSCHED::SegmentPeriodHelper::fill\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)\(\)](#).

## 25.47.3.3 stdair::FamilyCode\_T AIRSCHED::SegmentCabinStruct::\_itFamilyCode

Definition at line 28 of file [SegmentCabinStruct.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)\(\)](#).

## 25.47.3.4 FareFamilyStructList\_T AIRSCHED::SegmentCabinStruct::\_fareFamilies

Definition at line 29 of file [SegmentCabinStruct.hpp](#).

Referenced by [AIRSCHED::FlightPeriodStruct::addFareFamily\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/bom/SegmentCabinStruct.hpp](#)
- [airsched/bom/SegmentCabinStruct.cpp](#)

## 25.48 AIRSCHED::SegmentDateNotFoundException Class Reference

```
#include <airsched/AIRSCHED_Types.hpp>
```

Inheritance diagram for AIRSCHED::SegmentDateNotFoundException:



## Public Member Functions

- [SegmentDateNotFoundException](#) (const std::string &iWhat)

## 25.48.1 Detailed Description

Specific exception when some BOM objects can not be found within the schedule.

Definition at line 23 of file [AIRSCHED\\_Types.hpp](#).

## 25.48.2 Constructor &amp; Destructor Documentation

## 25.48.2.1 AIRSCHED::SegmentDateNotFoundException::SegmentDateNotFoundException ( const std::string &amp; iWhat ) [inline]

Constructor.

Definition at line 28 of file [AIRSCHED\\_Types.hpp](#).

The documentation for this class was generated from the following file:


- [airsched/AIRSCHED\\_Types.hpp](#)

## 25.49 AIRSCHED::SegmentPathGenerator Class Reference

Class handling the generation / instantiation of the network BOM.

```
#include <airsched/command/SegmentPathGenerator.hpp>
```

Inheritance diagram for AIRSCHED::SegmentPathGenerator:



#### Static Public Member Functions

- static void [createSegmentPathNetwork](#) (const stdair::BomRoot &)

#### 25.49.1 Detailed Description

Class handling the generation / instantiation of the network BOM.

Definition at line 34 of file [SegmentPathGenerator.hpp](#).

#### 25.49.2 Member Function Documentation

**25.49.2.1** void **AIRSCHED::SegmentPathGenerator::createSegmentPathNetwork** ( const stdair::BomRoot & *iBomRoot* ) [static]

Generate the segment path network.

Definition at line 26 of file [SegmentPathGenerator.cpp](#).

Referenced by [AIRSCHED::AIRSCHED\\_Service::buildSampleBom\(\)](#), and [AIRSCHED::ScheduleParser::generateInventories\(\)](#).

The documentation for this class was generated from the following files:


- [airsched/command/SegmentPathGenerator.hpp](#)
- [airsched/command/SegmentPathGenerator.cpp](#)

## 25.50 AIRSCHED::SegmentPathPeriod Class Reference

Class representing a segment/path.

```
#include <airsched/bom/SegmentPathPeriod.hpp>
```

Inheritance diagram for AIRSCHED::SegmentPathPeriod:



#### Public Types

- typedef [SegmentPathPeriodKey](#) Key\_T

## Public Member Functions

- const [Key\\_T](#) & [getKey](#) () const
- stdair::BomAbstract \*const [getParent](#) () const
- const stdair::PeriodStruct & [getDeparturePeriod](#) () const
- const [DateOffsetList\\_T](#) & [getBoardingDateOffsetList](#) () const
- const stdair::NbOfSegments\_T [getNbOfSegments](#) () const
- const stdair::NbOfAirlines\_T & [getNbOfAirlines](#) () const
- const stdair::Duration\_T & [getElapsedTime](#) () const
- const stdair::Duration\_T & [getBoardingTime](#) () const
- const stdair::HolderMap\_T & [getHolderMap](#) () const
- stdair::SegmentPeriod \* [getLastSegmentPeriod](#) () const
- stdair::SegmentPeriod \* [getFirstSegmentPeriod](#) () const
- const stdair::AirportCode\_T & [getDestination](#) () const
- [Key\\_T](#) [connectWithAnotherSegment](#) (const [SegmentPathPeriod](#) &) const
- bool [checkCircle](#) (const stdair::AirportCode\_T &) const
- bool [isAirlineFlown](#) (const stdair::AirlineCode\_T &) const
- bool [isDepartureDateValid](#) (const stdair::Date\_T &) const
- void [toStream](#) (std::ostream &ioOut) const
- void [fromStream](#) (std::istream &ioIn)
- std::string [toString](#) () const
- const std::string [describeKey](#) () const
- template<class Archive >  
void [serialize](#) (Archive &ar, const unsigned int iFileVersion)

## Protected Member Functions

- [SegmentPathPeriod](#) (const [Key\\_T](#) &)
- [~SegmentPathPeriod](#) ()

## Protected Attributes

- [Key\\_T \\_key](#)
- stdair::BomAbstract \* [\\_parent](#)
- stdair::HolderMap\_T [\\_holderMap](#)

## Friends

- class [stdair::FacBom](#)
- class [stdair::FacBomManager](#)
- class [boost::serialization::access](#)

## 25.50.1 Detailed Description

Class representing a segment/path.

It corresponds to an actual travel solution from the origin to the destination, that is, a path that a traveller can take with actual scheduled flights.

Definition at line 39 of file [SegmentPathPeriod.hpp](#).

## 25.50.2 Member Typedef Documentation

## 25.50.2.1 typedef SegmentPathPeriodKey AIRSCHED::SegmentPathPeriod::Key\_T

Definition allowing to retrieve the associated BOM key type.

Definition at line 52 of file [SegmentPathPeriod.hpp](#).

## 25.50.3 Constructor &amp; Destructor Documentation

## 25.50.3.1 AIRSCHED::SegmentPathPeriod::SegmentPathPeriod ( const Key\_T &amp; iKey ) [protected]

Main constructor.

Definition at line 43 of file [SegmentPathPeriod.cpp](#).

## 25.50.3.2 AIRSCHED::SegmentPathPeriod::~~SegmentPathPeriod ( ) [protected]

Destructor.

Definition at line 48 of file [SegmentPathPeriod.cpp](#).

## 25.50.4 Member Function Documentation

## 25.50.4.1 const Key\_T&amp; AIRSCHED::SegmentPathPeriod::getKey ( ) const [inline]

Get the primary key (destination airport).

Definition at line 60 of file [SegmentPathPeriod.hpp](#).

References [\\_key](#).

## 25.50.4.2 stdair::BomAbstract\* const AIRSCHED::SegmentPathPeriod::getParent ( ) const [inline]

Get the parent (i.e., [OriginDestinationSet](#)) object.

Definition at line 67 of file [SegmentPathPeriod.hpp](#).

References [\\_parent](#).

## 25.50.4.3 const stdair::PeriodStruct&amp; AIRSCHED::SegmentPathPeriod::getDeparturePeriod ( ) const [inline]

Get the departure period (part of the primary key).

Definition at line 72 of file [SegmentPathPeriod.hpp](#).

References [\\_key](#), and [AIRSCHED::SegmentPathPeriodKey::getPeriod\(\)](#).

Referenced by [connectWithAnotherSegment\(\)](#), and [isDepartureDateValid\(\)](#).

## 25.50.4.4 const DateOffsetList\_T&amp; AIRSCHED::SegmentPathPeriod::getBoardingDateOffsetList ( ) const [inline]

Get the boarding date offset list (part of the primary key).

Definition at line 77 of file [SegmentPathPeriod.hpp](#).

References [\\_key](#), and [AIRSCHED::SegmentPathPeriodKey::getBoardingDateOffsetList\(\)](#).

Referenced by [connectWithAnotherSegment\(\)](#).

**25.50.4.5** `const stdair::NbOfSegments_T AIRSCHED::SegmentPathPeriod::getNbOfSegments ( ) const [inline]`

Get the number of segments (part of the primary key).

Definition at line 82 of file [SegmentPathPeriod.hpp](#).

References [\\_key](#), and [AIRSCHED::SegmentPathPeriodKey::getNbOfSegments\(\)](#).

Referenced by [connectWithAnotherSegment\(\)](#).

**25.50.4.6** `const stdair::NbOfAirlines_T& AIRSCHED::SegmentPathPeriod::getNbOfAirlines ( ) const [inline]`

Get the number of airlines (part of the primary key).

Definition at line 87 of file [SegmentPathPeriod.hpp](#).

References [\\_key](#), and [AIRSCHED::SegmentPathPeriodKey::getNbOfAirlines\(\)](#).

**25.50.4.7** `const stdair::Duration_T& AIRSCHED::SegmentPathPeriod::getElapsedTime ( ) const [inline]`

Get the elapsed time (part of the primary key).

Definition at line 92 of file [SegmentPathPeriod.hpp](#).

References [\\_key](#), and [AIRSCHED::SegmentPathPeriodKey::getElapsedTime\(\)](#).

Referenced by [connectWithAnotherSegment\(\)](#).

**25.50.4.8** `const stdair::Duration_T& AIRSCHED::SegmentPathPeriod::getBoardingTime ( ) const [inline]`

Get the boarding time (part of the primary key).

Definition at line 97 of file [SegmentPathPeriod.hpp](#).

References [\\_key](#), and [AIRSCHED::SegmentPathPeriodKey::getBoardingTime\(\)](#).

Referenced by [connectWithAnotherSegment\(\)](#).

**25.50.4.9** `const stdair::HolderMap_T& AIRSCHED::SegmentPathPeriod::getHolderMap ( ) const [inline]`

Get the map of children holders (SegmentPeriod objects).

Definition at line 104 of file [SegmentPathPeriod.hpp](#).

References [\\_holderMap](#).

**25.50.4.10** `stdair::SegmentPeriod * AIRSCHED::SegmentPathPeriod::getLastSegmentPeriod ( ) const`

Get the last SegmentPeriod object of the list.

Return a NULL pointer if the list is empty.

Definition at line 91 of file [SegmentPathPeriod.cpp](#).

Referenced by [connectWithAnotherSegment\(\)](#), and [getDestination\(\)](#).

**25.50.4.11** `stdair::SegmentPeriod * AIRSCHED::SegmentPathPeriod::getFirstSegmentPeriod ( ) const`

Get the first SegmentPeriod object of the list.

Return a NULL pointer if the list is empty.

Definition at line 109 of file [SegmentPathPeriod.cpp](#).

Referenced by [connectWithAnotherSegment\(\)](#).

**25.50.4.12** `const stdair::AirportCode_T & AIRSCHED::SegmentPathPeriod::getDestination ( ) const`

Get the destination of the segment path (i.e., the destination of the last segment).

Definition at line 127 of file [SegmentPathPeriod.cpp](#).

References [getLastSegmentPeriod\(\)](#).

**25.50.4.13 SegmentPathPeriodKey AIRSCHED::SegmentPathPeriod::connectWithAnotherSegment ( const SegmentPathPeriod & iSingleSegmentPath ) const**

Check whether the (i-1)-length segment path period can be merged with the single segment path period in order to create an i-length segment path period. The function will return a valid or non-valid segment path period key.

The two segment path period above can be fused (and will produce a valid new segment path period key) if:

1. A passenger can connect from the last segment of the first segment path and the first segment of the next segment path. These two segments should not create another segment.
2. There is no circle within the new segment path.
3. The intersection of the two periods is non-empty.

Definition at line 163 of file [SegmentPathPeriod.cpp](#).

References [checkCircle\(\)](#), [getBoardingDateOffsetList\(\)](#), [getBoardingTime\(\)](#), [getDeparturePeriod\(\)](#), [getElapsedTime\(\)](#), [getFirstSegmentPeriod\(\)](#), [getLastSegmentPeriod\(\)](#), [getNbOfSegments\(\)](#), [AIRSCHED::SegmentPathPeriodKey::setBoardingDateOffsetList\(\)](#), [AIRSCHED::SegmentPathPeriodKey::setBoardingTime\(\)](#), [AIRSCHED::SegmentPathPeriodKey::setElapsedTime\(\)](#), and [AIRSCHED::SegmentPathPeriodKey::setPeriod\(\)](#).

**25.50.4.14 bool AIRSCHED::SegmentPathPeriod::checkCircle ( const stdair::AirportCode\_T & ) const**

Check whether the given destination airport is also the departure point of one of the other segment members. If yes, a circle exists.

Definition at line 289 of file [SegmentPathPeriod.cpp](#).

Referenced by [connectWithAnotherSegment\(\)](#).

**25.50.4.15 bool AIRSCHED::SegmentPathPeriod::isAirlineFlown ( const stdair::AirlineCode\_T & iAirlineCode ) const**

State whether or not the given airline is flown by (at least) one of the segments of the internal list.

Definition at line 135 of file [SegmentPathPeriod.cpp](#).

**25.50.4.16 bool AIRSCHED::SegmentPathPeriod::isDepartureDateValid ( const stdair::Date\_T & iDepartureDate ) const**

Check whether the given departure date is included in the departure period of the segment path.

Definition at line 308 of file [SegmentPathPeriod.cpp](#).

References [getDeparturePeriod\(\)](#).

**25.50.4.17 void AIRSCHED::SegmentPathPeriod::toStream ( std::ostream & ioOut ) const [inline]**

Dump a Business Object into an output stream.

#### Parameters

<i>ostream&amp;</i>	the output stream.
---------------------	--------------------

Definition at line 176 of file [SegmentPathPeriod.hpp](#).

References [toString\(\)](#).

**25.50.4.18 void AIRSCHED::SegmentPathPeriod::fromStream ( std::istream & iIn ) [inline]**

Read a Business Object from an input stream.



## Parameters

<i>istream</i> &	the input stream.
------------------	-------------------

Definition at line 185 of file [SegmentPathPeriod.hpp](#).

#### 25.50.4.19 std::string AIRSCHED::SegmentPathPeriod::toString ( ) const

Get the serialised version of the Business Object.

Definition at line 52 of file [SegmentPathPeriod.cpp](#).

References [\\_key](#), and [AIRSCHED::SegmentPathPeriodKey::toString\(\)](#).

Referenced by [toStream\(\)](#).

#### 25.50.4.20 const std::string AIRSCHED::SegmentPathPeriod::describeKey ( ) const [inline]

Get a string describing the key.

Definition at line 196 of file [SegmentPathPeriod.hpp](#).

References [\\_key](#), and [AIRSCHED::SegmentPathPeriodKey::toString\(\)](#).

#### 25.50.4.21 template<class Archive > void AIRSCHED::SegmentPathPeriod::serialize ( Archive & ar, const unsigned int iFileVersion )

Serialisation.

Definition at line 74 of file [SegmentPathPeriod.cpp](#).

References [\\_key](#).

### 25.50.5 Friends And Related Function Documentation

#### 25.50.5.1 friend class stdair::FacBom [friend]

Friend classes.

Definition at line 43 of file [SegmentPathPeriod.hpp](#).

#### 25.50.5.2 friend class stdair::FacBomManager [friend]

Definition at line 44 of file [SegmentPathPeriod.hpp](#).

#### 25.50.5.3 friend class boost::serialization::access [friend]

Definition at line 45 of file [SegmentPathPeriod.hpp](#).

### 25.50.6 Member Data Documentation

#### 25.50.6.1 Key\_T AIRSCHED::SegmentPathPeriod::\_key [protected]

Primary key (segment/path characteristics: scheduled period, number of segments, number of airlines, elapsed time, boarding time).

Definition at line 249 of file [SegmentPathPeriod.hpp](#).

Referenced by [describeKey\(\)](#), [getBoardingDateOffsetList\(\)](#), [getBoardingTime\(\)](#), [getDeparturePeriod\(\)](#), [getElapsedTime\(\)](#), [getKey\(\)](#), [getNbOfAirlines\(\)](#), [getNbOfSegments\(\)](#), [serialize\(\)](#), and [toString\(\)](#).

#### 25.50.6.2 stdair::BomAbstract\* AIRSCHED::SegmentPathPeriod::\_parent [protected]

Pointer on the parent ([OriginDestinationSet](#)) object.

Definition at line 254 of file [SegmentPathPeriod.hpp](#).

Referenced by [getParent\(\)](#).

#### 25.50.6.3 stdair::HolderMap\_T AIRSCHED::SegmentPathPeriod::\_holderMap [protected]

Map holding the children (SegmentPeriod objects).

#### Note

The SegmentPeriod objects themselves have for parent the FlightPeriod class (not the [SegmentPathPeriod](#) class).

Definition at line 262 of file [SegmentPathPeriod.hpp](#).

Referenced by [getHolderMap\(\)](#).

The documentation for this class was generated from the following files:


- [airsched/bom/SegmentPathPeriod.hpp](#)
- [airsched/bom/SegmentPathPeriod.cpp](#)

## 25.51 AIRSCHED::SegmentPathPeriodKey Struct Reference

Structure representing the key of a segment/path.

```
#include <airsched/bom/SegmentPathPeriodKey.hpp>
```

Inheritance diagram for AIRSCHED::SegmentPathPeriodKey:



#### Public Member Functions

- [SegmentPathPeriodKey](#) (const stdair::PeriodStruct &, const stdair::Duration\_T &iBoardingTime, const stdair::Duration\_T &iElapsed, const [DateOffsetList\\_T](#) &, const stdair::NbOfAirlines\_T &)
- [SegmentPathPeriodKey](#) ()
- [SegmentPathPeriodKey](#) (const [SegmentPathPeriodKey](#) &)
- [~SegmentPathPeriodKey](#) ()
- const stdair::PeriodStruct & [getPeriod](#) () const
- const [DateOffsetList\\_T](#) & [getBoardingDateOffsetList](#) () const
- const stdair::NbOfSegments\_T [getNbOfSegments](#) () const
- const stdair::NbOfAirlines\_T & [getNbOfAirlines](#) () const
- const stdair::Duration\_T & [getElapsedTime](#) () const
- const stdair::Duration\_T & [getBoardingTime](#) () const
- void [setPeriod](#) (const stdair::PeriodStruct &iPeriod)
- void [setBoardingDateOffsetList](#) (const [DateOffsetList\\_T](#) &iList)
- void [setNbOfAirlines](#) (const stdair::NbOfAirlines\_T &iNbOfAirlines)
- void [setElapsedTime](#) (const stdair::Duration\_T &iElapsed)
- void [setBoardingTime](#) (const stdair::Duration\_T &iBoardingTime)
- const bool [isValid](#) () const
- void [toStream](#) (std::ostream &ioOut) const
- void [fromStream](#) (std::istream &ioIn)
- const std::string [toString](#) () const
- template<class Archive >  
void [serialize](#) (Archive &ar, const unsigned int iFileVersion)

## Friends

- class [boost::serialization::access](#)

## 25.51.1 Detailed Description

Structure representing the key of a segment/path.

That key specifies a travel solution from a geographical point (origin airport) to another (destination airport).

Definition at line 33 of file [SegmentPathPeriodKey.hpp](#).

## 25.51.2 Constructor &amp; Destructor Documentation

**25.51.2.1 AIRSCHED::SegmentPathPeriodKey::SegmentPathPeriodKey ( const stdair::PeriodStruct & *iPeriod*, const stdair::Duration\_T & *iBoardingTime*, const stdair::Duration\_T & *iElapsed*, const DateOffsetList\_T & *iBoardingDateOffsetList*, const stdair::NbOfAirlines\_T & *iNbOfAirlines* )**

Constructor.

Definition at line 40 of file [SegmentPathPeriodKey.cpp](#).

**25.51.2.2 AIRSCHED::SegmentPathPeriodKey::SegmentPathPeriodKey ( )**

Default constructor.

Definition at line 22 of file [SegmentPathPeriodKey.cpp](#).

**25.51.2.3 AIRSCHED::SegmentPathPeriodKey::SegmentPathPeriodKey ( const SegmentPathPeriodKey & *iSPPK* )**

Copy constructor.

Definition at line 30 of file [SegmentPathPeriodKey.cpp](#).

**25.51.2.4 AIRSCHED::SegmentPathPeriodKey::~~SegmentPathPeriodKey ( )**

Destructor.

Definition at line 53 of file [SegmentPathPeriodKey.cpp](#).

## 25.51.3 Member Function Documentation

**25.51.3.1 const stdair::PeriodStruct& AIRSCHED::SegmentPathPeriodKey::getPeriod ( ) const** [inline]

Get the active days-of-week.

Definition at line 68 of file [SegmentPathPeriodKey.hpp](#).

Referenced by [AIRSCHED::SegmentPathPeriod::getDeparturePeriod\(\)](#).

**25.51.3.2 const DateOffsetList\_T& AIRSCHED::SegmentPathPeriodKey::getBoardingDateOffsetList ( ) const** [inline]

Get the list of boarding date off-sets.

Definition at line 75 of file [SegmentPathPeriodKey.hpp](#).

Referenced by [AIRSCHED::SegmentPathPeriod::getBoardingDateOffsetList\(\)](#).

**25.51.3.3** `const stdair::NbOfSegments_T AIRSCHED::SegmentPathPeriodKey::getNbOfSegments ( ) const`  
[inline]

Get the number of segments.

Definition at line 82 of file [SegmentPathPeriodKey.hpp](#).

Referenced by [AIRSCHED::SegmentPathPeriod::getNbOfSegments\(\)](#).

**25.51.3.4** `const stdair::NbOfAirlines_T& AIRSCHED::SegmentPathPeriodKey::getNbOfAirlines ( ) const`  
[inline]

Get the number of airlines.

Definition at line 89 of file [SegmentPathPeriodKey.hpp](#).

Referenced by [AIRSCHED::SegmentPathPeriod::getNbOfAirlines\(\)](#).

**25.51.3.5** `const stdair::Duration_T& AIRSCHED::SegmentPathPeriodKey::getElapsedTime ( ) const` [inline]

Get the elapsed time.

Definition at line 96 of file [SegmentPathPeriodKey.hpp](#).

Referenced by [AIRSCHED::SegmentPathPeriod::getElapsedTime\(\)](#).

**25.51.3.6** `const stdair::Duration_T& AIRSCHED::SegmentPathPeriodKey::getBoardingTime ( ) const`  
[inline]

Get the boarding time.

Definition at line 103 of file [SegmentPathPeriodKey.hpp](#).

Referenced by [AIRSCHED::SegmentPathPeriod::getBoardingTime\(\)](#).

**25.51.3.7** `void AIRSCHED::SegmentPathPeriodKey::setPeriod ( const stdair::PeriodStruct & iPeriod )` [inline]

Set the active days-of-week.

Definition at line 111 of file [SegmentPathPeriodKey.hpp](#).

Referenced by [AIRSCHED::SegmentPathPeriod::connectWithAnotherSegment\(\)](#).

**25.51.3.8** `void AIRSCHED::SegmentPathPeriodKey::setBoardingDateOffsetList ( const DateOffsetList_T & iList )` [inline]

Definition at line 115 of file [SegmentPathPeriodKey.hpp](#).

Referenced by [AIRSCHED::SegmentPathPeriod::connectWithAnotherSegment\(\)](#).

**25.51.3.9** `void AIRSCHED::SegmentPathPeriodKey::setNbOfAirlines ( const stdair::NbOfAirlines_T & iNbOfAirlines )` [inline]

Set the number of airlines.

Definition at line 120 of file [SegmentPathPeriodKey.hpp](#).

**25.51.3.10** `void AIRSCHED::SegmentPathPeriodKey::setElapsedTime ( const stdair::Duration_T & iElapsed )`  
[inline]

Set the elapsed time.

Definition at line 125 of file [SegmentPathPeriodKey.hpp](#).

Referenced by [AIRSCHED::SegmentPathPeriod::connectWithAnotherSegment\(\)](#).

**25.51.3.11** void AIRSCHED::SegmentPathPeriodKey::setBoardingTime ( const stdair::Duration\_T & iBoardingTime )  
[inline]

Set the boarding time.

Definition at line 130 of file [SegmentPathPeriodKey.hpp](#).

Referenced by [AIRSCHED::SegmentPathPeriod::connectWithAnotherSegment\(\)](#).

**25.51.3.12** const bool AIRSCHED::SegmentPathPeriodKey::isValid ( ) const [inline]

Check if the key is valid (i.e. the departure period is valid).

Definition at line 138 of file [SegmentPathPeriodKey.hpp](#).

**25.51.3.13** void AIRSCHED::SegmentPathPeriodKey::toStream ( std::ostream & ioOut ) const

Dump a Business Object Key into an output stream.

#### Parameters

<i>ostream&amp;</i>	the output stream.
---------------------	--------------------

Definition at line 57 of file [SegmentPathPeriodKey.cpp](#).

References [toString\(\)](#).

**25.51.3.14** void AIRSCHED::SegmentPathPeriodKey::fromStream ( std::istream & ioIn )

Read a Business Object Key from an input stream.

#### Parameters

<i>istream&amp;</i>	the input stream.
---------------------	-------------------

Definition at line 62 of file [SegmentPathPeriodKey.cpp](#).

**25.51.3.15** const std::string AIRSCHED::SegmentPathPeriodKey::toString ( ) const

Get the serialised version of the Business Object Key.

That string is unique, at the level of a given Business Object, when among children of a given parent Business Object.

For instance, "H" and "K" allow to differentiate among two marketing classes for the same segment-date.

Definition at line 66 of file [SegmentPathPeriodKey.cpp](#).

Referenced by [AIRSCHED::SegmentPathPeriod::describeKey\(\)](#), [toStream\(\)](#), and [AIRSCHED::SegmentPathPeriod::toString\(\)](#).

**25.51.3.16** template<class Archive > void AIRSCHED::SegmentPathPeriodKey::serialize ( Archive & ar, const unsigned int iFileVersion )

Serialisation.

Definition at line 98 of file [SegmentPathPeriodKey.cpp](#).

## 25.51.4 Friends And Related Function Documentation

**25.51.4.1** friend class boost::serialization::access [friend]

Definition at line 34 of file [SegmentPathPeriodKey.hpp](#).

The documentation for this struct was generated from the following files:


- [airsched/bom/SegmentPathPeriodKey.hpp](#)
- [airsched/bom/SegmentPathPeriodKey.cpp](#)

## 25.52 AIRSCHED::SegmentPathProvider Class Reference

Class building the travel solutions from airline schedules.

```
#include <airsched/command/SegmentPathProvider.hpp>
```

Inheritance diagram for AIRSCHED::SegmentPathProvider:



### Friends

- class [AIRSCHED\\_Service](#)

#### 25.52.1 Detailed Description

Class building the travel solutions from airline schedules.

Definition at line 27 of file [SegmentPathProvider.hpp](#).

#### 25.52.2 Friends And Related Function Documentation

##### 25.52.2.1 friend class AIRSCHED\_Service [friend]

Definition at line 28 of file [SegmentPathProvider.hpp](#).

The documentation for this class was generated from the following files:

- [airsched/command/SegmentPathProvider.hpp](#)
- [airsched/command/SegmentPathProvider.cpp](#)

## 25.53 AIRSCHED::SegmentPeriodHelper Class Reference

```
#include <airsched/bom/SegmentPeriodHelper.hpp>
```

### Static Public Member Functions

- static void [fill](#) (stdair::SegmentPeriod &, const [SegmentStruct](#) &)
- static void [fill](#) (stdair::SegmentPeriod &, const [LegStructList\\_T](#) &)

#### 25.53.1 Detailed Description

Class representing the actual business functions for an airline segment-period.

Definition at line 19 of file [SegmentPeriodHelper.hpp](#).

## 25.53.2 Member Function Documentation

25.53.2.1 `void AIRSCHED::SegmentPeriodHelper::fill ( stdair::SegmentPeriod & ioSegmentPeriod, const SegmentStruct & iSegmentStruct ) [static]`

Fill the attributes of the given segment-period with the cabins and classes.

Definition at line 14 of file [SegmentPeriodHelper.cpp](#).

References [AIRSCHED::SegmentCabinStruct::\\_cabinCode](#), [AIRSCHED::SegmentStruct::\\_cabinList](#), and [AIRSCHED::SegmentCabinStruct::\\_classes](#).

25.53.2.2 `void AIRSCHED::SegmentPeriodHelper::fill ( stdair::SegmentPeriod & ioSegmentPeriod, const LegStructList_T & iLegList ) [static]`

Fill the attributes of the given segment-period with the list of used legs.

Definition at line 29 of file [SegmentPeriodHelper.cpp](#).

References [AIRSCHED::LegStruct::\\_boardingPoint](#), [AIRSCHED::LegStruct::\\_offDateOffset](#), [AIRSCHED::LegStruct::\\_offPoint](#), and [AIRSCHED::LegStruct::\\_offTime](#).


The documentation for this class was generated from the following files:

- [airsched/bom/SegmentPeriodHelper.hpp](#)
- [airsched/bom/SegmentPeriodHelper.cpp](#)

## 25.54 AIRSCHED::SegmentStruct Struct Reference

```
#include <airsched/bom/SegmentStruct.hpp>
```

Inheritance diagram for AIRSCHED::SegmentStruct:

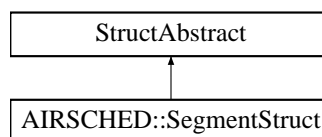

## Public Member Functions

- `void fill (stdair::SegmentDate &) const`
- `const std::string describe () const`

## Public Attributes

- `stdair::AirportCode_T _boardingPoint`
- `stdair::Date_T _boardingDate`
- `stdair::Duration_T _boardingTime`
- `stdair::AirportCode_T _offPoint`
- `stdair::Date_T _offDate`
- `stdair::Duration_T _offTime`
- `stdair::Duration_T _elapsed`
- `SegmentCabinStructList_T _cabinList`

### 25.54.1 Detailed Description

Utility Structure for the parsing of Segment structures.

Definition at line 24 of file [SegmentStruct.hpp](#).

### 25.54.2 Member Function Documentation

#### 25.54.2.1 void AIRSCHED::SegmentStruct::fill ( stdair::SegmentDate & ioSegmentDate ) const

Fill the SegmentDate objects with the attributes of the [SegmentStruct](#).

Definition at line 35 of file [SegmentStruct.cpp](#).

#### 25.54.2.2 const std::string AIRSCHED::SegmentStruct::describe ( ) const

Give a description of the structure (for display purposes).

Definition at line 15 of file [SegmentStruct.cpp](#).

References [\\_boardingPoint](#), [\\_boardingTime](#), [\\_cabinList](#), [\\_elapsed](#), [\\_offPoint](#), [\\_offTime](#), and [AIRSCHED::SegmentCabinStruct::describe\(\)](#).

Referenced by [AIRSCHED::FlightPeriodStruct::describe\(\)](#).

### 25.54.3 Member Data Documentation

#### 25.54.3.1 stdair::AirportCode\_T AIRSCHED::SegmentStruct::\_boardingPoint

Definition at line 26 of file [SegmentStruct.hpp](#).

Referenced by [AIRSCHED::FlightPeriodStruct::addFareFamily\(\)](#), [AIRSCHED::FlightPeriodStruct::addSegmentCabin\(\)](#), [AIRSCHED::FlightPeriodStruct::buildSegments\(\)](#), [describe\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)\(\)](#).

#### 25.54.3.2 stdair::Date\_T AIRSCHED::SegmentStruct::\_boardingDate

Definition at line 27 of file [SegmentStruct.hpp](#).

#### 25.54.3.3 stdair::Duration\_T AIRSCHED::SegmentStruct::\_boardingTime

Definition at line 28 of file [SegmentStruct.hpp](#).

Referenced by [describe\(\)](#).

#### 25.54.3.4 stdair::AirportCode\_T AIRSCHED::SegmentStruct::\_offPoint

Definition at line 29 of file [SegmentStruct.hpp](#).

Referenced by [AIRSCHED::FlightPeriodStruct::addFareFamily\(\)](#), [AIRSCHED::FlightPeriodStruct::addSegmentCabin\(\)](#), [AIRSCHED::FlightPeriodStruct::buildSegments\(\)](#), [describe\(\)](#), and [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)\(\)](#).

#### 25.54.3.5 stdair::Date\_T AIRSCHED::SegmentStruct::\_offDate

Definition at line 30 of file [SegmentStruct.hpp](#).

#### 25.54.3.6 stdair::Duration\_T AIRSCHED::SegmentStruct::\_offTime

Definition at line 31 of file [SegmentStruct.hpp](#).

Referenced by [describe\(\)](#).



## 25.54.3.7 stdair::Duration\_T AIRSCHED::SegmentStruct::\_elapsed

Definition at line 32 of file [SegmentStruct.hpp](#).

Referenced by [describe\(\)](#).

## 25.54.3.8 SegmentCabinStructList\_T AIRSCHED::SegmentStruct::\_cabinList

Definition at line 33 of file [SegmentStruct.hpp](#).

Referenced by [AIRSCHED::FlightPeriodStruct::addFareFamily\(\)](#), [AIRSCHED::FlightPeriodStruct::addSegmentCabin\(\)](#), [describe\(\)](#), and [AIRSCHED::SegmentPeriodHelper::fill\(\)](#).

The documentation for this struct was generated from the following files:

- [airsched/bom/SegmentStruct.hpp](#)
- [airsched/bom/SegmentStruct.cpp](#)

## 25.55 AIRSCHED::ServiceAbstract Class Reference

```
#include <airsched/service/ServiceAbstract.hpp>
```

## Public Member Functions

- virtual [~ServiceAbstract](#) ()
- virtual void [toStream](#) (std::ostream &ioOut) const
- virtual void [fromStream](#) (std::istream &ioIn)

## Protected Member Functions

- [ServiceAbstract](#) ()

## 25.55.1 Detailed Description

Base class for the Service layer.

Definition at line 14 of file [ServiceAbstract.hpp](#).

## 25.55.2 Constructor &amp; Destructor Documentation

## 25.55.2.1 virtual AIRSCHED::ServiceAbstract::~~ServiceAbstract ( ) [inline, virtual]

Destructor.

Definition at line 18 of file [ServiceAbstract.hpp](#).

## 25.55.2.2 AIRSCHED::ServiceAbstract::ServiceAbstract ( ) [inline, protected]

Protected Default Constructor to ensure this class is abstract.

Definition at line 30 of file [ServiceAbstract.hpp](#).

## 25.55.3 Member Function Documentation

## 25.55.3.1 virtual void AIRSCHED::ServiceAbstract::toStream ( std::ostream &amp; ioOut ) const [inline, virtual]

Dump a Business Object into an output stream.

## Parameters

<i>ostream</i> &	the output stream.
------------------	--------------------

Definition at line 22 of file [ServiceAbstract.hpp](#).

25.55.3.2 virtual void AIRSCHED::ServiceAbstract::fromStream ( std::istream & *ioIn* ) [inline, virtual]

Read a Business Object from an input stream.

## Parameters

<i>istream</i> &	the input stream.
------------------	-------------------

Definition at line 26 of file [ServiceAbstract.hpp](#).


Referenced by [operator>>\(\)](#).

The documentation for this class was generated from the following file:

- [airsched/service/ServiceAbstract.hpp](#)

## 25.56 ServiceAbstract Class Reference

Inheritance diagram for ServiceAbstract:




The documentation for this class was generated from the following file:

- [airsched/service/AIRSCHED\\_ServiceContext.hpp](#)

## 25.57 AIRSCHED::Simulator Class Reference

```
#include <airsched/command/Simulator.hpp>
```

Inheritance diagram for AIRSCHED::Simulator:



## Static Public Member Functions

- static void [simulate](#) (stdair::BomRoot &)

## 25.57.1 Detailed Description

Class implementing a small simulation, which uses the Airline Schedule.

Definition at line 18 of file [Simulator.hpp](#).

## 25.57.2 Member Function Documentation

25.57.2.1 void AIRSCHEDED::Simulator::simulate ( stdair::BomRoot & ioBomRoot ) [static]

Perform a small simulation, which uses the Airline Schedule.

## Parameters

<i>stdair::Bom-Root&amp;</i>	Root of the BOM tree.
------------------------------	-----------------------

Definition at line 19 of file [Simulator.cpp](#).

The documentation for this class was generated from the following files:

- [airsched/command/Simulator.hpp](#)
- [airsched/command/Simulator.cpp](#)

## 25.58 airsched::store\_adult\_passenger\_type Struct Reference

## Public Member Functions

- [store\\_adult\\_passenger\\_type](#) (SearchString\_T &ioSearchString)
- void [operator\(\)](#) (iterator\_t iStr, iterator\_t iStrEnd) const

## Public Attributes

- [SearchString\\_T](#) & [\\_searchString](#)

## 25.58.1 Detailed Description

Store the parsed passenger type.

Definition at line 145 of file [BookingRequestParser.cpp](#).

## 25.58.2 Constructor &amp; Destructor Documentation

25.58.2.1 airsched::store\_adult\_passenger\_type::store\_adult\_passenger\_type ( SearchString\_T & ioSearchString ) [inline]

Constructor.

Definition at line 147 of file [BookingRequestParser.cpp](#).

## 25.58.3 Member Function Documentation

25.58.3.1 void airsched::store\_adult\_passenger\_type::operator() ( iterator\_t iStr, iterator\_t iStrEnd ) const [inline]

Parse adult passenger type.

Definition at line 151 of file [BookingRequestParser.cpp](#).

References [airsched::SearchString\\_T::\\_passengerList](#), [\\_searchString](#), [airsched::SearchString\\_T::\\_tmpPassenger](#), [airsched::Passenger\\_T::\\_type](#), and [airsched::Passenger\\_T::ADULT](#).

#### 25.58.4 Member Data Documentation

##### 25.58.4.1 SearchString\_T& airsched::store\_adult\_passenger\_type::\_searchString

Definition at line 160 of file [BookingRequestParser.cpp](#).

Referenced by [operator\(\)\(\)](#).

The documentation for this struct was generated from the following file:

- [airsched/batches/BookingRequestParser.cpp](#)

## 25.59 airsched::store\_airline\_code Struct Reference

### Public Member Functions

- [store\\_airline\\_code](#) ([SearchString\\_T](#) &ioSearchString)
- void [operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

### Public Attributes

- [SearchString\\_T](#) & [\\_searchString](#)

#### 25.59.1 Detailed Description

Store the parsed airline code.

Definition at line 92 of file [BookingRequestParser.cpp](#).

#### 25.59.2 Constructor & Destructor Documentation

##### 25.59.2.1 airsched::store\_airline\_code::store\_airline\_code ( [SearchString\\_T](#) & *ioSearchString* ) [\[inline\]](#)

Constructor.

Definition at line 94 of file [BookingRequestParser.cpp](#).

#### 25.59.3 Member Function Documentation

##### 25.59.3.1 void airsched::store\_airline\_code::operator() ( [iterator\\_t](#) *iStr*, [iterator\\_t](#) *iStrEnd* ) const [\[inline\]](#)

Parse the airline code.

Definition at line 98 of file [BookingRequestParser.cpp](#).

References [airsched::SearchString\\_T::\\_airlineList](#), [airsched::Airline\\_T::\\_code](#), [\\_searchString](#), and [airsched::SearchString\\_T::\\_tmpAirline](#).

#### 25.59.4 Member Data Documentation

##### 25.59.4.1 SearchString\_T& airsched::store\_airline\_code::\_searchString

Definition at line 107 of file [BookingRequestParser.cpp](#).

Referenced by [operator\(\)\(\)](#).

The documentation for this struct was generated from the following file:

- [airsched/batches/BookingRequestParser.cpp](#)

## 25.60 `airsched::store_airline_name` Struct Reference

### Public Member Functions

- `store_airline_name` ([SearchString\\_T](#) &`ioSearchString`)
- void `operator()` (`iterator_t` `iStr`, `iterator_t` `iStrEnd`) const

### Public Attributes

- [SearchString\\_T](#) & `_searchString`

### 25.60.1 Detailed Description

Store the parsed airline name.

Definition at line 111 of file [BookingRequestParser.cpp](#).

### 25.60.2 Constructor & Destructor Documentation

25.60.2.1 `airsched::store_airline_name::store_airline_name ( SearchString\_T & ioSearchString )` [`inline`]

Constructor.

Definition at line 113 of file [BookingRequestParser.cpp](#).

### 25.60.3 Member Function Documentation

25.60.3.1 `void airsched::store_airline_name::operator() ( iterator_t iStr, iterator_t iStrEnd ) const` [`inline`]

Parse the airline name.

Definition at line 117 of file [BookingRequestParser.cpp](#).

References [airsched::SearchString\\_T::\\_airlineList](#), [airsched::Airline\\_T::\\_name](#), `_searchString`, and [airsched::SearchString\\_T::\\_tmpAirline](#).

### 25.60.4 Member Data Documentation

25.60.4.1 `SearchString\_T& airsched::store_airline_name::_searchString`

Definition at line 126 of file [BookingRequestParser.cpp](#).

Referenced by `operator>()`.

The documentation for this struct was generated from the following file:

- [airsched/batches/BookingRequestParser.cpp](#)

## 25.61 `airsched::store_airline_sign` Struct Reference

### Public Member Functions

- `store_airline_sign` ([SearchString\\_T](#) &`ioSearchString`)
- void `operator()` (bool `iAirlineSign`) const

## Public Attributes

- [SearchString\\_T](#) & [\\_searchString](#)

## 25.61.1 Detailed Description

Store the airline sign (+/-).

Definition at line 77 of file [BookingRequestParser.cpp](#).

## 25.61.2 Constructor &amp; Destructor Documentation

25.61.2.1 `airsched::store_airline_sign::store_airline_sign ( SearchString_T & ioSearchString ) [inline]`

Constructor.

Definition at line 79 of file [BookingRequestParser.cpp](#).

## 25.61.3 Member Function Documentation

25.61.3.1 `void airsched::store_airline_sign::operator() ( bool iAirlineSign ) const [inline]`

Parse the airline sign.

Definition at line 83 of file [BookingRequestParser.cpp](#).

References [airsched::Airline\\_T::\\_isPreferred](#), [\\_searchString](#), and [airsched::SearchString\\_T::\\_tmpAirline](#).

## 25.61.4 Member Data Documentation

25.61.4.1 `SearchString_T& airsched::store_airline_sign::_searchString`

Definition at line 88 of file [BookingRequestParser.cpp](#).

Referenced by [operator\(\)\(\)](#).

The documentation for this struct was generated from the following file:

- [airsched/batches/BookingRequestParser.cpp](#)

## 25.62 airsched::store\_child\_passenger\_type Struct Reference

## Public Member Functions

- [store\\_child\\_passenger\\_type](#) ([SearchString\\_T](#) &ioSearchString)
- void [operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

## Public Attributes

- [SearchString\\_T](#) & [\\_searchString](#)

## 25.62.1 Detailed Description

Store the parsed passenger type.

Definition at line 164 of file [BookingRequestParser.cpp](#).

### 25.62.2 Constructor & Destructor Documentation

#### 25.62.2.1 airsched::store\_child\_passenger\_type::store\_child\_passenger\_type ( SearchString\_T & ioSearchString ) [inline]

Constructor.

Definition at line 166 of file [BookingRequestParser.cpp](#).

### 25.62.3 Member Function Documentation

#### 25.62.3.1 void airsched::store\_child\_passenger\_type::operator() ( iterator\_t iStr, iterator\_t iStrEnd ) const [inline]

Parse child passenger type.

Definition at line 170 of file [BookingRequestParser.cpp](#).

References [airsched::SearchString\\_T::\\_passengerList](#), [\\_searchString](#), [airsched::SearchString\\_T::\\_tmpPassenger](#), [airsched::Passenger\\_T::\\_type](#), and [airsched::Passenger\\_T::CHILD](#).

### 25.62.4 Member Data Documentation

#### 25.62.4.1 SearchString\_T& airsched::store\_child\_passenger\_type::\_searchString

Definition at line 179 of file [BookingRequestParser.cpp](#).

Referenced by [operator\(\)\(\)](#).

The documentation for this struct was generated from the following file:

- [airsched/batches/BookingRequestParser.cpp](#)

## 25.63 airsched::store\_date Struct Reference

### Public Member Functions

- [store\\_date](#) ([SearchString\\_T](#) &ioSearchString)
- void [operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

### Public Attributes

- [SearchString\\_T](#) & [\\_searchString](#)

### 25.63.1 Detailed Description

Store a parsed date.

Definition at line 58 of file [BookingRequestParser.cpp](#).

### 25.63.2 Constructor & Destructor Documentation

#### 25.63.2.1 airsched::store\_date::store\_date ( SearchString\_T & ioSearchString ) [inline]

Constructor.

Definition at line 60 of file [BookingRequestParser.cpp](#).

### 25.63.3 Member Function Documentation

25.63.3.1 void airsched::store\_date::operator() ( iterator\_t iStr, iterator\_t iStrEnd ) const [inline]

Parse the date.

Definition at line 64 of file [BookingRequestParser.cpp](#).

References [airsched::Date\\_T::\\_date](#), [airsched::SearchString\\_T::\\_dateList](#), [\\_searchString](#), [airsched::SearchString\\_T::\\_tmpDate](#), and [airsched::Date\\_T::getDate\(\)](#).

### 25.63.4 Member Data Documentation

25.63.4.1 SearchString\_T& airsched::store\_date::\_searchString

Definition at line 73 of file [BookingRequestParser.cpp](#).

Referenced by [operator\(\)](#).

The documentation for this struct was generated from the following file:

- [airsched/batches/BookingRequestParser.cpp](#)

## 25.64 airsched::store\_passenger\_number Struct Reference

### Public Member Functions

- [store\\_passenger\\_number](#) ([SearchString\\_T](#) &ioSearchString)
- void [operator\(\)](#) (unsigned int iNumber) const

### Public Attributes

- [SearchString\\_T](#) & [\\_searchString](#)

### 25.64.1 Detailed Description

Store the parsed number of passengers.

Definition at line 130 of file [BookingRequestParser.cpp](#).

### 25.64.2 Constructor & Destructor Documentation

25.64.2.1 airsched::store\_passenger\_number::store\_passenger\_number ( [SearchString\\_T](#) & ioSearchString ) [inline]

Constructor.

Definition at line 132 of file [BookingRequestParser.cpp](#).

### 25.64.3 Member Function Documentation

25.64.3.1 void airsched::store\_passenger\_number::operator() ( unsigned int iNumber ) const [inline]

Parse number of passengers.

Definition at line 136 of file [BookingRequestParser.cpp](#).

References [airsched::Passenger\\_T::\\_number](#), [\\_searchString](#), and [airsched::SearchString\\_T::\\_tmpPassenger](#).



#### 25.64.4 Member Data Documentation

##### 25.64.4.1 `SearchString_T& airsched::store_passenger_number::_searchString`

Definition at line 141 of file [BookingRequestParser.cpp](#).

Referenced by [operator\(\)\(\)](#).

The documentation for this struct was generated from the following file:

- [airsched/batches/BookingRequestParser.cpp](#)

## 25.65 `airsched::store_pet_passenger_type` Struct Reference

### Public Member Functions

- [store\\_pet\\_passenger\\_type](#) ([SearchString\\_T](#) &[ioSearchString](#))
- void [operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

### Public Attributes

- [SearchString\\_T](#) & [\\_searchString](#)

#### 25.65.1 Detailed Description

Store the parsed passenger type.

Definition at line 183 of file [BookingRequestParser.cpp](#).

#### 25.65.2 Constructor & Destructor Documentation

##### 25.65.2.1 `airsched::store_pet_passenger_type::store_pet_passenger_type ( SearchString\_T & ioSearchString ) [inline]`

Constructor.

Definition at line 185 of file [BookingRequestParser.cpp](#).

#### 25.65.3 Member Function Documentation

##### 25.65.3.1 `void airsched::store_pet_passenger_type::operator() ( iterator\_t iStr, iterator\_t iStrEnd ) const [inline]`

Parse pet passenger type.

Definition at line 189 of file [BookingRequestParser.cpp](#).

References [airsched::SearchString\\_T::\\_passengerList](#), [\\_searchString](#), [airsched::SearchString\\_T::\\_tmpPassenger](#), [airsched::Passenger\\_T::\\_type](#), and [airsched::Passenger\\_T::PET](#).

#### 25.65.4 Member Data Documentation

##### 25.65.4.1 `SearchString_T& airsched::store_pet_passenger_type::_searchString`

Definition at line 198 of file [BookingRequestParser.cpp](#).

Referenced by [operator\(\)\(\)](#).

The documentation for this struct was generated from the following file:

- [airsched/batches/BookingRequestParser.cpp](#)

## 25.66 airsched::store\_place\_element Struct Reference

### Public Member Functions

- [store\\_place\\_element](#) ([SearchString\\_T](#) &ioSearchString)
- void [operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

### Public Attributes

- [SearchString\\_T](#) & [\\_searchString](#)

#### 25.66.1 Detailed Description

Store the parsed place element.

Definition at line 37 of file [BookingRequestParser.cpp](#).

#### 25.66.2 Constructor & Destructor Documentation

**25.66.2.1** `airsched::store_place_element::store_place_element ( SearchString\_T & ioSearchString )`  
`[inline]`

Constructor.

Definition at line 39 of file [BookingRequestParser.cpp](#).

#### 25.66.3 Member Function Documentation

**25.66.3.1** `void airsched::store_place_element::operator() ( iterator\_t iStr, iterator\_t iStrEnd ) const` `[inline]`

Parse the place.

Definition at line 43 of file [BookingRequestParser.cpp](#).

References [airsched::Place\\_T::\\_name](#), [\\_searchString](#), and [airsched::SearchString\\_T::\\_tmpPlace](#).

#### 25.66.4 Member Data Documentation

**25.66.4.1** `SearchString\_T& airsched::store_place_element::_searchString`

Definition at line 54 of file [BookingRequestParser.cpp](#).

Referenced by [operator>\(\)](#).


The documentation for this struct was generated from the following file:

- [airsched/batches/BookingRequestParser.cpp](#)

## 25.67 AIRSCHED::ScheduleParserHelper::storeAirlineCode Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::storeAirlineCode:



## Public Member Functions

- [storeAirlineCode](#) ([FlightPeriodStruct](#) &)
- void [operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

## Public Attributes

- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

### 25.67.1 Detailed Description

Store the parsed airline code.

Definition at line 37 of file [ScheduleParserHelper.hpp](#).

### 25.67.2 Constructor & Destructor Documentation

#### 25.67.2.1 AIRSCHED::ScheduleParserHelper::storeAirlineCode::storeAirlineCode ( [FlightPeriodStruct](#) & [ioFlightPeriod](#) )

Actor Constructor.

Definition at line 32 of file [ScheduleParserHelper.cpp](#).

### 25.67.3 Member Function Documentation

#### 25.67.3.1 void AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator() ( [iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd ) const

Actor Function (functor).

Definition at line 37 of file [ScheduleParserHelper.cpp](#).

References [AIRSCHED::FlightPeriodStruct::\\_airlineCode](#), [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#), and [AIRSCHED::FlightPeriodStruct::\\_legList](#).

### 25.67.4 Member Data Documentation

#### 25.67.4.1 [FlightPeriodStruct](#)& AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\_flightPeriod [inherited]

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDow::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), [AIRS-](#)

[CHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.68 AIRSCHED::OnDParserHelper::storeAirlineCode Struct Reference

```
#include <airsched/command/OnDParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::OnDParserHelper::storeAirlineCode:



### Public Member Functions

- [storeAirlineCode](#) ([OnDPeriodStruct](#) &)
- [void operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

### Public Attributes

- [OnDPeriodStruct](#) & [\\_onDPeriod](#)

#### 25.68.1 Detailed Description

Store the parsed airline code.

Definition at line 90 of file [OnDParserHelper.hpp](#).

#### 25.68.2 Constructor & Destructor Documentation

##### 25.68.2.1 AIRSCHED::OnDParserHelper::storeAirlineCode::storeAirlineCode ( [OnDPeriodStruct](#) & *ioOnDPeriod* )

Actor Constructor.

Definition at line 139 of file [OnDParserHelper.cpp](#).

#### 25.68.3 Member Function Documentation

##### 25.68.3.1 void AIRSCHED::OnDParserHelper::storeAirlineCode::operator() ( [iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd ) const

Actor Function (functor).

Definition at line 144 of file [OnDParserHelper.cpp](#).

References [AIRSCHED::OnDPeriodStruct::\\_airlineCode](#), [AIRSCHED::OnDPeriodStruct::\\_airlineCodeList](#), [AIRSCHED::OnDPeriodStruct::\\_nbOfAirlines](#), and [AIRSCHED::OnDParserHelper::ParserSemanticAction::\\_onDPeriod](#).

#### 25.68.4 Member Data Documentation

##### 25.68.4.1 OnDPeriodStruct& AIRSCHED::OnDParserHelper::ParserSemanticAction::\_onDPeriod [inherited]

Actor Context.

Definition at line 38 of file [OnDParserHelper.hpp](#).

Referenced by [AIRSCHED::OnDParserHelper::storeOrigin::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDestination::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeStartRangeTime::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeEndRangeTime::operator\(\)](#), [operator\(\)](#), [AIRSCHED::OnDParserHelper::storeClassCode::operator\(\)](#), and [AIRSCHED::OnDParserHelper::doEndOnD::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/OnDParserHelper.hpp](#)
- [airsched/command/OnDParserHelper.cpp](#)

## 25.69 AIRSCHED::ScheduleParserHelper::storeBoardingTime Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::storeBoardingTime:



#### Public Member Functions

- [storeBoardingTime](#) ([FlightPeriodStruct](#) &)
- void [operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

#### Public Attributes

- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

#### 25.69.1 Detailed Description

Store the boarding time.

Definition at line 93 of file [ScheduleParserHelper.hpp](#).

#### 25.69.2 Constructor & Destructor Documentation

##### 25.69.2.1 AIRSCHED::ScheduleParserHelper::storeBoardingTime::storeBoardingTime ( [FlightPeriodStruct](#) & *ioFlightPeriod* )

Actor Constructor.

Definition at line 155 of file [ScheduleParserHelper.cpp](#).

### 25.69.3 Member Function Documentation

25.69.3.1 void AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator() ( iterator\_t iStr, iterator\_t iStrEnd ) const

Actor Function (functor).

Definition at line 160 of file [ScheduleParserHelper.cpp](#).

References [AIRSCHED::LegStruct::\\_boardingTime](#), [AIRSCHED::FlightPeriodStruct::\\_dateOffset](#), [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#), [AIRSCHED::FlightPeriodStruct::\\_itLeg](#), [AIRSCHED::FlightPeriodStruct::\\_itSeconds](#), and [AIRSCHED::FlightPeriodStruct::getTime\(\)](#).

### 25.69.4 Member Data Documentation

25.69.4.1 FlightPeriodStruct& AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\_flightPeriod  
[inherited]

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDow::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#), [operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.70 AIRSCHED::ScheduleParserHelper::storeCapacity Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::storeCapacity:



### Public Member Functions

- [storeCapacity](#) ([FlightPeriodStruct](#) &)
- void [operator\(\)](#) (double iReal) const

## Public Attributes

- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

## 25.70.1 Detailed Description

Store the parsed capacity.

Definition at line 125 of file [ScheduleParserHelper.hpp](#).

## 25.70.2 Constructor &amp; Destructor Documentation

25.70.2.1 AIRSCHED::ScheduleParserHelper::storeCapacity::storeCapacity ( [FlightPeriodStruct](#) & [ioFlightPeriod](#) )

Actor Constructor.

Definition at line 227 of file [ScheduleParserHelper.cpp](#).

## 25.70.3 Member Function Documentation

25.70.3.1 void AIRSCHED::ScheduleParserHelper::storeCapacity::operator() ( [double iReal](#) ) const

Actor Function (functor).

Definition at line 232 of file [ScheduleParserHelper.cpp](#).

References [AIRSCHED::LegStruct::\\_cabinList](#), [AIRSCHED::LegCabinStruct::\\_capacity](#), [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#), [AIRSCHED::FlightPeriodStruct::\\_itLeg](#), and [AIRSCHED::FlightPeriodStruct::\\_itLegCabin](#).

## 25.70.4 Member Data Documentation

25.70.4.1 [FlightPeriodStruct](#)& AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\_flightPeriod  
[inherited]

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDow::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)](#), [operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.71 AIRSCHED::OnDParserHelper::storeClassCode Struct Reference

```
#include <airsched/command/OnDParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::OnDParserHelper::storeClassCode:



## Public Member Functions

- [storeClassCode](#) ([OnDPeriodStruct](#) &)
- void [operator\(\)](#) (char iChar) const

## Public Attributes

- [OnDPeriodStruct](#) & [\\_onDPeriod](#)

## 25.71.1 Detailed Description

Store the parsed class code.

Definition at line 98 of file [OnDParserHelper.hpp](#).

## 25.71.2 Constructor &amp; Destructor Documentation

25.71.2.1 AIRSCHED::OnDParserHelper::storeClassCode::storeClassCode ( [OnDPeriodStruct](#) & *ioOnDPeriod* )

Actor Constructor.

Definition at line 172 of file [OnDParserHelper.cpp](#).

## 25.71.3 Member Function Documentation

25.71.3.1 void AIRSCHED::OnDParserHelper::storeClassCode::operator() ( char *iChar* ) const

Actor Function (functor).

Definition at line 177 of file [OnDParserHelper.cpp](#).

References [AIRSCHED::OnDPeriodStruct::\\_classCode](#), [AIRSCHED::OnDPeriodStruct::\\_classCodeList](#), and [AIRSCHED::OnDParserHelper::ParserSemanticAction::\\_onDPeriod](#).

## 25.71.4 Member Data Documentation

25.71.4.1 [OnDPeriodStruct](#)& AIRSCHED::OnDParserHelper::ParserSemanticAction::\_onDPeriod  
[inherited]

Actor Context.

Definition at line 38 of file [OnDParserHelper.hpp](#).



Referenced by [AIRSCHED::OnDParserHelper::storeOrigin::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDestination::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeStartRangeTime::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeEndRangeTime::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeAirlineCode::operator\(\)](#), [operator\(\)](#), and [AIRSCHED::OnDParserHelper::doEndOnD::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/OnDParserHelper.hpp](#)
- [airsched/command/OnDParserHelper.cpp](#)

## 25.72 AIRSCHED::ScheduleParserHelper::storeClasses Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::storeClasses:



### Public Member Functions

- [storeClasses](#) ([FlightPeriodStruct](#) &)
- [void operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

### Public Attributes

- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

### 25.72.1 Detailed Description

Store the parsed list of class codes.

Definition at line 168 of file [ScheduleParserHelper.hpp](#).

### 25.72.2 Constructor & Destructor Documentation

#### 25.72.2.1 AIRSCHED::ScheduleParserHelper::storeClasses::storeClasses ( [FlightPeriodStruct](#) & [ioFlightPeriod](#) )

Actor Constructor.

Definition at line 309 of file [ScheduleParserHelper.cpp](#).

### 25.72.3 Member Function Documentation

#### 25.72.3.1 void AIRSCHED::ScheduleParserHelper::storeClasses::operator() ( [iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd ) const

Actor Function (functor).

Definition at line 314 of file [ScheduleParserHelper.cpp](#).

References [AIRSCHED::FlightPeriodStruct::\\_areSegmentDefinitionsSpecific](#), [AIRSCHED::SegmentCabinStruct::\\_classes](#), [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#), [AIRSCHED::FlightPeriodStruct::\\_itSegment](#), [AIRSCHED::FlightPeriodStruct::\\_itSegmentCabin](#), and [AIRSCHED::FlightPeriodStruct::addSegmentCabin\(\)](#).

#### 25.72.4 Member Data Documentation

##### 25.72.4.1 FlightPeriodStruct& AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\_flightPeriod [inherited]

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDow::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)](#), [operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

#### 25.73 AIRSCHED::ScheduleParserHelper::storeDateRangeEnd Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::storeDateRangeEnd:



#### Public Member Functions

- [storeDateRangeEnd](#) ([FlightPeriodStruct](#) &)
- void [operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

#### Public Attributes

- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

## 25.73.1 Detailed Description

Store the end of the date range.

Definition at line 61 of file [ScheduleParserHelper.hpp](#).

## 25.73.2 Constructor &amp; Destructor Documentation

25.73.2.1 AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::storeDateRangeEnd (   
 FlightPeriodStruct & ioFlightPeriod )

Actor Constructor.

Definition at line 75 of file [ScheduleParserHelper.cpp](#).

## 25.73.3 Member Function Documentation

## 25.73.3.1 void AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator() ( iterator\_t iStr, iterator\_t iStrEnd ) const

Actor Function (functor).

Definition at line 80 of file [ScheduleParserHelper.cpp](#).

References [AIRSCHED::FlightPeriodStruct::\\_dateRange](#), [AIRSCHED::FlightPeriodStruct::\\_dateRangeEnd](#), [AIRSCHED::FlightPeriodStruct::\\_dateRangeStart](#), [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#), [AIRSCHED::FlightPeriodStruct::\\_itSeconds](#), and [AIRSCHED::FlightPeriodStruct::getDate\(\)](#).

## 25.73.4 Member Data Documentation

25.73.4.1 FlightPeriodStruct& AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\_flightPeriod  
[inherited]

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), [operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDow::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.74 AIRSCHED::OnDParserHelper::storeDateRangeEnd Struct Reference

```
#include <airsched/command/OnDParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::OnDParserHelper::storeDateRangeEnd:



#### Public Member Functions

- [storeDateRangeEnd](#) ([OnDPeriodStruct](#) &)
- [void operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

#### Public Attributes

- [OnDPeriodStruct](#) & [\\_onDPeriod](#)

#### 25.74.1 Detailed Description

Store the end of the date range.

Definition at line 66 of file [OnDParserHelper.hpp](#).

#### 25.74.2 Constructor & Destructor Documentation

##### 25.74.2.1 AIRSCHED::OnDParserHelper::storeDateRangeEnd::storeDateRangeEnd ( [OnDPeriodStruct](#) & *ioOnDPeriod* )

Actor Constructor.

Definition at line 83 of file [OnDParserHelper.cpp](#).

#### 25.74.3 Member Function Documentation

##### 25.74.3.1 void AIRSCHED::OnDParserHelper::storeDateRangeEnd::operator() ( [iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd ) const

Actor Function (functor).

Definition at line 88 of file [OnDParserHelper.cpp](#).

References [AIRSCHED::OnDPeriodStruct::\\_datePeriod](#), [AIRSCHED::OnDPeriodStruct::\\_dateRangeEnd](#), [AIRSCHED::OnDPeriodStruct::\\_dateRangeStart](#), [AIRSCHED::OnDPeriodStruct::\\_itSeconds](#), [AIRSCHED::OnDParserHelper::ParserSemanticAction::\\_onDPeriod](#), and [AIRSCHED::OnDPeriodStruct::getDate\(\)](#).

#### 25.74.4 Member Data Documentation

##### 25.74.4.1 [OnDPeriodStruct](#)& AIRSCHED::OnDParserHelper::ParserSemanticAction::\_onDPeriod [inherited]

Actor Context.

Definition at line 38 of file [OnDParserHelper.hpp](#).

Referenced by [AIRSCHED::OnDParserHelper::storeOrigin::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDestination::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDateRangeStart::operator\(\)](#), [operator\(\)](#), [AIRSCHED::OnDParserHelper::storeStartRangeTime::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeEndRangeTime-](#)

[::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeClassCode::operator\(\)](#), and [AIRSCHED::OnDParserHelper::doEndOnD::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/OnDParserHelper.hpp](#)
- [airsched/command/OnDParserHelper.cpp](#)

## 25.75 AIRSCHED::OnDParserHelper::storeDateRangeStart Struct Reference

```
#include <airsched/command/OnDParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::OnDParserHelper::storeDateRangeStart:



### Public Member Functions

- [storeDateRangeStart](#) ([OnDPeriodStruct](#) &)
- [void operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

### Public Attributes

- [OnDPeriodStruct](#) & [\\_onDPeriod](#)

#### 25.75.1 Detailed Description

Store the start of the date range.

Definition at line 58 of file [OnDParserHelper.hpp](#).

#### 25.75.2 Constructor & Destructor Documentation

##### 25.75.2.1 AIRSCHED::OnDParserHelper::storeDateRangeStart::storeDateRangeStart ( [OnDPeriodStruct](#) & *ioOnDPeriod* )

Actor Constructor.

Definition at line 66 of file [OnDParserHelper.cpp](#).

#### 25.75.3 Member Function Documentation

##### 25.75.3.1 void AIRSCHED::OnDParserHelper::storeDateRangeStart::operator() ( [iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd ) const

Actor Function (functor).

Definition at line 71 of file [OnDParserHelper.cpp](#).

References [AIRSCHED::OnDPeriodStruct::\\_dateRangeStart](#), [AIRSCHED::OnDPeriodStruct::\\_itSeconds](#), [AIRSCHED::OnDParserHelper::ParserSemanticAction::\\_onDPeriod](#), and [AIRSCHED::OnDPeriodStruct::getDate\(\)](#).

## 25.75.4 Member Data Documentation

## 25.75.4.1 OnDPeriodStruct&amp; AIRSCHED::OnDParserHelper::ParserSemanticAction::\_onDPeriod [inherited]

Actor Context.

Definition at line 38 of file [OnDParserHelper.hpp](#).

Referenced by [AIRSCHED::OnDParserHelper::storeOrigin::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDestination::operator\(\)](#), [operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeStartRangeTime::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeEndRangeTime::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeClassCode::operator\(\)](#), and [AIRSCHED::OnDParserHelper::doEndOnD::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/OnDParserHelper.hpp](#)
- [airsched/command/OnDParserHelper.cpp](#)

## 25.76 AIRSCHED::ScheduleParserHelper::storeDateRangeStart Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::storeDateRangeStart:



## Public Member Functions

- [storeDateRangeStart](#) ([FlightPeriodStruct](#) &)
- [void operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

## Public Attributes

- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

## 25.76.1 Detailed Description

Store the start of the date range.

Definition at line 53 of file [ScheduleParserHelper.hpp](#).

## 25.76.2 Constructor &amp; Destructor Documentation

25.76.2.1 AIRSCHED::ScheduleParserHelper::storeDateRangeStart::storeDateRangeStart ([FlightPeriodStruct](#) & *ioFlightPeriod* )

Actor Constructor.

Definition at line 60 of file [ScheduleParserHelper.cpp](#).

## 25.76.3 Member Function Documentation

25.76.3.1 void AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator() ( iterator\_t iStr, iterator\_t iStrEnd ) const

Actor Function (functor).

Definition at line 65 of file [ScheduleParserHelper.cpp](#).

References [AIRSCHED::FlightPeriodStruct::\\_dateRangeStart](#), [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#), [AIRSCHED::FlightPeriodStruct::\\_itSeconds](#), and [AIRSCHED::FlightPeriodStruct::getDate\(\)](#).

## 25.76.4 Member Data Documentation

25.76.4.1 FlightPeriodStruct& AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\_flightPeriod  
[inherited]

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)](#), [operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDow::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.77 AIRSCHED::OnDParserHelper::storeDestination Struct Reference

```
#include <airsched/command/OnDParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::OnDParserHelper::storeDestination:



## Public Member Functions

- [storeDestination](#) (OnDPeriodStruct &)
- void [operator\(\)](#) (iterator\_t iStr, iterator\_t iStrEnd) const

## Public Attributes

- [OnDPeriodStruct](#) & [\\_onDPeriod](#)

## 25.77.1 Detailed Description

Store the parsed destination.

Definition at line 50 of file [OnDParserHelper.hpp](#).

## 25.77.2 Constructor &amp; Destructor Documentation

## 25.77.2.1 AIRSCHED::OnDParserHelper::storeDestination::storeDestination ( OnDPeriodStruct &amp; ioOnDPeriod )

Actor Constructor.

Definition at line 50 of file [OnDParserHelper.cpp](#).

## 25.77.3 Member Function Documentation

## 25.77.3.1 void AIRSCHED::OnDParserHelper::storeDestination::operator() ( iterator\_t iStr, iterator\_t iStrEnd ) const

Actor Function (functor).

Definition at line 55 of file [OnDParserHelper.cpp](#).

References [AIRSCHED::OnDPeriodStruct::\\_destination](#), and [AIRSCHED::OnDParserHelper::ParserSemanticAction::\\_onDPeriod](#).

## 25.77.4 Member Data Documentation

## 25.77.4.1 OnDPeriodStruct&amp; AIRSCHED::OnDParserHelper::ParserSemanticAction::\_onDPeriod [inherited]

Actor Context.

Definition at line 38 of file [OnDParserHelper.hpp](#).

Referenced by [AIRSCHED::OnDParserHelper::storeOrigin::operator\(\)\(\)](#), [operator\(\)\(\)](#), [AIRSCHED::OnDParserHelper::storeDateRangeStart::operator\(\)\(\)](#), [AIRSCHED::OnDParserHelper::storeDateRangeEnd::operator\(\)\(\)](#), [AIRSCHED::OnDParserHelper::storeStartRangeTime::operator\(\)\(\)](#), [AIRSCHED::OnDParserHelper::storeEndRangeTime::operator\(\)\(\)](#), [AIRSCHED::OnDParserHelper::storeAirlineCode::operator\(\)\(\)](#), [AIRSCHED::OnDParserHelper::storeClassCode::operator\(\)\(\)](#), and [AIRSCHED::OnDParserHelper::doEndOnD::operator\(\)\(\)](#).

The documentation for this struct was generated from the following files:


- [airsched/command/OnDParserHelper.hpp](#)
- [airsched/command/OnDParserHelper.cpp](#)

## 25.78 AIRSCHED::ScheduleParserHelper::storeDow Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::storeDow:



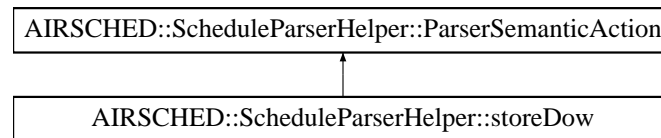

## Public Member Functions

- [storeDow](#) ([FlightPeriodStruct](#) &)
- [void operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

## Public Attributes

- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

### 25.78.1 Detailed Description

Store the DOW (day of the Week).

Definition at line 69 of file [ScheduleParserHelper.hpp](#).

### 25.78.2 Constructor & Destructor Documentation

#### 25.78.2.1 AIRSCHED::ScheduleParserHelper::storeDow::storeDow ( [FlightPeriodStruct](#) & *ioFlightPeriod* )

Actor Constructor.

Definition at line 98 of file [ScheduleParserHelper.cpp](#).

### 25.78.3 Member Function Documentation

#### 25.78.3.1 void AIRSCHED::ScheduleParserHelper::storeDow::operator() ( [iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd ) const

Actor Function (functor).

Definition at line 103 of file [ScheduleParserHelper.cpp](#).

References [AIRSCHED::FlightPeriodStruct::\\_dow](#), and [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#).

### 25.78.4 Member Data Documentation

#### 25.78.4.1 [FlightPeriodStruct](#)& AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\_flightPeriod [inherited]

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#), [operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#), [AIRSCHED::Schedule-](#)

[ParserHelper::storeSegmentBoardingPoint::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.79 AIRSCHED::ScheduleParserHelper::storeElapsedTime Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::storeElapsedTime:



### Public Member Functions

- [storeElapsedTime](#) ([FlightPeriodStruct](#) &)
- void [operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

### Public Attributes

- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

#### 25.79.1 Detailed Description

Store the elapsed time.

Definition at line 109 of file [ScheduleParserHelper.hpp](#).

#### 25.79.2 Constructor & Destructor Documentation

##### 25.79.2.1 AIRSCHED::ScheduleParserHelper::storeElapsedTime::storeElapsedTime ( [FlightPeriodStruct](#) & *ioFlightPeriod* )

Actor Constructor.

Definition at line 194 of file [ScheduleParserHelper.cpp](#).

#### 25.79.3 Member Function Documentation

##### 25.79.3.1 void AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator() ( [iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd ) const

Actor Function (functor).

Definition at line 199 of file [ScheduleParserHelper.cpp](#).

References [AIRSCHED::FlightPeriodStruct::\\_dateOffset](#), [AIRSCHED::LegStruct::\\_elapsed](#), [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#), [AIRSCHED::FlightPeriodStruct::\\_itLeg](#), [AIRSCHED::FlightPeriodStruct::\\_itSeconds](#), [AIRSCHED::LegStruct::\\_offDateOffset](#), and [AIRSCHED::FlightPeriodStruct::getTime\(\)](#).

## 25.79.4 Member Data Documentation

### 25.79.4.1 FlightPeriodStruct& AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\_flightPeriod [inherited]

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDow::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), [operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFCClasses::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.80 AIRSCHED::OnDParserHelper::storeEndRangeTime Struct Reference

```
#include <airsched/command/OnDParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::OnDParserHelper::storeEndRangeTime:



### Public Member Functions

- [storeEndRangeTime](#) ([OnDPeriodStruct](#) &)
- [void operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

### Public Attributes

- [OnDPeriodStruct](#) & [\\_onDPeriod](#)

### 25.80.1 Detailed Description

Store the end range time.

Definition at line 82 of file [OnDParserHelper.hpp](#).

## 25.80.2 Constructor & Destructor Documentation

### 25.80.2.1 AIRSCHED::OnDParserHelper::storeEndRangeTime::storeEndRangeTime ( OnDPeriodStruct & ioOnDPeriod )

Actor Constructor.

Definition at line 124 of file [OnDParserHelper.cpp](#).

## 25.80.3 Member Function Documentation

### 25.80.3.1 void AIRSCHED::OnDParserHelper::storeEndRangeTime::operator() ( iterator\_t iStr, iterator\_t iStrEnd ) const

Actor Function (functor).

Definition at line 129 of file [OnDParserHelper.cpp](#).

References [AIRSCHED::OnDPeriodStruct::\\_itSeconds](#), [AIRSCHED::OnDParserHelper::ParserSemanticAction::\\_onDPeriod](#), [AIRSCHED::OnDPeriodStruct::\\_timeRangeEnd](#), and [AIRSCHED::OnDPeriodStruct::getTime\(\)](#).

## 25.80.4 Member Data Documentation

### 25.80.4.1 OnDPeriodStruct& AIRSCHED::OnDParserHelper::ParserSemanticAction::\_onDPeriod [inherited]

Actor Context.

Definition at line 38 of file [OnDParserHelper.hpp](#).

Referenced by [AIRSCHED::OnDParserHelper::storeOrigin::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDestination::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeStartRangeTime::operator\(\)](#), [operator\(\)](#), [AIRSCHED::OnDParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeClassCode::operator\(\)](#), and [AIRSCHED::OnDParserHelper::doEndOnD::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/OnDParserHelper.hpp](#)
- [airsched/command/OnDParserHelper.cpp](#)

## 25.81 AIRSCHED::ScheduleParserHelper::storeFamilyCode Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::storeFamilyCode:



## Public Member Functions

- [storeFamilyCode](#) ([FlightPeriodStruct](#) &)
- void [operator\(\)](#) (int iCode) const

## Public Attributes

- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

## 25.81.1 Detailed Description

Store the parsed family code.

Definition at line 176 of file [ScheduleParserHelper.hpp](#).

## 25.81.2 Constructor &amp; Destructor Documentation

25.81.2.1 AIRSCHED::ScheduleParserHelper::storeFamilyCode::storeFamilyCode ( [FlightPeriodStruct](#) & [ioFlightPeriod](#) )

Actor Constructor.

Definition at line 334 of file [ScheduleParserHelper.cpp](#).

## 25.81.3 Member Function Documentation

25.81.3.1 void AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator() ( int *iCode* ) const

Actor Function (functor).

Definition at line 339 of file [ScheduleParserHelper.cpp](#).

References [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#), [AIRSCHED::SegmentCabinStruct::\\_itFamilyCode](#), and [AIRSCHED::FlightPeriodStruct::\\_itSegmentCabin](#).

## 25.81.4 Member Data Documentation

25.81.4.1 [FlightPeriodStruct](#)& AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\_flightPeriod  
[inherited]

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDow::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), [operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.82 AIRSCHED::ScheduleParserHelper::storeFClasses Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::storeFClasses:



### Public Member Functions

- [storeFClasses](#) ([FlightPeriodStruct](#) &)
- void [operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

### Public Attributes

- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

#### 25.82.1 Detailed Description

Store the parsed list of class codes (for families).

Definition at line 184 of file [ScheduleParserHelper.hpp](#).

#### 25.82.2 Constructor & Destructor Documentation

##### 25.82.2.1 AIRSCHED::ScheduleParserHelper::storeFClasses::storeFClasses ( [FlightPeriodStruct](#) & [ioFlightPeriod](#) )

Actor Constructor.

Definition at line 347 of file [ScheduleParserHelper.cpp](#).

#### 25.82.3 Member Function Documentation

##### 25.82.3.1 void AIRSCHED::ScheduleParserHelper::storeFClasses::operator() ( [iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd ) const

Actor Function (functor).

Definition at line 352 of file [ScheduleParserHelper.cpp](#).

References [AIRSCHED::FlightPeriodStruct::\\_areSegmentDefinitionsSpecific](#), [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#), [AIRSCHED::SegmentCabinStruct::\\_itFamilyCode](#), [AIRSCHED::FlightPeriodStruct::\\_itSegment](#), [AIRSCHED::FlightPeriodStruct::\\_itSegmentCabin](#), and [AIRSCHED::FlightPeriodStruct::addFareFamily\(\)](#).

#### 25.82.4 Member Data Documentation

##### 25.82.4.1 [FlightPeriodStruct](#)& AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\_flightPeriod [inherited]

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDow::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)](#), [operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.83 AIRSCHED::ScheduleParserHelper::storeFlightNumber Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::storeFlightNumber:



### Public Member Functions

- [storeFlightNumber](#) ([FlightPeriodStruct](#) &)
- void [operator\(\)](#) (unsigned int iNumber) const

### Public Attributes

- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

#### 25.83.1 Detailed Description

Store the parsed flight number.

Definition at line 45 of file [ScheduleParserHelper.hpp](#).

#### 25.83.2 Constructor & Destructor Documentation

##### 25.83.2.1 AIRSCHED::ScheduleParserHelper::storeFlightNumber::storeFlightNumber ( [FlightPeriodStruct](#) & [ioFlightPeriod](#) )

Actor Constructor.

Definition at line 49 of file [ScheduleParserHelper.cpp](#).

## 25.83.3 Member Function Documentation

25.83.3.1 void AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator()( unsigned int *iNumber* ) const

Actor Function (functor).

Definition at line 54 of file [ScheduleParserHelper.cpp](#).

References [AIRSCHED::FlightPeriodStruct::\\_flightNumber](#), and [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#).

## 25.83.4 Member Data Documentation

25.83.4.1 FlightPeriodStruct& AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\_flightPeriod  
[inherited]

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)\(\)](#), [operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDow::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.84 AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint:



## Public Member Functions

- [storeLegBoardingPoint](#) ([FlightPeriodStruct](#) &)
- void [operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const



## Public Attributes

- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

## 25.84.1 Detailed Description

Store the parsed leg boarding point.

Definition at line 77 of file [ScheduleParserHelper.hpp](#).

## 25.84.2 Constructor &amp; Destructor Documentation

25.84.2.1 AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::storeLegBoardingPoint ( [FlightPeriodStruct](#) & *ioFlightPeriod* )

Actor Constructor.

Definition at line 110 of file [ScheduleParserHelper.cpp](#).

## 25.84.3 Member Function Documentation

25.84.3.1 void AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator() ( *iterator\_t iStr*, *iterator\_t iStrEnd* ) const

Actor Function (functor).

Definition at line 115 of file [ScheduleParserHelper.cpp](#).

References [AIRSCHED::LegStruct::\\_boardingPoint](#), [AIRSCHED::LegStruct::\\_cabinList](#), [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#), [AIRSCHED::FlightPeriodStruct::\\_itLeg](#), [AIRSCHED::FlightPeriodStruct::\\_legAlreadyDefined](#), [AIRSCHED::FlightPeriodStruct::\\_legList](#), and [AIRSCHED::FlightPeriodStruct::addAirport\(\)](#).

## 25.84.4 Member Data Documentation

25.84.4.1 [FlightPeriodStruct](#)& AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\_flightPeriod [inherited]

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDow::operator\(\)](#), [operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.85 AIRSCHED::ScheduleParserHelper::storeLegCabinCode Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::storeLegCabinCode:



## Public Member Functions

- [storeLegCabinCode](#) ([FlightPeriodStruct](#) &)
- void [operator\(\)](#) (char iChar) const

## Public Attributes

- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

## 25.85.1 Detailed Description

Store the parsed leg cabin code.

Definition at line 117 of file [ScheduleParserHelper.hpp](#).

## 25.85.2 Constructor &amp; Destructor Documentation

25.85.2.1 AIRSCHED::ScheduleParserHelper::storeLegCabinCode::storeLegCabinCode ( [FlightPeriodStruct](#) & *ioFlightPeriod* )

Actor Constructor.

Definition at line 215 of file [ScheduleParserHelper.cpp](#).

## 25.85.3 Member Function Documentation

25.85.3.1 void AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator() ( char *iChar* ) const

Actor Function (functor).

Definition at line 220 of file [ScheduleParserHelper.cpp](#).

References [AIRSCHED::LegCabinStruct::\\_cabinCode](#), [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#), and [AIRSCHED::FlightPeriodStruct::\\_itLegCabin](#).

## 25.85.4 Member Data Documentation

25.85.4.1 [FlightPeriodStruct](#)& AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\_flightPeriod  
[inherited]

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDow::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#), [operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.86 AIRSCHED::ScheduleParserHelper::storeLegOffPoint Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::storeLegOffPoint:



### Public Member Functions

- [storeLegOffPoint](#) ([FlightPeriodStruct](#) &)
- [void operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

### Public Attributes

- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

#### 25.86.1 Detailed Description

Store the parsed leg off point.

Definition at line 85 of file [ScheduleParserHelper.hpp](#).

#### 25.86.2 Constructor & Destructor Documentation

##### 25.86.2.1 AIRSCHED::ScheduleParserHelper::storeLegOffPoint::storeLegOffPoint ( [FlightPeriodStruct](#) & [ioFlightPeriod](#) )

Actor Constructor.

Definition at line 139 of file [ScheduleParserHelper.cpp](#).

## 25.86.3 Member Function Documentation

25.86.3.1 void AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator()( iterator\_t iStr, iterator\_t iStrEnd ) const

Actor Function (functor).

Definition at line 144 of file [ScheduleParserHelper.cpp](#).

References [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#), [AIRSCHED::FlightPeriodStruct::\\_itLeg](#), [AIRSCHED::LegStruct::\\_offPoint](#), and [AIRSCHED::FlightPeriodStruct::addAirport\(\)](#).

## 25.86.4 Member Data Documentation

25.86.4.1 **FlightPeriodStruct& AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\_flightPeriod**  
[inherited]

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDow::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.87 AIRSCHED::ScheduleParserHelper::storeOffTime Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::storeOffTime:



## Public Member Functions

- [storeOffTime](#) ([FlightPeriodStruct](#) &)
- void [operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

## Public Attributes

- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

## 25.87.1 Detailed Description

Store the off time.

Definition at line 101 of file [ScheduleParserHelper.hpp](#).

## 25.87.2 Constructor &amp; Destructor Documentation

25.87.2.1 AIRSCHED::ScheduleParserHelper::storeOffTime::storeOffTime ( [FlightPeriodStruct](#) & [ioFlightPeriod](#) )

Actor Constructor.

Definition at line 173 of file [ScheduleParserHelper.cpp](#).

## 25.87.3 Member Function Documentation

25.87.3.1 void AIRSCHED::ScheduleParserHelper::storeOffTime::operator() ( [iterator\\_t iStr](#), [iterator\\_t iStrEnd](#) ) const

Actor Function (functor).

Definition at line 178 of file [ScheduleParserHelper.cpp](#).

References [AIRSCHED::LegStruct::\\_boardingDateOffset](#), [AIRSCHED::FlightPeriodStruct::\\_dateOffset](#), [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#), [AIRSCHED::FlightPeriodStruct::\\_itLeg](#), [AIRSCHED::FlightPeriodStruct::\\_itSeconds](#), [AIRSCHED::LegStruct::\\_offTime](#), and [AIRSCHED::FlightPeriodStruct::getTime\(\)](#).

## 25.87.4 Member Data Documentation

25.87.4.1 [FlightPeriodStruct](#)& [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#) [inherited]

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDow::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.88 AIRSCHED::OnDParserHelper::storeOrigin Struct Reference

```
#include <airsched/command/OnDParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::OnDParserHelper::storeOrigin:



### Public Member Functions

- [storeOrigin](#) ([OnDPeriodStruct](#) &)
- void [operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

### Public Attributes

- [OnDPeriodStruct](#) & [\\_onDPeriod](#)

#### 25.88.1 Detailed Description

Store the parsed origin.

Definition at line 42 of file [OnDParserHelper.hpp](#).

#### 25.88.2 Constructor & Destructor Documentation

##### 25.88.2.1 AIRSCHED::OnDParserHelper::storeOrigin::storeOrigin ( [OnDPeriodStruct](#) & *ioOnDPeriod* )

Actor Constructor.

Definition at line 30 of file [OnDParserHelper.cpp](#).

#### 25.88.3 Member Function Documentation

##### 25.88.3.1 void AIRSCHED::OnDParserHelper::storeOrigin::operator() ( [iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd ) const

Actor Function (functor).

Definition at line 35 of file [OnDParserHelper.cpp](#).

References [AIRSCHED::OnDPeriodStruct::\\_airlineCode](#), [AIRSCHED::OnDPeriodStruct::\\_airlineCodeList](#), [AIRSCHED::OnDPeriodStruct::\\_classCode](#), [AIRSCHED::OnDPeriodStruct::\\_classCodeList](#), [AIRSCHED::OnDPeriodStruct::\\_nbOfAirlines](#), [AIRSCHED::OnDParserHelper::ParserSemanticAction::\\_onDPeriod](#), and [AIRSCHED::OnDPeriodStruct::\\_origin](#).

#### 25.88.4 Member Data Documentation

##### 25.88.4.1 [OnDPeriodStruct](#)& [AIRSCHED::OnDParserHelper::ParserSemanticAction::\\_onDPeriod](#) [*inherited*]

Actor Context.

Definition at line 38 of file [OnDParserHelper.hpp](#).

Referenced by [operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDestination::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeStartRangeTime::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeEndRangeTime::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeClassCode::operator\(\)](#), and [AIRSCHED::OnDParserHelper::doEndOnD::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/OnDParserHelper.hpp](#)
- [airsched/command/OnDParserHelper.cpp](#)

## 25.89 AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint:



### Public Member Functions

- [storeSegmentBoardingPoint](#) ([FlightPeriodStruct](#) &)
- void [operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

### Public Attributes

- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

#### 25.89.1 Detailed Description

Store the parsed segment boarding point.

Definition at line 144 of file [ScheduleParserHelper.hpp](#).

#### 25.89.2 Constructor & Destructor Documentation

##### 25.89.2.1 AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::storeSegmentBoardingPoint ( [FlightPeriodStruct](#) & *ioFlightPeriod* )

Actor Constructor.

Definition at line 272 of file [ScheduleParserHelper.cpp](#).

#### 25.89.3 Member Function Documentation

##### 25.89.3.1 void AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator() ( [iterator\\_t](#) *iStr*, [iterator\\_t](#) *iStrEnd* ) const

Actor Function (functor).

Definition at line 277 of file [ScheduleParserHelper.cpp](#).

References [AIRSCHED::SegmentStruct::\\_boardingPoint](#), [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#), and [AIRSCHED::FlightPeriodStruct::\\_itSegment](#).

## 25.89.4 Member Data Documentation

### 25.89.4.1 FlightPeriodStruct& AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\_flightPeriod [inherited]

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDown::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#), [operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.90 AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode:



### Public Member Functions

- [storeSegmentCabinCode](#) ([FlightPeriodStruct](#) &)
- [void operator\(\)](#) (char iChar) const

### Public Attributes

- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

### 25.90.1 Detailed Description

Store the parsed segment cabin code.

Definition at line 160 of file [ScheduleParserHelper.hpp](#).



## 25.90.2 Constructor &amp; Destructor Documentation

## 25.90.2.1 AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::storeSegmentCabinCode ( FlightPeriodStruct &amp; ioFlightPeriod )

Actor Constructor.

Definition at line 298 of file [ScheduleParserHelper.cpp](#).

## 25.90.3 Member Function Documentation

## 25.90.3.1 void AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator() ( char iChar ) const

Actor Function (functor).

Definition at line 303 of file [ScheduleParserHelper.cpp](#).

References [AIRSCHED::SegmentCabinStruct::\\_cabinCode](#), [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#), and [AIRSCHED::FlightPeriodStruct::\\_itSegmentCabin](#).

## 25.90.4 Member Data Documentation

## 25.90.4.1 FlightPeriodStruct&amp; AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\_flightPeriod [inherited]

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDow::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)](#), [operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.91 AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint:



## Public Member Functions

- [storeSegmentOffPoint](#) ([FlightPeriodStruct](#) &)
- void [operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

## Public Attributes

- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

## 25.91.1 Detailed Description

Store the parsed segment off point.

Definition at line 152 of file [ScheduleParserHelper.hpp](#).

## 25.91.2 Constructor &amp; Destructor Documentation

25.91.2.1 AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::storeSegmentOffPoint ( [FlightPeriodStruct](#) & *ioFlightPeriod* )

Actor Constructor.

Definition at line 285 of file [ScheduleParserHelper.cpp](#).

## 25.91.3 Member Function Documentation

25.91.3.1 void AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator() ( [iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd ) const

Actor Function (functor).

Definition at line 290 of file [ScheduleParserHelper.cpp](#).

References [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#), [AIRSCHED::FlightPeriodStruct::\\_itSegment](#), and [AIRSCHED::SegmentStruct::\\_offPoint](#).

## 25.91.4 Member Data Documentation

25.91.4.1 [FlightPeriodStruct](#)& AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\_flightPeriod [inherited]

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDow::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)](#), [operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.92 AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity Struct Reference

```
#include <airsched/command/ScheduleParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity:



### Public Member Functions

- [storeSegmentSpecificity](#) ([FlightPeriodStruct](#) &)
- void [operator\(\)](#) (char iChar) const

### Public Attributes

- [FlightPeriodStruct](#) & [\\_flightPeriod](#)

#### 25.92.1 Detailed Description

Store whether or not the segment definitions are specific. Specific means that there is a definition for each segment. General (not specific) means that a single definition defines all the segments.

Definition at line 136 of file [ScheduleParserHelper.hpp](#).

#### 25.92.2 Constructor & Destructor Documentation

##### 25.92.2.1 AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::storeSegmentSpecificity ( [FlightPeriodStruct](#) & *ioFlightPeriod* )

Actor Constructor.

Definition at line 246 of file [ScheduleParserHelper.cpp](#).

#### 25.92.3 Member Function Documentation

##### 25.92.3.1 void AIRSCHED::ScheduleParserHelper::storeSegmentSpecificity::operator() ( char *iChar* ) const

Actor Function (functor).

Definition at line 251 of file [ScheduleParserHelper.cpp](#).

References [AIRSCHED::FlightPeriodStruct::airportList](#), [AIRSCHED::FlightPeriodStruct::airportOrderedList](#), [AIRSCHED::FlightPeriodStruct::\\_areSegmentDefinitionsSpecific](#), [AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\\_flightPeriod](#), and [AIRSCHED::FlightPeriodStruct::buildSegments\(\)](#).

## 25.92.4 Member Data Documentation

## 25.92.4.1 FlightPeriodStruct&amp; AIRSCHED::ScheduleParserHelper::ParserSemanticAction::\_flightPeriod [inherited]

Actor Context.

Definition at line 33 of file [ScheduleParserHelper.hpp](#).

Referenced by [AIRSCHED::ScheduleParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFlightNumber::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDateRangeEnd::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeDow::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeBoardingTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeOffTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeElapsedTime::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeLegCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeCapacity::operator\(\)](#), [operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentBoardingPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeClasses::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFamilyCode::operator\(\)](#), [AIRSCHED::ScheduleParserHelper::storeFClasses::operator\(\)](#), and [AIRSCHED::ScheduleParserHelper::doEndFlight::operator\(\)](#).


The documentation for this struct was generated from the following files:

- [airsched/command/ScheduleParserHelper.hpp](#)
- [airsched/command/ScheduleParserHelper.cpp](#)

## 25.93 AIRSCHED::OnDParserHelper::storeStartRangeTime Struct Reference

```
#include <airsched/command/OnDParserHelper.hpp>
```

Inheritance diagram for AIRSCHED::OnDParserHelper::storeStartRangeTime:



## Public Member Functions

- [storeStartRangeTime](#) ([OnDPeriodStruct](#) &)
- void [operator\(\)](#) ([iterator\\_t](#) iStr, [iterator\\_t](#) iStrEnd) const

## Public Attributes

- [OnDPeriodStruct](#) & [\\_onDPeriod](#)

## 25.93.1 Detailed Description

Store the start range time.

Definition at line 74 of file [OnDParserHelper.hpp](#).

## 25.93.2 Constructor &amp; Destructor Documentation

## 25.93.2.1 AIRSCHED::OnDParserHelper::storeStartRangeTime::storeStartRangeTime ( OnDPeriodStruct &amp; ioOnDPeriod )

Actor Constructor.

Definition at line 109 of file [OnDParserHelper.cpp](#).

## 25.93.3 Member Function Documentation

## 25.93.3.1 void AIRSCHED::OnDParserHelper::storeStartRangeTime::operator() ( iterator\_t iStr, iterator\_t iStrEnd ) const

Actor Function (functor).

Definition at line 114 of file [OnDParserHelper.cpp](#).

References [AIRSCHED::OnDPeriodStruct::\\_itSeconds](#), [AIRSCHED::OnDParserHelper::ParserSemanticAction::\\_onDPeriod](#), [AIRSCHED::OnDPeriodStruct::\\_timeRangeStart](#), and [AIRSCHED::OnDPeriodStruct::getTime\(\)](#).

## 25.93.4 Member Data Documentation

25.93.4.1 OnDPeriodStruct& AIRSCHED::OnDParserHelper::ParserSemanticAction::\_onDPeriod  
[inherited]

Actor Context.

Definition at line 38 of file [OnDParserHelper.hpp](#).

Referenced by [AIRSCHED::OnDParserHelper::storeOrigin::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDestination::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDateRangeStart::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeDateRangeEnd::operator\(\)](#), [operator\(\)](#), [AIRSCHED::OnDParserHelper::storeEndRangeTime::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeAirlineCode::operator\(\)](#), [AIRSCHED::OnDParserHelper::storeClassCode::operator\(\)](#), and [AIRSCHED::OnDParserHelper::doEndOnD::operator\(\)](#).

The documentation for this struct was generated from the following files:

- [airsched/command/OnDParserHelper.hpp](#)
- [airsched/command/OnDParserHelper.cpp](#)

## 25.94 StructAbstract Class Reference

Inheritance diagram for StructAbstract:




The documentation for this class was generated from the following file:

- [airsched/bom/SegmentStruct.hpp](#)

## 25.95 TestFixture Class Reference

Inheritance diagram for TestFixture:



The documentation for this class was generated from the following file:


- [test/airsched/AirlineScheduleTestSuite.hpp](#)

## 25.96 AIRSCHED::TravelSolutionParser Class Reference

Class filling the TravelSolutionHolder structure (representing a list of classes/travelSolutions) from a given input file.

```
#include <airsched/command/TravelSolutionParser.hpp>
```

Inheritance diagram for AIRSCHED::TravelSolutionParser:



### Static Public Member Functions

- static bool [parseInputFileAndBuildBom](#) (const stdair::Filename\_T &)

#### 25.96.1 Detailed Description

Class filling the TravelSolutionHolder structure (representing a list of classes/travelSolutions) from a given input file.

Definition at line 19 of file [TravelSolutionParser.hpp](#).

#### 25.96.2 Member Function Documentation

**25.96.2.1** bool [AIRSCHED::TravelSolutionParser::parseInputFileAndBuildBom](#) ( const stdair::Filename\_T & )  
[static]

Parse the input values from a CSV-formatted travel solution file.

#### Parameters

<i>const</i>	std::string& iInputFileName Travel solution file to be parsed.
--------------	--

#### Returns

bool Whether or not the parsing was successful.

Definition at line 21 of file [TravelSolutionParser.cpp](#).

The documentation for this class was generated from the following files:

- [airsched/command/TravelSolutionParser.hpp](#)
- [airsched/command/TravelSolutionParser.cpp](#)

## 26 File Documentation

### 26.1 airsched/AIRSCHEd\_Service.hpp File Reference

```
#include <stdair/stdair_basic_types.hpp>
#include <stdair/stdair_service_types.hpp>
#include <stdair/bom/TravelSolutionTypes.hpp>
#include <airsched/AIRSCHEd_Types.hpp>
```

#### Classes

- class [AIRSCHEd::AIRSCHEd\\_Service](#)  
*Interface for the AirSched Services.*

#### Namespaces

- namespace [stdair](#)  
*Forward declarations.*
- namespace [AIRSCHEd](#)

### 26.2 AIRSCHEd\_Service.hpp

```
00001 #ifndef __AIRSCHEd_SVC_AIRSCHEd_SERVICE_HPP
00002 #define __AIRSCHEd_SVC_AIRSCHEd_SERVICE_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // StdAir
00008 #include <stdair/stdair_basic_types.hpp>
00009 #include <stdair/stdair_service_types.hpp>
00010 #include <stdair/bom/TravelSolutionTypes.hpp>
00011 // AirSched
00012 #include <airsched/AIRSCHEd_Types.hpp>
00013
00015 namespace stdair {
00016     class STDAIR_Service;
00017     struct BasLogParams;
00018     struct BasDBParams;
00019     struct BookingRequestStruct;
00020     struct TravelSolutionStruct;
00021 }
00022
00023 namespace AIRSCHEd {
00024
00026     class AIRSCHEd_ServiceContext;
00027
00028
00032     class AIRSCHEd_Service {
00033     public:
00034         // ////////////////////////////////// Constructors and Destructors //////////////////////////////////
00050         AIRSCHEd_Service (const stdair::BasLogParams&, const stdair::BasDBParams&);
00051
00063         AIRSCHEd_Service (const stdair::BasLogParams&);
00064
00080         AIRSCHEd_Service (stdair::STDAIR_ServicePtr_T ioSTDAIR_ServicePtr);
00081
00090         void parseAndLoad (const stdair::Filename_T& iScheduleInputFilename);
00091
00101         void parseAndLoad (const stdair::Filename_T& iScheduleFilename,
00102                             const stdair::Filename_T& iODInputFilename);
00103
00107         ~AIRSCHEd_Service ();
00108
00109
00110     public:
00111         // ////////////////////////////////// Business Methods //////////////////////////////////
00119         void buildSampleBom();
00120
```

```

00125     void buildSegmentPathList (stdair::TravelSolutionList_T&,
00126                             const stdair::BookingRequestStruct&);
00127
00133     void simulate();
00134
00135
00136 public:
00137     // //////////// Export support methods ////////////
00149     std::string jsonExport (const stdair::AirlineCode_T&,
00150                             const stdair::FlightNumber_T&,
00151                             const stdair::Date_T& iDepartureDate) const;
00152
00153
00154 public:
00155     // //////////// Display support methods ////////////
00163     std::string csvDisplay() const;
00164
00178     std::string csvDisplay (const stdair::AirlineCode_T&,
00179                             const stdair::FlightNumber_T&,
00180                             const stdair::Date_T& iDepartureDate) const;
00181
00182
00183 private:
00184     // ////////// Construction and Destruction helper methods //////////
00188     AIRSCHEd_Service();
00189
00193     AIRSCHEd_Service (const AIRSCHEd_Service&);
00194
00204     stdair::STDAIR_ServicePtr_T initStdAirService (const stdair::BasLogParams&,
00205                                                     const stdair::BasDBParams&);
00206
00215     stdair::STDAIR_ServicePtr_T initStdAirService (const stdair::BasLogParams&)
00216 ;
00225     void addStdAirService (stdair::STDAIR_ServicePtr_T,
00226                             const bool iOwnStdairService);
00227
00232     void initServiceContext();
00233
00240     void initAirschedService();
00241
00245     void finalise();
00246
00247
00248 private:
00249     // ////////// Service Context //////////
00253     AIRSCHEd_ServiceContext* _airschedServiceContext;
00254 };
00255 }
00256 #endif // __AIRSCHEd_SVC_AIRSCHEd_SERVICE_HPP

```

## 26.3 airsched/AIRSCHEd\_Types.hpp File Reference

```

#include <boost/shared_ptr.hpp>
#include <stdair/stdair_exceptions.hpp>

```

### Classes

- class [AIRSCHEd::SegmentDateNotFoundException](#)
- class [AIRSCHEd::OnDInputFileNotFoundException](#)
- class [AIRSCHEd::ScheduleInputFileNotFoundException](#)

### Namespaces

- namespace [AIRSCHEd](#)

### Typedefs

- typedef boost::shared\_ptr  
< AIRSCHEd\_Service > [AIRSCHEd::AIRSCHEd\\_ServicePtr\\_T](#)



## 26.4 AIRSCHED\_Types.hpp

```

00001 #ifndef __AIRSCHED_AIRSCHED_TYPES_HPP
00002 #define __AIRSCHED_AIRSCHED_TYPES_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // Boost
00008 #include <boost/shared_ptr.hpp>
00009 // StdAir
00010 #include <stdair/stdair_exceptions.hpp>
00011
00012 namespace AIRSCHED {
00013
00014     // Forward declarations
00015     class AIRSCHED_Service;
00016
00017
00018     // ////////// Exceptions //////////
00023     class SegmentDateNotFoundException : public stdair::ParserException {
00024     public:
00028         SegmentDateNotFoundException (const std::string& iWhat)
00029             : stdair::ParserException (iWhat) {}
00030     };
00031
00035     class OnDInputFileNotFoundException : public stdair::FileNotFoundException {
00036     public:
00040         OnDInputFileNotFoundException (const std::string& iWhat)
00041             : stdair::FileNotFoundException (iWhat) {}
00042     };
00043
00047     class ScheduleInputFileNotFoundException
00048         : public stdair::FileNotFoundException {
00049     public:
00053         ScheduleInputFileNotFoundException (const std::string& iWhat)
00054             : stdair::FileNotFoundException (iWhat) {}
00055     };
00056
00057
00058     // ////////// Type definitions specific to AirSched //////////
00062     typedef boost::shared_ptr<AIRSCHED_Service> AIRSCHED_ServicePtr_T;
00063
00064 }
00065 #endif // __AIRSCHED_AIRSCHED_TYPES_HPP

```

## 26.5 airsched/basic/BasConst.cpp File Reference

```

#include <airsched/basic/BasConst_General.hpp>
#include <airsched/basic/BasConst_AIRSCHED_Service.hpp>

```

### Namespaces

- namespace [AIRSCHED](#)

### Variables

- const int [AIRSCHED::DEFAULT\\_NUMBER\\_OF\\_DRAWS\\_FOR\\_MC\\_SIMULATION](#) = 100000

## 26.6 BasConst.cpp

```

00001 #include <airsched/basic/BasConst_General.hpp>
00002 #include <airsched/basic/BasConst_AIRSCHED_Service.hpp>
00003
00004 namespace AIRSCHED {
00005
00008     const int DEFAULT_NUMBER_OF_DRAWS_FOR_MC_SIMULATION = 100000;
00009
00010 }

```

## 26.7 airsched/basic/BasConst\_AIRSCHEDED\_Service.hpp File Reference

### Namespaces

- namespace [AIRSCHEDED](#)

## 26.8 BasConst\_AIRSCHEDED\_Service.hpp

```

00001 #ifndef __AIRSCHEDED_BAS_BASCONST_AIRSCHEDED_SERVICE_HPP
00002 #define __AIRSCHEDED_BAS_BASCONST_AIRSCHEDED_SERVICE_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007
00008 namespace AIRSCHEDED {
00009
00010 }
00011 #endif // __AIRSCHEDED_BAS_BASCONST_AIRSCHEDED_SERVICE_HPP

```

## 26.9 airsched/basic/BasConst\_General.hpp File Reference

### Namespaces

- namespace [AIRSCHEDED](#)

## 26.10 BasConst\_General.hpp

```

00001 #ifndef __AIRSCHEDED_BAS_BASCONST_GENERAL_HPP
00002 #define __AIRSCHEDED_BAS_BASCONST_GENERAL_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007
00008 namespace AIRSCHEDED {
00009
00012     extern const int DEFAULT_NUMBER_OF_DRAWS_FOR_MC_SIMULATION;
00013
00014 }
00015 #endif // __AIRSCHEDED_BAS_BASCONST_GENERAL_HPP

```

## 26.11 airsched/basic/BasParserTypes.hpp File Reference

```

#include <string>
#include <boost/spirit/home/classic/core.hpp>
#include <boost/spirit/home/classic/attribute.hpp>
#include <boost/spirit/home/classic/utility/functor_parser.hpp>
#include <boost/spirit/home/classic/utility/loops.hpp>
#include <boost/spirit/home/classic/utility/chset.hpp>
#include <boost/spirit/home/classic/utility/config.hpp>
#include <boost/spirit/home/classic/iterator/file_iterator.hpp>
#include <boost/spirit/home/classic/actor/push_back_actor.hpp>
#include <boost/spirit/home/classic/actor/assign_actor.hpp>

```

### Namespaces

- namespace [AIRSCHEDED](#)

## Typedefs

- typedef char AIRSCHED::char\_t
- typedef  
boost::spirit::classic::file\_iterator  
< char\_t > AIRSCHED::iterator\_t
- typedef  
boost::spirit::classic::scanner  
< iterator\_t > AIRSCHED::scanner\_t
- typedef  
boost::spirit::classic::rule  
< scanner\_t > AIRSCHED::rule\_t
- typedef  
boost::spirit::classic::int\_parser  
< unsigned int, 10, 1, 1 > AIRSCHED::int1\_p\_t
- typedef  
boost::spirit::classic::uint\_parser  
< unsigned int, 10, 2, 2 > AIRSCHED::uint2\_p\_t
- typedef  
boost::spirit::classic::uint\_parser  
< unsigned int, 10, 4, 4 > AIRSCHED::uint4\_p\_t
- typedef  
boost::spirit::classic::uint\_parser  
< unsigned int, 10, 1, 4 > AIRSCHED::uint1\_4\_p\_t
- typedef  
boost::spirit::classic::chset  
< char\_t > AIRSCHED::chset\_t
- typedef  
boost::spirit::classic::impl::loop\_traits  
< chset\_t, unsigned int,  
unsigned int >::type AIRSCHED::repeat\_p\_t
- typedef  
boost::spirit::classic::bounded  
< uint2\_p\_t, unsigned int > AIRSCHED::bounded2\_p\_t
- typedef  
boost::spirit::classic::bounded  
< uint4\_p\_t, unsigned int > AIRSCHED::bounded4\_p\_t
- typedef  
boost::spirit::classic::bounded  
< uint1\_4\_p\_t, unsigned int > AIRSCHED::bounded1\_4\_p\_t

## 26.12 BasParserTypes.hpp

```

00001 #ifndef __AIRSCHED_BAS_BASCOMPARSERTYPES_HPP
00002 #define __AIRSCHED_BAS_BASCOMPARSERTYPES_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <string>
00009 // Boost
00010 // #define BOOST_SPIRIT_DEBUG
00011 #include <boost/spirit/home/classic/core.hpp>
00012 #include <boost/spirit/home/classic/attribute.hpp>
00013 #include <boost/spirit/home/classic/utility/functor_parser.hpp>
00014 #include <boost/spirit/home/classic/utility/loops.hpp>
00015 #include <boost/spirit/home/classic/utility/chset.hpp>
00016 #include <boost/spirit/home/classic/utility/confix.hpp>
00017 #include <boost/spirit/home/classic/iterator/file_iterator.hpp>
00018 #include <boost/spirit/home/classic/actor/push_back_actor.hpp>
00019 #include <boost/spirit/home/classic/actor/assign_actor.hpp>
00020
00021 namespace AIRSCHED {

```

```

00022
00023 // //////////////////////////////////////
00024 //
00025 // Definition of Basic Types
00026 //
00027 // //////////////////////////////////////
00028 // For a file, the parsing unit is the character (char). For a string,
00029 // it is a "char const *".
00030 // typedef char const* iterator_t;
00031 typedef char char_t;
00032
00033 // The types of iterator, scanner and rule are then derived from
00034 // the parsing unit.
00035 typedef boost::spirit::classic::file_iterator<char_t> iterator_t;
00036 typedef boost::spirit::classic::scanner<iterator_t> scanner_t;
00037 typedef boost::spirit::classic::rule<scanner_t> rule_t;
00038
00039 // //////////////////////////////////////
00040 //
00041 // Parser related types
00042 //
00043 // //////////////////////////////////////
00045 typedef boost::spirit::classic::int_parser<unsigned int, 10, 1, 1> int1_p_t;
00046
00048 typedef boost::spirit::classic::uint_parser<unsigned int, 10, 2, 2> uint2_p_t
;
00049
00051 typedef boost::spirit::classic::uint_parser<unsigned int, 10, 4, 4> uint4_p_t
;
00052
00054 typedef boost::spirit::classic::uint_parser<unsigned int, 10, 1, 4>
uint1_4_p_t;
00055
00057 typedef boost::spirit::classic::chset<char_t> chset_t;
00058
00061 typedef boost::spirit::classic::impl::loop_traits<chset_t,
00062 unsigned int,
00063 unsigned int>::type repeat_p_t;
00064
00066 typedef boost::spirit::classic::bounded<uint2_p_t, unsigned int> bounded2_p_t
;
00067 typedef boost::spirit::classic::bounded<uint4_p_t, unsigned int> bounded4_p_t
;
00068 typedef boost::spirit::classic::bounded<uint1_4_p_t, unsigned int>
bounded1_4_p_t;
00069
00070 }
00071 #endif // __AIRSCHED_BAS_BASCOMPARSERTYPES_HPP

```

## 26.13 airsched/batches/airsched.cpp File Reference

```

#include <cassert>
#include <sstream>
#include <fstream>
#include <string>
#include <boost/date_time/posix_time/posix_time.hpp>
#include <boost/date_time/gregorian/gregorian.hpp>
#include <boost/program_options.hpp>
#include <boost/tokenizer.hpp>
#include <boost/lexical_cast.hpp>
#include <stdair/STDAIR_Service.hpp>
#include <stdair/bom/BomDisplay.hpp>
#include <stdair/bom/BookingRequestStruct.hpp>
#include <stdair/bom/TravelSolutionStruct.hpp>
#include <stdair/service/Logger.hpp>
#include <airsched/AIRSCHED_Service.hpp>
#include <airsched/batches/BookingRequestParser.hpp>
#include <airsched/config/airsched-paths.hpp>

```

## Typedefs

- typedef std::vector< std::string > [WordList\\_T](#)

## Functions

- const std::string [K\\_AIRSCHED\\_DEFAULT\\_LOG\\_FILENAME](#) ("airsched.log")
- const std::string [K\\_AIRSCHED\\_DEFAULT\\_INPUT\\_FILENAME](#) (STDAIR\_SAMPLE\_DIR"/schedule03.csv")
- const std::string [K\\_AIRSCHED\\_DEFAULT\\_BOOKING\\_REQUEST](#) ("NCE BKK NCE 2007-04-21 2007-03-21 08:32:00 C 1 DF RO 5 NONE 10:00:00 2000.0 20.0")
- std::string [createStringFromWordList](#) (const [WordList\\_T](#) &iWordList)
- template<class T >  
std::ostream & [operator<<](#) (std::ostream &os, const std::vector< T > &v)
- int [readConfiguration](#) (int argc, char \*argv[], bool &iolsBuiltin, bool &ioReadBookingRequestFromCmdLine, stdair::Filename\_T &ioInputFilename, std::string &ioLogFilename, std::string &ioBookingRequestString)
- stdair::BookingRequestStruct [parseBookingRequest](#) (const std::string &iRequestOption)
- int [main](#) (int argc, char \*argv[])

## Variables

- const bool [K\\_AIRSCHED\\_DEFAULT\\_BUILT\\_IN\\_INPUT](#) = false
- const bool [K\\_AIRSCHED\\_DEFAULT\\_BOOKING\\_REQUEST\\_MODE](#) = false
- const int [K\\_AIRSCHED\\_EARLY\\_RETURN\\_STATUS](#) = 99

### 26.13.1 Typedef Documentation

#### 26.13.1.1 typedef std::vector<std::string> WordList\_T

Definition at line 24 of file [airsched.cpp](#).

### 26.13.2 Function Documentation

#### 26.13.2.1 const std::string K\_AIRSCHED\_DEFAULT\_LOG\_FILENAME ( "airsched.log" )

Default name and location for the log file.

Referenced by [readConfiguration\(\)](#).

#### 26.13.2.2 const std::string K\_AIRSCHED\_DEFAULT\_INPUT\_FILENAME ( STDAIR\_SAMPLE\_DIR"/schedule03.csv" )

Default name and location for the (CSV) input file.

Referenced by [readConfiguration\(\)](#).

#### 26.13.2.3 const std::string K\_AIRSCHED\_DEFAULT\_BOOKING\_REQUEST ( "NCE BKK NCE 2007-04-21 2007-03-21 08:32:00 C 1 DF RO 5 NONE 10:00:00 2000.0 20.0" )

Default booking request string, to be seached against the AirSched network.

Referenced by [main\(\)](#).

#### 26.13.2.4 std::string createStringFromWordList ( const WordList\_T &iWordList )

Definition at line 59 of file [airsched.cpp](#).

Referenced by [readConfiguration\(\)](#).

26.13.2.5 `template<class T> std::ostream& operator<< ( std::ostream & os, const std::vector< T> & v )`

Definition at line 77 of file [airsched.cpp](#).

26.13.2.6 `int readConfiguration ( int argc, char * argv[], bool & iolsBuiltin, bool & ioReadBookingRequestFromCmdLine, stdair::Filename_T & ioInputFilename, std::string & ioLogFilename, std::string & ioBookingRequestString )`

Read and parse the command line options.

Definition at line 87 of file [airsched.cpp](#).

References [createStringFromWordList\(\)](#), [K\\_AIRSCHED\\_DEFAULT\\_BOOKING\\_REQUEST\\_MODE](#), [K\\_AIRSCHED\\_DEFAULT\\_BUILT\\_IN\\_INPUT](#), [K\\_AIRSCHED\\_DEFAULT\\_INPUT\\_FILENAME\(\)](#), [K\\_AIRSCHED\\_DEFAULT\\_LOG\\_FILENAME\(\)](#), and [K\\_AIRSCHED\\_EARLY\\_RETURN\\_STATUS](#).

Referenced by [main\(\)](#).

26.13.2.7 `stdair::BookingRequestStruct parseBookingRequest ( const std::string & iRequestOption )`

Definition at line 230 of file [airsched.cpp](#).

Referenced by [main\(\)](#).

26.13.2.8 `int main ( int argc, char * argv[] )`

Definition at line 335 of file [airsched.cpp](#).

References [AIRSCHED::AIRSCHED\\_Service::buildSampleBom\(\)](#), [AIRSCHED::AIRSCHED\\_Service::buildSegmentPathList\(\)](#), [K\\_AIRSCHED\\_DEFAULT\\_BOOKING\\_REQUEST\(\)](#), [K\\_AIRSCHED\\_EARLY\\_RETURN\\_STATUS](#), [AIRSCHED::AIRSCHED\\_Service::parseAndLoad\(\)](#), [parseBookingRequest\(\)](#), and [readConfiguration\(\)](#).

### 26.13.3 Variable Documentation

26.13.3.1 `const bool K_AIRSCHED_DEFAULT_BUILT_IN_INPUT = false`

Default for the BOM tree building. The BOM tree can either be built-in or provided by an input file. That latter must then be given with the -s option.

Definition at line 44 of file [airsched.cpp](#).

Referenced by [readConfiguration\(\)](#).

26.13.3.2 `const bool K_AIRSCHED_DEFAULT_BOOKING_REQUEST_MODE = false`

Default for the input type. It can be either built-in or provided by an input file. That latter must then be given with the -i option.

Definition at line 50 of file [airsched.cpp](#).

Referenced by [readConfiguration\(\)](#).

26.13.3.3 `const int K_AIRSCHED_EARLY_RETURN_STATUS = 99`

Early return status (so that it can be differentiated from an error).

Definition at line 84 of file [airsched.cpp](#).

Referenced by [main\(\)](#), and [readConfiguration\(\)](#).

## 26.14 airsched.cpp

```
00001 // STL
00002 #include <cassert>
00003 #include <sstream>
00004 #include <fstream>
00005 #include <string>
```

```

00006 // Boost (Extended STL)
00007 #include <boost/date_time/posix_time/posix_time.hpp>
00008 #include <boost/date_time/gregorian/gregorian.hpp>
00009 #include <boost/program_options.hpp>
00010 #include <boost/tokenizer.hpp>
00011 #include <boost/lexical_cast.hpp>
00012 // StdAir
00013 #include <stdair/STDAIR_Service.hpp>
00014 #include <stdair/bom/BomDisplay.hpp>
00015 #include <stdair/bom/BookingRequestStruct.hpp>
00016 #include <stdair/bom/TravelSolutionStruct.hpp>
00017 #include <stdair/service/Logger.hpp>
00018 // AirSched
00019 #include <airsched/AIRSCHEM_Service.hpp>
00020 #include <airsched/batches/BookingRequestParser.hpp>
00021 #include <airsched/config/airsched-paths.hpp>
00022
00023 // ////////// Type definitions //////////
00024 typedef std::vector<std::string> WordList_T;
00025
00026
00027 // ////////// Constants //////////
00031 const std::string K_AIRSCHEM_DEFAULT_LOG_FILENAME ("airsched.log");
00032
00036 const std::string K_AIRSCHEM_DEFAULT_INPUT_FILENAME (STDAIR_SAMPLE_DIR
00037 "schedule03.csv");
00038
00044 const bool K_AIRSCHEM_DEFAULT_BUILT_IN_INPUT = false;
00045
00050 const bool K_AIRSCHEM_DEFAULT_BOOKING_REQUEST_MODE = false;
00051
00056 const std::string K_AIRSCHEM_DEFAULT_BOOKING_REQUEST ("NCE BKK NCE 2007-04-21
2007-03-21 08:32:00 C 1 DF RO 5 NONE 10:00:00 2000.0 20.0");
00057
00058 // //////////////////////////////////////
00059 std::string createStringFromWordList (const WordList_T& iWordList) {
00060     std::ostringstream oStr;
00061
00062     unsigned short idx = iWordList.size();
00063     for (WordList_T::const_iterator itWord = iWordList.begin();
00064          itWord != iWordList.end(); ++itWord, --idx) {
00065         const std::string& lWord = *itWord;
00066         oStr << lWord;
00067         if (idx > 1) {
00068             oStr << " ";
00069         }
00070     }
00071
00072     return oStr.str();
00073 }
00074
00075 // ////////// Parsing of Options & Configuration //////////
00076 // A helper function to simplify the main part.
00077 template<class T> std::ostream& operator<< (std::ostream& os,
00078 const std::vector<T>& v) {
00079     std::copy (v.begin(), v.end(), std::ostream_iterator<T> (std::cout, " "));
00080     return os;
00081 }
00082
00084 const int K_AIRSCHEM_EARLY_RETURN_STATUS = 99;
00085
00087 int readConfiguration (int argc, char* argv[],
00088 bool& ioIsBuiltin, bool& ioReadBookingRequestFromCmdLine
00089 ,
00090 stdair::Filename_T& ioInputFilename,
00091 std::string& ioLogFilename,
00092 std::string& ioBookingRequestString) {
00093     // Default for the built-in input
00094     ioIsBuiltin = K_AIRSCHEM_DEFAULT_BUILT_IN_INPUT;
00095
00096     // Default for the booking request mode (whether it is read from
00097     command-line)
00098     ioReadBookingRequestFromCmdLine = K_AIRSCHEM_DEFAULT_BOOKING_REQUEST_MODE;
00099
00100     //
00101     WordList_T lWordList;
00102
00103     // Declare a group of options that will be allowed only on command line
00104     boost::program_options::options_description generic ("Generic options");
00105     generic.add_options()
00106         ("prefix", "print installation prefix")
00107         ("version,v", "print version string")
00108         ("help,h", "produce help message");
00109
00109     // Declare a group of options that will be allowed both on command
00110     // line and in config file

```

```

00111 boost::program_options::options_description config ("Configuration");
00112 config.add_options()
00113     ("builtin,b",
00114      "The sample BOM tree can be either built-in or parsed from input files. In
that latter case, the -i/--input option must be specified as well")
00115     ("input,i",
00116      boost::program_options::value< std::string >(&ioInputFilename)->
default_value(K_AIRSCHED_DEFAULT_INPUT_FILENAME),
00117      "(CSV) input file specifying the schedule (flight-period) entries")
00118     ("log,l",
00119      boost::program_options::value< std::string >(&ioLogFilename)->
default_value(K_AIRSCHED_DEFAULT_LOG_FILENAME),
00120      "Filename for the logs")
00121     ("read_booking_request,r",
00122      "Indicates that a booking request is given as a command-line option. That
latter must then be given with the -b/--bkg_req option")
00123     ("bkg_req,q",
00124      boost::program_options::value< WordList_T >(&lWordList)->multitoken(),
00125      "Booking request word list (e.g. 'NCE BKK NCE 2007-04-21 2007-04-21
10:00:00 C 1 DF RO 5 NONE 10:0:0 2000.0 20.0'), which should be located at the end of
the command line (otherwise, the other options would be interpreted as part of
that booking request word list)");
00126 ;
00127
00128 // Hidden options, will be allowed both on command line and
00129 // in config file, but will not be shown to the user.
00130 boost::program_options::options_description hidden ("Hidden options");
00131 hidden.add_options()
00132     ("copyright",
00133      boost::program_options::value< std::vector<std::string> >(),
00134      "Show the copyright (license)");
00135
00136 boost::program_options::options_description cmdline_options;
00137 cmdline_options.add(generic).add(config).add(hidden);
00138
00139 boost::program_options::options_description config_file_options;
00140 config_file_options.add(config).add(hidden);
00141
00142 boost::program_options::options_description visible ("Allowed options");
00143 visible.add(generic).add(config);
00144
00145 boost::program_options::positional_options_description p;
00146 p.add ("copyright", -1);
00147
00148 boost::program_options::variables_map vm;
00149 boost::program_options::
00150     store (boost::program_options::command_line_parser (argc, argv).
00151           options (cmdline_options).positional(p).run(), vm);
00152
00153 std::ifstream ifs ("airsched.cfg");
00154 boost::program_options::store (parse_config_file (ifs, config_file_options),
00155                               vm);
00156 boost::program_options::notify (vm);
00157
00158 if (vm.count ("help")) {
00159     std::cout << visible << std::endl;
00160     return K_AIRSCHED_EARLY_RETURN_STATUS;
00161 }
00162
00163 if (vm.count ("version")) {
00164     std::cout << PACKAGE_NAME << ", version " << PACKAGE_VERSION << std::endl;
00165     return K_AIRSCHED_EARLY_RETURN_STATUS;
00166 }
00167
00168 if (vm.count ("prefix")) {
00169     std::cout << "Installation prefix: " << PREFIXDIR << std::endl;
00170     return K_AIRSCHED_EARLY_RETURN_STATUS;
00171 }
00172
00173 if (vm.count ("builtin")) {
00174     ioIsBuiltin = true;
00175 }
00176 const std::string isBuiltinStr = (ioIsBuiltin == true)? "yes": "no";
00177 std::cout << "The BOM should be built-in? " << isBuiltinStr << std::endl;
00178
00179 //
00180 std::ostringstream oErrorMessageStr;
00181 oErrorMessageStr << "Either the -b/--builtin option, or the -i/--input option
"
00182     << " must be specified";
00183
00184 if (ioIsBuiltin == false) {
00185     if (vm.count ("input")) {
00186         ioInputFilename = vm["input"].as< std::string >();
00187         std::cout << "Input filename is: " << ioInputFilename << std::endl;
00188     } else {

```



```

00190         // The built-in option is not selected. However, no schedule input file
00191         // is specified
00192         std::cerr << oErrorMessageStr.str() << std::endl;
00193     }
00194 }
00195
00196 //
00197 if (vm.count ("read_booking_request")) {
00198     ioReadBookingRequestFromCmdLine = true;
00199 }
00200 const std::string readBookingRequestFromCmdLineStr =
00201     (ioReadBookingRequestFromCmdLine == true)?"yes":"no";
00202 std::cout << "A booking request is to be given as command-line option? "
00203     << readBookingRequestFromCmdLineStr << std::endl;
00204
00205 if (ioReadBookingRequestFromCmdLine == true) {
00206     if (lWordList.empty() == true) {
00207         std::cerr << "When the --read_booking_request/-r option is given, "
00208             << "a query must also be provided (with the --bkg_req/-b "
00209             << "option at the end of the command-line)" << std::endl;
00210         return K_AIRSCHED_EARLY_RETURN_STATUS;
00211     }
00212 }
00213
00214 // Rebuild the booking request query string
00215 ioBookingRequestString = createStringFromWordList (lWordList);
00216 std::cout << "The booking request string is: " << ioBookingRequestString
00217     << std::endl;
00218 }
00219
00220 if (vm.count ("log")) {
00221     ioLogFilename = vm["log"].as< std::string >();
00222     std::cout << "Log filename is: " << ioLogFilename << std::endl;
00223 }
00224
00225 return 0;
00226 }
00227
00228 // //////////////////////////////////////
00229 stdair::BookingRequestStruct
00230 parseBookingRequest (const std::string& iRequestOption) {
00231     typedef boost::tokenizer<boost::char_separator<char> > tokenizer;
00232     boost::char_separator<char> sep(" -:");
00233
00234     tokenizer tokens (iRequestOption, sep);
00235
00236     // Origin (e.g., "NCE")
00237     tokenizer::iterator tok_iter = tokens.begin();
00238     assert (tok_iter != tokens.end());
00239     const stdair::AirportCode_T iOrigin (*tok_iter);
00240
00241     // Destination (e.g., "BKK")
00242     ++tok_iter; assert (tok_iter != tokens.end());
00243     const stdair::AirportCode_T iDestination (*tok_iter);
00244
00245     // POS (e.g., "NCE")
00246     ++tok_iter; assert (tok_iter != tokens.end());
00247     const stdair::AirportCode_T iPOS (*tok_iter);
00248
00249     // Preferred departure date (e.g., "2007-04-21")
00250     ++tok_iter; assert (tok_iter != tokens.end());
00251     const short lDepDateYear = boost::lexical_cast<short> (*tok_iter);
00252     ++tok_iter; assert (tok_iter != tokens.end());
00253     const short lDepDateMonth = boost::lexical_cast<short> (*tok_iter);
00254     ++tok_iter; assert (tok_iter != tokens.end());
00255     const short lDepDateDay = boost::lexical_cast<short> (*tok_iter);
00256     const stdair::Date_T iDepartureDate (lDepDateYear, lDepDateMonth, lDepDateDay);
00257
00258     // Request date (e.g., "2007-03-21")
00259     ++tok_iter; assert (tok_iter != tokens.end());
00260     const short lReqDateYear = boost::lexical_cast<short> (*tok_iter);
00261     ++tok_iter; assert (tok_iter != tokens.end());
00262     const short lReqDateMonth = boost::lexical_cast<short> (*tok_iter);
00263     ++tok_iter; assert (tok_iter != tokens.end());
00264     const short lReqDateDay = boost::lexical_cast<short> (*tok_iter);
00265     const stdair::Date_T iRequestDate (lReqDateYear, lReqDateMonth, lReqDateDay);
00266
00267     // Request time (e.g., "08:34:23")
00268     ++tok_iter; assert (tok_iter != tokens.end());
00269     const short lReqTimeHours = boost::lexical_cast<short> (*tok_iter);
00270     ++tok_iter; assert (tok_iter != tokens.end());
00271     const short lReqTimeMinutes = boost::lexical_cast<short> (*tok_iter);
00272     ++tok_iter; assert (tok_iter != tokens.end());
00273     const short lReqTimeSeconds = boost::lexical_cast<short> (*tok_iter);
00274     const stdair::Duration_T iRequestTime (lReqTimeHours, lReqTimeMinutes,
00275         lReqTimeSeconds);

```

```

00276
00277 // Request date-time (aggregation of the two items above)
00278 const stdair::DateTime_T iRequestDateTime (iRequestDate, iRequestTime);
00279
00280 // Preferred cabin (e.g., "C")
00281 ++tok_iter; assert (tok_iter != tokens.end());
00282 const stdair::CabinCode_T iPreferredCabin (*tok_iter);
00283
00284 // Party size (e.g., 1)
00285 ++tok_iter; assert (tok_iter != tokens.end());
00286 const stdair::NbOfSeats_T iPartySize = 1;
00287
00288 // Channel (e.g., "DF")
00289 ++tok_iter; assert (tok_iter != tokens.end());
00290 const stdair::ChannelLabel_T iChannel (*tok_iter);
00291
00292 // Trip type (e.g., "RO")
00293 ++tok_iter; assert (tok_iter != tokens.end());
00294 const stdair::TripType_T iTripType (*tok_iter);
00295
00296 // Stay duration (e.g., 5)
00297 ++tok_iter; assert (tok_iter != tokens.end());
00298 const stdair::DayDuration_T iStayDuration = 5;
00299
00300 // Frequent flyer (e.g., "NONE")
00301 ++tok_iter; assert (tok_iter != tokens.end());
00302 const stdair::FrequentFlyer_T iFrequentFlyerType ("NONE");
00303
00304 // Preferred departure time (e.g., "10:00:00")
00305 ++tok_iter; assert (tok_iter != tokens.end());
00306 const short lPrefTimeHours = boost::lexical_cast<short> (*tok_iter);
00307 ++tok_iter; assert (tok_iter != tokens.end());
00308 const short lPrefTimeMinutes = boost::lexical_cast<short> (*tok_iter);
00309 ++tok_iter; assert (tok_iter != tokens.end());
00310 const short lPrefTimeSeconds = boost::lexical_cast<short> (*tok_iter);
00311 const stdair::Duration_T iPreferredDepartureTime (lPrefTimeHours,
00312                                                    lPrefTimeMinutes,
00313                                                    lPrefTimeSeconds);
00314
00315 // Willingness-to-pay (e.g., 2000.0)
00316 ++tok_iter; assert (tok_iter != tokens.end());
00317 const stdair::WTP_T iWTP = 2000.0;
00318
00319 // Value of time (e.g., 20.0)
00320 ++tok_iter; assert (tok_iter != tokens.end());
00321 const stdair::PriceValue_T iValueOfTime = 20.0;
00322
00323 // Build and return the booking request structure
00324 return stdair::BookingRequestStruct (iOrigin,
00325                                     iDestination, iPOS,
00326                                     iDepartureDate, iRequestDateTime,
00327                                     iPreferredCabin, iPartySize,
00328                                     iChannel, iTripType, iStayDuration,
00329                                     iFrequentFlyerType,
00330                                     iPreferredDepartureTime, iWTP,
00331                                     iValueOfTime);
00332 }
00333
00334 // ////////// M A I N //////////
00335 int main (int argc, char* argv[]) {
00336
00337 // State whether the BOM tree should be built-in or parsed from an
00338 // input file
00339 bool isBuiltin;
00340
00341 // A booking request should be given as command-line option
00342 bool readBookingRequestFromCmdLine;
00343
00344 // Input file name
00345 stdair::Filename_T lInputFilename;
00346
00347 // Output log File
00348 stdair::Filename_T lLogFilename;
00349
00350 // Booking request string
00351 std::string lBookingRequestString;
00352
00353 // Call the command-line option parser
00354 const int lOptionParserStatus =
00355     readConfiguration (argc, argv, isBuiltin, readBookingRequestFromCmdLine,
00356                       lInputFilename, lLogFilename, lBookingRequestString);
00357
00358 if (lOptionParserStatus == K_AIRSCHED_EARLY_RETURN_STATUS) {
00359     return 0;
00360 }
00361
00362 // Set the log parameters

```

```

00363     std::ofstream logOutputFile;
00364     // Open and clean the log outputfile
00365     logOutputFile.open (lLogFilename.c_str());
00366     logOutputFile.clear();
00367
00368     // Initialise the AirSched service object
00369     const stdair::BasLogParams lLogParams (stdair::LOG::DEBUG, logOutputFile);
00370     AIRSCHED::AIRSCHED_Service airschedService (lLogParams);
00371
00372     // Check whether or not (CSV) input files should be read
00373     if (isBuiltin == true) {
00374
00375         // Build the sample BOM tree
00376         airschedService.buildSampleBom();
00377
00378     } else {
00379         // Build the BOM tree from parsing input files
00380         airschedService.parseAndLoad (lInputFilename);
00381     }
00382
00383     // Check whether or not a booking request is given as a command-line option
00384     if (readBookingRequestFromCmdLine == false) {
00385         lBookingRequestString = K_AIRSCHED_DEFAULT_BOOKING_REQUEST;
00386     }
00387
00388     // DEBUG
00389     STDAIR_LOG_DEBUG("Booking request string: '" << lBookingRequestString << "'");
00390 ;
00391
00392     // Create a booking request object
00393     const stdair::BookingRequestStruct& lBookingRequest =
00394         parseBookingRequest (lBookingRequestString);
00395
00396     //
00397     stdair::TravelSolutionList_T lTravelSolutionList;
00398     airschedService.buildSegmentPathList (lTravelSolutionList, lBookingRequest);
00399
00400     // DEBUG
00401     STDAIR_LOG_DEBUG ("Parsed booking request: " << lBookingRequest);
00402
00403     // DEBUG
00404     std::ostringstream oStream;
00405     stdair::BomDisplay::csvDisplay (oStream, lTravelSolutionList);
00406     STDAIR_LOG_DEBUG (oStream.str());
00407
00408     // Close the Log outputfile
00409     logOutputFile.close();
00410
00411     return 0;
00412 }

```

## 26.15 airsched/batches/BookingRequestParser.cpp File Reference

```

#include <cassert>
#include <sstream>
#include <fstream>
#include <boost/date_time/posix_time/posix_time.hpp>
#include <boost/date_time/gregorian/gregorian.hpp>
#include <boost/spirit/home/classic/core.hpp>
#include <boost/spirit/home/classic/attribute.hpp>
#include <boost/spirit/home/classic/utility/functor_parser.hpp>
#include <boost/spirit/home/classic/utility/loops.hpp>
#include <boost/spirit/home/classic/utility/chset.hpp>
#include <boost/spirit/home/classic/utility/config.hpp>
#include <boost/spirit/home/classic/iterator/file_iterator.hpp>
#include <boost/spirit/home/classic/actor/push_back_actor.hpp>
#include <boost/spirit/home/classic/actor/assign_actor.hpp>
#include <stdair/service/Logger.hpp>
#include <airsched/batches/BookingRequestParser.hpp>

```

## Classes

- struct [airsched::store\\_place\\_element](#)
- struct [airsched::store\\_date](#)
- struct [airsched::store\\_airline\\_sign](#)
- struct [airsched::store\\_airline\\_code](#)
- struct [airsched::store\\_airline\\_name](#)
- struct [airsched::store\\_passenger\\_number](#)
- struct [airsched::store\\_adult\\_passenger\\_type](#)
- struct [airsched::store\\_child\\_passenger\\_type](#)
- struct [airsched::store\\_pet\\_passenger\\_type](#)
- struct [airsched::SearchStringParser](#)
- struct [airsched::SearchStringParser::definition< ScannerT >](#)

## Namespaces

- namespace [airsched](#)

## Defines

- `#define` [BOOST\\_SPIRIT\\_DEBUG](#)

## Typedefs

- typedef char [char\\_t](#)
- typedef char const \* [iterator\\_t](#)
- typedef  
boost::spirit::classic::scanner  
< [iterator\\_t](#) > [scanner\\_t](#)
- typedef  
boost::spirit::classic::rule  
< [scanner\\_t](#) > [rule\\_t](#)

## Functions

- SearchString\_T [airsched::parseBookingRequest](#) (const std::string &iSearchString)

## Variables

- boost::spirit::classic::int\_parser  
< unsigned int, 10, 1, 1 > [airsched::int1\\_p](#)
- boost::spirit::classic::uint\_parser  
< unsigned int, 10, 1, 1 > [airsched::uint1\\_p](#)
- boost::spirit::classic::uint\_parser  
< unsigned int, 10, 1, 2 > [airsched::uint1\\_2\\_p](#)
- boost::spirit::classic::uint\_parser  
< int, 10, 2, 2 > [airsched::uint2\\_p](#)
- boost::spirit::classic::uint\_parser  
< int, 10, 2, 4 > [airsched::uint2\\_4\\_p](#)
- boost::spirit::classic::uint\_parser  
< int, 10, 4, 4 > [airsched::uint4\\_p](#)
- boost::spirit::classic::uint\_parser  
< int, 10, 1, 4 > [airsched::uint1\\_4\\_p](#)

## 26.15.1 Define Documentation

## 26.15.1.1 #define BOOST\_SPIRIT\_DEBUG

Definition at line 12 of file [BookingRequestParser.cpp](#).

## 26.15.2 Typedef Documentation

## 26.15.2.1 typedef char char\_t

Definition at line 28 of file [BookingRequestParser.cpp](#).

## 26.15.2.2 typedef char const\* iterator\_t

Definition at line 29 of file [BookingRequestParser.cpp](#).

## 26.15.2.3 typedef boost::spirit::classic::scanner&lt;iterator\_t&gt; scanner\_t

Definition at line 31 of file [BookingRequestParser.cpp](#).

## 26.15.2.4 typedef boost::spirit::classic::rule&lt;scanner\_t&gt; rule\_t

Definition at line 32 of file [BookingRequestParser.cpp](#).

## 26.16 BookingRequestParser.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <sstream>
00007 #include <fstream>
00008 // Boost (Extended STL)
00009 #include <boost/date_time/posix_time/posix_time.hpp>
00010 #include <boost/date_time/gregorian/gregorian.hpp>
00011 // Boost Spirit (Parsing)
00012 #define BOOST_SPIRIT_DEBUG
00013 #include <boost/spirit/home/classic/core.hpp>
00014 #include <boost/spirit/home/classic/attribute.hpp>
00015 #include <boost/spirit/home/classic/utility/functor_parser.hpp>
00016 #include <boost/spirit/home/classic/utility/loops.hpp>
00017 #include <boost/spirit/home/classic/utility/chset.hpp>
00018 #include <boost/spirit/home/classic/utility/config.hpp>
00019 #include <boost/spirit/home/classic/iterator/file_iterator.hpp>
00020 #include <boost/spirit/home/classic/actor/push_back_actor.hpp>
00021 #include <boost/spirit/home/classic/actor/assign_actor.hpp>
00022 // StdAir
00023 #include <stdair/service/Logger.hpp>
00024 // AirSched
00025 #include <airsched/batches/BookingRequestParser.hpp>
00026
00027 // Type definitions
00028 typedef char char_t;
00029 typedef char const* iterator_t;
00030 //typedef boost::spirit::classic::file_iterator<char_t> iterator_t;
00031 typedef boost::spirit::classic::scanner<iterator_t> scanner_t;
00032 typedef boost::spirit::classic::rule<scanner_t> rule_t;
00033
00034 namespace airsched {
00035
00036     struct store_place_element {
00037         store_place_element (SearchString_T& ioSearchString)
00038             : _searchString (ioSearchString) {}
00039
00040         void operator() (iterator_t iStr, iterator_t iStrEnd) const {
00041             std::string lPlace (iStr, iStrEnd);
00042             // std::cout << "Place: " << lPlace << std::endl;
00043
00044             // Set the place
00045             _searchString._tmpPlace._name += " " + lPlace;
00046
00047             // Add the parsed place to the list
00048             _searchString._placeList.push_back (_searchString._tmpPlace);
00049         }
00050     };
00051 }

```

```

00052     }
00053
00054     SearchString_T& _searchString;
00055 };
00056
00057 struct store_date {
00058     store_date (SearchString_T& ioSearchString)
00059         : _searchString (ioSearchString) {}
00060
00061     void operator() (iterator_t iStr, iterator_t iStrEnd) const {
00062         _searchString._tmpDate._date = _searchString._tmpDate.getDate();
00063         // std::cout << "Board date: "
00064         // << _searchString._date << std::endl;
00065
00066         // Add the parsed date to the list
00067         _searchString._dateList.push_back (_searchString._tmpDate);
00068     }
00069
00070     SearchString_T& _searchString;
00071 };
00072
00073 struct store_airline_sign {
00074     store_airline_sign (SearchString_T& ioSearchString)
00075         : _searchString (ioSearchString) {}
00076
00077     void operator() (bool iAirlineSign) const {
00078         _searchString._tmpAirline._isPreferred = !iAirlineSign;
00079         // std::cout << "Airline is preferred: " << iAirlineSign << std::endl;
00080     }
00081
00082     SearchString_T& _searchString;
00083 };
00084
00085 struct store_airline_code {
00086     store_airline_code (SearchString_T& ioSearchString)
00087         : _searchString (ioSearchString) {}
00088
00089     void operator() (iterator_t iStr, iterator_t iStrEnd) const {
00090         std::string lAirlineCode (iStr, iStrEnd);
00091         _searchString._tmpAirline._code = lAirlineCode;
00092         // std::cout << "Airline code: " << lAirlineCode << std::endl;
00093
00094         // Add the parsed airline to the list
00095         _searchString._airlineList.push_back (_searchString._tmpAirline);
00096     }
00097
00098     SearchString_T& _searchString;
00099 };
00100
00101 struct store_airline_name {
00102     store_airline_name (SearchString_T& ioSearchString)
00103         : _searchString (ioSearchString) {}
00104
00105     void operator() (iterator_t iStr, iterator_t iStrEnd) const {
00106         std::string lAirlineName (iStr, iStrEnd);
00107         _searchString._tmpAirline._name = lAirlineName;
00108         // std::cout << "Airline: " << lAirlineName << std::endl;
00109
00110         // Add the parsed airline to the list
00111         _searchString._airlineList.push_back (_searchString._tmpAirline);
00112     }
00113
00114     SearchString_T& _searchString;
00115 };
00116
00117 struct store_passenger_number {
00118     store_passenger_number (SearchString_T& ioSearchString)
00119         : _searchString (ioSearchString) {}
00120
00121     void operator() (unsigned int iNumber) const {
00122         _searchString._tmpPassenger._number = iNumber;
00123         // std::cout << "Number of passengers: " << iNumber << std::endl;
00124     }
00125
00126     SearchString_T& _searchString;
00127 };
00128
00129 struct store_adult_passenger_type {
00130     store_adult_passenger_type (SearchString_T& ioSearchString)
00131         : _searchString (ioSearchString) {}
00132
00133     void operator() (iterator_t iStr, iterator_t iStrEnd) const {
00134         std::string lPassengerType (iStr, iStrEnd);
00135         _searchString._tmpPassenger._type = Passenger_T::ADULT;
00136         // std::cout << "Passenger type: " << lPassengerType << std::endl;
00137
00138         // Add the parsed passenger to the list
00139     }
00140
00141     SearchString_T& _searchString;
00142 };
00143
00144 struct store_adult_passenger_type {
00145     store_adult_passenger_type (SearchString_T& ioSearchString)
00146         : _searchString (ioSearchString) {}
00147
00148     void operator() (iterator_t iStr, iterator_t iStrEnd) const {
00149         std::string lPassengerType (iStr, iStrEnd);
00150         _searchString._tmpPassenger._type = Passenger_T::ADULT;
00151         // std::cout << "Passenger type: " << lPassengerType << std::endl;
00152
00153         // Add the parsed passenger to the list
00154     }
00155
00156     SearchString_T& _searchString;
00157 };

```

```

00157     _searchString._passengerList.push_back (_searchString._tmpPassenger);
00158 }
00159
00160 SearchString_T& _searchString;
00161 };
00162
00164 struct store_child_passenger_type {
00166     store_child_passenger_type (SearchString_T& ioSearchString)
00167         : _searchString (ioSearchString) {}
00168
00170     void operator() (iterator_t iStr, iterator_t iStrEnd) const {
00171         std::string lPassengerType (iStr, iStrEnd);
00172         _searchString._tmpPassenger._type = Passenger_T::CHILD;
00173         // std::cout << "Passenger type: " << lPassengerType << std::endl;
00174
00175         // Add the parsed passenger to the list
00176         _searchString._passengerList.push_back (_searchString._tmpPassenger);
00177     }
00178
00179     SearchString_T& _searchString;
00180 };
00181
00183 struct store_pet_passenger_type {
00185     store_pet_passenger_type (SearchString_T& ioSearchString)
00186         : _searchString (ioSearchString) {}
00187
00189     void operator() (iterator_t iStr, iterator_t iStrEnd) const {
00190         std::string lPassengerType (iStr, iStrEnd);
00191         _searchString._tmpPassenger._type = Passenger_T::PET;
00192         // std::cout << "Passenger type: " << lPassengerType << std::endl;
00193
00194         // Add the parsed passenger to the list
00195         _searchString._passengerList.push_back (_searchString._tmpPassenger);
00196     }
00197
00198     SearchString_T& _searchString;
00199 };
00200
00201 // //////////// Utilities ////////////
00203 boost::spirit::classic::int_parser<unsigned int, 10, 1, 1> int1_p;
00205 boost::spirit::classic::uint_parser<unsigned int, 10, 1, 1> uint1_p;
00207 boost::spirit::classic::uint_parser<unsigned int, 10, 1, 2> uint1_2_p;
00209 boost::spirit::classic::uint_parser<int, 10, 2, 2> uint2_p;
00211 boost::spirit::classic::uint_parser<int, 10, 2, 4> uint2_4_p;
00213 boost::spirit::classic::uint_parser<int, 10, 4, 4> uint4_p;
00215 boost::spirit::classic::uint_parser<int, 10, 1, 4> uint1_4_p;
00216
00218 //
00219 // Our calculator grammar (using subrules)
00220 //
00222
00248 using namespace boost::spirit::classic;
00249
00251 struct SearchStringParser :
00252     public boost::spirit::classic::grammar<SearchStringParser> {
00253
00254     SearchStringParser (SearchString_T& ioSearchString)
00255         : _searchString (ioSearchString) {}
00256
00257     template <typename ScannerT>
00259     struct definition {
00260         definition (SearchStringParser const& self) {
00261
00262             search_string = places
00263                 >> !( dates )
00264                 >> *( preferred_airlines )
00265                 >> *( passengers )
00266             ;
00267
00268             places =
00269                 +( place_element )
00270             ;
00271
00272             place_element =
00273                 lexeme_d[ (repeat_p(1,20)[chset_p("a-z")]) [store_place_element(self,
00274 _searchString)] ]
00275             ;
00276
00277             dates =
00278                 date[store_date(self._searchString)]
00279                 >> !date[store_date(self._searchString)]
00280             ;
00281
00282             date =
00283                 ( month | day )
00284                 >> boost::spirit::classic::chset_p("/")

```

```

00284         >> ( day | month )
00285         >> ! ( boost::spirit::classic::chset_p("/-")
00286             >> year )
00287         ;
00288
00289         day =
00290             lexeme_d[ limit_d(1u,31u) [uint1_2_p] [assign_a(self._searchString.
00291                 _tmpDate._day)] ]
00292         ;
00293         month =
00294             lexeme_d[ limit_d(1u,12u) [uint1_2_p] [assign_a(self._searchString.
00295                 _tmpDate._month)] ]
00296         ;
00297         year =
00298             lexeme_d[ limit_d(2000u,2099u) [uint4_p] [assign_a(self._searchString.
00299                 _tmpDate._year)] ]
00300             | lexeme_d[ limit_d(0u,99u) [uint2_p] [assign_a(self._searchString.
00301                 _tmpDate._year)] ]
00302         ;
00303         preferred_airlines =
00304             !(boost::spirit::classic::sign_p) [store_airline_sign(self.
00305                 _searchString)]
00306             >> airline_code | airline_name
00307         ;
00308         airline_code =
00309             lexeme_d[ (repeat_p(2,3) [chset_p("0-9a-z")]) [store_airline_code(self.
00310                 _searchString)] ]
00311         ;
00312         airline_name =
00313             lexeme_d[ (repeat_p(4,20) [chset_p("0-9a-z")]) [store_airline_name(self.
00314                 _searchString)] ]
00315         ;
00316         passengers =
00317             passenger_number >> passenger_type
00318         ;
00319         passenger_number =
00320             lexeme_d[ limit_d(1u, 9u) [uint1_p] [store_passenger_number(self.
00321                 _searchString)] ]
00322         ;
00323         passenger_type =
00324             passenger_adult_type[store_adult_passenger_type(self._searchString)]
00325             | passenger_child_type[store_child_passenger_type(self._searchString)]
00326             | passenger_pet_type[store_pet_passenger_type(self._searchString)]
00327         ;
00328         passenger_adult_type =
00329             lexeme_d[ as_lower_d [ str_p("adult") >> !ch_p('s') ] ]
00330         ;
00331         passenger_child_type =
00332             lexeme_d[ as_lower_d [ str_p("child") >> !str_p("ren") ] ]
00333         ;
00334         passenger_pet_type =
00335             lexeme_d[ as_lower_d [ str_p("dog") | str_p("cat") >> !ch_p('s') ] ]
00336         ;
00337         BOOST_SPIRIT_DEBUG_NODE (search_string);
00338         BOOST_SPIRIT_DEBUG_NODE (places);
00339         BOOST_SPIRIT_DEBUG_NODE (place_element);
00340         BOOST_SPIRIT_DEBUG_NODE (dates);
00341         BOOST_SPIRIT_DEBUG_NODE (day);
00342         BOOST_SPIRIT_DEBUG_NODE (month);
00343         BOOST_SPIRIT_DEBUG_NODE (year);
00344         BOOST_SPIRIT_DEBUG_NODE (preferred_airlines);
00345         BOOST_SPIRIT_DEBUG_NODE (airline_code);
00346         BOOST_SPIRIT_DEBUG_NODE (airline_name);
00347         BOOST_SPIRIT_DEBUG_NODE (passengers);
00348         BOOST_SPIRIT_DEBUG_NODE (passenger_number);
00349         BOOST_SPIRIT_DEBUG_NODE (passenger_type);
00350         BOOST_SPIRIT_DEBUG_NODE (passenger_adult_type);
00351         BOOST_SPIRIT_DEBUG_NODE (passenger_child_type);
00352         BOOST_SPIRIT_DEBUG_NODE (passenger_pet_type);
00353     }
00354
00355     boost::spirit::classic::rule<ScannerT> search_string, places,
00356     place_element,

```



```

00361         dates, date, month, day, year,
00362         preferred_airlines, airline_code, airline_name,
00363         passengers, passenger_number, passenger_type, passenger_adult_type,
00364         passenger_child_type, passenger_pet_type;
00365
00366         boost::spirit::classic::rule<ScannerT> const& start() const { return
search_string; }
00367     };
00368
00369     SearchString_T& _searchString;
00370 };
00371
00372 // //////////////////////////////////////
00373 SearchString_T parseBookingRequest (const std::string& iSearchString) {
00374     SearchString_T oSearchStringStruct;
00375
00376     // Read the search string
00377     iterator_t lStringIterator = iSearchString.c_str();
00378
00379     // Instantiate the structure that will hold the result of the parsing.
00380     SearchStringParser lSearchStringParser (oSearchStringStruct);
00381     boost::spirit::classic::parse_info<iterator_t> info =
00382         boost::spirit::classic::parse (lStringIterator, lSearchStringParser,
00383                                         boost::spirit::classic::space_p);
00384
00385     STDAIR_LOG_DEBUG ("-----");
00386
00387     bool hasBeenParsingSuccessful = info.full;
00388     if (hasBeenParsingSuccessful == true) {
00389         STDAIR_LOG_DEBUG ("Parsing succeeded");
00390
00391     } else {
00392         STDAIR_LOG_DEBUG ("Parsing failed");
00393     }
00394     STDAIR_LOG_DEBUG ("-----");
00395
00396     return oSearchStringStruct;
00397 }
00398
00399 }

```

## 26.17 airsched/batches/BookingRequestParser.hpp File Reference

```

#include <string>
#include <vector>

```

### Classes

- struct [airsched::Place\\_T](#)
- struct [airsched::Date\\_T](#)
- struct [airsched::Airline\\_T](#)
- struct [airsched::Passenger\\_T](#)
- struct [airsched::SearchString\\_T](#)

### Namespaces

- namespace [airsched](#)

### Typedefs

- typedef std::vector< Place\_T > [airsched::PlaceList\\_T](#)
- typedef std::vector< Date\_T > [airsched::DateList\\_T](#)
- typedef std::vector< Airline\_T > [airsched::AirlineList\\_T](#)
- typedef std::vector< Passenger\_T > [airsched::PassengerList\\_T](#)

## Functions

- SearchString\_T [airsched::parseBookingRequest](#) (const std::string &iSearchString)

## 26.18 BookingRequestParser.hpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <string>
00006 #include <vector>
00007
00008 namespace airsched {
00009
00010     struct Place_T {
00011         // Attributes
00012         std::string _name;
00013         std::string _code;
00014         Place_T () : _name (""), _code ("") {}
00015         /* Display. */
00016         void display() const {
00017             std::cout << "Place: " << _name << " (" << _code << ")" << std::endl;
00018         }
00019     };
00020
00021     typedef std::vector<Place_T> PlaceList_T;
00022
00023     struct Date_T {
00024         // Attributes
00025         boost::gregorian::date _date;
00026         unsigned int _reldays;
00027         unsigned int _day;
00028         unsigned int _month;
00029         unsigned int _year;
00030         Date_T () : _reldays (14), _day(1), _month(1), _year(1970) {}
00031         /* Display. */
00032         void display() const {
00033             std::cout << "Date: " << _date << " (" << _day << "/" << _month
00034                 << "/" << _year << "), i.e. in " << _reldays << " days"
00035                 << std::endl;
00036         }
00037         boost::gregorian::date getDate() const {
00038             return boost::gregorian::date (_year, _month, _day);
00039         }
00040     };
00041
00042     typedef std::vector<Date_T> DateList_T;
00043
00044     struct Airline_T {
00045         // Attributes
00046         bool _isPreferred;
00047         std::string _name;
00048         std::string _code;
00049         Airline_T () : _isPreferred (true), _name(""), _code("") {}
00050         /* Display. */
00051         void display() const {
00052             const std::string isPreferredStr = (_isPreferred)?"+":"-";
00053             std::cout << "Airline: " << isPreferredStr << _name << " (" << _code << "
00054                 << std::endl;
00055         }
00056     };
00057
00058     typedef std::vector<Airline_T> AirlineList_T;
00059
00060     struct Passenger_T {
00061         // Attributes
00062         typedef enum { ADULT = 0, CHILD, PET, LAST_VALUE } PassengerType_T;
00063         static const std::string _labels[LAST_VALUE];
00064         PassengerType_T _type;
00065         unsigned short _number;
00066         Passenger_T () : _type(ADULT), _number(1) {}
00067         /* Display. */
00068         void display() const {
00069             std::cout << "Passenger: " << _number << " (" << _labels[_type] << ")"
00070                 << std::endl;
00071         }
00072     };
00073
00074     const std::string Passenger_T::_labels[Passenger_T::LAST_VALUE] =
00075         { "Adult", "Child", "Pet" };
00076

```

```

00091 typedef std::vector<Passenger_T> PassengerList_T;
00092
00094 struct SearchString_T {
00095     // Attributes
00096     PlaceList_T _placeList;
00097     DateList_T _dateList;
00098     AirlineList_T _airlineList;
00099     PassengerList_T _passengerList;
00100
00102     SearchString_T () {}
00103
00104     /* Display. */
00105     void display() const {
00106         std::cout << std::endl;
00107
00108         for (PlaceList_T::const_iterator itPlace = _placeList.begin();
00109              itPlace != _placeList.end(); ++itPlace) {
00110             const Place_T& lPlace = *itPlace;
00111             lPlace.display();
00112         }
00113
00114         for (DateList_T::const_iterator itDate = _dateList.begin();
00115              itDate != _dateList.end(); ++itDate) {
00116             const Date_T& lDate = *itDate;
00117             lDate.display();
00118         }
00119
00120         for (AirlineList_T::const_iterator itAirline = _airlineList.begin();
00121              itAirline != _airlineList.end(); ++itAirline) {
00122             const Airline_T& lAirline = *itAirline;
00123             lAirline.display();
00124         }
00125
00126         for (PassengerList_T::const_iterator itPassenger = _passengerList.begin();
00127              itPassenger != _passengerList.end(); ++itPassenger) {
00128             const Passenger_T& lPassenger = *itPassenger;
00129             lPassenger.display();
00130         }
00131
00132         std::cout << "-- Staging --" << std::endl;
00133         _tmpPlace.display();
00134     }
00135
00136     // //// Staging ////
00137     Place_T _tmpPlace;
00138     Date_T _tmpDate;
00139     Airline_T _tmpAirline;
00140     Passenger_T _tmpPassenger;
00141 };
00142
00144 //
00145 // The booking request grammar (using subrules)
00146 //
00148
00174 SearchString_T parseBookingRequest (const std::string& iSearchString);
00175
00176 }

```

## 26.19 airsched/bom/AirportList.hpp File Reference

```

#include <set>
#include <vector>
#include <stdair/stdair_basic_types.hpp>

```

### Namespaces

- namespace [AIRSCHED](#)

### Typedefs

- typedef std::set  
< stdair::AirportCode\_T > [AIRSCHED::AirportList\\_T](#)

- typedef std::vector  
 < stdair::AirportCode\_T > AIRSCHEd::AirportOrderedList\_T

## 26.20 AirportList.hpp

```

00001 #ifndef __AIRSCHEd_BOM_AIRPORTLIST_HPP
00002 #define __AIRSCHEd_BOM_AIRPORTLIST_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <set>
00009 #include <vector>
00010 // StdAir
00011 #include <stdair/stdair_basic_types.hpp>
00012
00013 namespace AIRSCHEd {
00014
00016     typedef std::set<stdair::AirportCode_T> AirportList_T;
00017     typedef std::vector<stdair::AirportCode_T> AirportOrderedList_T;
00018
00019 }
00020 #endif // __AIRSCHEd_BOM_AIRPORTLIST_HPP

```

## 26.21 airsched/bom/BomDisplay.cpp File Reference

```

#include <cassert>
#include <ostream>
#include <stdair/basic/BasConst_BomDisplay.hpp>
#include <stdair/bom/BomManager.hpp>
#include <stdair/bom/BomRoot.hpp>
#include <airsched/bom/ReachableUniverse.hpp>
#include <airsched/bom/BomDisplay.hpp>

```

### Classes

- struct AIRSCHEd::FlagSaver

### Namespaces

- namespace AIRSCHEd

## 26.22 BomDisplay.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <ostream>
00007 // StdAir
00008 #include <stdair/basic/BasConst_BomDisplay.hpp>
00009 #include <stdair/bom/BomManager.hpp>
00010 #include <stdair/bom/BomRoot.hpp>
00011 // AirSched
00012 #include <airsched/bom/ReachableUniverse.hpp>
00013 #include <airsched/bom/BomDisplay.hpp>
00014
00015 namespace AIRSCHEd {
00016
00022     struct FlagSaver {
00023     public:
00025         FlagSaver (std::ostream& oStream)
00026             : _oStream (oStream), _streamFlags (oStream.flags()) {
00027         }
00028

```

```

00030     ~FlagSaver() {
00031         // Reset formatting flags of the given output stream
00032         _oStream.flags (_streamFlags);
00033     }
00034
00035 private:
00036     std::ostream& _oStream;
00037     std::ios::fmtflags _streamFlags;
00038 };
00039
00040 // //////////////////////////////////////
00041 std::string BomDisplay::csvDisplay (const stdair::BomRoot& iBomRoot) {
00042     std::ostringstream oStream;
00043
00044     oStream << std::endl;
00045     oStream << "=====
00046
00047     << std::endl;
00048     oStream << "BomRoot: " << iBomRoot.describeKey() << std::endl;
00049     oStream << "=====
00050
00051     << std::endl;
00052
00053     // Check whether there are ReachableUniverse objects
00054     if (stdair::BomManager::hasList<ReachableUniverse> (iBomRoot) == false) {
00055         return oStream.str();
00056     }
00057
00058     // Retrieve the ReachableUniverse list
00059     const ReachableUniverseList_T& lReachableUniverseList =
00060         stdair::BomManager::getList<ReachableUniverse> (iBomRoot);
00061
00062     // Browse the networks for each departure airport
00063     for (ReachableUniverseList_T::const_iterator itReachableUniverse =
00064         lReachableUniverseList.begin();
00065         itReachableUniverse != lReachableUniverseList.end();
00066         ++itReachableUniverse) {
00067         ReachableUniverse* lReachableUniverse_ptr = *itReachableUniverse;
00068         assert (lReachableUniverse_ptr != NULL);
00069
00070         // Display the reachable universe
00071         csvDisplay (oStream, *lReachableUniverse_ptr);
00072     }
00073
00074     return oStream.str();
00075 }
00076
00077 // //////////////////////////////////////
00078 void BomDisplay::csvDisplay (std::ostream& oStream,
00079                             const ReachableUniverse& iReachableUniverse) {
00080     // Save the formatting flags for the given STL output stream
00081     FlagSaver flagSaver (oStream);
00082
00083     oStream << "+++++" << std::endl;
00084
00085     oStream << iReachableUniverse.toString();
00086     oStream << "+++++" << std::endl;
00087 }
00088
00089 }
00090
00091 }
00092
00093 }
00094

```

## 26.23 airsched/bom/BomDisplay.hpp File Reference

```

#include <iosfwd>
#include <string>

```

### Classes

- class [AIRSCHEDED::BomDisplay](#)  
*Utility class to display AirSched objects with a pretty format.*

### Namespaces

- namespace [stdair](#)

*Forward declarations.*

- namespace AIRSCHED

## 26.24 BomDisplay.hpp

```

00001 #ifndef __AIRSCHED_BOM_BOMDISPLAY_HPP
00002 #define __AIRSCHED_BOM_BOMDISPLAY_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <iosfwd>
00009 #include <string>
00010 // AirSched
00011
00013 namespace stdair {
00014     class BomRoot;
00015 }
00016
00017 namespace AIRSCHED {
00018
00020     class ReachableUniverse;
00021
00026     class BomDisplay {
00027     public:
00028         // ////////////////////////////////// Display support methods //////////////////////////////////
00037         static std::string csvDisplay (const stdair::BomRoot&);
00038
00047         static void csvDisplay (std::ostream&, const ReachableUniverse&);
00048     };
00049
00050 }
00051 #endif // __AIRSCHED_BOM_BOMDISPLAY_HPP

```

## 26.25 airsched/bom/FareFamilyStruct.cpp File Reference

```

#include <cassert>
#include <sstream>
#include <airsched/bom/FareFamilyStruct.hpp>

```

### Namespaces

- namespace AIRSCHED

## 26.26 FareFamilyStruct.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <sstream>
00007 // AIRSCHED
00008 #include <airsched/bom/FareFamilyStruct.hpp>
00009
00010 namespace AIRSCHED {
00011
00012     // //////////////////////////////////////
00013     FareFamilyStruct::
00014     FareFamilyStruct (const stdair::FamilyCode_T& iFamilyCode,
00015                     const stdair::ClassList_String_T& iClasses)
00016         : _familyCode (iFamilyCode),
00017           _classes (iClasses) {
00018     }
00019
00020     // //////////////////////////////////////
00021     const std::string FareFamilyStruct::describe() const {
00022         std::ostringstream ostr;
00023         ostr << " " << _familyCode << " " << _classes << ", ";
00024         return ostr.str();
00025     }

```

```
00026
00027 }
```

## 26.27 airsched/bom/FareFamilyStruct.hpp File Reference

```
#include <string>
#include <vector>
#include <stdair/stdair_basic_types.hpp>
#include <stdair/basic/StructAbstract.hpp>
```

### Classes

- struct [AIRSCHED::FareFamilyStruct](#)

### Namespaces

- namespace [AIRSCHED](#)

### Typedefs

- typedef std::vector  
< FareFamilyStruct > [AIRSCHED::FareFamilyStructList\\_T](#)

## 26.28 FareFamilyStruct.hpp

```
00001 #ifndef __AIRSCHED_BOM_FAREFAMILYSTRUCT_HPP
00002 #define __AIRSCHED_BOM_FAREFAMILYSTRUCT_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <string>
00009 #include <vector>
00010 // StdAir
00011 #include <stdair/stdair_basic_types.hpp>
00012 #include <stdair/basic/StructAbstract.hpp>
00013
00014 namespace AIRSCHED {
00015
00017     struct FareFamilyStruct : public stdair::StructAbstract {
00018         // Attributes
00019         stdair::FamilyCode_T _familyCode;
00020         stdair::ClassList_String_T _classes;
00021
00023         FareFamilyStruct (const stdair::FamilyCode_T&,
00024                         const stdair::ClassList_String_T&);
00025
00027         const std::string describe() const;
00028     };
00029
00031     typedef std::vector<FareFamilyStruct> FareFamilyStructList_T;
00032
00033 }
00034 #endif // __AIRSCHED_BOM_FAREFAMILYSTRUCT_HPP
```

## 26.29 airsched/bom/FlightPeriodStruct.cpp File Reference

```
#include <cassert>
#include <sstream>
#include <stdair/basic/BasConst_Period_BOM.hpp>
#include <stdair/service/Logger.hpp>
#include <airsched/AIRSCHEDED_Types.hpp>
#include <airsched/bom/FlightPeriodStruct.hpp>
```

### Namespaces

- namespace [AIRSCHEDED](#)

## 26.30 FlightPeriodStruct.cpp

```
00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <sstream>
00007 // StdAir
00008 #include <stdair/basic/BasConst_Period_BOM.hpp>
00009 #include <stdair/service/Logger.hpp>
00010 // AirSched
00011 #include <airsched/AIRSCHEDED_Types.hpp>
00012 #include <airsched/bom/FlightPeriodStruct.hpp>
00013
00014 namespace AIRSCHEDED {
00015
00016 // //////////////////////////////////////
00017 FlightPeriodStruct::FlightPeriodStruct ()
00018 : _dateRange (stdair::BOOST_DEFAULT_DATE_PERIOD),
00019   _dow (stdair::DEFAULT_DOW_STRING),
00020   _legAlreadyDefined (false), _itSeconds (0) {
00021 }
00022
00023 // //////////////////////////////////////
00024 stdair::Date_T FlightPeriodStruct::getDate() const {
00025     return stdair::Date_T (_itYear, _itMonth, _itDay);
00026 }
00027
00028 // //////////////////////////////////////
00029 stdair::Duration_T FlightPeriodStruct::getTime() const {
00030     return boost::posix_time::hours (_itHours)
00031         + boost::posix_time::minutes (_itMinutes)
00032         + boost::posix_time::seconds (_itSeconds);
00033 }
00034
00035 // //////////////////////////////////////
00036 const std::string FlightPeriodStruct::describe() const {
00037     std::ostringstream ostr;
00038     ostr << _airlineCode << _flightNumber << ", " << _dateRange
00039         << " - " << _dow << std::endl;
00040
00041     for (LegStructList_T::const_iterator itLeg = _legList.begin();
00042          itLeg != _legList.end(); ++itLeg) {
00043         const LegStruct& lLeg = *itLeg;
00044         ostr << lLeg.describe();
00045     }
00046
00047     for (SegmentStructList_T::const_iterator itSegment = _segmentList.begin();
00048          itSegment != _segmentList.end(); ++itSegment) {
00049         const SegmentStruct& lSegment = *itSegment;
00050         ostr << lSegment.describe();
00051     }
00052
00053     //ostr << "[Debug] - Staging Leg: ";
00054     //ostr << _itLeg.describe();
00055     //ostr << "[Debug] - Staging Cabin: ";
00056     //ostr << _itCabin.describe();
00057
00058     return ostr.str();
00059 }
00060
00061 // //////////////////////////////////////
```



```

00062 void FlightPeriodStruct::addAirport (const stdair::AirportCode_T& iAirport) {
00063     AirportList_T::const_iterator itAirport = _airportList.find (iAirport);
00064     if (itAirport == _airportList.end()) {
00065         // Add the airport code to the airport set
00066         const bool insertSuccessful = _airportList.insert (iAirport).second;
00067
00068         if (insertSuccessful == false) {
00069             // TODO: throw an exception
00070         }
00071
00072         // Add the airport code to the airport vector
00073         _airportOrderedList.push_back (iAirport);
00074     }
00075 }
00076
00077 // //////////////////////////////////////
00078 void FlightPeriodStruct::buildSegments () {
00079     // The list of airports encompasses all the airports on which
00080     // the flight takes off or lands. Moreover, that list is
00081     // time-ordered: the first airport is the initial departure of
00082     // the flight, and the last airport is the eventual point of
00083     // rest of the flight.
00084     // Be l the size of the ordered list of airports.
00085     // We want to generate all the segment combinations from the legs
00086     // and, hence, from all the possible (time-ordered) airport pairs.
00087     // Thus, we both iterator on i=0...l-1 and j=i+1...l
00088     assert (_airportOrderedList.size() >= 2);
00089
00090     _segmentList.clear();
00091     for (AirportOrderedList_T::const_iterator itAirport_i =
00092         _airportOrderedList.begin();
00093         itAirport_i != _airportOrderedList.end()-1; ++itAirport_i) {
00094         for (AirportOrderedList_T::const_iterator itAirport_j = itAirport_i + 1;
00095             itAirport_j != _airportOrderedList.end(); ++itAirport_j) {
00096             SegmentStruct lSegmentStruct;
00097             lSegmentStruct._boardingPoint = *itAirport_i;
00098             lSegmentStruct._offPoint = *itAirport_j;
00099
00100             _segmentList.push_back (lSegmentStruct);
00101         }
00102     }
00103
00104     // Clear the lists of airports, so that it is ready for the next flight
00105     _airportList.clear();
00106     _airportOrderedList.clear();
00107 }
00108
00109 // //////////////////////////////////////
00110 void FlightPeriodStruct::
00111 addSegmentCabin (const SegmentStruct& iSegment,
00112                 const SegmentCabinStruct& iCabin) {
00113     // Retrieve the Segment structure corresponding to the (boarding, off)
00114     point
00115     // pair.
00116     SegmentStructList_T::iterator itSegment = _segmentList.begin();
00117     for ( ; itSegment != _segmentList.end(); ++itSegment) {
00118         const SegmentStruct& lSegment = *itSegment;
00119
00120         const stdair::AirportCode_T& lBoardingPoint = iSegment._boardingPoint;
00121         const stdair::AirportCode_T& lOffPoint = iSegment._offPoint;
00122         if (lSegment._boardingPoint == lBoardingPoint
00123             && lSegment._offPoint == lOffPoint) {
00124             break;
00125         }
00126     }
00127
00128     if (itSegment == _segmentList.end()) {
00129         std::ostream oStr;
00130         oStr << "Within the schedule input file, there is a flight, for which "
00131             << "the airports of segments and those of the legs "
00132             << "do not correspond";
00133         STDAIR_LOG_ERROR (oStr.str());
00134         throw SegmentDateNotFoundExpection (oStr.str());
00135     }
00136
00137     // Add the Cabin structure to the Segment Cabin structure.
00138     assert (itSegment != _segmentList.end());
00139     SegmentStruct& lSegment = *itSegment;
00140     lSegment._cabinList.push_back (iCabin);
00141 }
00142
00143 // //////////////////////////////////////
00144 void FlightPeriodStruct::
00145 addSegmentCabin (const SegmentCabinStruct& iCabin) {
00146     // Iterate on all the Segment structures (as they get the same cabin
00147     // definitions)
00148     for (SegmentStructList_T::iterator itSegment = _segmentList.begin();

```

```

00153         itSegment != _segmentList.end(); ++itSegment) {
00154             SegmentStruct& lSegment = *itSegment;
00155
00156             lSegment._cabinList.push_back (iCabin);
00157         }
00158     }
00159
00160     ///////////////////////////////////////////////////////////////////
00161 void FlightPeriodStruct::
00162 addFareFamily (const SegmentStruct& iSegment,
00163               const SegmentCabinStruct& iCabin,
00164               const FareFamilyStruct& iFareFamily) {
00165     // Retrieve the Segment structure corresponding to the (boarding, off)
point
00166     // pair.
00167     SegmentStructList_T::iterator itSegment = _segmentList.begin();
00168     for ( ; itSegment != _segmentList.end(); ++itSegment) {
00169         const SegmentStruct& lSegment = *itSegment;
00170
00171         const stdair::AirportCode_T& lBoardingPoint = iSegment._boardingPoint;
00172         const stdair::AirportCode_T& lOffPoint = iSegment._offPoint;
00173         if (lSegment._boardingPoint == lBoardingPoint
00174             && lSegment._offPoint == lOffPoint) {
00175             break;
00176         }
00177     }
00178
00179     if (itSegment == _segmentList.end()) {
00180         std::ostringstream ostr;
00181         ostr << "Within the schedule input file, there is a flight, for which "
00182             << "the airports of segments and those of the legs "
00183             << "do not correspond";
00184         STDAIR_LOG_ERROR (ostr.str());
00185         throw SegmentDateNotFoundException (ostr.str());
00186     }
00187
00188     // Add the Cabin structure to the Segment Cabin structure.
00189     assert (itSegment != _segmentList.end());
00190     SegmentStruct& lSegment = *itSegment;
00191
00192     // Retrieve the Segment cabin structure given the cabin code
00193     SegmentCabinStructList_T::iterator itCabin = lSegment._cabinList.begin();
00194     for ( ; itCabin != lSegment._cabinList.end(); ++itCabin) {
00195         const SegmentCabinStruct& lCabin = *itCabin;
00196
00197         const stdair::CabinCode_T& lCabinCode = lCabin._cabinCode;
00198         if (iCabin._cabinCode == lCabinCode) {
00199             break;
00200         }
00201     }
00202
00203     if (itCabin == lSegment._cabinList.end()) {
00204         std::ostringstream ostr;
00205         ostr << "Within the schedule input file, there is a flight "
00206             << "for which the cabin code does not exist.";
00207         STDAIR_LOG_ERROR (ostr.str());
00208         throw SegmentDateNotFoundException (ostr.str());
00209     }
00210
00211     // Add the Cabin structure to the Segment Cabin structure.
00212     assert (itCabin != lSegment._cabinList.end());
00213     SegmentCabinStruct& lCabin = *itCabin;
00214     lCabin._fareFamilies.push_back(iFareFamily);
00215 }
00216
00217 ///////////////////////////////////////////////////////////////////
00218 void FlightPeriodStruct::
00219 addFareFamily (const SegmentCabinStruct& iCabin,
00220               const FareFamilyStruct& iFareFamily) {
00221     // Iterate on all the Segment structures (as they get the same cabin
00222     // definitions)
00223
00224     for (SegmentStructList_T::iterator itSegment = _segmentList.begin();
00225          itSegment != _segmentList.end(); ++itSegment) {
00226         SegmentStruct& lSegment = *itSegment;
00227
00228         // Retrieve the Segment cabin structure given the cabin code
00229         SegmentCabinStructList_T::iterator itCabin = lSegment._cabinList.begin();
00230         for ( ; itCabin != lSegment._cabinList.end(); ++itCabin) {
00231             const SegmentCabinStruct& lCabin = *itCabin;
00232
00233             const stdair::CabinCode_T& lCabinCode = lCabin._cabinCode;
00234             if (iCabin._cabinCode == lCabinCode) {
00235                 break;
00236             }
00237         }
00238     }
00239 }
00240
00241
00242
00243
00244
00245
00246
00247
00248

```

```

00254     if (itCabin == lSegment._cabinList.end()) {
00255         std::ostringstream ostr;
00256         ostr << "Within the schedule input file, there is a flight "
00257             << "for which the cabin code does not exist.";
00258         STDAIR_LOG_ERROR (ostr.str());
00259         throw SegmentDateNotFoundException (ostr.str());
00260     }
00261
00262     // Add the Cabin structure to the Segment Cabin structure.
00263     assert (itCabin != lSegment._cabinList.end());
00264     SegmentCabinStruct& lCabin = *itCabin;
00265     lCabin._fareFamilies.push_back(iFareFamily);
00266 }
00267 }
00268
00269 }

```

## 26.31 airsched/bom/FlightPeriodStruct.hpp File Reference

```

#include <string>
#include <stdair/stdair_basic_types.hpp>
#include <stdair/basic/StructAbstract.hpp>
#include <stdair/bom/DoWStruct.hpp>
#include <airsched/bom/LegCabinStruct.hpp>
#include <airsched/bom/LegStruct.hpp>
#include <airsched/bom/SegmentStruct.hpp>
#include <airsched/bom/SegmentCabinStruct.hpp>
#include <airsched/bom/FareFamilyStruct.hpp>
#include <airsched/bom/AirportList.hpp>

```

### Classes

- struct [AIRSCHEDED::FlightPeriodStruct](#)

### Namespaces

- namespace [AIRSCHEDED](#)

## 26.32 FlightPeriodStruct.hpp

```

00001 #ifndef __AIRSCHEDED_BOM_FLIGHTPERIODSTRUCT_HPP
00002 #define __AIRSCHEDED_BOM_FLIGHTPERIODSTRUCT_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <string>
00009 // StdAir
00010 #include <stdair/stdair_basic_types.hpp>
00011 #include <stdair/basic/StructAbstract.hpp>
00012 #include <stdair/bom/DoWStruct.hpp>
00013 // AirSched
00014 #include <airsched/bom/LegCabinStruct.hpp>
00015 #include <airsched/bom/LegStruct.hpp>
00016 #include <airsched/bom/SegmentStruct.hpp>
00017 #include <airsched/bom/SegmentCabinStruct.hpp>
00018 #include <airsched/bom/FareFamilyStruct.hpp>
00019 #include <airsched/bom/AirportList.hpp>
00020
00021 namespace AIRSCHEDED {
00022
00026     struct FlightPeriodStruct : public stdair::StructAbstract {
00027
00029         stdair::Date_T getDate() const;
00030
00032         stdair::Duration_T getTime() const;
00033
00035         const std::string describe() const;

```

```

00036
00039 void addAirport (const stdair::AirportCode_T&);
00040
00042 void buildSegments();
00043
00050 void addSegmentCabin (const SegmentStruct&,
00051                      const SegmentCabinStruct&);
00052
00058 void addSegmentCabin (const SegmentCabinStruct&);
00059
00066 void addFareFamily (const SegmentStruct&,
00067                    const SegmentCabinStruct&,
00068                    const FareFamilyStruct&);
00069
00075 void addFareFamily (const SegmentCabinStruct&,
00076                    const FareFamilyStruct&);
00077
00081 FlightPeriodStruct();
00082
00083 // Attributes
00084 stdair::AirlineCode_T _airlineCode;
00085 stdair::FlightNumber_T _flightNumber;
00086 stdair::DatePeriod_T _dateRange;
00087 stdair::DoWStruct _dow;
00088 LegStructList_T _legList;
00089 SegmentStructList_T _segmentList;
00090
00093 bool _legAlreadyDefined;
00094 LegStruct _itLeg;
00095 LegCabinStruct _itLegCabin;
00096
00098 stdair::Date_T _dateRangeStart;
00099 stdair::Date_T _dateRangeEnd;
00100 unsigned int _itYear;
00101 unsigned int _itMonth;
00102 unsigned int _itDay;
00103 int _dateOffset;
00104
00106 long _itHours;
00107 long _itMinutes;
00108 long _itSeconds;
00109
00112 AirportList_T _airportList;
00113 AirportOrderedList_T _airportOrderedList;
00114
00116 bool _areSegmentDefinitionsSpecific;
00117 SegmentStruct _itSegment;
00118 SegmentCabinStruct _itSegmentCabin;
00119 };
00120
00121 }
00122 #endif // __AIRSCHED_BOM_FLIGHTPERIODSTRUCT_HPP

```

## 26.33 airsched/bom/LegCabinStruct.cpp File Reference

```

#include <cassert>
#include <sstream>
#include <stdair/bom/LegCabin.hpp>
#include <airsched/bom/LegCabinStruct.hpp>

```

### Namespaces

- namespace [AIRSCHED](#)

## 26.34 LegCabinStruct.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <sstream>
00007 // STDAIR
00008 #include <stdair/bom/LegCabin.hpp>
00009 // AIRSCHED

```

```

00010 #include <airsched/bom/LegCabinStruct.hpp>
00011
00012 namespace AIRSCHED {
00013
00014     // //////////////////////////////////////
00015     const std::string LegCabinStruct::describe() const {
00016         std::ostringstream ostr;
00017         ostr << " " << _cabinCode << " " << _capacity << ", ";
00018         return ostr.str();
00019     }
00020
00021     // //////////////////////////////////////
00022     void LegCabinStruct::fill (stdair::LegCabin& ioLegCabin) const {
00023         // Set the Capacity
00024         ioLegCabin.setCapacities (_capacity);
00025     }
00026
00027 }

```

## 26.35 airsched/bom/LegCabinStruct.hpp File Reference

```

#include <string>
#include <vector>
#include <stdair/stdair_inventory_types.hpp>
#include <stdair/basic/StructAbstract.hpp>

```

### Classes

- struct [AIRSCHED::LegCabinStruct](#)

### Namespaces

- namespace [stdair](#)  
*Forward declarations.*
- namespace [AIRSCHED](#)

### Typedefs

- typedef std::vector  
< LegCabinStruct > [AIRSCHED::LegCabinStructList\\_T](#)

## 26.36 LegCabinStruct.hpp

```

00001 #ifndef __AIRSCHED_BOM_LEGCABINSTRUCT_HPP
00002 #define __AIRSCHED_BOM_LEGCABINSTRUCT_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <string>
00009 #include <vector>
00010 // StdAir
00011 #include <stdair/stdair_inventory_types.hpp>
00012 #include <stdair/basic/StructAbstract.hpp>
00013
00014 // Forward declarations
00015 namespace stdair {
00016     class LegCabin;
00017 }
00018
00019 namespace AIRSCHED {
00020
00022     struct LegCabinStruct : public stdair::StructAbstract {
00023         // Attributes
00024         stdair::CabinCode_T _cabinCode;
00025         stdair::CabinCapacity_T _capacity;

```

```

00026
00029     void fill (stdair::LegCabin&) const;
00030
00032     const std::string describe() const;
00033 };
00034
00036 typedef std::vector<LegCabinStruct> LegCabinStructList_T;
00037
00038 }
00039 #endif // __AIRSCHED_BOM_LEGCABINSTRUCT_HPP

```

## 26.37 airsched/bom/LegStruct.cpp File Reference

```

#include <cassert>
#include <sstream>
#include <stdair/basic/BasConst_Period_BOM.hpp>
#include <stdair/bom/LegDate.hpp>
#include <airsched/bom/LegStruct.hpp>

```

### Namespaces

- namespace [AIRSCHED](#)

## 26.38 LegStruct.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <sstream>
00007 // STDAIR
00008 #include <stdair/basic/BasConst_Period_BOM.hpp>
00009 #include <stdair/bom/LegDate.hpp>
00010 // AIRSCHED
00011 #include <airsched/bom/LegStruct.hpp>
00012
00013 namespace AIRSCHED {
00014
00015 // //////////////////////////////////////
00016 LegStruct::LegStruct ()
00017 : _boardingDateOffset (stdair::DEFAULT_DATE_OFFSET),
00018   _offDateOffset (stdair::DEFAULT_DATE_OFFSET) {
00019 }
00020
00021 // //////////////////////////////////////
00022 const std::string LegStruct::describe() const {
00023     std::ostringstream ostr;
00024     ostr << " " << _boardingPoint << " / "
00025           << boost::posix_time::to_simple_string(_boardingTime);
00026     if (_boardingDateOffset.days() != 0) {
00027         ostr << " [" << _boardingDateOffset.days() << "]";
00028     }
00029     ostr << " -- " << _offPoint << " / "
00030           << boost::posix_time::to_simple_string(_offTime);
00031     if (_offDateOffset.days() != 0) {
00032         ostr << " [" << _offDateOffset.days() << "]";
00033     }
00034     ostr << " --> "
00035           << boost::posix_time::to_simple_string(_elapsed)
00036           << std::endl;
00037     for (LegCabinStructList_T::const_iterator itCabin = _cabinList.begin();
00038          itCabin != _cabinList.end(); itCabin++) {
00039         const LegCabinStruct& lCabin = *itCabin;
00040         ostr << lCabin.describe();
00041     }
00042     ostr << std::endl;
00043     return ostr.str();
00044 }
00045
00046 // //////////////////////////////////////
00048 void LegStruct::fill (const stdair::Date_T& iRefDate,
00049                      stdair::LegDate& ioLegDate) const {

```

```

00050      // Set the Off Point
00051      ioLegDate.setOffPoint (_offPoint);
00052
00053      // Set the Boarding Date
00054      ioLegDate.setBoardingDate (iRefDate + _boardingDateOffset);
00055
00056      // Set the Boarding Time
00057      ioLegDate.setBoardingTime (_boardingTime);
00058
00059      // Set the Off Date
00060      ioLegDate.setOffDate (iRefDate + _offDateOffset);
00061
00062      // Set the Off Time
00063      ioLegDate.setOffTime (_offTime);
00064
00065      // Set the Elapsed Time
00066      ioLegDate.setElapsedTime (_elapsed);
00067  }
00068
00069 }
```

## 26.39 airsched/bom/LegStruct.hpp File Reference

```

#include <string>
#include <vector>
#include <stdair/stdair_basic_types.hpp>
#include <stdair/basic/StructAbstract.hpp>
#include <airsched/bom/LegCabinStruct.hpp>
```

### Classes

- struct [AIRSCHED::LegStruct](#)

### Namespaces

- namespace [stdair](#)  
*Forward declarations.*
- namespace [AIRSCHED](#)

### Typedefs

- typedef std::vector< LegStruct > [AIRSCHED::LegStructList\\_T](#)

## 26.40 LegStruct.hpp

```

00001 #ifndef __AIRSCHED_BOM_LEGSTRUCT_HPP
00002 #define __AIRSCHED_BOM_LEGSTRUCT_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <string>
00009 #include <vector>
00010 // StdAir
00011 #include <stdair/stdair_basic_types.hpp>
00012 #include <stdair/basic/StructAbstract.hpp>
00013 // AirSched
00014 #include <airsched/bom/LegCabinStruct.hpp>
00015
00016 // Forward declarations
00017 namespace stdair {
00018     class LegDate;
00019 }
00020
00021 namespace AIRSCHED {
00022
```

```

00024 struct LegStruct : public stdair::StructAbstract {
00025     // Attributes
00026     stdair::AirportCode_T _boardingPoint;
00027     stdair::DateOffset_T _boardingDateOffset;
00028     stdair::Duration_T _boardingTime;
00029     stdair::AirportCode_T _offPoint;
00030     stdair::DateOffset_T _offDateOffset;
00031     stdair::Duration_T _offTime;
00032     stdair::Duration_T _elapsed;
00033     LegCabinStructList_T _cabinList;
00034
00040 void fill (const stdair::Date_T& iRefDate, stdair::LegDate&) const;
00041
00043     const std::string describe() const;
00044
00046     LegStruct ();
00047 };
00048
00050 typedef std::vector<LegStruct> LegStructList_T;
00051
00052 }
00053 #endif // __AIRSCHED_BOM_LEGSTRUCT_HPP

```

## 26.41 airsched/bom/OnDPeriodStruct.cpp File Reference

```

#include <cassert>
#include <iostream>
#include <stdair/basic/BasConst_Period_BOM.hpp>
#include <stdair/basic/BasConst_General.hpp>
#include <stdair/basic/BasConst_Inventory.hpp>
#include <stdair/service/Logger.hpp>
#include <airsched/bom/OnDPeriodStruct.hpp>

```

### Namespaces

- namespace [AIRSCHED](#)

## 26.42 OnDPeriodStruct.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <iostream>
00007 // StdAir
00008 #include <stdair/basic/BasConst_Period_BOM.hpp>
00009 #include <stdair/basic/BasConst_General.hpp>
00010 #include <stdair/basic/BasConst_Inventory.hpp>
00011 #include <stdair/service/Logger.hpp>
00012 // AIRSCHED
00013 #include <airsched/bom/OnDPeriodStruct.hpp>
00014
00015 namespace AIRSCHED {
00016     // //////////////////////////////////////
00017     OnDPeriodStruct::OnDPeriodStruct ()
00018         : _datePeriod (stdair::BOOST_DEFAULT_DATE_PERIOD),
00019           _timeRangeStart (stdair::NULL_BOOST_TIME_DURATION),
00020           _timeRangeEnd (stdair::NULL_BOOST_TIME_DURATION),
00021           _nbOfAirlines (stdair::DEFAULT_NBOFAIRLINES),
00022           _airlineCode (stdair::DEFAULT_NULL_AIRLINE_CODE),
00023           _classCode (stdair::DEFAULT_NULL_CLASS_CODE),
00024           _itSeconds (0) {
00025     }
00026
00027     // //////////////////////////////////////
00028     stdair::Date_T OnDPeriodStruct::getDate() const {
00029         return stdair::Date_T (_itYear, _itMonth, _itDay);
00030     }
00031
00032     // //////////////////////////////////////
00033     stdair::Duration_T OnDPeriodStruct::getTime() const {
00034         return boost::posix_time::hours (_itHours)

```



```

00035         + boost::posix_time::minutes (_itMinutes)
00036         + boost::posix_time::seconds (_itSeconds);
00037     }
00038
00039     // //////////////////////////////////////
00040     const std::string OnDPeriodStruct::describe() const {
00041         std::ostringstream ostr;
00042         ostr << _origin << "-" << _destination << ", "
00043             << _datePeriod << ", between "
00044             << boost::posix_time::to_simple_string(_timeRangeStart)
00045             << " to "
00046             << boost::posix_time::to_simple_string(_timeRangeEnd) << ", "
00047             << _classCode << ", "
00048             << _airlineCode << ", "
00049             << std::endl;
00050
00051         return ostr.str();
00052     }
00053
00054     // //////////////////////////////////////
00055     const std::string OnDPeriodStruct::describeTSKey() const {
00056         std::ostringstream ostr;
00057         ostr << _origin << "-" << _destination << ", "
00058             << _airlineCode << ", " << _classCode << std::endl;
00059
00060         return ostr.str();
00061     }
00062
00063     // //////////////////////////////////////
00064     const stdair::AirlineCode_T& OnDPeriodStruct::getFirstAirlineCode () const {
00065         assert (_airlineCodeList.size() > 0);
00066         stdair::AirlineCodeList_T::const_iterator itFirstAirlineCode =
00067             _airlineCodeList.begin();
00068         return *itFirstAirlineCode;
00069     }
00070
00071 }

```

## 26.43 airsched/bom/OnDPeriodStruct.hpp File Reference

```

#include <string>
#include <stdair/stdair_inventory_types.hpp>
#include <stdair/basic/StructAbstract.hpp>

```

### Classes

- struct [AIRSCHEDED::OnDPeriodStruct](#)

### Namespaces

- namespace [AIRSCHEDED](#)

## 26.44 OnDPeriodStruct.hpp

```

00001 #ifndef __AIRSCHEDED_BOM_ONDPERIODSTRUCT_HPP
00002 #define __AIRSCHEDED_BOM_ONDPERIODSTRUCT_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <string>
00009 // StdAir
00010 #include <stdair/stdair_inventory_types.hpp>
00011 #include <stdair/basic/StructAbstract.hpp>
00012
00013 namespace AIRSCHEDED {
00015     struct OnDPeriodStruct : public stdair::StructAbstract {
00016     public:
00017         // ////////////////////////////////////// Getters //////////////////////////////////////
00019         const stdair::AirlineCode_T& getFirstAirlineCode () const;
00020

```

```

00022     stdair::Date_T getDate() const;
00023
00025     stdair::Duration_T getTime() const;
00026
00027     // ////////// Display Methods //////////
00029     const std::string describe() const;
00030
00033     const std::string describeTSKey() const;
00034
00035 public:
00037     OnDPeriodStruct ();
00038
00039 public:
00040     // Attributes
00041     stdair::AirportCode_T _origin;
00042     stdair::AirportCode_T _destination;
00043     stdair::DatePeriod_T _datePeriod;
00044     stdair::Duration_T _timeRangeStart;
00045     stdair::Duration_T _timeRangeEnd;
00046     stdair::NbOfAirlines_T _nbOfAirlines;
00047     stdair::AirlineCode_T _airlineCode;
00048     stdair::ClassCode_T _classCode;
00049     stdair::AirlineCodeList_T _airlineCodeList;
00050     stdair::ClassCodeList_T _classCodeList;
00051
00053     stdair::Date_T _dateRangeStart;
00054     stdair::Date_T _dateRangeEnd;
00055     unsigned int _itYear;
00056     unsigned int _itMonth;
00057     unsigned int _itDay;
00058
00060     long _itHours;
00061     long _itMinutes;
00062     long _itSeconds;
00063 };
00064 }
00065 #endif // __AIRSCHED_BOM_ONDPERIODSTRUCT_HPP

```

## 26.45 airsched/bom/OriginDestinationSet.cpp File Reference

```

#include <cassert>
#include <sstream>
#include <boost/archive/text_iarchive.hpp>
#include <boost/archive/text_oarchive.hpp>
#include <boost/serialization/access.hpp>
#include <stdair/basic/BasConst_Inventory.hpp>
#include <airsched/bom/OriginDestinationSet.hpp>

```

### Namespaces

- namespace [AIRSCHED](#)

### Functions

- template void [AIRSCHED::OriginDestinationSet::serialize< ba::text\\_oarchive >](#) (ba::text\_oarchive &, unsigned int)
- template void [AIRSCHED::OriginDestinationSet::serialize< ba::text\\_iarchive >](#) (ba::text\_iarchive &, unsigned int)

## 26.46 OriginDestinationSet.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <sstream>
00007 // Boost.Serialization
00008 #include <boost/archive/text_iarchive.hpp>

```

```

00009 #include <boost/archive/text_oarchive.hpp>
00010 #include <boost/serialization/access.hpp>
00011 // StdAir
00012 #include <stdair/basic/BasConst_Inventory.hpp>
00013 // AirSched
00014 #include <airsched/bom/OriginDestinationSet.hpp>
00015
00016 namespace AIRSCHED {
00017
00018 // //////////////////////////////////////
00019 OriginDestinationSet::OriginDestinationSet ()
00020 : _key (stdair::DEFAULT_ORIGIN), _parent (NULL) {
00021     assert (false);
00022 }
00023
00024 // //////////////////////////////////////
00025 OriginDestinationSet::OriginDestinationSet (const OriginDestinationSet&)
00026 : _key (stdair::DEFAULT_ORIGIN), _parent (NULL) {
00027     assert (false);
00028 }
00029
00030 // //////////////////////////////////////
00031 OriginDestinationSet::OriginDestinationSet (const Key_T& iKey)
00032 : _key (iKey), _parent (NULL) {
00033 }
00034
00035 // //////////////////////////////////////
00036 OriginDestinationSet::~OriginDestinationSet () {
00037 }
00038
00039 // //////////////////////////////////////
00040 std::string OriginDestinationSet::toString() const {
00041     std::ostringstream oStr;
00042     oStr << _key.toString();
00043     return oStr.str();
00044 }
00045
00046 // //////////////////////////////////////
00047 void OriginDestinationSet::serialisationImplementationExport() const {
00048     std::ostringstream oStr;
00049     boost::archive::text_oarchive oa (oStr);
00050     oa << *this;
00051 }
00052
00053 // //////////////////////////////////////
00054 void OriginDestinationSet::serialisationImplementationImport() {
00055     std::istringstream iStr;
00056     boost::archive::text_iarchive ia (iStr);
00057     ia >> *this;
00058 }
00059
00060 // //////////////////////////////////////
00061 template<class Archive>
00062 void OriginDestinationSet::serialize (Archive& ioArchive,
00063                                     const unsigned int iFileVersion) {
00064     ioArchive & _key;
00065 }
00066
00067 // //////////////////////////////////////
00068 // Explicit template instantiation
00069 namespace ba = boost::archive;
00070 template
00071 void OriginDestinationSet::serialize<ba::text_oarchive> (ba::text_oarchive&,
00072                                                         unsigned int);
00073 template
00074 void OriginDestinationSet::serialize<ba::text_iarchive> (ba::text_iarchive&,
00075                                                         unsigned int);
00076 // //////////////////////////////////////
00077 }
00078
00079

```

## 26.47 airsched/bom/OriginDestinationSet.hpp File Reference

```

#include <iosfwd>
#include <string>
#include <stdair/bom/BomAbstract.hpp>
#include <airsched/bom/OriginDestinationSetKey.hpp>
#include <airsched/bom/OriginDestinationSetTypes.hpp>

```

## Classes

- class [AIRSCHED::OriginDestinationSet](#)  
Class representing a simple sub-network.

## Namespaces

- namespace [boost](#)  
Forward declarations.
- namespace [boost::serialization](#)
- namespace [stdair](#)  
Forward declarations.
- namespace [AIRSCHED](#)

## 26.48 OriginDestinationSet.hpp

```

00001 #ifndef __AIRSCHED_BOM_ORIGINDESTINATIONSET_HPP
00002 #define __AIRSCHED_BOM_ORIGINDESTINATIONSET_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <iosfwd>
00009 #include <string>
00010 // StdAir
00011 #include <stdair/bom/BomAbstract.hpp>
00012 // AirSched
00013 #include <airsched/bom/OriginDestinationSetKey.hpp>
00014 #include <airsched/bom/OriginDestinationSetTypes.hpp>
00015
00017 namespace boost {
00018     namespace serialization {
00019         class access;
00020     }
00021 }
00022
00024 namespace stdair {
00025     template <typename BOM> class FacBom;
00026     class FacBomManager;
00027 }
00028
00029 namespace AIRSCHED {
00030
00044     class OriginDestinationSet : public stdair::BomAbstract {
00048     template <typename BOM> friend class stdair::FacBom;
00049     friend class stdair::FacBomManager;
00050     friend class boost::serialization::access;
00051
00052     public:
00053         // ////////// Type definitions //////////
00057         typedef OriginDestinationSetKey Key_T;
00058
00059     public:
00061         // ////////// Getters //////////
00065         const Key_T& getKey() const {
00066             return _key;
00067         }
00068
00072         const stdair::AirportCode_T& getDestination() const {
00073             return _key.getOffPoint();
00074         }
00075
00079         stdair::BomAbstract* const getParent() const {
00080             return _parent;
00081         }
00082
00086         const stdair::HolderMap_T& getHolderMap() const {
00087             return _holderMap;
00088         }
00089
00090     public:
00092         // ////////// Display support methods //////////
00098         void toStream (std::ostream& ioOut) const {

```

```

00099         ioOut << toString();
00100     }
00101
00107     void fromStream (std::istream& ioIn) {
00108     }
00109
00113     std::string toString() const;
00114
00118     const std::string describeKey() const {
00119         return _key.toString();
00120     }
00121
00122
00123 public:
00124     // /////////// (Boost) Serialisation support methods ///////////
00128     template<class Archive>
00129     void serialize (Archive& ar, const unsigned int iFileVersion);
00130
00131 private:
00136     void serialisationImplementationExport() const;
00137     void serialisationImplementationImport();
00138
00139
00140 protected:
00141     // /////////// Constructors and destructors ///////////
00145     OriginDestinationSet (const Key_T&);
00146
00150     ~OriginDestinationSet ();
00151
00152 private:
00156     OriginDestinationSet ();
00157
00161     OriginDestinationSet (const OriginDestinationSet&);
00162
00163 protected:
00164     // /////////// Attributes ///////////
00168     Key_T _key;
00169
00173     stdair::BomAbstract* _parent;
00174
00178     stdair::HolderMap_T _holderMap;
00179 };
00180
00181 }
00182 #endif // __AIRSCHED_BOM_ORIGINDESTINATIONSET_HPP
00183

```

## 26.49 airsched/bom/OriginDestinationSetKey.cpp File Reference

```

#include <cassert>
#include <sstream>
#include <boost/archive/text_iarchive.hpp>
#include <boost/archive/text_oarchive.hpp>
#include <boost/serialization/access.hpp>
#include <stdair/basic/BasConst_Inventory.hpp>
#include <airsched/bom/OriginDestinationSetKey.hpp>

```

### Namespaces

- namespace [AIRSCHED](#)

### Functions

- template void [AIRSCHED::OriginDestinationSetKey::serialize< ba::text\\_oarchive >](#) (ba::text\_oarchive &, unsigned int)
- template void [AIRSCHED::OriginDestinationSetKey::serialize< ba::text\\_iarchive >](#) (ba::text\_iarchive &, unsigned int)

## 26.50 OriginDestinationSetKey.cpp

```

00001 ///////////////////////////////////////////////////////////////////
00002 // Import section
00003 ///////////////////////////////////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <sstream>
00007 // Boost.Serialization
00008 #include <boost/archive/text_iarchive.hpp>
00009 #include <boost/archive/text_oarchive.hpp>
00010 #include <boost/serialization/access.hpp>
00011 // StdAir
00012 #include <stdair/basic/BasConst_Inventory.hpp>
00013 // AirSched
00014 #include <airsched/bom/OriginDestinationSetKey.hpp>
00015
00016 namespace AIRSCHED {
00017
00018 ///////////////////////////////////////////////////////////////////
00019 OriginDestinationSetKey::OriginDestinationSetKey()
00020 : _destination (stdair::DEFAULT_DESTINATION) {
00021     assert (false);
00022 }
00023
00024 ///////////////////////////////////////////////////////////////////
00025 OriginDestinationSetKey::
00026 OriginDestinationSetKey (const stdair::AirportCode_T& iDestination)
00027 : _destination (iDestination) {
00028 }
00029
00030 ///////////////////////////////////////////////////////////////////
00031 OriginDestinationSetKey::
00032 OriginDestinationSetKey (const OriginDestinationSetKey& iKey)
00033 : _destination (iKey._destination) {
00034 }
00035
00036 ///////////////////////////////////////////////////////////////////
00037 OriginDestinationSetKey::~OriginDestinationSetKey() {
00038 }
00039
00040 ///////////////////////////////////////////////////////////////////
00041 void OriginDestinationSetKey::toStream (std::ostream& ioOut) const {
00042     ioOut << "OriginDestinationSetKey: " << toString() << std::endl;
00043 }
00044
00045 ///////////////////////////////////////////////////////////////////
00046 void OriginDestinationSetKey::fromStream (std::istream& ioIn) {
00047 }
00048
00049 ///////////////////////////////////////////////////////////////////
00050 const std::string OriginDestinationSetKey::toString() const {
00051     std::ostringstream oStr;
00052     oStr << _destination;
00053     return oStr.str();
00054 }
00055
00056 ///////////////////////////////////////////////////////////////////
00057 void OriginDestinationSetKey::serialisationImplementationExport() const {
00058     std::ostringstream oStr;
00059     boost::archive::text_oarchive oa (oStr);
00060     oa << *this;
00061 }
00062
00063 ///////////////////////////////////////////////////////////////////
00064 void OriginDestinationSetKey::serialisationImplementationImport() {
00065     std::istringstream iStr;
00066     boost::archive::text_iarchive ia (iStr);
00067     ia >> *this;
00068 }
00069
00070 ///////////////////////////////////////////////////////////////////
00071 template<class Archive>
00072 void OriginDestinationSetKey::serialize (Archive& ioArchive,
00073                                         const unsigned int iFileVersion) {
00074     ioArchive & _destination;
00075 }
00076
00077 ///////////////////////////////////////////////////////////////////
00078 // Explicit template instantiation
00079 namespace ba = boost::archive;
00080 template
00081 void OriginDestinationSetKey::serialize<ba::text_oarchive> (ba::text_oarchive
00082 &,
00083                                                             unsigned int);
00084 template
00085 void OriginDestinationSetKey::serialize<ba::text_iarchive> (ba::text_iarchive

```

```

00089      &,
00090      // //////////////////////////////////////// unsigned int);
00091      // ////////////////////////////////////////
00092  }

```

## 26.51 airsched/bom/OriginDestinationSetKey.hpp File Reference

```

#include <iosfwd>
#include <string>
#include <stdair/stdair_basic_types.hpp>
#include <stdair/bom/KeyAbstract.hpp>

```

### Classes

- struct [AIRSCHEDED::OriginDestinationSetKey](#)  
Structure representing the key of a sub-network.

### Namespaces

- namespace [boost](#)  
Forward declarations.
- namespace [boost::serialization](#)
- namespace [AIRSCHEDED](#)

## 26.52 OriginDestinationSetKey.hpp

```

00001 #ifndef __AIRSCHEDED_BOM_ORIGINDESTINATIONSETKEY_HPP
00002 #define __AIRSCHEDED_BOM_ORIGINDESTINATIONSETKEY_HPP
00003
00004 // ////////////////////////////////////////
00005 // Import section
00006 // ////////////////////////////////////////
00007 // STL
00008 #include <iosfwd>
00009 #include <string>
00010 // StdAir
00011 #include <stdair/stdair_basic_types.hpp>
00012 #include <stdair/bom/KeyAbstract.hpp>
00013
00015 namespace boost {
00016     namespace serialization {
00017         class access;
00018     }
00019 }
00020
00021 namespace AIRSCHEDED {
00022
00030     struct OriginDestinationSetKey : public stdair::KeyAbstract {
00031         friend class boost::serialization::access;
00032
00033         // ////////////////////////////////// Constructors and destructors //////////////////////////////////
00034     private:
00038         OriginDestinationSetKey();
00039
00040     public:
00044         OriginDestinationSetKey (const stdair::AirportCode_T& iDestination);
00045
00049         OriginDestinationSetKey (const OriginDestinationSetKey&);
00050
00054         ~OriginDestinationSetKey();
00055
00056
00057     public:
00058         // ////////////////////////////////// Getters //////////////////////////////////
00062         const stdair::AirportCode_T& getOffPoint() const {
00063             return _destination;
00064         }
00065

```

```

00066
00067 public:
00068     // //////////// Display support methods ////////////
00074     void toStream (std::ostream& ioOut) const;
00075
00081     void fromStream (std::istream& ioIn);
00082
00092     const std::string toString() const;
00093
00094
00095 public:
00096     // //////////// (Boost) Serialisation support methods ////////////
00100     template<class Archive>
00101     void serialize (Archive& ar, const unsigned int iFileVersion);
00102
00103 private:
00108     void serialisationImplementationExport() const;
00109     void serialisationImplementationImport();
00110
00111
00112 private:
00113     // //////////// Attributes ////////////
00117     stdair::AirportCode_T _destination;
00118 };
00119
00120 }
00121 #endif // __AIRSCHED_BOM_ORIGINDESTINATIONSETKEY_HPP

```

## 26.53 airsched/bom/OriginDestinationSetTypes.hpp File Reference

```

#include <map>
#include <list>
#include <stdair/stdair_basic_types.hpp>
#include <stdair/bom/key_types.hpp>

```

### Namespaces

- namespace [AIRSCHED](#)

### Typedefs

- typedef std::list  
< OriginDestinationSet \* > [AIRSCHED::OriginDestinationSetList\\_T](#)
- typedef std::map< const  
stdair::MapKey\_T,  
OriginDestinationSet \* > [AIRSCHED::OriginDestinationSetMap\\_T](#)

## 26.54 OriginDestinationSetTypes.hpp

```

00001 // //////////////////////////////////////
00002 #ifndef __AIRSCHED_BOM_ORIGINDESTINATIONSETTYPES_HPP
00003 #define __AIRSCHED_BOM_ORIGINDESTINATIONSETTYPES_HPP
00004
00005 // //////////////////////////////////////
00006 // Import section
00007 // //////////////////////////////////////
00008 // STL
00009 #include <map>
00010 #include <list>
00011 // StdAir
00012 #include <stdair/stdair_basic_types.hpp>
00013 #include <stdair/bom/key_types.hpp>
00014
00015 namespace AIRSCHED {
00016
00017     // Forward declarations.
00018     class OriginDestinationSet;
00019
00021     typedef std::list<OriginDestinationSet*> OriginDestinationSetList_T;
00022

```



```

00024     typedef std::map<const stdair::MapKey_T,
00025                   OriginDestinationSet*> OriginDestinationSetMap_T;
00026
00027 }
00028 #endif // __AIRSCHED_BOM_ORIGINDESTINATIONSETTYPES_HPP
00029

```

## 26.55 airsched/bom/ReachableUniverse.cpp File Reference

```

#include <cassert>
#include <sstream>
#include <boost/archive/text_iarchive.hpp>
#include <boost/archive/text_oarchive.hpp>
#include <boost/serialization/access.hpp>
#include <stdair/basic/BasConst_Inventory.hpp>
#include <airsched/bom/ReachableUniverse.hpp>
#include <airsched/bom/SegmentPathPeriod.hpp>

```

### Namespaces

- namespace [AIRSCHED](#)

### Functions

- template void [AIRSCHED::ReachableUniverse::serialize< ba::text\\_oarchive >](#) (ba::text\_oarchive &, unsigned int)
- template void [AIRSCHED::ReachableUniverse::serialize< ba::text\\_iarchive >](#) (ba::text\_iarchive &, unsigned int)

## 26.56 ReachableUniverse.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <sstream>
00007 // Boost.Serialization
00008 #include <boost/archive/text_iarchive.hpp>
00009 #include <boost/archive/text_oarchive.hpp>
00010 #include <boost/serialization/access.hpp>
00011 // StdAir
00012 #include <stdair/basic/BasConst_Inventory.hpp>
00013 // AirSched
00014 #include <airsched/bom/ReachableUniverse.hpp>
00015 #include <airsched/bom/SegmentPathPeriod.hpp>
00016
00017 namespace AIRSCHED {
00018
00019     // //////////////////////////////////////
00020     ReachableUniverse::ReachableUniverse()
00021         : _key (stdair::DEFAULT_ORIGIN), _parent (NULL) {
00022         assert (false);
00023     }
00024
00025     // //////////////////////////////////////
00026     ReachableUniverse::ReachableUniverse (const ReachableUniverse&)
00027         : _key (stdair::DEFAULT_ORIGIN), _parent (NULL) {
00028         assert (false);
00029     }
00030
00031     // //////////////////////////////////////
00032     ReachableUniverse::ReachableUniverse (const Key_T& iKey)
00033         : _key (iKey), _parent (NULL) {
00034     }
00035
00036     // //////////////////////////////////////
00037     ReachableUniverse::~ReachableUniverse () {

```

```

00038     }
00039
00040     // //////////////////////////////////////
00041     std::string ReachableUniverse::toString() const {
00042         std::ostringstream oStr;
00043         oStr << _key.toString();
00044         return oStr.str();
00045     }
00046
00047     // //////////////////////////////////////
00048     void ReachableUniverse::serialisationImplementationExport() const {
00049         std::ostringstream oStr;
00050         boost::archive::text_oarchive oa (oStr);
00051         oa << *this;
00052     }
00053
00054     // //////////////////////////////////////
00055     void ReachableUniverse::serialisationImplementationImport() {
00056         std::istringstream iStr;
00057         boost::archive::text_iarchive ia (iStr);
00058         ia >> *this;
00059     }
00060
00061     // //////////////////////////////////////
00062     template<class Archive>
00063     void ReachableUniverse::serialize (Archive& ioArchive,
00064                                         const unsigned int iFileVersion) {
00065         ioArchive & _key;
00066     }
00067
00068     // //////////////////////////////////////
00069     // Explicit template instantiation
00070     namespace ba = boost::archive;
00071     template
00072     void ReachableUniverse::serialize<ba::text_oarchive> (ba::text_oarchive&,
00073                                                         unsigned int);
00074     template
00075     void ReachableUniverse::serialize<ba::text_iarchive> (ba::text_iarchive&,
00076                                                         unsigned int);
00077     // //////////////////////////////////////
00078
00079 }
00080

```

## 26.57 airsched/bom/ReachableUniverse.hpp File Reference

```

#include <iosfwd>
#include <string>
#include <stdair/bom/BomAbstract.hpp>
#include <airsched/bom/ReachableUniverseKey.hpp>
#include <airsched/bom/ReachableUniverseTypes.hpp>
#include <airsched/bom/SegmentPathPeriodTypes.hpp>

```

### Classes

- class [AIRSCHED::ReachableUniverse](#)  
Class representing the root of the schedule-related BOM tree.

### Namespaces

- namespace [boost](#)  
Forward declarations.
- namespace [boost::serialization](#)
- namespace [stdair](#)  
Forward declarations.
- namespace [AIRSCHED](#)

## 26.58 ReachableUniverse.hpp

```

00001 #ifndef __AIRSCHED_BOM_REACHABLEUNIVERSE_HPP
00002 #define __AIRSCHED_BOM_REACHABLEUNIVERSE_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <iosfwd>
00009 #include <string>
00010 // StdAir
00011 #include <stdair/bom/BomAbstract.hpp>
00012 // AirSched
00013 #include <airsched/bom/ReachableUniverseKey.hpp>
00014 #include <airsched/bom/ReachableUniverseTypes.hpp>
00015 #include <airsched/bom/SegmentPathPeriodTypes.hpp>
00016
00017 namespace boost {
00018     namespace serialization {
00019         class access;
00020     }
00021 }
00022
00023 namespace stdair {
00024     template <typename BOM> class FacBom;
00025     class FacBomManager;
00026 }
00027
00028 namespace AIRSCHED {
00029
00030     class ReachableUniverse : public stdair::BomAbstract {
00031     public:
00032         template <typename BOM> friend class stdair::FacBom;
00033         friend class stdair::FacBomManager;
00034         friend class SegmentPathGenerator;
00035         friend class boost::serialization::access;
00036
00037     public:
00038         // ////////////////////////////////// Type definitions //////////////////////////////////
00039         typedef ReachableUniverseKey Key_T;
00040
00041     public:
00042         // ////////////////////////////////// Getters //////////////////////////////////
00043         const Key_T& getKey() const {
00044             return _key;
00045         }
00046
00047         const stdair::AirportCode_T& getOrigin() const {
00048             return _key.getBoardingPoint();
00049         }
00050
00051         stdair::BomAbstract* const getParent() const {
00052             return _parent;
00053         }
00054
00055         const stdair::HolderMap_T& getHolderMap() const {
00056             return _holderMap;
00057         }
00058
00059         const SegmentPathPeriodListList_T& getSegmentPathPeriodListList() const {
00060             return _segmentPathPeriodListList;
00061         }
00062
00063     public:
00064         // ////////////////////////////////// Display support methods //////////////////////////////////
00065         void toStream (std::ostream& ioOut) const {
00066             ioOut << toString();
00067         }
00068
00069         void fromStream (std::istream& ioIn) {
00070         }
00071
00072         std::string toString() const;
00073
00074         const std::string describeKey() const {
00075             return _key.toString();
00076         }
00077
00078     public:
00079         // ////////////////////////////////// (Boost) Serialisation support methods //////////////////////////////////
00080         template<class Archive>
00081         void serialize (Archive& ar, const unsigned int iFileVersion);
00082
00083     private:
00084         void serialisationImplementationExport() const;
00085     };
00086
00087 }
00088
00089 #endif

```

```

00142     void serialisationImplementationImport();
00143
00144
00145 protected:
00146     // ////////// Constructors and destructors //////////
00150     ReachableUniverse (const Key_T&);
00151
00155     ~ReachableUniverse();
00156
00157 private:
00161     ReachableUniverse();
00162
00166     ReachableUniverse (const ReachableUniverse&);
00167
00168
00169 protected:
00170     // ////////// Attributes //////////
00174     Key_T _key;
00175
00179     stdair::BomAbstract* _parent;
00180
00184     stdair::HolderMap_T _holderMap;
00185
00191     SegmentPathPeriodListList_T _segmentPathPeriodListList;
00192 };
00193
00194 }
00195 #endif // __AIRSCHED_BOM_REACHABLEUNIVERSE_HPP
00196

```

## 26.59 airsched/bom/ReachableUniverseKey.cpp File Reference

```

#include <cassert>
#include <sstream>
#include <boost/archive/text_iarchive.hpp>
#include <boost/archive/text_oarchive.hpp>
#include <boost/serialization/access.hpp>
#include <stdair/basic/BasConst_Inventory.hpp>
#include <airsched/bom/ReachableUniverseKey.hpp>

```

### Namespaces

- namespace [AIRSCHED](#)

### Functions

- template void [AIRSCHED::ReachableUniverseKey::serialize< ba::text\\_oarchive >](#) (ba::text\_oarchive &, unsigned int)
- template void [AIRSCHED::ReachableUniverseKey::serialize< ba::text\\_iarchive >](#) (ba::text\_iarchive &, unsigned int)

## 26.60 ReachableUniverseKey.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <sstream>
00007 // Boost.Serialization
00008 #include <boost/archive/text_iarchive.hpp>
00009 #include <boost/archive/text_oarchive.hpp>
00010 #include <boost/serialization/access.hpp>
00011 // StdAir
00012 #include <stdair/basic/BasConst_Inventory.hpp>
00013 // AirSched
00014 #include <airsched/bom/ReachableUniverseKey.hpp>
00015
00016 namespace AIRSCHED {

```

```

00017
00018 ///////////////////////////////////////////////////////////////////
00019 ReachableUniverseKey::ReachableUniverseKey()
00020 : _origin (stdair::DEFAULT_ORIGIN) {
00021     assert (false);
00022 }
00023
00024 ///////////////////////////////////////////////////////////////////
00025 ReachableUniverseKey::
00026 ReachableUniverseKey (const ReachableUniverseKey& iKey)
00027 : _origin (iKey._origin) {
00028 }
00029
00030 ///////////////////////////////////////////////////////////////////
00031 ReachableUniverseKey::
00032 ReachableUniverseKey (const stdair::AirportCode_T& iAirportCode)
00033 : _origin (iAirportCode) {
00034 }
00035
00036 ///////////////////////////////////////////////////////////////////
00037 ReachableUniverseKey::~ReachableUniverseKey() {
00038 }
00039
00040 ///////////////////////////////////////////////////////////////////
00041 void ReachableUniverseKey::toStream (std::ostream& ioOut) const {
00042     ioOut << "ReachableUniverseKey: " << toString() << std::endl;
00043 }
00044
00045 ///////////////////////////////////////////////////////////////////
00046 void ReachableUniverseKey::fromStream (std::istream& ioIn) {
00047 }
00048
00049 ///////////////////////////////////////////////////////////////////
00050 const std::string ReachableUniverseKey::toString() const {
00051     std::ostringstream oStr;
00052     oStr << _origin;
00053     return oStr.str();
00054 }
00055
00056 ///////////////////////////////////////////////////////////////////
00057 void ReachableUniverseKey::serialisationImplementationExport() const {
00058     std::ostringstream oStr;
00059     boost::archive::text_oarchive oa (oStr);
00060     oa << *this;
00061 }
00062
00063 ///////////////////////////////////////////////////////////////////
00064 void ReachableUniverseKey::serialisationImplementationImport() {
00065     std::istringstream iStr;
00066     boost::archive::text_iarchive ia (iStr);
00067     ia >> *this;
00068 }
00069
00070 ///////////////////////////////////////////////////////////////////
00071 template<class Archive>
00072 void ReachableUniverseKey::serialize (Archive& ioArchive,
00073                                     const unsigned int iFileVersion) {
00074     ioArchive & _origin;
00075 }
00076
00077 ///////////////////////////////////////////////////////////////////
00078 // Explicit template instantiation
00079 namespace ba = boost::archive;
00080 template
00081 void ReachableUniverseKey::serialize<ba::text_oarchive> (ba::text_oarchive&,
00082                                                         unsigned int);
00083 template
00084 void ReachableUniverseKey::serialize<ba::text_iarchive> (ba::text_iarchive&,
00085                                                         unsigned int);
00086 ///////////////////////////////////////////////////////////////////
00087
00088 }

```

## 26.61 airsched/bom/ReachableUniverseKey.hpp File Reference

```

#include <iosfwd>
#include <string>
#include <stdair/stdair_basic_types.hpp>
#include <stdair/bom/KeyAbstract.hpp>

```

## Classes

- struct [AIRSCHED::ReachableUniverseKey](#)  
Structure representing the key of the schedule-related BOM tree root.

## Namespaces

- namespace [boost](#)  
Forward declarations.
- namespace [boost::serialization](#)
- namespace [AIRSCHED](#)

## 26.62 ReachableUniverseKey.hpp

```

00001 #ifndef __AIRSCHED_BOM_REACHABLEUNIVERSEKEY_HPP
00002 #define __AIRSCHED_BOM_REACHABLEUNIVERSEKEY_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <iosfwd>
00009 #include <string>
00010 // StdAir
00011 #include <stdair/stdair_basic_types.hpp>
00012 #include <stdair/bom/KeyAbstract.hpp>
00013
00015 namespace boost {
00016     namespace serialization {
00017         class access;
00018     }
00019 }
00020
00021 namespace AIRSCHED {
00022
00033     struct ReachableUniverseKey : public stdair::KeyAbstract {
00034         friend class boost::serialization::access;
00035
00036         // ////////////////////////////////// Constructors and destructors //////////////////////////////////
00037     private:
00041         ReachableUniverseKey();
00042
00043     public:
00047         ReachableUniverseKey (const stdair::AirportCode_T& iOrigin);
00048
00052         ReachableUniverseKey (const ReachableUniverseKey&);
00053
00057         ~ReachableUniverseKey();
00058
00059     public:
00061         // ////////////////////////////////// Getters //////////////////////////////////
00066         const stdair::AirportCode_T& getBoardingPoint() const {
00067             return _origin;
00068         }
00069
00070     public:
00072         // ////////////////////////////////// Display support methods //////////////////////////////////
00078         void toStream (std::ostream& ioOut) const;
00079
00085         void fromStream (std::istream& ioIn);
00086
00096         const std::string toString() const;
00097
00099     public:
00100         // ////////////////////////////////// (Boost) Serialisation support methods //////////////////////////////////
00104         template<class Archive>
00105         void serialize (Archive& ar, const unsigned int iFileVersion);
00106
00107     private:
00112         void serialisationImplementationExport() const;
00113         void serialisationImplementationImport();
00114
00115     private:
00116

```

```

00117 // ////////////////////////////////// Attributes //////////////////////////////////
00122 stdair::AirportCode_T _origin;
00123 };
00124
00125 }
00126
00127 #endif // __AIRSCHED_BOM_REACHABLEUNIVERSEKEY_HPP

```

## 26.63 airsched/bom/ReachableUniverseTypes.hpp File Reference

```

#include <map>
#include <list>
#include <stdair/stdair_basic_types.hpp>
#include <stdair/bom/key_types.hpp>

```

### Namespaces

- namespace [AIRSCHED](#)

### Typedefs

- typedef std::list  
< ReachableUniverse \* > [AIRSCHED::ReachableUniverseList\\_T](#)
- typedef std::map< const  
stdair::MapKey\_T,  
ReachableUniverse \* > [AIRSCHED::ReachableUniverseMap\\_T](#)

## 26.64 ReachableUniverseTypes.hpp

```

00001 // ////////////////////////////////// //////////////////////////////////
00002 #ifndef __AIRSCHED_BOM_REACHABLEUNIVERSETYPES_HPP
00003 #define __AIRSCHED_BOM_REACHABLEUNIVERSETYPES_HPP
00004
00005 // ////////////////////////////////// Import section //////////////////////////////////
00006 // Import section
00007 // ////////////////////////////////// STL //////////////////////////////////
00008 // STL
00009 #include <map>
00010 #include <list>
00011 // StdAir
00012 #include <stdair/stdair_basic_types.hpp>
00013 #include <stdair/bom/key_types.hpp>
00014
00015 namespace AIRSCHED {
00016
00017 // Forward declarations.
00018 class ReachableUniverse;
00019
00020 typedef std::list<ReachableUniverse*> ReachableUniverseList_T;
00021
00022 typedef std::map<const stdair::MapKey_T,
00023                 ReachableUniverse*> ReachableUniverseMap_T;
00024
00025 }
00026
00027 #endif // __AIRSCHED_BOM_REACHABLEUNIVERSETYPES_HPP
00028
00029

```

## 26.65 airsched/bom/SegmentCabinStruct.cpp File Reference

```

#include <cassert>
#include <sstream>
#include <stdair/bom/SegmentCabin.hpp>
#include <airsched/bom/SegmentCabinStruct.hpp>

```

## Namespaces

- namespace [AIRSCHED](#)

## 26.66 SegmentCabinStruct.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <sstream>
00007 // STDAIR
00008 #include <stdair/bom/SegmentCabin.hpp>
00009 // AIRSCHED
00010 #include <airsched/bom/SegmentCabinStruct.hpp>
00011
00012 namespace AIRSCHED {
00013
00014 // //////////////////////////////////////
00015 const std::string SegmentCabinStruct::describe() const {
00016     std::ostringstream ostr;
00017     ostr << "          " << _cabinCode << " " << _classes;
00018     return ostr.str();
00019 }
00020
00021 // //////////////////////////////////////
00022 void SegmentCabinStruct::fill (stdair::SegmentCabin& ioSegmentCabin) const {
00023 }
00024
00025 }

```

## 26.67 airsched/bom/SegmentCabinStruct.hpp File Reference

```

#include <string>
#include <vector>
#include <stdair/stdair_basic_types.hpp>
#include <stdair/basic/StructAbstract.hpp>
#include <airsched/bom/FareFamilyStruct.hpp>

```

## Classes

- struct [AIRSCHED::SegmentCabinStruct](#)

## Namespaces

- namespace [stdair](#)  
*Forward declarations.*
- namespace [AIRSCHED](#)

## Typedefs

- typedef std::vector  
< SegmentCabinStruct > [AIRSCHED::SegmentCabinStructList\\_T](#)

## 26.68 SegmentCabinStruct.hpp

```

00001 #ifndef __AIRSCHED_BOM_SEGMENTCABINSTRUCT_HPP
00002 #define __AIRSCHED_BOM_SEGMENTCABINSTRUCT_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section

```



```

00006 // //////////////////////////////////////
00007 // STL
00008 #include <string>
00009 #include <vector>
00010 // StdAir
00011 #include <stdair/stdair_basic_types.hpp>
00012 #include <stdair/basic/StructAbstract.hpp>
00013 // AirSched
00014 #include <airsched/bom/FareFamilyStruct.hpp>
00015
00016 // Forward declarations
00017 namespace stdair {
00018     class SegmentCabin;
00019 }
00020
00021 namespace AIRSCHED {
00022
00024     struct SegmentCabinStruct : public stdair::StructAbstract {
00025         // Attributes
00026         stdair::CabinCode_T _cabinCode;
00027         stdair::ClassList_String_T _classes;
00028         stdair::FamilyCode_T _itFamilyCode;
00029         FareFamilyStructList_T _fareFamilies;
00030
00033         void fill (stdair::SegmentCabin& const;
00034
00036         const std::string describe() const;
00037
00038     };
00039
00041     typedef std::vector<SegmentCabinStruct> SegmentCabinStructList_T;
00042
00043 }
00044 #endif // __AIRSCHED_BOM_SEGMENTCABINSTRUCT_HPP

```

## 26.69 airsched/bom/SegmentPathPeriod.cpp File Reference

```

#include <cassert>
#include <sstream>
#include <boost/archive/text_iarchive.hpp>
#include <boost/archive/text_oarchive.hpp>
#include <boost/serialization/access.hpp>
#include <stdair/basic/BasConst_General.hpp>
#include <stdair/basic/BasConst_Inventory.hpp>
#include <stdair/basic/BasConst_Period_BOM.hpp>
#include <stdair/basic/BasConst_TravelSolution.hpp>
#include <stdair/bom/Inventory.hpp>
#include <stdair/bom/FlightPeriod.hpp>
#include <stdair/bom/SegmentPeriod.hpp>
#include <stdair/bom/BomManager.hpp>
#include <airsched/bom/SegmentPathPeriod.hpp>

```

### Namespaces

- namespace [AIRSCHED](#)

### Functions

- template void [AIRSCHED::SegmentPathPeriod::serialize< ba::text\\_oarchive >](#) (ba::text\_oarchive &, unsigned int)
- template void [AIRSCHED::SegmentPathPeriod::serialize< ba::text\\_iarchive >](#) (ba::text\_iarchive &, unsigned int)

## 26.70 SegmentPathPeriod.cpp

```

00001 // //////////////////////////////////////

```

```

00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <sstream>
00007 // Boost.Serialization
00008 #include <boost/archive/text_iarchive.hpp>
00009 #include <boost/archive/text_oarchive.hpp>
00010 #include <boost/serialization/access.hpp>
00011 // StdAir
00012 #include <stdair/basic/BasConst_General.hpp>
00013 #include <stdair/basic/BasConst_Inventory.hpp>
00014 #include <stdair/basic/BasConst_Period_BOM.hpp>
00015 #include <stdair/basic/BasConst_TravelSolution.hpp>
00016 #include <stdair/bom/Inventory.hpp>
00017 #include <stdair/bom/FlightPeriod.hpp>
00018 #include <stdair/bom/SegmentPeriod.hpp>
00019 #include <stdair/bom/BomManager.hpp>
00020 // AirSched
00021 #include <airsched/bom/SegmentPathPeriod.hpp>
00022
00023 namespace AIRSCHED {
00024
00025 // //////////////////////////////////////
00026 SegmentPathPeriod::SegmentPathPeriod()
00027 : _key (stdair::PeriodStruct (stdair::BOOST_DEFAULT_DATE_PERIOD,
00028                               stdair::DEFAULT_DOW_STRING),
00029         stdair::NULL_BOOST_TIME_DURATION, stdair::NULL_BOOST_TIME_DURATION
00030 ,
00031         DateOffsetList_T(),
00032         stdair::DEFAULT_NBOFAIRLINES),
00033   _parent (NULL) {
00034     assert (false);
00035 }
00036
00037 // //////////////////////////////////////
00038 SegmentPathPeriod::SegmentPathPeriod (const SegmentPathPeriod& iSPP)
00039 : _key (iSPP._key), _parent (NULL) {
00040     assert (false);
00041 }
00042
00043 // //////////////////////////////////////
00044 SegmentPathPeriod::SegmentPathPeriod (const Key_T& iKey)
00045 : _key (iKey), _parent (NULL) {
00046 }
00047
00048 // //////////////////////////////////////
00049 SegmentPathPeriod::~SegmentPathPeriod() {
00050 }
00051
00052 // //////////////////////////////////////
00053 std::string SegmentPathPeriod::toString() const {
00054     std::ostringstream oStr;
00055     oStr << _key.toString();
00056     return oStr.str();
00057 }
00058
00059 // //////////////////////////////////////
00060 void SegmentPathPeriod::serialisationImplementationExport() const {
00061     std::ostringstream oStr;
00062     boost::archive::text_oarchive oa (oStr);
00063     oa << *this;
00064 }
00065
00066 // //////////////////////////////////////
00067 void SegmentPathPeriod::serialisationImplementationImport() {
00068     std::istringstream iStr;
00069     boost::archive::text_iarchive ia (iStr);
00070     ia >> *this;
00071 }
00072
00073 // //////////////////////////////////////
00074 template<class Archive>
00075 void SegmentPathPeriod::serialize (Archive& ioArchive,
00076                                     const unsigned int iFileVersion) {
00077     ioArchive & _key;
00078 }
00079
00080 // Explicit template instantiation
00081 namespace ba = boost::archive;
00082 template
00083 void SegmentPathPeriod::serialize<ba::text_oarchive> (ba::text_oarchive&,
00084                                                         unsigned int);
00085 template
00086 void SegmentPathPeriod::serialize<ba::text_iarchive> (ba::text_iarchive&,
00087                                                         unsigned int);

```

```

00088 // //////////////////////////////////////
00089
00090 // //////////////////////////////////////
00091 stdair::SegmentPeriod* SegmentPathPeriod::getLastSegmentPeriod () const {
00092 // Retrieve the last segment of the list
00093     const stdair::SegmentPeriodList_T& lSegmentPeriodList =
00094         stdair::BomManager::getList<stdair::SegmentPeriod> (*this);
00095     stdair::SegmentPeriodList_T::const_reverse_iterator itLastSegment =
00096         lSegmentPeriodList.rbegin();
00097
00098     if (itLastSegment == lSegmentPeriodList.rend()) {
00099         return NULL;
00100     }
00101
00102     stdair::SegmentPeriod* oSegment_ptr = *itLastSegment;
00103     assert (oSegment_ptr != NULL);
00104
00105     return oSegment_ptr;
00106 }
00107
00108 // //////////////////////////////////////
00109 stdair::SegmentPeriod* SegmentPathPeriod::getFirstSegmentPeriod () const {
00110 // Retrieve the first segment of the list
00111     const stdair::SegmentPeriodList_T& lSegmentPeriodList =
00112         stdair::BomManager::getList<stdair::SegmentPeriod> (*this);
00113     stdair::SegmentPeriodList_T::const_iterator itFirstSegment =
00114         lSegmentPeriodList.begin();
00115
00116     if (itFirstSegment == lSegmentPeriodList.end()) {
00117         return NULL;
00118     }
00119
00120     stdair::SegmentPeriod* oSegment_ptr = *itFirstSegment;
00121     assert (oSegment_ptr != NULL);
00122
00123     return oSegment_ptr;
00124 }
00125
00126 // //////////////////////////////////////
00127 const stdair::AirportCode_T& SegmentPathPeriod::getDestination () const {
00128     const stdair::SegmentPeriod* lLastSegment_ptr = getLastSegmentPeriod();
00129     assert (lLastSegment_ptr != NULL);
00130     return lLastSegment_ptr->getOffPoint();
00131 }
00132
00133 // //////////////////////////////////////
00134 bool SegmentPathPeriod::
00135 isAirlineFlown (const stdair::AirlineCode_T& iAirlineCode) const {
00136     bool oAirlineFlown = false;
00137
00138     const stdair::SegmentPeriodList_T& lSegmentPeriodList =
00139         stdair::BomManager::getList<stdair::SegmentPeriod> (*this);
00140     for (stdair::SegmentPeriodList_T::const_iterator itSegmentPeriod =
00141         lSegmentPeriodList.begin();
00142         itSegmentPeriod != lSegmentPeriodList.end(); ++itSegmentPeriod) {
00143         const stdair::SegmentPeriod* lSegmentPeriod_ptr = *itSegmentPeriod;
00144         assert (lSegmentPeriod_ptr != NULL);
00145
00146         const stdair::FlightPeriod& lFlightPeriod =
00147             stdair::BomManager::getParent<stdair::FlightPeriod>
00148             (*lSegmentPeriod_ptr);
00149         const stdair::Inventory& lInventory =
00150             stdair::BomManager::getParent<stdair::Inventory> (lFlightPeriod);
00151         const stdair::AirlineCode_T& lSegmentAirlineCode =
00152             lInventory.getAirlineCode ();
00153         if (lSegmentAirlineCode == iAirlineCode) {
00154             oAirlineFlown = true;
00155             break;
00156         }
00157     }
00158     return oAirlineFlown;
00159 }
00160
00161 // //////////////////////////////////////
00162 SegmentPathPeriodKey SegmentPathPeriod::
00163 connectWithAnotherSegment (const SegmentPathPeriod& iSingleSegmentPath) const
00164 {
00165     SegmentPathPeriodKey oSegmentPathPeriodKey;
00166
00167     // Retrieve the (only) segment period of the single segment path.
00168     const stdair::SegmentPeriod* lNextSegmentPeriod_ptr =
00169         iSingleSegmentPath.getFirstSegmentPeriod();
00170     assert (lNextSegmentPeriod_ptr != NULL);
00171
00172     // Retrive the last segment period of the current segment path and check
    // if the combination of the last segment and the next segment that we

```

```

00173 // want to add to the current segment path will create a new segment
00174 // (i.e., the two segment period belongs to the same flight number).
00175 const stdair::SegmentPeriod* lLastSegmentPeriod_ptr = getLastSegmentPeriod
    ();
00176 assert (lLastSegmentPeriod_ptr != NULL);
00177 const stdair::FlightPeriod& lLastFlightPeriod = stdair::BomManager::
    getParent<stdair::FlightPeriod> (*lLastSegmentPeriod_ptr);
00178 const stdair::Inventory& lLastInventory =
    stdair::BomManager::getParent<stdair::Inventory> (lLastFlightPeriod);
00181
00182 const stdair::FlightPeriod& lNextFlightPeriod = stdair::BomManager::
    getParent<stdair::FlightPeriod> (*lNextSegmentPeriod_ptr);
00183 const stdair::Inventory& lNextInventory =
    stdair::BomManager::getParent<stdair::Inventory> (lNextFlightPeriod);
00186
00187 if (lLastFlightPeriod.getFlightNumber() == lNextFlightPeriod.getFlightNumber(
00188 )
    && lLastInventory.getAirlineCode() == lNextInventory.getAirlineCode())
    {
00189         return oSegmentPathPeriodKey;
00190     }
00191
00192 // Check if the new segment period will create a circle.
00193 const stdair::AirportCode_T& lDestination =
    lNextSegmentPeriod_ptr->getOffPoint();
00194 if (checkCircle (lDestination) == true) {
00195     return oSegmentPathPeriodKey;
00196 }
00197
00198 // Check if a passenger can connect from the last segment of the
00199 // current segment path to the first segment of the to-be-added
00200 // segment path. If yes, build a new departure period for the new
00201 // segment path.
00202 DateOffsetList_T lBoardingDateOffsetList =
    getBoardingDateOffsetList();
00203 const stdair::PeriodStruct& lCurrentDeparturePeriod = getDeparturePeriod();
00204 const stdair::PeriodStruct& lNextDeparturePeriod =
    iSingleSegmentPath.getDeparturePeriod();
00205 const stdair::Duration_T& lLastOffTime =
    lLastSegmentPeriod_ptr->getOffTime();
00206 const stdair::Duration_T& lNextBoardingTime =
    lNextSegmentPeriod_ptr->getBoardingTime();
00207 // If the next boarding time is later than the last off time, check if
00208 // the passengers will have enough time for the transfer. If the next
00209 // boarding time is earlier than the last off time, check if the passengers
00210 // can connect to a flight in the next day.
00211 if (lNextBoardingTime >= lLastOffTime) {
00212     const stdair::Duration_T lStopTime = lNextBoardingTime - lLastOffTime;
00213     if (lStopTime < stdair::DEFAULT_MINIMAL_CONNECTION_TIME) {
00214         return oSegmentPathPeriodKey;
00215     } else {
00216         // Calculate the date offset of the next segment compare to
00217         // the first one. In this case, this value is equal to the offset
00218         // of the off date of the last segment compare to the boarding date
00219         // of the first segment.
00220         const stdair::DateOffset_T& lLastBoardingDateOffset =
            lBoardingDateOffsetList.at (getNbOfSegments() - 1);
00221         const stdair::DateOffset_T lNextBoardingDateOffset =
            lLastBoardingDateOffset + lLastSegmentPeriod_ptr->getOffDateOffset()
            - lLastSegmentPeriod_ptr->getBoardingDateOffset();
00222         const stdair::DateOffset_T lNegativeNextBoardingDateOffset =
            stdair::DateOffset_T (0) - lNextBoardingDateOffset;
00223
00224         // Compute the adjusted departure period of the next segment by
00225         // subtracting the origin one with the boarding date offset.
00226         const stdair::PeriodStruct lAdjustedNextDeparturePeriod =
            lNextDeparturePeriod.addDateOffset (lNegativeNextBoardingDateOffset);
00227
00228         // Build the intersection of the two periods.
00229         const stdair::PeriodStruct lNewDeparturePeriod =
            lCurrentDeparturePeriod.intersection (lAdjustedNextDeparturePeriod);
00230         stdair::Duration_T lNewElapsed = getElapsedTime() + lStopTime +
            lNextSegmentPeriod_ptr->getElapsedTime();
00231         lBoardingDateOffsetList.push_back (lNextBoardingDateOffset);
00232         oSegmentPathPeriodKey.setPeriod (lNewDeparturePeriod);
00233         oSegmentPathPeriodKey.setElapsedTime (lNewElapsed);
00234     }
00235 } else {
00236     const stdair::Duration_T lStopTime =
        lNextBoardingTime - lLastOffTime + stdair::Duration_T (24, 0, 0);
00237     if (lStopTime < stdair::DEFAULT_MINIMAL_CONNECTION_TIME) {
00238         return oSegmentPathPeriodKey;
00239     } else {
00240         // Calculate the date offset of the next segment compare to
00241         // the first one.
00242         const stdair::DateOffset_T& lLastBoardingDateOffset =
            lBoardingDateOffsetList.at (getNbOfSegments() - 1);

```

```

00257     const stdair::DateOffset_T lNextBoardingDateOffset =
00258         lLastBoardingDateOffset + lLastSegmentPeriod_ptr->getOffDateOffset ()
00259         - lLastSegmentPeriod_ptr->getBoardingDateOffset () +
00260         stdair::DateOffset_T (1);
00261     const stdair::DateOffset_T lNegativeNextBoardingDateOffset =
00262         stdair::DateOffset_T (0) - lNextBoardingDateOffset;
00263
00264     // Compute the adjusted departure period of the next segment by
00265     // subtracting the origin one with the boarding date offset.
00266     const stdair::PeriodStruct lAdjustedNextDeparturePeriod =
00267         lNextDeparturePeriod.addDateOffset (lNegativeNextBoardingDateOffset);
00268
00269     // Build the intersection of the two periods.
00270     const stdair::PeriodStruct lNewDeparturePeriod =
00271         lCurrentDeparturePeriod.intersection (lAdjustedNextDeparturePeriod);
00272     stdair::Duration_T lNewElapsed = getElapsedTime () + lStopTime +
00273         lNextSegmentPeriod_ptr->getElapsedTime ();
00274     lBoardingDateOffsetList.push_back (lNextBoardingDateOffset);
00275     oSegmentPathPeriodKey.setPeriod (lNewDeparturePeriod);
00276     oSegmentPathPeriodKey.setElapsedTime (lNewElapsed);
00277 }
00278 }
00279
00280     const stdair::Duration_T lBoardingTime = getBoardingTime ();
00281     oSegmentPathPeriodKey.setBoardingTime (lBoardingTime);
00282     oSegmentPathPeriodKey.setBoardingDateOffsetList (lBoardingDateOffsetList);
00283
00284     return oSegmentPathPeriodKey;
00285 }
00286
00287 // //////////////////////////////////////
00288 bool SegmentPathPeriod::
00289 checkCircle (const stdair::AirlineCode_T& iDestination) const {
00290     const stdair::SegmentPeriodList_T& lSegmentPeriodList =
00291         stdair::BomManager::getList<stdair::SegmentPeriod> (*this);
00292     for (stdair::SegmentPeriodList_T::const_iterator itSegment =
00293         lSegmentPeriodList.begin();
00294         itSegment != lSegmentPeriodList.end(); ++itSegment) {
00295         const stdair::SegmentPeriod* lCurrentSegment_ptr = *itSegment;
00296         assert (lCurrentSegment_ptr != NULL);
00297         const stdair::AirlineCode_T& lCurrentBoardingPoint =
00298             lCurrentSegment_ptr->getBoardingPoint ();
00299         if (lCurrentBoardingPoint == iDestination) {
00300             return true;
00301         }
00302     }
00303     return false;
00304 }
00305
00306 // //////////////////////////////////////
00307 bool SegmentPathPeriod::
00308 isDepartureDateValid (const stdair::Date_T& iDepartureDate) const {
00309     const stdair::PeriodStruct& lPeriod = getDeparturePeriod ();
00310
00311     // Check if the departure date is within the date range.
00312     const stdair::DatePeriod_T& lDeparturePeriod = lPeriod.getDateRange ();
00313     if (lDeparturePeriod.contains (iDepartureDate) == false) {
00314         return false;
00315     }
00316
00317     // Check if the departure date is valid within the DOW.
00318     // 0 = Sunday, 1 = Monday, etc.
00319     const short lDay = iDepartureDate.day_of_week ();
00320     const stdair::DoWStruct& lDoW = lPeriod.getDoW ();
00321     if (lDoW.getStandardDayOfWeek (lDay) == false) {
00322         return false;
00323     }
00324
00325     return true;
00326 }
00327
00328 }

```

## 26.71 airsched/bom/SegmentPathPeriod.hpp File Reference

```

#include <iosfwd>
#include <string>
#include <stdair/bom/BomAbstract.hpp>
#include <airsched/bom/SegmentPathPeriodKey.hpp>
#include <airsched/bom/SegmentPathPeriodTypes.hpp>

```

## Classes

- class `AIRSCHEd::SegmentPathPeriod`  
*Class representing a segment/path.*

## Namespaces

- namespace `boost`  
*Forward declarations.*
- namespace `boost::serialization`
- namespace `stdair`  
*Forward declarations.*
- namespace `AIRSCHEd`

## 26.72 SegmentPathPeriod.hpp

```

00001 #ifndef __AIRSCHEd_BOM_SEGMENTPATHPERIOD_HPP
00002 #define __AIRSCHEd_BOM_SEGMENTPATHPERIOD_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <iosfwd>
00009 #include <string>
00010 // StdAir
00011 #include <stdair/bom/BomAbstract.hpp>
00012 // AirSched
00013 #include <airsched/bom/SegmentPathPeriodKey.hpp>
00014 #include <airsched/bom/SegmentPathPeriodTypes.hpp>
00015
00016 namespace boost {
00017     namespace serialization {
00018         class access;
00019     }
00020 }
00021
00022 namespace stdair {
00023     template <typename BOM> class FacBom;
00024     class FacBomManager;
00025     class SegmentPeriod;
00026 }
00027
00028 namespace AIRSCHEd {
00029
00030     class SegmentPathPeriod : public stdair::BomAbstract {
00031     public:
00032         template <typename BOM> friend class stdair::FacBom;
00033         friend class stdair::FacBomManager;
00034         friend class boost::serialization::access;
00035
00036         // ////////////////////////////////// Type definitions //////////////////////////////////
00037         typedef SegmentPathPeriodKey Key_T;
00038
00039     public:
00040         // ////////////////////////////////// Getters //////////////////////////////////
00041         const Key_T& getKey() const {
00042             return _key;
00043         }
00044
00045         stdair::BomAbstract* getParent() const {
00046             return _parent;
00047         }
00048
00049         const stdair::PeriodStruct& getDeparturePeriod() const {
00050             return _key.getPeriod();
00051         }
00052
00053         const DateOffsetList_T& getBoardingDateOffsetList () const {
00054             return _key.getBoardingDateOffsetList ();
00055         }
00056
00057         const stdair::NbOfSegments_T getNbOfSegments () const {
00058             return _key.getNbOfSegments ();
00059         }
00060     }
00061
00062 }
00063
00064 
```

```

00085
00087     const stdair::NbOfAirlines_T& getNbOfAirlines() const {
00088         return _key.getNbOfAirlines();
00089     }
00090
00092     const stdair::Duration_T& getElapsedTime() const {
00093         return _key.getElapsedTime();
00094     }
00095
00097     const stdair::Duration_T& getBoardingTime() const {
00098         return _key.getBoardingTime();
00099     }
00100
00104     const stdair::HolderMap_T& getHolderMap() const {
00105         return _holderMap;
00106     }
00107
00113     stdair::SegmentPeriod* getLastSegmentPeriod() const;
00114
00120     stdair::SegmentPeriod* getFirstSegmentPeriod() const;
00121
00126     const stdair::AirportCode_T& getDestination() const;
00127
00128
00129 public:
00130     // //////////// Business methods ////////////
00148     Key_T connectWithAnotherSegment (const SegmentPathPeriod&) const;
00149
00155     bool checkCircle (const stdair::AirportCode_T&) const;
00156
00161     bool isAirlineFlown (const stdair::AirlineCode_T&) const;
00162
00167     bool isDepartureDateValid (const stdair::Date_T&) const;
00168
00169 public:
00170     // //////////// Display support methods ////////////
00176     void toStream (std::ostream& ioOut) const {
00177         ioOut << toString();
00178     }
00179
00185     void fromStream (std::istream& ioIn) {
00186     }
00187
00191     std::string toString() const;
00192
00196     const std::string describeKey() const {
00197         return _key.toString();
00198     }
00199
00200
00201 public:
00202     // //////////// (Boost) Serialisation support methods ////////////
00206     template<class Archive>
00207     void serialize (Archive& ar, const unsigned int iFileVersion);
00208
00209 private:
00214     void serialisationImplementationExport() const;
00215     void serialisationImplementationImport();
00216
00217
00218 protected:
00219     // //////////// Constructors and destructors ////////////
00223     SegmentPathPeriod (const Key_T&);
00224
00228     ~SegmentPathPeriod();
00229
00230 private:
00234     SegmentPathPeriod();
00235
00239     SegmentPathPeriod (const SegmentPathPeriod&);
00240
00241
00242 protected:
00243     // //////////// Attributes ////////////
00249     Key_T _key;
00250
00254     stdair::BomAbstract* _parent;
00255
00262     stdair::HolderMap_T _holderMap;
00263 };
00264
00265 }
00266 #endif // __AIRSCHED_BOM_SEGMENTPATHPERIOD_HPP
00267

```

## 26.73 airsched/bom/SegmentPathPeriodKey.cpp File Reference

```
#include <cassert>
#include <sstream>
#include <boost/archive/text_iarchive.hpp>
#include <boost/archive/text_oarchive.hpp>
#include <boost/serialization/access.hpp>
#include <stdair/basic/BasConst_General.hpp>
#include <stdair/basic/BasConst_Inventory.hpp>
#include <stdair/basic/BasConst_Period_BOM.hpp>
#include <stdair/basic/BasConst_TravelSolution.hpp>
#include <airsched/bom/SegmentPathPeriodKey.hpp>
```

## Namespaces

- namespace [AIRSCHED](#)

## Functions

- template void [AIRSCHED::SegmentPathPeriodKey::serialize< ba::text\\_oarchive >](#) (ba::text\_oarchive &, unsigned int)
- template void [AIRSCHED::SegmentPathPeriodKey::serialize< ba::text\\_iarchive >](#) (ba::text\_iarchive &, unsigned int)

## 26.74 SegmentPathPeriodKey.cpp

```
00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <sstream>
00007 // Boost.Serialization
00008 #include <boost/archive/text_iarchive.hpp>
00009 #include <boost/archive/text_oarchive.hpp>
00010 #include <boost/serialization/access.hpp>
00011 // StdAir
00012 #include <stdair/basic/BasConst_General.hpp>
00013 #include <stdair/basic/BasConst_Inventory.hpp>
00014 #include <stdair/basic/BasConst_Period_BOM.hpp>
00015 #include <stdair/basic/BasConst_TravelSolution.hpp>
00016 // AirSched
00017 #include <airsched/bom/SegmentPathPeriodKey.hpp>
00018
00019 namespace AIRSCHED {
00020
00021 // //////////////////////////////////////
00022 SegmentPathPeriodKey::SegmentPathPeriodKey()
00023 : _period (stdair::BOOST_DEFAULT_DATE_PERIOD, stdair::DEFAULT_DOW_STRING),
00024   _boardingTime (stdair::NULL_BOOST_TIME_DURATION),
00025   _elapsed (stdair::NULL_BOOST_TIME_DURATION),
00026   _nbOfAirlines (stdair::DEFAULT_NBOFAIRLINES) {
00027 }
00028
00029 // //////////////////////////////////////
00030 SegmentPathPeriodKey::SegmentPathPeriodKey (const SegmentPathPeriodKey& iSPPK
00031 )
00032 : _period (iSPPK._period),
00033   _boardingTime (iSPPK._boardingTime),
00034   _elapsed (iSPPK._elapsed),
00035   _boardingDateOffsetList (iSPPK._boardingDateOffsetList),
00036   _nbOfAirlines (iSPPK._nbOfAirlines) {
00037 }
00038
00039 // //////////////////////////////////////
00039 SegmentPathPeriodKey::
00040 SegmentPathPeriodKey (const stdair::PeriodStruct& iPeriod,
00041                      const stdair::Duration_T& iBoardingTime,
00042                      const stdair::Duration_T& iElapsedTime,
00043                      const DateOffsetList_T& iBoardingDateOffsetList,
```



```

00044         const stdair::NbOfAirlines_T& iNbOfAirlines)
00045     : _period (iPeriod),
00046       _boardingTime (iBoardingTime),
00047       _elapsed (iElapsedTime),
00048       _boardingDateOffsetList (iBoardingDateOffsetList),
00049       _nbOfAirlines (iNbOfAirlines) {
00050     }
00051
00052 // //////////////////////////////////////
00053 SegmentPathPeriodKey::~SegmentPathPeriodKey() {
00054 }
00055
00056 // //////////////////////////////////////
00057 void SegmentPathPeriodKey::toStream (std::ostream& ioOut) const {
00058     ioOut << "SegmentPathPeriodKey: " << toString() << std::endl;
00059 }
00060
00061 // //////////////////////////////////////
00062 void SegmentPathPeriodKey::fromStream (std::istream& ioIn) {
00063 }
00064
00065 // //////////////////////////////////////
00066 const std::string SegmentPathPeriodKey::toString() const {
00067     std::ostringstream ostr;
00068     ostr << _period.describeShort() << ", "
00069         << _boardingTime << ", " << _elapsed << ", ";
00070
00071     for (DateOffsetList_T::const_iterator itOffset =
00072          _boardingDateOffsetList.begin();
00073          itOffset != _boardingDateOffsetList.end(); ++itOffset) {
00074         const stdair::DateOffset_T& lDateOffset = *itOffset;
00075         ostr << lDateOffset.days() << ", ";
00076     }
00077
00078     ostr << _nbOfAirlines ;
00079     return ostr.str();
00080 }
00081
00082 // //////////////////////////////////////
00083 void SegmentPathPeriodKey::serialisationImplementationExport() const {
00084     std::ostringstream ostr;
00085     boost::archive::text_oarchive oa (ostr);
00086     oa << *this;
00087 }
00088
00089 // //////////////////////////////////////
00090 void SegmentPathPeriodKey::serialisationImplementationImport() {
00091     std::istringstream istr;
00092     boost::archive::text_iarchive ia (istr);
00093     ia >> *this;
00094 }
00095
00096 // //////////////////////////////////////
00097 template<class Archive>
00098 void SegmentPathPeriodKey::serialize (Archive& ioArchive,
00099                                       const unsigned int iFileVersion) {
00100     //ioArchive & _period & _boardingTime & _elapsed & _nbOfAirlines;
00101     std::string lBTStr = boost::posix_time::to_simple_string (_boardingTime);
00102     std::string lElapsedStr = boost::posix_time::to_simple_string (_elapsed);
00103     ioArchive & lBTStr & lElapsedStr & _nbOfAirlines;
00104 }
00105
00106 // //////////////////////////////////////
00107 // Explicit template instantiation
00108 namespace ba = boost::archive;
00109 template
00110 void SegmentPathPeriodKey::serialize<ba::text_oarchive> (ba::text_oarchive&,
00111                                                         unsigned int);
00112 template
00113 void SegmentPathPeriodKey::serialize<ba::text_iarchive> (ba::text_iarchive&,
00114                                                         unsigned int);
00115 // //////////////////////////////////////
00116
00117 }

```

## 26.75 airsched/bom/SegmentPathPeriodKey.hpp File Reference

```
#include <iosfwd>
#include <string>
#include <stdair/stdair_basic_types.hpp>
#include <stdair/stdair_date_time_types.hpp>
#include <stdair/bom/KeyAbstract.hpp>
#include <stdair/bom/PeriodStruct.hpp>
#include <airsched/bom/SegmentPathPeriodTypes.hpp>
```

## Classes

- struct [AIRSCHEDED::SegmentPathPeriodKey](#)  
Structure representing the key of a segment/path.

## Namespaces

- namespace [boost](#)  
Forward declarations.
- namespace [boost::serialization](#)
- namespace [AIRSCHEDED](#)

## 26.76 SegmentPathPeriodKey.hpp

```
00001 #ifndef __AIRSCHEDED_BOM_SEGMENTPATHPERIODKEY_HPP
00002 #define __AIRSCHEDED_BOM_SEGMENTPATHPERIODKEY_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <iosfwd>
00009 #include <string>
00010 // StdAir
00011 #include <stdair/stdair_basic_types.hpp>
00012 #include <stdair/stdair_date_time_types.hpp>
00013 #include <stdair/bom/KeyAbstract.hpp>
00014 #include <stdair/bom/PeriodStruct.hpp>
00015 // AirSched
00016 #include <airsched/bom/SegmentPathPeriodTypes.hpp>
00017
00019 namespace boost {
00020     namespace serialization {
00021         class access;
00022     }
00023 }
00024
00025 namespace AIRSCHEDED {
00026
00033     struct SegmentPathPeriodKey : public stdair::KeyAbstract {
00034         friend class boost::serialization::access;
00035
00036         // ////////////////////////////////// Constructors and destructors //////////////////////////////////
00037     public:
00041         SegmentPathPeriodKey (const stdair::PeriodStruct&,
00042                               const stdair::Duration_T& iBoardingTime,
00043                               const stdair::Duration_T& iElapsed,
00044                               const DateOffsetList_T&,
00045                               const stdair::NbOfAirlines_T&);
00046
00050         SegmentPathPeriodKey();
00051
00055         SegmentPathPeriodKey (const SegmentPathPeriodKey&);
00056
00060         ~SegmentPathPeriodKey();
00061
00062     public:
00063         // ////////////////////////////////// Getters //////////////////////////////////
00064         const stdair::PeriodStruct& getPeriod() const {
```

```

00069     return _period;
00070 }
00071
00075 const DateOffsetList_T& getBoardingDateOffsetList() const {
00076     return _boardingDateOffsetList;
00077 }
00078
00082 const stdair::NbOfSegments_T getNbOfSegments() const {
00083     return _boardingDateOffsetList.size();
00084 }
00085
00089 const stdair::NbOfAirlines_T& getNbOfAirlines() const {
00090     return _nbOfAirlines;
00091 }
00092
00096 const stdair::Duration_T& getElapsedTime() const {
00097     return _elapsed;
00098 }
00099
00103 const stdair::Duration_T& getBoardingTime() const {
00104     return _boardingTime;
00105 }
00106
00107
00108 public:
00109     // //////////// Setters ////////////
00111     void setPeriod (const stdair::PeriodStruct& iPeriod) {
00112         _period = iPeriod;
00113     }
00114
00115     void setBoardingDateOffsetList (const DateOffsetList_T& iList) {
00116         _boardingDateOffsetList = iList;
00117     }
00118
00120     void setNbOfAirlines (const stdair::NbOfAirlines_T& iNbOfAirlines) {
00121         _nbOfAirlines = iNbOfAirlines;
00122     }
00123
00125     void setElapsedTime (const stdair::Duration_T& iElapsed) {
00126         _elapsed = iElapsed;
00127     }
00128
00130     void setBoardingTime (const stdair::Duration_T& iBoardingTime) {
00131         _boardingTime = iBoardingTime;
00132     }
00133
00134
00135 public:
00136     // //////////// Business methods ////////////
00138     const bool isValid () const {
00139         return _period.isValid ();
00140     }
00141
00142
00143 public:
00144     // //////////// Display support methods ////////////
00150     void toStream (std::ostream& ioOut) const;
00151
00157     void fromStream (std::istream& ioIn);
00158
00168     const std::string toString() const;
00169
00170
00171 public:
00172     // //////////// (Boost) Serialisation support methods ////////////
00176     template<class Archive>
00177     void serialize (Archive& ar, const unsigned int iFileVersion);
00178
00179 private:
00184     void serialisationImplementationExport() const;
00185     void serialisationImplementationImport();
00186
00187
00188 private:
00189     // //////////// Attributes ////////////
00193     stdair::PeriodStruct _period;
00194
00198     stdair::Duration_T _boardingTime;
00199
00203     stdair::Duration_T _elapsed;
00204
00209     DateOffsetList_T _boardingDateOffsetList;
00210
00214     stdair::NbOfAirlines_T _nbOfAirlines;
00215 };
00216
00217 }

```

```
00018 #endif // __AIRSCHED_BOM_SEGMENTPATHPERIODKEY_HPP
```

## 26.77 airsched/bom/SegmentPathPeriodTypes.hpp File Reference

```
#include <map>
#include <vector>
#include <list>
#include <stdair/stdair_basic_types.hpp>
#include <stdair/stdair_date_time_types.hpp>
#include <stdair/bom/key_types.hpp>
```

### Namespaces

- namespace [AIRSCHED](#)

### Typedefs

- typedef std::list  
< SegmentPathPeriod \* > [AIRSCHED::SegmentPathPeriodList\\_T](#)
- typedef std::multimap< const  
stdair::MapKey\_T,  
SegmentPathPeriod \* > [AIRSCHED::SegmentPathPeriodMultimap\\_T](#)
- typedef std::vector< const  
SegmentPathPeriod \* > [AIRSCHED::SegmentPathPeriodLightList\\_T](#)
- typedef std::vector  
< SegmentPathPeriodLightList\_T > [AIRSCHED::SegmentPathPeriodListList\\_T](#)
- typedef std::vector  
< stdair::DateOffset\_T > [AIRSCHED::DateOffsetList\\_T](#)

## 26.78 SegmentPathPeriodTypes.hpp

```
00001 // //////////////////////////////////////
00002 #ifndef __AIRSCHED_BOM_SEGMENTPATHPERIODTYPES_HPP
00003 #define __AIRSCHED_BOM_SEGMENTPATHPERIODTYPES_HPP
00004
00005 // //////////////////////////////////////
00006 // Import section
00007 // //////////////////////////////////////
00008 // STL
00009 #include <map>
00010 #include <vector>
00011 #include <list>
00012 // StdAir
00013 #include <stdair/stdair_basic_types.hpp>
00014 #include <stdair/stdair_date_time_types.hpp>
00015 #include <stdair/bom/key_types.hpp>
00016
00017 namespace AIRSCHED {
00018
00020     class SegmentPathPeriod;
00021
00023     typedef std::list<SegmentPathPeriod*> SegmentPathPeriodList_T;
00024
00026     typedef std::multimap<const stdair::MapKey_T,
00027                          SegmentPathPeriod*> SegmentPathPeriodMultimap_T;
00028
00030     typedef std::vector<const SegmentPathPeriod*> SegmentPathPeriodLightList_T;
00031     typedef std::vector<SegmentPathPeriodLightList_T>SegmentPathPeriodListList_T;
00032
00035     typedef std::vector<stdair::DateOffset_T> DateOffsetList_T;
00036
00037 }
00038 #endif // __AIRSCHED_BOM_SEGMENTPATHPERIODTYPES_HPP
00039
```

## 26.79 airsched/bom/SegmentPeriodHelper.cpp File Reference

```
#include <cassert>
#include <stdair/basic/BasConst_General.hpp>
#include <stdair/bom/SegmentPeriod.hpp>
#include <airsched/bom/SegmentPeriodHelper.hpp>
```

## Namespaces

- namespace [AIRSCHED](#)

## 26.80 SegmentPeriodHelper.cpp

```
00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 // STDAIR
00007 #include <stdair/basic/BasConst_General.hpp>
00008 #include <stdair/bom/SegmentPeriod.hpp>
00009 // AIRSCHED
00010 #include <airsched/bom/SegmentPeriodHelper.hpp>
00011
00012 namespace AIRSCHED {
00013 // //////////////////////////////////////
00014 void SegmentPeriodHelper::fill (stdair::SegmentPeriod& ioSegmentPeriod,
00015                                const SegmentStruct& iSegmentStruct) {
00016     // Browse the list of segment cabins and fill the cabin booking
00017     // class map of the BOM segment period.
00018     for (SegmentCabinStructList_T::const_iterator itCabin =
00019          iSegmentStruct._cabinList.begin();
00020          itCabin != iSegmentStruct._cabinList.end(); ++itCabin) {
00021         const SegmentCabinStruct& lSegmentCabinStruct = *itCabin;
00022         ioSegmentPeriod.
00023             addCabinBookingClassList (lSegmentCabinStruct._cabinCode,
00024                                     lSegmentCabinStruct._classes);
00025     }
00026 }
00027
00028 // //////////////////////////////////////
00029 void SegmentPeriodHelper::fill (stdair::SegmentPeriod& ioSegmentPeriod,
00030                                const LegStructList_T& iLegList) {
00031
00032     const stdair::AirportCode_T& lBoardingPoint =
00033         ioSegmentPeriod.getBoardingPoint ();
00034     const stdair::AirportCode_T& lOffPoint = ioSegmentPeriod.getOffPoint ();
00035     stdair::Duration_T lElapsedTime;
00036
00037     // Find the leg which has the same boarding point.
00038     LegStructList_T::const_iterator itLeg = iLegList.begin ();
00039     while (itLeg != iLegList.end()) {
00040         const LegStruct& lLeg = *itLeg;
00041         if (lLeg._boardingPoint == lBoardingPoint) {
00042             break;
00043         } else {
00044             ++itLeg;
00045         }
00046     }
00047     assert (itLeg != iLegList.end());
00048     const LegStruct& lFirstLeg = *itLeg;
00049     stdair::AirportCode_T lCurrentOffPoint = lFirstLeg._offPoint;
00050     stdair::Duration_T lCurrentOffTime = lFirstLeg._offTime;
00051
00052     // Update the elapsed time.
00053     lElapsedTime += lFirstLeg._elapsed;
00054
00055     // Find the last used leg.
00056     while (lCurrentOffPoint != lOffPoint) {
00057         ++itLeg;
00058         assert (itLeg != iLegList.end());
00059
00060         const LegStruct& lCurrentLeg = *itLeg;
00061         assert (lCurrentOffPoint == lCurrentLeg._boardingPoint);
00062         // As the boarding point of the current leg is the same as the off point
00063         // of the previous leg (by construction), there is no time difference.
00064         const stdair::Duration_T lStopOverTime =
```

```

00065         lCurrentLeg._boardingTime - lCurrentOffTime;
00066         lElapsedTime += lStopOverTime;
00067
00068         // Add the elapsed time of the current leg
00069         lElapsedTime += lCurrentLeg._elapsed;
00070
00071         lCurrentOffTime = lCurrentLeg._offTime;
00072         lCurrentOffPoint = lCurrentLeg._offPoint;
00073     }
00074     const LegStruct& lLastLeg = *itLeg;
00075
00076     // Update the attributes of the segment-period.
00077     ioSegmentPeriod.setBoardingTime (lFirstLeg._boardingTime);
00078     ioSegmentPeriod.setOffTime (lLastLeg._offTime);
00079     ioSegmentPeriod.setBoardingDateOffset (lFirstLeg._boardingDateOffset);
00080     ioSegmentPeriod.setOffDateOffset (lLastLeg._offDateOffset);
00081     ioSegmentPeriod.setElapsedTime (lElapsedTime);
00082 }
00083
00084 }
```

## 26.81 airsched/bom/SegmentPeriodHelper.hpp File Reference

```

#include <airsched/bom/LegStruct.hpp>
#include <airsched/bom/SegmentStruct.hpp>
```

### Classes

- class [AIRSCHEDED::SegmentPeriodHelper](#)

### Namespaces

- namespace [stdair](#)  
Forward declarations.
- namespace [AIRSCHEDED](#)

## 26.82 SegmentPeriodHelper.hpp

```

00001 #ifndef __AIRSCHEDED_BOM_SEGMENTPERIODHELPER_HPP
00002 #define __AIRSCHEDED_BOM_SEGMENTPERIODHELPER_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // AIRSCHEDED
00008 #include <airsched/bom/LegStruct.hpp>
00009 #include <airsched/bom/SegmentStruct.hpp>
00010
00011 // Forward declarations
00012 namespace stdair {
00013     class SegmentPeriod;
00014 }
00015
00016 namespace AIRSCHEDED {
00019     class SegmentPeriodHelper {
00020     public:
00021         // ////////////////////////////////// Business Methods //////////////////////////////////
00024         static void fill (stdair::SegmentPeriod&, const SegmentStruct&);
00025
00028         static void fill (stdair::SegmentPeriod&, const LegStructList_T&);
00029     };
00030
00031 }
00032 #endif // __AIRSCHEDED_BOM_SEGMENTPERIODHELPER_HPP
```

**26.83 airsched/bom/SegmentStruct.cpp File Reference**

```
#include <cassert>
#include <sstream>
#include <stdair/bom/SegmentDate.hpp>
#include <airsched/bom/SegmentStruct.hpp>
```

**Namespaces**

- namespace [AIRSCHED](#)

**26.84 SegmentStruct.cpp**

```
00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <sstream>
00007 // STDAIR
00008 #include <stdair/bom/SegmentDate.hpp>
00009 // AIRSCHED
00010 #include <airsched/bom/SegmentStruct.hpp>
00011
00012 namespace AIRSCHED {
00013
00014 // //////////////////////////////////////
00015 const std::string SegmentStruct::describe() const {
00016     std::ostringstream ostr;
00017     ostr << " " << _boardingPoint << " / "
00018         << boost::posix_time::to_simple_string(_boardingTime)
00019         << " -- " << _offPoint << " / "
00020         << boost::posix_time::to_simple_string(_offTime)
00021         << " --> "
00022         << boost::posix_time::to_simple_string(_elapsed)
00023         << std::endl;
00024     for (SegmentCabinStructList_T::const_iterator itCabin =
00025         _cabinList.begin(); itCabin != _cabinList.end(); itCabin++) {
00026         const SegmentCabinStruct& lCabin = *itCabin;
00027         ostr << lCabin.describe();
00028     }
00029     ostr << std::endl;
00030
00031     return ostr.str();
00032 }
00033
00034 // //////////////////////////////////////
00035 void SegmentStruct::fill (stdair::SegmentDate& ioSegmentDate) const {
00036     // Note that some parameters (boarding date, boarding time, off
00037     // date, off time, elapsed time) are set by
00038     // SegmentDate::fillFromRouting() when the routing (with legs) is
00039     // built. So, it is useless to set those parameters here.
00040
00041     // At that time, there are no other parameters.
00042 }
00043
00044 }
```

**26.85 airsched/bom/SegmentStruct.hpp File Reference**

```
#include <string>
#include <vector>
#include <stdair/stdair_basic_types.hpp>
#include <stdair/basic/StructAbstract.hpp>
#include <airsched/bom/SegmentCabinStruct.hpp>
```

## Classes

- struct [AIRSCHEd::SegmentStruct](#)

## Namespaces

- namespace [stdair](#)  
*Forward declarations.*
- namespace [AIRSCHEd](#)

## Typedefs

- typedef std::vector  
< SegmentStruct > [AIRSCHEd::SegmentStructList\\_T](#)

## 26.86 SegmentStruct.hpp

```

00001 #ifndef __AIRSCHEd_BOM_SEGMENTSTRUCT_HPP
00002 #define __AIRSCHEd_BOM_SEGMENTSTRUCT_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <string>
00009 #include <vector>
00010 // StdAir
00011 #include <stdair/stdair_basic_types.hpp>
00012 #include <stdair/basic/StructAbstract.hpp>
00013 // AirSched
00014 #include <airsched/bom/SegmentCabinStruct.hpp>
00015
00016 // Forward declarations
00017 namespace stdair {
00018     class SegmentDate;
00019 }
00020
00021 namespace AIRSCHEd {
00022
00023     struct SegmentStruct : public stdair::StructAbstract {
00024         // Attributes
00025         stdair::AirportCode_T _boardingPoint;
00026         stdair::Date_T _boardingDate;
00027         stdair::Duration_T _boardingTime;
00028         stdair::AirportCode_T _offPoint;
00029         stdair::Date_T _offDate;
00030         stdair::Duration_T _offTime;
00031         stdair::Duration_T _elapsed;
00032         SegmentCabinStructList_T _cabinList;
00033
00034         void fill (stdair::SegmentDate&) const;
00035
00036         const std::string describe() const;
00037     };
00038
00039     typedef std::vector<SegmentStruct> SegmentStructList_T;
00040 }
00041
00042 #endif // __AIRSCHEd_BOM_SEGMENTSTRUCT_HPP

```



## 26.87 airsched/command/InventoryGenerator.cpp File Reference

```

#include <cassert>
#include <boost/date_time/date_iterator.hpp>
#include <stdair/stdair_basic_types.hpp>
#include <stdair/basic/BasConst_Inventory.hpp>
#include <stdair/bom/BomManager.hpp>
#include <stdair/bom/BomRoot.hpp>
#include <stdair/bom/Inventory.hpp>
#include <stdair/bom/FlightPeriod.hpp>
#include <stdair/bom/SegmentPeriod.hpp>
#include <stdair/factory/FacBomManager.hpp>
#include <stdair/service/Logger.hpp>
#include <airsched/bom/FlightPeriodStruct.hpp>
#include <airsched/bom/SegmentPeriodHelper.hpp>
#include <airsched/command/InventoryGenerator.hpp>

```

## Namespaces

- namespace [AIRSCHED](#)

## 26.88 InventoryGenerator.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 // Boost
00007 #include <boost/date_time/date_iterator.hpp>
00008 // StdAir
00009 #include <stdair/stdair_basic_types.hpp>
00010 #include <stdair/basic/BasConst_Inventory.hpp>
00011 #include <stdair/bom/BomManager.hpp>
00012 #include <stdair/bom/BomRoot.hpp>
00013 #include <stdair/bom/Inventory.hpp>
00014 #include <stdair/bom/FlightPeriod.hpp>
00015 #include <stdair/bom/SegmentPeriod.hpp>
00016 #include <stdair/factory/FacBomManager.hpp>
00017 #include <stdair/service/Logger.hpp>
00018 // AirSched
00019 #include <airsched/bom/FlightPeriodStruct.hpp>
00020 #include <airsched/bom/SegmentPeriodHelper.hpp>
00021 #include <airsched/command/InventoryGenerator.hpp>
00022
00023 namespace AIRSCHED {
00024
00025 // //////////////////////////////////////
00026 void InventoryGenerator::
00027     createFlightPeriod (stdair::BomRoot& ioBomRoot,
00028                         const FlightPeriodStruct& iFlightPeriodStruct) {
00029
00030     const stdair::AirlineCode_T& lAirlineCode = iFlightPeriodStruct.
00031         _airlineCode;
00032
00033     // Instantiate an inventory object (if not exist)
00034     // for the given key (airline code)
00035     stdair::Inventory* lInventory_ptr = stdair::BomManager::
00036         getObjectPtr<stdair::Inventory> (ioBomRoot, lAirlineCode);
00037     if (lInventory_ptr == NULL) {
00038         stdair::InventoryKey lKey (lAirlineCode);
00039
00040         lInventory_ptr =
00041             &stdair::FacBom<stdair::Inventory>::instance().create (lKey);
00042         stdair::FacBomManager::addToListAndMap (ioBomRoot, *lInventory_ptr);
00043         stdair::FacBomManager::linkWithParent (ioBomRoot, *lInventory_ptr);
00044     }
00045     assert (lInventory_ptr != NULL);
00046
00047     // Create the flight-period key.
00048     const stdair::PeriodStruct lPeriod (iFlightPeriodStruct._dateRange,
00049                                         iFlightPeriodStruct._dow);

```

```

00049     const stdair::FlightPeriodKey
00050         lFlightPeriodKey (iFlightPeriodStruct._flightNumber, lPeriod);
00051
00052     // Check that the flight-period object is not already created.
00053     stdair::FlightPeriod* lFlightPeriod_ptr = stdair::BomManager::
00054         getObjectPtr<stdair::FlightPeriod> (*lInventory_ptr,
00055             lFlightPeriodKey.toString());
00056     if (lFlightPeriod_ptr != NULL) {
00057         throw stdair::ObjectCreationDuplicationException ("");
00058     }
00059     assert (lFlightPeriod_ptr == NULL);
00060
00061     // Instantiate a flight-period object with the given key.
00062     lFlightPeriod_ptr = &stdair::FacBom<stdair::FlightPeriod>::
00063         instance().create (lFlightPeriodKey);
00064     stdair::FacBomManager::addToListAndMap (*lInventory_ptr, *lFlightPeriod_ptr
00065 );
00066     stdair::FacBomManager::linkWithParent (*lInventory_ptr, *lFlightPeriod_ptr)
00067 ;
00068
00069     // Create the segment-periods.
00070     createSegmentPeriods (*lFlightPeriod_ptr, iFlightPeriodStruct);
00071 }
00072
00073 // //////////////////////////////////////
00074 void InventoryGenerator::
00075     createSegmentPeriods (stdair::FlightPeriod& ioFlightPeriod,
00076         const FlightPeriodStruct& iFlightPeriodStruct) {
00077
00078     // Iterate on the segment structures.
00079     const SegmentStructList_T& lSegmentList = iFlightPeriodStruct._segmentList;
00080     for (SegmentStructList_T::const_iterator itSegment = lSegmentList.begin();
00081         itSegment != lSegmentList.end(); ++itSegment) {
00082
00083         const SegmentStruct& lSegment = *itSegment;
00084
00085         // Set the segment-period primary key.
00086         const stdair::AirportCode_T& lBoardingPoint = lSegment._boardingPoint;
00087         const stdair::AirportCode_T& lOffPoint = lSegment._offPoint;
00088         const stdair::SegmentPeriodKey lSegmentPeriodKey (lBoardingPoint,
00089             lOffPoint);
00090
00091         // Instantiate a segment-period with the key.
00092         stdair::SegmentPeriod& lSegmentPeriod = stdair::
00093             FacBom<stdair::SegmentPeriod>::instance().create (lSegmentPeriodKey);
00094         stdair::FacBomManager::addToListAndMap (ioFlightPeriod, lSegmentPeriod);
00095         stdair::FacBomManager::linkWithParent (ioFlightPeriod, lSegmentPeriod);
00096
00097         // Set the segment-period attributes.
00098         SegmentPeriodHelper::fill (lSegmentPeriod, lSegment);
00099         SegmentPeriodHelper::fill (lSegmentPeriod, iFlightPeriodStruct._legList);
00100     }
00101 }

```

## 26.89 airsched/command/InventoryGenerator.hpp File Reference

```

#include <stdair/command/CmdAbstract.hpp>
#include <airsched/AIRSCHEDED_Types.hpp>

```

### Classes

- class [AIRSCHEDED::InventoryGenerator](#)

### Namespaces

- namespace [stdair](#)  
Forward declarations.
- namespace [AIRSCHEDED](#)
- namespace [AIRSCHEDED::ScheduleParserHelper](#)

## 26.90 InventoryGenerator.hpp

```

00001 #ifndef __AIRSCHED_CMD_INVENTORYGENERATOR_HPP
00002 #define __AIRSCHED_CMD_INVENTORYGENERATOR_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // StdAir
00008 #include <stdair/command/CmdAbstract.hpp>
00009 // AirSched
00010 #include <airsched/AIRSCHED_Types.hpp>
00011
00012 // Forward declarations
00013 namespace stdair {
00014     class BomRoot;
00015     class FlightPeriod;
00016 }
00017
00018 namespace AIRSCHED {
00019
00020     // Forward declarations
00021     struct FlightPeriodStruct;
00022     struct LegStruct;
00023     struct SegmentStruct;
00024     struct LegCabinStruct;
00025     struct SegmentCabinStruct;
00026     namespace ScheduleParserHelper {
00027         struct doEndFlight;
00028     }
00029
00031     class InventoryGenerator : public stdair::CmdAbstract {
00032     // Only the following class may use methods of InventoryGenerator.
00033     // Indeed, as those methods build the BOM, it is not good to expose
00034     // them publicly.
00035     friend class FlightPeriodFileParser;
00036     friend class FFFlightPeriodFileParser;
00037     friend struct ScheduleParserHelper::doEndFlight;
00038     friend class ScheduleParser;
00039
00040     private:
00043         static void createFlightPeriod (stdair::BomRoot&,
00044                                         const FlightPeriodStruct&);
00045
00047         static void createSegmentPeriods (stdair::FlightPeriod&,
00048                                           const FlightPeriodStruct&);
00049
00050     };
00051
00052 }
00053 #endif // __AIRSCHED_CMD_INVENTORYGENERATOR_HPP

```

## 26.91 airsched/command/OnDParser.cpp File Reference

```

#include <cassert>
#include <stdair/basic/BasFileMgr.hpp>
#include <stdair/bom/BomRoot.hpp>
#include <airsched/command/OnDParserHelper.hpp>
#include <airsched/command/OnDParser.hpp>

```

## Namespaces

- namespace [AIRSCHED](#)

## 26.92 OnDParser.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 // StdAir
00007 #include <stdair/basic/BasFileMgr.hpp>
00008 #include <stdair/bom/BomRoot.hpp>

```

```

00009 // AirSched
00010 #include <airsched/command/OnDParserHelper.hpp>
00011 #include <airsched/command/OnDParser.hpp>
00012 namespace AIRSCHED {
00013 // //////////////////////////////////////
00014 void OnDParser::generateOnDPeriods (const stdair::Filename_T& iFilename,
00015                                     stdair::BomRoot& ioBomRoot) {
00016     // Check that the file path given as input corresponds to an actual file
00017     const bool doesExistAndIsReadable =
00018         stdair::BasFileMgr::doesExistAndIsReadable (iFilename);
00019     if (doesExistAndIsReadable == false) {
00020         throw OnDInputFileNotFoundExpection ("The O&D file " + iFilename
00021                                             + " does not exist or can not be "
00022                                             "read");
00023     }
00024     // Initialise the O&D-Period file parser.
00025     OnDPeriodFileParser lOnDPeriodParser (iFilename, ioBomRoot);
00026     // Parse the CSV-formatted O&D input file, and generate the
00027     // corresponding O&D-Period for the airlines.
00028     lOnDPeriodParser.generateOnDPeriods();
00029 }
00030 }
00031 }
00032 }
00033 }

```

## 26.93 airsched/command/OnDParser.hpp File Reference

```

#include <string>
#include <stdair/stdair_basic_types.hpp>
#include <stdair/command/CmdAbstract.hpp>

```

### Classes

- class [AIRSCHED::OnDParser](#)  
Class wrapping the parser entry point.

### Namespaces

- namespace [stdair](#)  
Forward declarations.
- namespace [AIRSCHED](#)

## 26.94 OnDParser.hpp

```

00001 #ifndef __AIRSCHED_CMD_ONDPARSER_HPP
00002 #define __AIRSCHED_CMD_ONDPARSER_HPP
00003 // //////////////////////////////////////
00004 // Import section
00005 // //////////////////////////////////////
00006 // STL
00007 #include <string>
00008 // StdAir
00009 #include <stdair/stdair_basic_types.hpp>
00010 #include <stdair/command/CmdAbstract.hpp>
00011 namespace stdair {
00012     class BomRoot;
00013 }
00014 namespace AIRSCHED {
00015     class OnDParser : public stdair::CmdAbstract {
00016     public:
00017         static void generateOnDPeriods (const stdair::Filename_T&,

```

```

00032                                     stdair::BomRoot&);
00033     };
00034
00035 }
00036 #endif // __AIRSCHED_CMD_ONDPARSER_HPP

```

## 26.95 airsched/command/OnDParserHelper.cpp File Reference

```

#include <cassert>
#include <stdair/basic/BasFileMgr.hpp>
#include <stdair/bom/BomRoot.hpp>
#include <stdair/service/Logger.hpp>
#include <airsched/command/OnDParserHelper.hpp>
#include <airsched/command/OnDPeriodGenerator.hpp>

```

### Namespaces

- namespace [AIRSCHED](#)
- namespace [AIRSCHED::OnDParserHelper](#)

### Functions

- [chset\\_t AIRSCHED::OnDParserHelper::alpha\\_cap\\_set\\_p](#) ("A-Z")
- [repeat\\_p\\_t AIRSCHED::OnDParserHelper::airport\\_p](#) (chset\_t("0-9A-Z").derived(), 3, 3)
- [repeat\\_p\\_t AIRSCHED::OnDParserHelper::airline\\_code\\_p](#) (alpha\_cap\_set\_p.derived(), 2, 3)
- [bounded4\\_p\\_t AIRSCHED::OnDParserHelper::year\\_p](#) (uint4\_p.derived(), 2000u, 2099u)
- [bounded2\\_p\\_t AIRSCHED::OnDParserHelper::month\\_p](#) (uint2\_p.derived(), 1u, 12u)
- [bounded2\\_p\\_t AIRSCHED::OnDParserHelper::day\\_p](#) (uint2\_p.derived(), 1u, 31u)
- [bounded2\\_p\\_t AIRSCHED::OnDParserHelper::hours\\_p](#) (uint2\_p.derived(), 0u, 23u)
- [bounded2\\_p\\_t AIRSCHED::OnDParserHelper::minutes\\_p](#) (uint2\_p.derived(), 0u, 59u)
- [bounded2\\_p\\_t AIRSCHED::OnDParserHelper::seconds\\_p](#) (uint2\_p.derived(), 0u, 59u)
- [chset\\_t AIRSCHED::OnDParserHelper::class\\_code\\_p](#) ("A-Z")

### Variables

- [uint2\\_p\\_t AIRSCHED::OnDParserHelper::uint2\\_p](#)
- [uint4\\_p\\_t AIRSCHED::OnDParserHelper::uint4\\_p](#)
- [uint1\\_4\\_p\\_t AIRSCHED::OnDParserHelper::uint1\\_4\\_p](#)

## 26.96 OnDParserHelper.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 // StdAir
00007 #include <stdair/basic/BasFileMgr.hpp>
00008 #include <stdair/bom/BomRoot.hpp>
00009 #include <stdair/service/Logger.hpp>
00010 // AIRSCHED
00011 #include <airsched/command/OnDParserHelper.hpp>
00012 #include <airsched/command/OnDPeriodGenerator.hpp>
00013
00014 namespace AIRSCHED {
00015
00016     namespace OnDParserHelper {
00017
00018         // //////////////////////////////////////
00019         //
00020         // Semantic actions

```

```

00021 //
00022 // ////////////////////////////////////////////////////////////////////
00023
00024 ParserSemanticAction::
00025 ParserSemanticAction (OnDPeriodStruct& ioOnDPeriod)
00026 : _onDPeriod (ioOnDPeriod) {
00027 }
00028
00029 // ////////////////////////////////////////////////////////////////////
00030 storeOrigin::storeOrigin (OnDPeriodStruct& ioOnDPeriod)
00031 : ParserSemanticAction (ioOnDPeriod) {
00032 }
00033
00034 // ////////////////////////////////////////////////////////////////////
00035 void storeOrigin::operator() (iterator_t iStr,
00036                               iterator_t iStrEnd) const {
00037     std::string lOrigin (iStr, iStrEnd);
00038     //STDAIR_LOG_DEBUG ( "Origin: " << lOrigin << std::endl);
00039
00040     // Set the origin
00041     _onDPeriod._origin = lOrigin;
00042     _onDPeriod._nbOfAirlines = 0;
00043     _onDPeriod._airlineCode = "";
00044     _onDPeriod._classCode = "";
00045     _onDPeriod._airlineCodeList.clear();
00046     _onDPeriod._classCodeList.clear();
00047 }
00048
00049 // ////////////////////////////////////////////////////////////////////
00050 storeDestination::storeDestination (OnDPeriodStruct& ioOnDPeriod)
00051 : ParserSemanticAction (ioOnDPeriod) {
00052 }
00053
00054 // ////////////////////////////////////////////////////////////////////
00055 void storeDestination::operator() (iterator_t iStr,
00056                                    iterator_t iStrEnd) const {
00057     std::string lDestination (iStr, iStrEnd);
00058     //STDAIR_LOG_DEBUG ("Destination: " << lDestination << std::endl);
00059
00060     // Set the destination
00061     _onDPeriod._destination = lDestination;
00062 }
00063
00064 // ////////////////////////////////////////////////////////////////////
00065 storeDateRangeStart::
00066 storeDateRangeStart (OnDPeriodStruct& ioOnDPeriod)
00067 : ParserSemanticAction (ioOnDPeriod) {
00068 }
00069
00070 // ////////////////////////////////////////////////////////////////////
00071 void storeDateRangeStart::operator() (iterator_t iStr,
00072                                       iterator_t iStrEnd) const {
00073     _onDPeriod._dateRangeStart = _onDPeriod.getDate();
00074     /*STDAIR_LOG_DEBUG ("Date Range Start: "
00075         << _onDPeriod._dateRangeStart << std::endl);*/
00076
00077     // Reset the number of seconds
00078     _onDPeriod._itSeconds = 0;
00079 }
00080
00081 // ////////////////////////////////////////////////////////////////////
00082 storeDateRangeEnd::
00083 storeDateRangeEnd (OnDPeriodStruct& ioOnDPeriod)
00084 : ParserSemanticAction (ioOnDPeriod) {
00085 }
00086
00087 // ////////////////////////////////////////////////////////////////////
00088 void storeDateRangeEnd::operator() (iterator_t iStr,
00089                                     iterator_t iStrEnd) const {
00090     // As a Boost date period (COM::DatePeriod_T) defines the last day of
00091     // the period to be end-date - one day, we have to add one day to that
00092     // end date before.
00093     const stdair::DateOffset_T oneDay (1);
00094     _onDPeriod._dateRangeEnd = _onDPeriod.getDate() + oneDay;
00095     /*STDAIR_LOG_DEBUG ( "Date Range End: "
00096         << _onDPeriod._dateRangeEnd << std::endl);*/
00097
00098     // Transform the date pair (i.e., the date range) into a date period
00099     _onDPeriod._datePeriod =
00100         stdair::DatePeriod_T (_onDPeriod._dateRangeStart,
00101                               _onDPeriod._dateRangeEnd);
00102
00103     // Reset the number of seconds
00104     _onDPeriod._itSeconds = 0;
00105 }
00106
00107 // ////////////////////////////////////////////////////////////////////

```

```

00108     storeStartRangeTime::
00109     storeStartRangeTime (OnDPeriodStruct& ioOnDPeriod)
00110         : ParserSemanticAction (ioOnDPeriod) {
00111     }
00112
00113     // //////////////////////////////////////
00114 void storeStartRangeTime::operator() (iterator_t iStr,
00115                                     iterator_t iStrEnd) const {
00116     _onDPeriod._timeRangeStart = _onDPeriod.getTime();
00117
00118     // Reset the number of seconds
00119     _onDPeriod._itSeconds = 0;
00120 }
00121
00122     // //////////////////////////////////////
00123 storeEndRangeTime::
00124 storeEndRangeTime (OnDPeriodStruct& ioOnDPeriod)
00125     : ParserSemanticAction (ioOnDPeriod) {
00126 }
00127
00128     // //////////////////////////////////////
00129 void storeEndRangeTime::operator() (iterator_t iStr,
00130                                     iterator_t iStrEnd) const {
00131     _onDPeriod._timeRangeEnd = _onDPeriod.getTime();
00132
00133     // Reset the number of seconds
00134     _onDPeriod._itSeconds = 0;
00135 }
00136
00137     // //////////////////////////////////////
00138 storeAirlineCode::
00139 storeAirlineCode (OnDPeriodStruct& ioOnDPeriod)
00140     : ParserSemanticAction (ioOnDPeriod) {
00141 }
00142
00143     // //////////////////////////////////////
00144 void storeAirlineCode::operator() (iterator_t iStr,
00145                                     iterator_t iStrEnd) const {
00146     const std::string lAirlineCodeStr (iStr, iStrEnd);
00147     const stdair::AirlineCode_T lAirlineCode (lAirlineCodeStr);
00148     // Test if the OnD Period Struct stands for interline products
00149     if (_onDPeriod._airlineCodeList.size() > 0) {
00150         // update the airline code
00151         std::ostringstream ostr;
00152         ostr << _onDPeriod._airlineCode << lAirlineCode;
00153         _onDPeriod._airlineCode = ostr.str();
00154         // Update the number of airlines if necessary
00155         const stdair::AirlineCode_T lPreviousAirlineCode =
00156             _onDPeriod._airlineCodeList.back();
00157         if (lPreviousAirlineCode != lAirlineCode) {
00158             _onDPeriod._nbOfAirlines = _onDPeriod._nbOfAirlines + 1;
00159         }
00160     }
00161     else {
00162         _onDPeriod._airlineCode = lAirlineCode;
00163         _onDPeriod._nbOfAirlines = 1;
00164     }
00165     _onDPeriod._airlineCodeList.push_back (lAirlineCode);
00166
00167     //STDAIR_LOG_DEBUG ( "Airline code: " << lAirlineCode << std::endl);
00168 }
00169
00170     // //////////////////////////////////////
00171 storeClassCode::
00172 storeClassCode (OnDPeriodStruct& ioOnDPeriod)
00173     : ParserSemanticAction (ioOnDPeriod) {
00174 }
00175
00176     // //////////////////////////////////////
00177 void storeClassCode::operator() (char iChar) const {
00178     std::ostringstream ostr;
00179     ostr << iChar;
00180     std::string classCodeStr = ostr.str();
00181     const stdair::ClassCode_T lClassCode (classCodeStr);
00182     _onDPeriod._classCodeList.push_back (lClassCode);
00183     /*STDAIR_LOG_DEBUG ("Class Code: "
00184         << lClassCode << std::endl);*/
00185     // Insertion of this class Code in the whole classCode name
00186     std::ostringstream ostrr;
00187     ostrr << _onDPeriod._classCode << classCodeStr;
00188     _onDPeriod._classCode = ostrr.str();
00189 }
00190
00191     // //////////////////////////////////////
00192 doEndOnD::doEndOnD (stdair::BomRoot& ioBomRoot, OnDPeriodStruct&
00193 ioOnDPeriod)

```

```

00194         : ParserSemanticAction (ioOnDPeriod),
00195         _bomRoot (ioBomRoot) {
00196     }
00197
00198     // ////////////////////////////////////////
00199 void doEndOnD::operator() (iterator_t iStr, iterator_t iStrEnd) const {
00200
00201         // DEBUG: Display the result
00202         // STDAIR_LOG_DEBUG ("FareRule " << _onDPeriod.describe());
00203
00204         // Generation of the O&D-Period object.
00205         OnDPeriodGenerator::createOnDPeriod (_bomRoot, _onDPeriod);
00206     }
00207
00208     // ////////////////////////////////////////
00209     //
00210     // Utility Parsers
00211     //
00212     // ////////////////////////////////////////
00213
00215     uint2_p_t uint2_p;
00216
00218     uint4_p_t uint4_p;
00219
00221     uint1_4_p_t uint1_4_p;
00222
00224     chset_t alpha_cap_set_p ("A-Z");
00225
00227     repeat_p_t airport_p (chset_t("0-9A-Z").derived(), 3, 3);
00228
00230     repeat_p_t airline_code_p (alpha_cap_set_p.derived(), 2, 3);
00231
00233     bounded4_p_t year_p (uint4_p.derived(), 2000u, 2099u);
00234
00236     bounded2_p_t month_p (uint2_p.derived(), 1u, 12u);
00237
00239     bounded2_p_t day_p (uint2_p.derived(), 1u, 31u);
00240
00242     bounded2_p_t hours_p (uint2_p.derived(), 0u, 23u);
00243
00245     bounded2_p_t minutes_p (uint2_p.derived(), 0u, 59u);
00246
00248     bounded2_p_t seconds_p (uint2_p.derived(), 0u, 59u);
00249
00251     chset_t class_code_p ("A-Z");
00252
00254     //
00255     // (Boost Spirit) Grammar Definition
00256     //
00258
00259     // ////////////////////////////////////////
00260     OnDParser::
00261     OnDParser (stdair::BomRoot& ioBomRoot, OnDPeriodStruct& ioOnDPeriod)
00262         : _bomRoot (ioBomRoot), _onDPeriod (ioOnDPeriod) {
00263     }
00264
00265     // ////////////////////////////////////////
00266     template<typename ScannerT>
00267     OnDParser::definition<ScannerT>::definition (OnDParser const& self) {
00268
00269         ond_list = *( boost::spirit::classic::comment_p("//")
00270                     | boost::spirit::classic::comment_p("/*", "*/")
00271                     | ond )
00272
00273         ;
00274
00275         ond = ond_key
00276             >> + ( ';' >> segment )
00277             >> ond_end[doEndOnD(self._bomRoot, self._onDPeriod)]
00278
00279         ;
00280
00281         ond_end = boost::spirit::classic::ch_p(';')
00282
00283         ;
00284
00285         ond_key = (airport_p)[storeOrigin(self._onDPeriod)]
00286             >> ';' >> (airport_p)[storeDestination(self._onDPeriod)]
00287             >> ';' >> date[storeDateRangeStart(self._onDPeriod)]
00288             >> ';' >> date[storeDateRangeEnd(self._onDPeriod)]
00289             >> ';' >> time[storeStartRangeTime(self._onDPeriod)]
00290             >> ';' >> time[storeEndRangeTime(self._onDPeriod)]
00291
00292         ;
00293
00294         date = boost::spirit::classic::
00295             lexeme_d[ (year_p)[boost::spirit::classic::
00296                 assign_a(self._onDPeriod._itYear)]
00297                 >> '-'
00298                 >> (month_p)[boost::spirit::classic::
00299                     assign_a(self._onDPeriod._itMonth)]

```



```

00296         >> '._'
00297         >> (day_p) [boost::spirit::classic::
00298             assign_a(self._onDPeriod._itDay)]
00299     ;
00300
00301     time = boost::spirit::classic::
00302         lexeme_d[(hours_p) [boost::spirit::classic::
00303             assign_a(self._onDPeriod._itHours)]
00304             >> ';'
00305             >> (minutes_p) [boost::spirit::classic::
00306                 assign_a(self._onDPeriod._itMinutes)]
00307             >> !(':' >> (seconds_p) [boost::spirit::classic::
00308                 assign_a(self._onDPeriod._itSeconds)])
00309 ]
00310 ;
00311
00312     segment = boost::spirit::classic::
00313         lexeme_d[(airline_code_p) [storeAirlineCode(self._onDPeriod)]
00314             >> ';' >> (class_code_p) [storeClassCode(self._onDPeriod)]
00315             ;
00316         //BOOST_SPIRIT_DEBUG_NODE (OnDParser);
00317         BOOST_SPIRIT_DEBUG_NODE (ond_list);
00318         BOOST_SPIRIT_DEBUG_NODE (ond);
00319         BOOST_SPIRIT_DEBUG_NODE (segment);
00320         BOOST_SPIRIT_DEBUG_NODE (ond_key);
00321         BOOST_SPIRIT_DEBUG_NODE (ond_end);
00322         BOOST_SPIRIT_DEBUG_NODE (date);
00323         BOOST_SPIRIT_DEBUG_NODE (time);
00324     }
00325 }
00326
00327 // //////////////////////////////////////
00328 template<typename ScannerT>
00329 boost::spirit::classic::rule<ScannerT> const&
00330 OnDParser::definition<ScannerT>::start() const {
00331     return ond_list;
00332 }
00333 }
00334
00335 //
00336 // Entry class for the file parser
00337 //
00338 //
00339
00340 // //////////////////////////////////////
00341 OnDPeriodFileParser::OnDPeriodFileParser (const stdair::Filename_T& iFilename
00342 ,
00343     stdair::BomRoot& ioBomRoot)
00344 : _filename (iFilename), _bomRoot (ioBomRoot) {
00345     init();
00346 }
00347
00348 // //////////////////////////////////////
00349 void OnDPeriodFileParser::init() {
00350     // Check that the file exists and is readable
00351     const bool doesExistAndIsReadable =
00352         stdair::BasFileMgr::doesExistAndIsReadable (_filename);
00353
00354     if (doesExistAndIsReadable == false) {
00355         STDAIR_LOG_ERROR ("The O&D file " << _filename
00356             << " does not exist or can not be read.");
00357
00358         throw OnDInputFileNotFoundExpection ("The O&D file " + _filename
00359             + " does not exist or can not be
00360 read");
00361     }
00362
00363     // Open the file
00364     _startIterator = iterator_t (_filename);
00365
00366     // Check that the filename exists and can be open
00367     if (!_startIterator) {
00368         STDAIR_LOG_DEBUG ("The O&D file " << _filename << " can not be open."
00369             << std::endl);
00370         throw OnDInputFileNotFoundExpection ("The file " + _filename
00371             + " does not exist or can not be
00372 read");
00373     }
00374
00375     // Create an EOF iterator
00376     _endIterator = _startIterator.make_end();
00377 }
00378
00379 // //////////////////////////////////////
00380 bool OnDPeriodFileParser::generateOnDPeriods () {
00381     bool oResult = false;

```

```

00381     STDAIR_LOG_DEBUG ("Parsing O&D input file: " << _filename);
00382
00383     // Initialise the parser (grammar) with the helper/staging structure.
00384     OnDParserHelper::OnDParser lODParser (_bomRoot, _onDPeriod);
00385
00386     // Launch the parsing of the file and, thanks to the doEndOnD
00387     // call-back structure, filling the worldSchedule (Fares)
00388     boost::spirit::classic::parse_info<iterator_t> info =
00389         boost::spirit::classic::parse (_startIterator, _endIterator, lODParser,
00390                                         boost::spirit::classic::space_p);
00391
00392     // Retrieves whether or not the parsing was successful
00393     oResult = info.hit;
00394
00395     const std::string hasBeenFullyReadStr = (info.full == true)?"":"not ";
00396     if (oResult == true) {
00397         STDAIR_LOG_DEBUG ("Parsing of O&D input file: " << _filename
00398                         << " succeeded: read " << info.length
00399                         << " characters. The input file has "
00400                         << hasBeenFullyReadStr
00401                         << "been fully read. Stop point: " << info.stop);
00402
00403     } else {
00404         // TODO: decide whether to throw an exception
00405         STDAIR_LOG_ERROR ("Parsing of O&D input file: " << _filename
00406                         << " failed: read " << info.length
00407                         << " characters. The input file has "
00408                         << hasBeenFullyReadStr
00409                         << "been fully read. Stop point: " << info.stop);
00410     }
00411
00412     return oResult;
00413 }
00414 }

```

## 26.97 airsched/command/OnDParserHelper.hpp File Reference

```

#include <string>
#include <boost/date_time/posix_time/posix_time.hpp>
#include <boost/date_time/gregorian/gregorian.hpp>
#include <stdair/command/CmdAbstract.hpp>
#include <airsched/AIRSCHEDED_Types.hpp>
#include <airsched/basic/BasParserTypes.hpp>
#include <airsched/bom/OnDPeriodStruct.hpp>

```

### Classes

- struct [AIRSCHEDED::OnDParserHelper::ParserSemanticAction](#)
- struct [AIRSCHEDED::OnDParserHelper::storeOrigin](#)
- struct [AIRSCHEDED::OnDParserHelper::storeDestination](#)
- struct [AIRSCHEDED::OnDParserHelper::storeDateRangeStart](#)
- struct [AIRSCHEDED::OnDParserHelper::storeDateRangeEnd](#)
- struct [AIRSCHEDED::OnDParserHelper::storeStartRangeTime](#)
- struct [AIRSCHEDED::OnDParserHelper::storeEndRangeTime](#)
- struct [AIRSCHEDED::OnDParserHelper::storeAirlineCode](#)
- struct [AIRSCHEDED::OnDParserHelper::storeClassCode](#)
- struct [AIRSCHEDED::OnDParserHelper::doEndOnD](#)
- struct [AIRSCHEDED::OnDParserHelper::OnDParser](#)
- struct [AIRSCHEDED::OnDParserHelper::OnDParser::definition< ScannerT >](#)
- class [AIRSCHEDED::OnDPeriodFileParser](#)

### Namespaces

- namespace [stdair](#)  
Forward declarations.

- namespace AIRSCHED
- namespace AIRSCHED::OnDParserHelper

## 26.98 OnDParserHelper.hpp

```

00001 #ifndef __AIRSCHED_CMD_ONDPARSERHELPER_HPP
00002 #define __AIRSCHED_CMD_ONDPARSERHELPER_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <string>
00009 // Boost (Extended STL)
00010 #include <boost/date_time/posix_time/posix_time.hpp>
00011 #include <boost/date_time/gregorian/gregorian.hpp>
00012 // StdAir
00013 #include <stdair/command/CmdAbstract.hpp>
00014 // AirSched
00015 #include <airsched/AIRSCHED_Types.hpp>
00016 #include <airsched/basic/BasParserTypes.hpp>
00017 #include <airsched/bom/OnDPeriodStruct.hpp>
00018
00019 // Forward declarations
00020 namespace stdair {
00021     class BomRoot;
00022 }
00023
00024 namespace AIRSCHED {
00025
00026     namespace OnDParserHelper {
00027
00028         // //////////////////////////////////////
00029         //
00030         // Semantic actions
00031         //
00032         // //////////////////////////////////////
00033         struct ParserSemanticAction {
00034             ParserSemanticAction (OnDPeriodStruct&);
00035             OnDPeriodStruct& _onDPeriod;
00036         };
00037
00038         struct storeOrigin : public ParserSemanticAction {
00039             storeOrigin (OnDPeriodStruct&);
00040             void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00041         };
00042
00043         struct storeDestination : public ParserSemanticAction {
00044             storeDestination (OnDPeriodStruct&);
00045             void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00046         };
00047
00048         struct storeDateRangeStart : public ParserSemanticAction {
00049             storeDateRangeStart (OnDPeriodStruct&);
00050             void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00051         };
00052
00053         struct storeDateRangeEnd : public ParserSemanticAction {
00054             storeDateRangeEnd (OnDPeriodStruct&);
00055             void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00056         };
00057
00058         struct storeStartRangeTime : public ParserSemanticAction {
00059             storeStartRangeTime (OnDPeriodStruct&);
00060             void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00061         };
00062
00063         struct storeEndRangeTime : public ParserSemanticAction {
00064             storeEndRangeTime (OnDPeriodStruct&);
00065             void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00066         };
00067
00068         struct storeAirlineCode : public ParserSemanticAction {
00069             storeAirlineCode (OnDPeriodStruct&);
00070             void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00071         };
00072
00073         struct storeClassCode : public ParserSemanticAction {
00074             storeClassCode (OnDPeriodStruct&);
00075             void operator() (char iChar) const;
00076         };
00077
00078         struct doEndOnD : public ParserSemanticAction {
00079             doEndOnD (stdair::BomRoot&, OnDPeriodStruct&);
00080         };
00081
00082     }
00083
00084 }
00085
00086 #endif

```

```

00110     void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00112     stdair::BomRoot& _bomRoot;
00113 };
00114
00116     //
00117     // (Boost Spirit) Grammar Definition
00118     //
00120
00127     struct OnDParser :
00128     public boost::spirit::classic::grammar<OnDParser> {
00129
00130         OnDParser (stdair::BomRoot&, OnDPeriodStruct&);
00131
00132         template <typename ScannerT>
00133         struct definition {
00134             definition (OnDParser const& self);
00135
00136             // Instantiation of rules
00137             boost::spirit::classic::rule<ScannerT> ond_list, ond, segment,
00138             ond_key, ond_end, date, time;
00139
00141             boost::spirit::classic::rule<ScannerT> const& start() const;
00142         };
00143
00144         // Parser Context
00145         stdair::BomRoot& _bomRoot;
00146         OnDPeriodStruct& _onDPeriod;
00147     };
00148 }
00149
00151 //
00152 // Entry class for the file parser
00153 //
00155
00161 class OnDPeriodFileParser : public stdair::CmdAbstract {
00162 public:
00164     OnDPeriodFileParser (const stdair::Filename_T& iFilename,
00165                         stdair::BomRoot& ioBomRoot);
00166
00168     bool generateOnDPeriods ();
00169
00170 private:
00172     void init();
00173
00174 private:
00175     // Attributes
00177     stdair::Filename_T _filename;
00178
00180     iterator_t _startIterator;
00181
00183     iterator_t _endIterator;
00184
00186     stdair::BomRoot& _bomRoot;
00187
00189     OnDPeriodStruct _onDPeriod;
00190 };
00191
00192 }
00193 #endif // __AIRSCHED_CMD_ONDPARSERHELPER_HPP

```

## 26.99 airsched/command/OnDPeriodGenerator.cpp File Reference

```

#include <cassert>
#include <stdair/stdair_date_time_types.hpp>
#include <stdair/bom/BomManager.hpp>
#include <stdair/bom/BomRoot.hpp>
#include <stdair/factory/FacBomManager.hpp>
#include <stdair/service/Logger.hpp>
#include <airsched/bom/OnDPeriodStruct.hpp>
#include <airsched/command/OnDPeriodGenerator.hpp>

```

### Namespaces

- namespace [AIRSCHED](#)

## 26.100 OnDPeriodGenerator.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 // StdAir
00007 #include <stdair/stdair_date_time_types.hpp>
00008 #include <stdair/bom/BomManager.hpp>
00009 #include <stdair/bom/BomRoot.hpp>
00010 #include <stdair/factory/FacBomManager.hpp>
00011 #include <stdair/service/Logger.hpp>
00012 // AirSched
00013 #include <airsched/bom/OnDPeriodStruct.hpp>
00014 #include <airsched/command/OnDPeriodGenerator.hpp>
00015
00016 namespace AIRSCHED {
00017
00018 // //////////////////////////////////////
00019 void OnDPeriodGenerator::
00020     createOnDPeriod (stdair::BomRoot& ioBomRoot,
00021                     const OnDPeriodStruct& iOnDPeriodStruct) {
00022 }
00023 }

```

## 26.101 airsched/command/OnDPeriodGenerator.hpp File Reference

```

#include <stdair/command/CmdAbstract.hpp>
#include <airsched/AIRSCHED_Types.hpp>

```

## Classes

- class [AIRSCHED::OnDPeriodGenerator](#)  
Class handling the generation / instantiation of the O&D-Period BOM.

## Namespaces

- namespace [stdair](#)  
Forward declarations.
- namespace [AIRSCHED](#)
- namespace [AIRSCHED::OnDParserHelper](#)

## 26.102 OnDPeriodGenerator.hpp

```

00001 #ifndef __AIRSCHED_CMD_ONDPERIODGENERATOR_HPP
00002 #define __AIRSCHED_CMD_ONDPERIODGENERATOR_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // StdAir
00008 #include <stdair/command/CmdAbstract.hpp>
00009 // AirSched
00010 #include <airsched/AIRSCHED_Types.hpp>
00011
00012 namespace stdair {
00013     class BomRoot;
00014 }
00015
00016 namespace AIRSCHED {
00017
00018     struct OnDPeriodStruct_T;
00019     namespace OnDParserHelper {
00020         struct doEndOnD;
00021     }
00022
00023     class OnDPeriodGenerator : public stdair::CmdAbstract {
00024     friend class OnDPeriodFileParser;
00025 }

```

```

00036     friend struct OnDParserHelper::doEndOnD;
00037     friend class OnDParser;
00038
00039 private:
00048     static void createOnDPeriod (stdair::BomRoot&, const OnDPeriodStruct&);
00049 };
00050
00051 }
00052 #endif // __AIRSCHED_CMD_ONDPERIODGENERATOR_HPP

```

## 26.103 airsched/command/ScheduleParser.cpp File Reference

```

#include <cassert>
#include <string>
#include <stdair/basic/BasFileMgr.hpp>
#include <stdair/bom/BomRoot.hpp>
#include <airsched/command/SegmentPathGenerator.hpp>
#include <airsched/command/ScheduleParserHelper.hpp>
#include <airsched/command/ScheduleParser.hpp>

```

### Namespaces

- namespace [AIRSCHED](#)

## 26.104 ScheduleParser.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <string>
00007 // StdAir
00008 #include <stdair/basic/BasFileMgr.hpp>
00009 #include <stdair/bom/BomRoot.hpp>
00010 // AirSched
00011 #include <airsched/command/SegmentPathGenerator.hpp>
00012 #include <airsched/command/ScheduleParserHelper.hpp>
00013 #include <airsched/command/ScheduleParser.hpp>
00014
00015 namespace AIRSCHED {
00016
00017 // //////////////////////////////////////
00018 void ScheduleParser::generateInventories (const stdair::Filename_T& iFilename
00019
00020                                     stdair::BomRoot& ioBomRoot) {
00021
00022     // Check that the file path given as input corresponds to an actual file
00023     const bool doesExistAndIsReadable =
00024         stdair::BasFileMgr::doesExistAndIsReadable (iFilename);
00025     if (doesExistAndIsReadable == false) {
00026         throw ScheduleInputFileNotFoundException ("The schedule file " +
00027 iFilename
00028                                     + " does not exist or can not "
00029                                     + "be read");
00030     }
00031
00032     // Initialise the Flight-Period file parser.
00033     FlightPeriodFileParser lFlightPeriodParser (ioBomRoot, iFilename);
00034
00035     // Parse the CSV-formatted schedule input file, and generate the
00036     // corresponding Inventories for the airlines.
00037     lFlightPeriodParser.generateInventories();
00038
00039     // Build the network from the schedule.
00040     SegmentPathGenerator::createSegmentPathNetwork (ioBomRoot);
00041 }
00042 }

```

## 26.105 airsched/command/ScheduleParser.hpp File Reference

```
#include <string>
#include <stdair/stdair_basic_types.hpp>
#include <stdair/command/CmdAbstract.hpp>
```

### Classes

- class [AIRSCHED::ScheduleParser](#)

### Namespaces

- namespace [stdair](#)  
*Forward declarations.*
- namespace [AIRSCHED](#)

## 26.106 ScheduleParser.hpp

```
00001 #ifndef __AIRSCHED_CMD_SCHEDULEPARSER_HPP
00002 #define __AIRSCHED_CMD_SCHEDULEPARSER_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <string>
00009 // StdAir
00010 #include <stdair/stdair_basic_types.hpp>
00011 #include <stdair/command/CmdAbstract.hpp>
00012
00013 // Forward declarations.
00014 namespace stdair {
00015     class BomRoot;
00016 }
00017
00018 namespace AIRSCHED {
00019
00021     class ScheduleParser : public stdair::CmdAbstract {
00022     public:
00028         static void generateInventories (const stdair::Filename_T&,
00029                                         stdair::BomRoot&);
00030     };
00031 }
00032 #endif // __AIRSCHED_CMD_SCHEDULEPARSER_HPP
```

## 26.107 airsched/command/ScheduleParserHelper.cpp File Reference

```
#include <cassert>
#include <stdair/basic/BasFileMgr.hpp>
#include <stdair/bom/BomRoot.hpp>
#include <stdair/service/Logger.hpp>
#include <airsched/command/ScheduleParserHelper.hpp>
#include <airsched/command/InventoryGenerator.hpp>
```

### Namespaces

- namespace [AIRSCHED](#)
- namespace [AIRSCHED::ScheduleParserHelper](#)

## Functions

- repeat\_p\_t AIRSCHED::ScheduleParserHelper::airline\_code\_p (chset\_t("0-9A-Z").derived(), 2, 3)
- bounded1\_4\_p\_t AIRSCHED::ScheduleParserHelper::flight\_number\_p (uint1\_4\_p.derived(), 0u, 9999u)
- bounded4\_p\_t AIRSCHED::ScheduleParserHelper::year\_p (uint4\_p.derived(), 2000u, 2099u)
- bounded2\_p\_t AIRSCHED::ScheduleParserHelper::month\_p (uint2\_p.derived(), 1u, 12u)
- bounded2\_p\_t AIRSCHED::ScheduleParserHelper::day\_p (uint2\_p.derived(), 1u, 31u)
- repeat\_p\_t AIRSCHED::ScheduleParserHelper::dow\_p (chset\_t("0-1").derived().derived(), 7, 7)
- repeat\_p\_t AIRSCHED::ScheduleParserHelper::airport\_p (chset\_t("0-9A-Z").derived(), 3, 3)
- bounded2\_p\_t AIRSCHED::ScheduleParserHelper::hours\_p (uint2\_p.derived(), 0u, 23u)
- bounded2\_p\_t AIRSCHED::ScheduleParserHelper::minutes\_p (uint2\_p.derived(), 0u, 59u)
- bounded2\_p\_t AIRSCHED::ScheduleParserHelper::seconds\_p (uint2\_p.derived(), 0u, 59u)
- chset\_t AIRSCHED::ScheduleParserHelper::cabin\_code\_p ("A-Z")
- repeat\_p\_t AIRSCHED::ScheduleParserHelper::class\_code\_list\_p (chset\_t("A-Z").derived(), 1, 26)

## Variables

- int1\_p\_t AIRSCHED::ScheduleParserHelper::int1\_p
- uint2\_p\_t AIRSCHED::ScheduleParserHelper::uint2\_p
- uint4\_p\_t AIRSCHED::ScheduleParserHelper::uint4\_p
- uint1\_4\_p\_t AIRSCHED::ScheduleParserHelper::uint1\_4\_p
- int1\_p\_t AIRSCHED::ScheduleParserHelper::family\_code\_p

## 26.108 ScheduleParserHelper.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 // StdAir
00007 #include <stdair/basic/BasFileMgr.hpp>
00008 #include <stdair/bom/BomRoot.hpp>
00009 #include <stdair/service/Logger.hpp>
00010 // AIRSCHED
00011 // #define BOOST_SPIRIT_DEBUG
00012 #include <airsched/command/ScheduleParserHelper.hpp>
00013 #include <airsched/command/InventoryGenerator.hpp>
00014
00015 namespace bsc = boost::spirit::classic;
00016
00017 namespace AIRSCHED {
00018     namespace ScheduleParserHelper {
00019
00020         // //////////////////////////////////////
00021         // Semantic actions
00022         // //////////////////////////////////////
00023
00024         ParserSemanticAction::
00025         ParserSemanticAction (FlightPeriodStruct& ioFlightPeriod)
00026             : _flightPeriod (ioFlightPeriod) {
00027         }
00028
00029         // //////////////////////////////////////
00030         storeAirlineCode::
00031         storeAirlineCode (FlightPeriodStruct& ioFlightPeriod)
00032             : ParserSemanticAction (ioFlightPeriod) {
00033         }
00034
00035         // //////////////////////////////////////
00036         void storeAirlineCode::operator() (iterator_t iStr,
00037             iterator_t iStrEnd) const {
00038             const stdair::AirlineCode_T lAirlineCode (iStr, iStrEnd);
00039             _flightPeriod._airlineCode = lAirlineCode;
00040
00041             // As that's the beginning of a new flight, the list of legs
00042             // must be reset
00043             _flightPeriod._legList.clear();
00044         }
00045     }
00046 }

```



```

00047 // //////////////////////////////////////
00048 storeFlightNumber::
00049 storeFlightNumber (FlightPeriodStruct& ioFlightPeriod)
00050 : ParserSemanticAction (ioFlightPeriod) {
00051 }
00052
00053 // //////////////////////////////////////
00054 void storeFlightNumber::operator() (unsigned int iNumber) const {
00055     _flightPeriod._flightNumber = iNumber;
00056 }
00057
00058 // //////////////////////////////////////
00059 storeDateRangeStart::
00060 storeDateRangeStart (FlightPeriodStruct& ioFlightPeriod)
00061 : ParserSemanticAction (ioFlightPeriod) {
00062 }
00063
00064 // //////////////////////////////////////
00065 void storeDateRangeStart::operator() (iterator_t iStr,
00066                                     iterator_t iStrEnd) const {
00067     _flightPeriod._dateRangeStart = _flightPeriod.getDate();
00068
00069     // Reset the number of seconds
00070     _flightPeriod._itSeconds = 0;
00071 }
00072
00073 // //////////////////////////////////////
00074 storeDateRangeEnd::
00075 storeDateRangeEnd (FlightPeriodStruct& ioFlightPeriod)
00076 : ParserSemanticAction (ioFlightPeriod) {
00077 }
00078
00079 // //////////////////////////////////////
00080 void storeDateRangeEnd::operator() (iterator_t iStr,
00081                                     iterator_t iStrEnd) const {
00082     // As a Boost date period (DatePeriod_T) defines the last day of
00083     // the period to be end-date - one day, we have to add one day to that
00084     // end date before.
00085     const stdair::DateOffset_T oneDay (1);
00086     _flightPeriod._dateRangeEnd = _flightPeriod.getDate() + oneDay;
00087
00088     // Transform the date pair (i.e., the date range) into a date period
00089     _flightPeriod._dateRange =
00090         stdair::DatePeriod_T (_flightPeriod._dateRangeStart,
00091                             _flightPeriod._dateRangeEnd);
00092
00093     // Reset the number of seconds
00094     _flightPeriod._itSeconds = 0;
00095 }
00096
00097 // //////////////////////////////////////
00098 storeDow::storeDow (FlightPeriodStruct& ioFlightPeriod)
00099 : ParserSemanticAction (ioFlightPeriod) {
00100 }
00101
00102 // //////////////////////////////////////
00103 void storeDow::operator() (iterator_t iStr, iterator_t iStrEnd) const {
00104     stdair::DOW_String_T lDow (iStr, iStrEnd);
00105     _flightPeriod._dow = lDow;
00106 }
00107
00108 // //////////////////////////////////////
00109 storeLegBoardingPoint::
00110 storeLegBoardingPoint (FlightPeriodStruct& ioFlightPeriod)
00111 : ParserSemanticAction (ioFlightPeriod) {
00112 }
00113
00114 // //////////////////////////////////////
00115 void storeLegBoardingPoint::operator() (iterator_t iStr,
00116                                         iterator_t iStrEnd) const {
00117     stdair::AirportCode_T lBoardingPoint (iStr, iStrEnd);
00118
00119     // If a leg has already been parsed, add it to the FlightPeriod
00120     if (_flightPeriod._legAlreadyDefined == true) {
00121         _flightPeriod._legList.push_back (_flightPeriod._itLeg);
00122     } else {
00123         _flightPeriod._legAlreadyDefined = true;
00124     }
00125
00126     // Set the (new) boarding point
00127     _flightPeriod._itLeg._boardingPoint = lBoardingPoint;
00128
00129     // As that's the beginning of a new leg, the list of cabins
00130     // must be reset
00131     _flightPeriod._itLeg._cabinList.clear();
00132
00133     // Add the airport code if it is not already stored in the airport lists

```

```

00134     _flightPeriod.addAirport (lBoardingPoint);
00135 }
00136
00137 // //////////////////////////////////////
00138 storeLegOffPoint::
00139 storeLegOffPoint (FlightPeriodStruct& ioFlightPeriod)
00140 : ParserSemanticAction (ioFlightPeriod) {
00141 }
00142
00143 // //////////////////////////////////////
00144 void storeLegOffPoint::operator() (iterator_t iStr,
00145                                     iterator_t iStrEnd) const {
00146     stdair::AirportCode_T lOffPoint (iStr, iStrEnd);
00147     _flightPeriod._itLeg._offPoint = lOffPoint;
00148
00149     // Add the airport code if it is not already stored in the airport lists
00150     _flightPeriod.addAirport (lOffPoint);
00151 }
00152
00153 // //////////////////////////////////////
00154 storeBoardingTime::
00155 storeBoardingTime (FlightPeriodStruct& ioFlightPeriod)
00156 : ParserSemanticAction (ioFlightPeriod) {
00157 }
00158
00159 // //////////////////////////////////////
00160 void storeBoardingTime::operator() (iterator_t iStr,
00161                                     iterator_t iStrEnd) const {
00162     _flightPeriod._itLeg._boardingTime = _flightPeriod.getTime();
00163
00164     // Reset the number of seconds
00165     _flightPeriod._itSeconds = 0;
00166
00167     // Reset the date off-set
00168     _flightPeriod._dateOffset = 0;
00169 }
00170
00171 // //////////////////////////////////////
00172 storeOffTime::
00173 storeOffTime (FlightPeriodStruct& ioFlightPeriod)
00174 : ParserSemanticAction (ioFlightPeriod) {
00175 }
00176
00177 // //////////////////////////////////////
00178 void storeOffTime::operator() (iterator_t iStr,
00179                                 iterator_t iStrEnd) const {
00180     _flightPeriod._itLeg._offTime = _flightPeriod.getTime();
00181
00182     // Reset the number of seconds
00183     _flightPeriod._itSeconds = 0;
00184
00185     // As the boarding date off set is optional, it can be set only
00186     // afterwards, based on the staging date off-set value
00187     // (_flightPeriod._dateOffset).
00188     const stdair::DateOffset_T lDateOffset (_flightPeriod._dateOffset);
00189     _flightPeriod._itLeg._boardingDateOffset = lDateOffset;
00190 }
00191
00192 // //////////////////////////////////////
00193 storeElapsedTime::
00194 storeElapsedTime (FlightPeriodStruct& ioFlightPeriod)
00195 : ParserSemanticAction (ioFlightPeriod) {
00196 }
00197
00198 // //////////////////////////////////////
00199 void storeElapsedTime::operator() (iterator_t iStr,
00200                                     iterator_t iStrEnd) const {
00201     _flightPeriod._itLeg._elapsed = _flightPeriod.getTime();
00202
00203     // Reset the number of seconds
00204     _flightPeriod._itSeconds = 0;
00205
00206     // As the boarding date off set is optional, it can be set only
00207     // afterwards, based on the staging date off-set value
00208     // (_flightPeriod._dateOffset).
00209     const stdair::DateOffset_T lDateOffset (_flightPeriod._dateOffset);
00210     _flightPeriod._itLeg._offDateOffset = lDateOffset;
00211 }
00212
00213 // //////////////////////////////////////
00214 storeLegCabinCode::
00215 storeLegCabinCode (FlightPeriodStruct& ioFlightPeriod)
00216 : ParserSemanticAction (ioFlightPeriod) {
00217 }
00218
00219 // //////////////////////////////////////
00220 void storeLegCabinCode::operator() (char iChar) const {

```

```

00221     _flightPeriod._itLegCabin._cabinCode = iChar;
00222     //std::cout << "Cabin code: " << iChar << std::endl;
00223 }
00224
00225 // //////////////////////////////////////
00226 storeCapacity::
00227 storeCapacity (FlightPeriodStruct& ioFlightPeriod)
00228     : ParserSemanticAction (ioFlightPeriod) {
00229 }
00230
00231 // //////////////////////////////////////
00232 void storeCapacity::operator() (double iReal) const {
00233     _flightPeriod._itLegCabin._capacity = iReal;
00234     //std::cout << "Capacity: " << iReal << std::endl;
00235
00236     // The capacity is the last (according to the arrival order
00237     // within the schedule input file) detail of the leg cabin. Hence,
00238     // when a capacity is parsed, it means that the full cabin
00239     // details have already been parsed as well: the cabin can
00240     // thus be added to the leg.
00241     _flightPeriod._itLeg._cabinList.push_back (_flightPeriod._itLegCabin);
00242 }
00243
00244 // //////////////////////////////////////
00245 storeSegmentSpecificity::
00246 storeSegmentSpecificity (FlightPeriodStruct& ioFlightPeriod)
00247     : ParserSemanticAction (ioFlightPeriod) {
00248 }
00249
00250 // //////////////////////////////////////
00251 void storeSegmentSpecificity::operator() (char iChar) const {
00252     if (iChar == '0') {
00253         _flightPeriod._areSegmentDefinitionsSpecific = false;
00254     } else {
00255         _flightPeriod._areSegmentDefinitionsSpecific = true;
00256     }
00257
00258     // Do a few sanity checks: the two lists should get exactly the same
00259     // content (in terms of airport codes). The only difference is that one
00260     // is a STL set, and the other a STL vector.
00261     assert (_flightPeriod._airportList.size()
00262         == _flightPeriod._airportOrderedList.size());
00263     assert (_flightPeriod._airportList.size() >= 2);
00264
00265     // Since all the legs have now been parsed, we get all the airports
00266     // and the segments may be built.
00267     _flightPeriod.buildSegments();
00268 }
00269
00270 // //////////////////////////////////////
00271 storeSegmentBoardingPoint::
00272 storeSegmentBoardingPoint (FlightPeriodStruct& ioFlightPeriod)
00273     : ParserSemanticAction (ioFlightPeriod) {
00274 }
00275
00276 // //////////////////////////////////////
00277 void storeSegmentBoardingPoint::operator() (iterator_t iStr,
00278     iterator_t iStrEnd) const {
00279     stdair::AirportCode_T lBoardingPoint (iStr, iStrEnd);
00280     _flightPeriod._itSegment._boardingPoint = lBoardingPoint;
00281 }
00282
00283 // //////////////////////////////////////
00284 storeSegmentOffPoint::
00285 storeSegmentOffPoint (FlightPeriodStruct& ioFlightPeriod)
00286     : ParserSemanticAction (ioFlightPeriod) {
00287 }
00288
00289 // //////////////////////////////////////
00290 void storeSegmentOffPoint::operator() (iterator_t iStr,
00291     iterator_t iStrEnd) const {
00292     stdair::AirportCode_T lOffPoint (iStr, iStrEnd);
00293     _flightPeriod._itSegment._offPoint = lOffPoint;
00294 }
00295
00296 // //////////////////////////////////////
00297 storeSegmentCabinCode::
00298 storeSegmentCabinCode (FlightPeriodStruct& ioFlightPeriod)
00299     : ParserSemanticAction (ioFlightPeriod) {
00300 }
00301
00302 // //////////////////////////////////////
00303 void storeSegmentCabinCode::operator() (char iChar) const {
00304     _flightPeriod._itSegmentCabin._cabinCode = iChar;
00305 }
00306
00307 // //////////////////////////////////////

```

```

00308     storeClasses::
00309     storeClasses (FlightPeriodStruct& ioFlightPeriod)
00310         : ParserSemanticAction (ioFlightPeriod) {
00311     }
00312
00313     // //////////////////////////////////////
00314 void storeClasses::operator() (iterator_t iStr,
00315                               iterator_t iStrEnd) const {
00316     std::string lClasses (iStr, iStrEnd);
00317     _flightPeriod._itSegmentCabin._classes = lClasses;
00318
00319     // The list of classes is the last (according to the arrival order
00320     // within the schedule input file) detail of the segment cabin. Hence,
00321     // when a list of classes is parsed, it means that the full segment
00322     // cabin details have already been parsed as well: the segment cabin
00323     // can thus be added to the segment.
00324     if (_flightPeriod._areSegmentDefinitionsSpecific == true) {
00325         _flightPeriod.addSegmentCabin (_flightPeriod._itSegment,
00326                                     _flightPeriod._itSegmentCabin);
00327     } else {
00328         _flightPeriod.addSegmentCabin (_flightPeriod._itSegmentCabin);
00329     }
00330 }
00331
00332     // //////////////////////////////////////
00333 storeFamilyCode::
00334 storeFamilyCode (FlightPeriodStruct& ioFlightPeriod)
00335     : ParserSemanticAction (ioFlightPeriod) {
00336 }
00337
00338     // //////////////////////////////////////
00339 void storeFamilyCode::operator() (int iCode) const {
00340     std::ostringstream ostr;
00341     ostr << iCode;
00342     _flightPeriod._itSegmentCabin._itFamilyCode = ostr.str();
00343 }
00344
00345     // //////////////////////////////////////
00346 storeFClasses::
00347 storeFClasses (FlightPeriodStruct& ioFlightPeriod)
00348     : ParserSemanticAction (ioFlightPeriod) {
00349 }
00350
00351     // //////////////////////////////////////
00352 void storeFClasses::operator() (iterator_t iStr,
00353                               iterator_t iStrEnd) const {
00354     std::string lClasses (iStr, iStrEnd);
00355     FareFamilyStruct lFareFamily(_flightPeriod._itSegmentCabin._itFamilyCode,
00356                                lClasses);
00357
00358     // The list of classes is the last (according to the arrival order
00359     // within the schedule input file) detail of the segment cabin. Hence,
00360     // when a list of classes is parsed, it means that the full segment
00361     // cabin details have already been parsed as well: the segment cabin
00362     // can thus be added to the segment.
00363     if (_flightPeriod._areSegmentDefinitionsSpecific == true) {
00364         _flightPeriod.addFareFamily (_flightPeriod._itSegment,
00365                                    _flightPeriod._itSegmentCabin,
00366                                    lFareFamily);
00367     } else {
00368         _flightPeriod.addFareFamily (_flightPeriod._itSegmentCabin,
00369                                    lFareFamily);
00370     }
00371 }
00372
00373     // //////////////////////////////////////
00374 doEndFlight::
00375 doEndFlight (stdair::BomRoot& ioBomRoot,
00376             FlightPeriodStruct& ioFlightPeriod)
00377     : ParserSemanticAction (ioFlightPeriod),
00378       _bomRoot (ioBomRoot) {
00379 }
00380
00381     // //////////////////////////////////////
00382 // void doEndFlight::operator() (char iChar) const {
00383 void doEndFlight::operator() (iterator_t iStr,
00384                               iterator_t iStrEnd) const {
00385
00386     assert (_flightPeriod._legAlreadyDefined == true);
00387     _flightPeriod._legList.push_back (_flightPeriod._itLeg);
00388
00389     // The lists of legs and cabins must be reset
00390     _flightPeriod._legAlreadyDefined = false;
00391     _flightPeriod._itLeg._cabinList.clear();
00392
00393     // DEBUG: Display the result
00394     STDAIR_LOG_DEBUG ("FlightPeriod: " << _flightPeriod.describe());

```

```

00395
00396     // Create the FlightPeriod BOM objects, and potentially the intermediary
00397     // objects (e.g., Inventory).
00398     InventoryGenerator::createFlightPeriod (_bomRoot, _flightPeriod);
00399 }
00400
00401
00402 // ////////////////////////////////////////
00403 //
00404 // Utility Parsers
00405 //
00406 // ////////////////////////////////////////
00408 int1_p_t int1_p;
00409
00411 uint2_p_t uint2_p;
00412
00414 uint4_p_t uint4_p;
00415
00417 uint1_4_p_t uint1_4_p;
00418
00420 repeat_p_t airline_code_p (chset_t("0-9A-Z").derived(), 2, 3);
00421
00423 bounded1_4_p_t flight_number_p (uint1_4_p.derived(), 0u, 9999u);
00424
00426 bounded4_p_t year_p (uint4_p.derived(), 2000u, 2099u);
00427
00429 bounded2_p_t month_p (uint2_p.derived(), 1u, 12u);
00430
00432 bounded2_p_t day_p (uint2_p.derived(), 1u, 31u);
00433
00435 repeat_p_t dow_p (chset_t("0-1").derived().derived(), 7, 7);
00436
00438 repeat_p_t airport_p (chset_t("0-9A-Z").derived(), 3, 3);
00439
00441 bounded2_p_t hours_p (uint2_p.derived(), 0u, 23u);
00442
00444 bounded2_p_t minutes_p (uint2_p.derived(), 0u, 59u);
00445
00447 bounded2_p_t seconds_p (uint2_p.derived(), 0u, 59u);
00448
00450 chset_t cabin_code_p ("A-Z");
00451
00453 int1_p_t family_code_p;
00454
00456 repeat_p_t class_code_list_p (chset_t("A-Z").derived(), 1, 26);
00457
00458
00459 // ////////////////////////////////////////
00460 // (Boost Spirit) Grammar Definition
00461 // ////////////////////////////////////////
00462
00463 // ////////////////////////////////////////
00464 FlightPeriodParser::
00465 FlightPeriodParser (stdair::BomRoot& ioBomRoot,
00466                    FlightPeriodStruct& ioFlightPeriod)
00467 : _bomRoot (ioBomRoot),
00468   _flightPeriod (ioFlightPeriod) {
00469 }
00470
00471 // ////////////////////////////////////////
00472 template<typename ScannerT>
00473 FlightPeriodParser::definition<ScannerT>::
00474 definition (FlightPeriodParser const& self) {
00475
00476     flight_period_list = *(not_to_be_parsed
00477                          | flight_period )
00478
00479     ;
00480
00481     not_to_be_parsed = bsc::
00482         lexeme_d[bsc::comment_p("//") | bsc::comment_p("/*", "*/")
00483                 | bsc::eol_p];
00484
00485     flight_period = flight_key
00486         >> +(';' >> leg )
00487         >> ';' >> segment_section
00488         >> flight_period_end[doEndFlight (self._bomRoot, self._flightPeriod)]
00489
00490     ;
00491
00492     flight_period_end =
00493         bsc::ch_p(';')
00494
00495     ;
00496
00497     flight_key = airline_code
00498         >> ';' >> flight_number
00499         >> ';' >> date[storeDateRangeStart(self._flightPeriod)]
00500         >> ';' >> date[storeDateRangeEnd(self._flightPeriod)]
00501         >> ';' >> dow[storeDow(self._flightPeriod)]

```

```

00499         ;
00500
00501     airline_code =bsc::
00502         lexeme_d[ (airline_code_p) [storeAirlineCode(self._flightPeriod)] ]
00503         ;
00504
00505     flight_number =bsc::
00506         lexeme_d[ (flight_number_p) [storeFlightNumber(self._flightPeriod)] ]
00507         ;
00508
00509     date =bsc::
00510         lexeme_d[ (year_p) [bsc::assign_a(self._flightPeriod._itYear)]
00511                 >> ' '
00512                 >> (month_p) [bsc::assign_a(self._flightPeriod._itMonth)]
00513                 >> ' '
00514                 >> (day_p) [bsc::assign_a(self._flightPeriod._itDay)]
00515                 ]
00516         ;
00517
00518     dow =bsc::lexeme_d[ dow_p ]
00519         ;
00520
00521     leg = leg_key >> ';' >> leg_details >> + ( ';' >> leg_cabin_details )
00522         ;
00523
00524     leg_key =
00525         (airport_p) [storeLegBoardingPoint(self._flightPeriod)]
00526         >> ';'
00527         >> (airport_p) [storeLegOffPoint(self._flightPeriod)]
00528         ;
00529
00530     leg_details =
00531         time[storeBoardingTime(self._flightPeriod)]
00532         >> !(date_offset)
00533         >> ';'
00534         >> time[storeOffTime(self._flightPeriod)]
00535         >> !(date_offset)
00536         >> ';'
00537         >> time[storeElapsedTime(self._flightPeriod)]
00538         ;
00539
00540     time =bsc::
00541         lexeme_d[ (hours_p) [bsc::assign_a(self._flightPeriod._itHours)]
00542                 >> ':'
00543                 >> (minutes_p) [bsc::assign_a(self._flightPeriod._itMinutes)]
00544                 >> ':'
00545                 >> (seconds_p) [bsc::assign_a(self._flightPeriod.
00546         _itSeconds))]
00547         ;
00548
00549     date_offset =bsc::ch_p('/')
00550         >> (int1_p) [bsc::assign_a(self._flightPeriod._dateOffset)]
00551         ;
00552
00553     leg_cabin_details = (cabin_code_p) [storeLegCabinCode(self._flightPeriod)]
00554         >> ';' >> (bsc::ureal_p) [storeCapacity(self._flightPeriod)]
00555         ;
00556
00557     segment_key =
00558         (airport_p) [storeSegmentBoardingPoint(self._flightPeriod)]
00559         >> ';'
00560         >> (airport_p) [storeSegmentOffPoint(self._flightPeriod)]
00561         ;
00562
00563     segment_section =
00564         generic_segment | specific_segment_list
00565         ;
00566
00567     generic_segment =bsc::
00568         ch_p('0') [storeSegmentSpecificity(self._flightPeriod)]
00569         >> +(';') >> segment_cabin_details
00570         ;
00571
00572     specific_segment_list =bsc::
00573         ch_p('1') [storeSegmentSpecificity(self._flightPeriod)]
00574         >> +(';') >> segment_key >> full_segment_cabin_details
00575         ;
00576
00577     full_segment_cabin_details =
00578         +(';') >> segment_cabin_details
00579         ;
00580
00581     segment_cabin_details =
00582         (cabin_code_p) [storeSegmentCabinCode(self._flightPeriod)]
00583         >> ';' >> (class_code_list_p) [storeClasses(self._flightPeriod)]
00584         >> *(';') >> family_cabin_details

```

```

00585         ;
00586
00587     family_cabin_details =
00588         (family_code_p)[storeFamilyCode(self._flightPeriod)]
00589         >> ',';
00590         >> (class_code_list_p)[storeFClasses(self._flightPeriod)]
00591         ;
00592
00593     // BOOST_SPIRIT_DEBUG_NODE (FlightPeriodParser);
00594     BOOST_SPIRIT_DEBUG_NODE (flight_period_list);
00595     BOOST_SPIRIT_DEBUG_NODE (flight_period);
00596     BOOST_SPIRIT_DEBUG_NODE (not_to_be_parsed);
00597     BOOST_SPIRIT_DEBUG_NODE (flight_period_end);
00598     BOOST_SPIRIT_DEBUG_NODE (flight_key);
00599     BOOST_SPIRIT_DEBUG_NODE (airline_code);
00600     BOOST_SPIRIT_DEBUG_NODE (flight_number);
00601     BOOST_SPIRIT_DEBUG_NODE (date);
00602     BOOST_SPIRIT_DEBUG_NODE (dow);
00603     BOOST_SPIRIT_DEBUG_NODE (leg);
00604     BOOST_SPIRIT_DEBUG_NODE (leg_key);
00605     BOOST_SPIRIT_DEBUG_NODE (leg_details);
00606     BOOST_SPIRIT_DEBUG_NODE (time);
00607     BOOST_SPIRIT_DEBUG_NODE (date_offset);
00608     BOOST_SPIRIT_DEBUG_NODE (leg_cabin_details);
00609     BOOST_SPIRIT_DEBUG_NODE (segment_section);
00610     BOOST_SPIRIT_DEBUG_NODE (segment_key);
00611     BOOST_SPIRIT_DEBUG_NODE (generic_segment);
00612     BOOST_SPIRIT_DEBUG_NODE (specific_segment_list);
00613     BOOST_SPIRIT_DEBUG_NODE (full_segment_cabin_details);
00614     BOOST_SPIRIT_DEBUG_NODE (segment_cabin_details);
00615     BOOST_SPIRIT_DEBUG_NODE (family_cabin_details);
00616 }
00617
00618 // //////////////////////////////////////
00619 template<typename ScannerT>
00620 bsc::rule<ScannerT> const&
00621 FlightPeriodParser::definition<ScannerT>::start() const {
00622     return flight_period_list;
00623 }
00624
00625 }
00626
00627 //
00628 // Entry class for the file parser
00629 //
00630
00631 //
00632 // //////////////////////////////////////
00633 FlightPeriodFileParser::
00634 FlightPeriodFileParser (stdair::BomRoot& ioBomRoot,
00635                         const stdair::Filename_T& iFilename)
00636 : _filename (iFilename), _bomRoot (ioBomRoot) {
00637     init();
00638 }
00639
00640 //
00641 // //////////////////////////////////////
00642 void FlightPeriodFileParser::init() {
00643     // Check that the file exists and is readable
00644     const bool doesExistAndIsReadable =
00645         stdair::BasFileMgr::doesExistAndIsReadable (_filename);
00646
00647     if (doesExistAndIsReadable == false) {
00648         STDAIR_LOG_ERROR ("The schedule file " << _filename
00649             << " does not exist or can not be read.");
00650
00651         throw ScheduleInputFileNotFoundException ("The schedule file " +
00652             _filename
00653             + " does not exist or can not
00654             be read");
00655     }
00656
00657     // Open the file
00658     _startIterator = iterator_t (_filename);
00659
00660     // Check the filename exists and can be open
00661     if (!_startIterator) {
00662         STDAIR_LOG_ERROR ("The schedule file " << _filename << " can not be open.
00663             "
00664             << std::endl);
00665
00666         throw ScheduleInputFileNotFoundException ("The file " + _filename
00667             + " does not exist or can not
00668             be read");
00669     }
00670
00671     // Create an EOF iterator
00672     _endIterator = _startIterator.make_end();

```

```

00670     }
00671
00672     // //////////////////////////////////////
00673     bool FlightPeriodFileParser::generateInventories () {
00674         bool oResult = false;
00675
00676         STDAIR_LOG_DEBUG ("Parsing schedule input file: " << _filename);
00677
00678         // Initialise the parser (grammar) with the helper/staging structure.
00679         ScheduleParserHelper::FlightPeriodParser lFPParser (_bomRoot,
00680                                                         _flightPeriod);
00681
00682         // Launch the parsing of the file and, thanks to the doEndFlight
00683         // call-back structure, the building of the whole BomRoot BOM
00684         // (i.e., including Inventory, FlightDate, LegDate, SegmentDate, etc.)
00685         bsc::parse_info<iterator_t> info =
00686             bsc::parse (_startIterator, _endIterator, lFPParser,
00687                       bsc::space_p - bsc::eol_p);
00688
00689         // Retrieves whether or not the parsing was successful
00690         oResult = info.hit;
00691
00692         const std::string hasBeenFullyReadStr = (info.full == true) ? "": "not ";
00693         if (oResult == true) {
00694             STDAIR_LOG_DEBUG ("Parsing of schedule input file: " << _filename
00695                             << " succeeded: read " << info.length
00696                             << " characters. The input file has "
00697                             << hasBeenFullyReadStr
00698                             << "been fully read. Stop point: " << info.stop);
00699
00700         } else {
00701             // TODO: decide whether to throw an exception
00702             STDAIR_LOG_ERROR ("Parsing of schedule input file: " << _filename
00703                             << " failed: read " << info.length
00704                             << " characters. The input file has "
00705                             << hasBeenFullyReadStr
00706                             << "been fully read. Stop point: " << info.stop);
00707         }
00708
00709         return oResult;
00710     }
00711
00712 }

```

## 26.109 airsched/command/ScheduleParserHelper.hpp File Reference

```

#include <string>
#include <stdair/command/CmdAbstract.hpp>
#include <airsched/AIRSCHEDED_Types.hpp>
#include <airsched/basic/BasParserTypes.hpp>
#include <airsched/bom/FlightPeriodStruct.hpp>

```

### Classes

- struct [AIRSCHEDED::ScheduleParserHelper::ParserSemanticAction](#)
- struct [AIRSCHEDED::ScheduleParserHelper::storeAirlineCode](#)
- struct [AIRSCHEDED::ScheduleParserHelper::storeFlightNumber](#)
- struct [AIRSCHEDED::ScheduleParserHelper::storeDateRangeStart](#)
- struct [AIRSCHEDED::ScheduleParserHelper::storeDateRangeEnd](#)
- struct [AIRSCHEDED::ScheduleParserHelper::storeDow](#)
- struct [AIRSCHEDED::ScheduleParserHelper::storeLegBoardingPoint](#)
- struct [AIRSCHEDED::ScheduleParserHelper::storeLegOffPoint](#)
- struct [AIRSCHEDED::ScheduleParserHelper::storeBoardingTime](#)
- struct [AIRSCHEDED::ScheduleParserHelper::storeOffTime](#)
- struct [AIRSCHEDED::ScheduleParserHelper::storeElapsedTime](#)
- struct [AIRSCHEDED::ScheduleParserHelper::storeLegCabinCode](#)
- struct [AIRSCHEDED::ScheduleParserHelper::storeCapacity](#)
- struct [AIRSCHEDED::ScheduleParserHelper::storeSegmentSpecificity](#)
- struct [AIRSCHEDED::ScheduleParserHelper::storeSegmentBoardingPoint](#)



- struct AIRSCHED::ScheduleParserHelper::storeSegmentOffPoint
- struct AIRSCHED::ScheduleParserHelper::storeSegmentCabinCode
- struct AIRSCHED::ScheduleParserHelper::storeClasses
- struct AIRSCHED::ScheduleParserHelper::storeFamilyCode
- struct AIRSCHED::ScheduleParserHelper::storeFClasses
- struct AIRSCHED::ScheduleParserHelper::doEndFlight
- struct AIRSCHED::ScheduleParserHelper::FlightPeriodParser
- struct AIRSCHED::ScheduleParserHelper::FlightPeriodParser::definition< ScannerT >
- class AIRSCHED::FlightPeriodFileParser

## Namespaces

- namespace stdair
  - Forward declarations.*
- namespace AIRSCHED
- namespace AIRSCHED::ScheduleParserHelper

## 26.110 ScheduleParserHelper.hpp

```

00001 #ifndef __AIRSCHED_CMD_SCHEDULEPARSERHELPER_HPP
00002 #define __AIRSCHED_CMD_SCHEDULEPARSERHELPER_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <string>
00009 // StdAir
00010 #include <stdair/command/CmdAbstract.hpp>
00011 // AirSched
00012 #include <airsched/AIRSCHED_Types.hpp>
00013 #include <airsched/basic/BasParserTypes.hpp>
00014 #include <airsched/bom/FlightPeriodStruct.hpp>
00015
00016 // Forward declarations
00017 namespace stdair {
00018     class BomRoot;
00019 }
00020
00021 namespace AIRSCHED {
00022
00023     namespace ScheduleParserHelper {
00024
00025         // //////////////////////////////////////
00026         // Semantic actions
00027         // //////////////////////////////////////
00028         struct ParserSemanticAction {
00029             ParserSemanticAction (FlightPeriodStruct&);
00030             FlightPeriodStruct& _flightPeriod;
00031         };
00032
00033         struct storeAirlineCode : public ParserSemanticAction {
00034             storeAirlineCode (FlightPeriodStruct&);
00035             void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00036         };
00037
00038         struct storeFlightNumber : public ParserSemanticAction {
00039             storeFlightNumber (FlightPeriodStruct&);
00040             void operator() (unsigned int iNumber) const;
00041         };
00042
00043         struct storeDateRangeStart : public ParserSemanticAction {
00044             storeDateRangeStart (FlightPeriodStruct&);
00045             void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00046         };
00047
00048         struct storeDateRangeEnd : public ParserSemanticAction {
00049             storeDateRangeEnd (FlightPeriodStruct&);
00050             void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00051         };
00052
00053         struct storeDow : public ParserSemanticAction {
00054             storeDow (FlightPeriodStruct&);
00055             void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00056         };
00057
00058     }
00059
00060 }
00061
00062 #endif

```

```

00074     };
00075
00077     struct storeLegBoardingPoint : public ParserSemanticAction {
00079         storeLegBoardingPoint (FlightPeriodStruct&);
00081         void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00082     };
00083
00085     struct storeLegOffPoint : public ParserSemanticAction {
00087         storeLegOffPoint (FlightPeriodStruct&);
00089         void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00090     };
00091
00093     struct storeBoardingTime : public ParserSemanticAction {
00095         storeBoardingTime (FlightPeriodStruct&);
00097         void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00098     };
00099
00101     struct storeOffTime : public ParserSemanticAction {
00103         storeOffTime (FlightPeriodStruct&);
00105         void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00106     };
00107
00109     struct storeElapsedTime : public ParserSemanticAction {
00111         storeElapsedTime (FlightPeriodStruct&);
00113         void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00114     };
00115
00117     struct storeLegCabinCode : public ParserSemanticAction {
00119         storeLegCabinCode (FlightPeriodStruct&);
00121         void operator() (char iChar) const;
00122     };
00123
00125     struct storeCapacity : public ParserSemanticAction {
00127         storeCapacity (FlightPeriodStruct&);
00129         void operator() (double iReal) const;
00130     };
00131
00136     struct storeSegmentSpecificity : public ParserSemanticAction {
00138         storeSegmentSpecificity (FlightPeriodStruct&);
00140         void operator() (char iChar) const;
00141     };
00142
00144     struct storeSegmentBoardingPoint : public ParserSemanticAction {
00146         storeSegmentBoardingPoint (FlightPeriodStruct&);
00148         void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00149     };
00150
00152     struct storeSegmentOffPoint : public ParserSemanticAction {
00154         storeSegmentOffPoint (FlightPeriodStruct&);
00156         void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00157     };
00158
00160     struct storeSegmentCabinCode : public ParserSemanticAction {
00162         storeSegmentCabinCode (FlightPeriodStruct&);
00164         void operator() (char iChar) const;
00165     };
00166
00168     struct storeClasses : public ParserSemanticAction {
00170         storeClasses (FlightPeriodStruct&);
00172         void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00173     };
00174
00176     struct storeFamilyCode : public ParserSemanticAction {
00178         storeFamilyCode (FlightPeriodStruct&);
00180         void operator() (int iCode) const;
00181     };
00182
00184     struct storeFClasses : public ParserSemanticAction {
00186         storeFClasses (FlightPeriodStruct&);
00188         void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00189     };
00190
00192     struct doEndFlight : public ParserSemanticAction {
00194         doEndFlight (stdair::BomRoot&, FlightPeriodStruct&);
00196         void operator() (iterator_t iStr, iterator_t iStrEnd) const;
00198         stdair::BomRoot& _bomRoot;
00199     };
00200
00201
00203     //
00204     // (Boost Spirit) Grammar Definition
00205     //
00207
00249     struct FlightPeriodParser :
00250         public boost::spirit::classic::grammar<FlightPeriodParser> {
00251
00252         FlightPeriodParser (stdair::BomRoot&, FlightPeriodStruct&);

```

```

00253
00254     template <typename ScannerT>
00255     struct definition {
00256         definition (FlightPeriodParser const& self);
00257
00258         // Instantiation of rules
00259         boost::spirit::classic::rule<ScannerT> flight_period_list, flight_period
,
00260         not_to_be_parsed, flight_period_end, flight_key, airline_code,
00261         flight_number, date, dow, time, date_offset,
00262         leg, leg_key, leg_details, leg_cabin_details,
00263         segment_section, segment_key, full_segment_cabin_details,
00264         segment_cabin_details, full_family_cabin_details,
00265         family_cabin_details, generic_segment, specific_segment_list;
00266
00267         boost::spirit::classic::rule<ScannerT> const& start() const;
00268     };
00269
00270
00271     // Parser Context
00272     stdair::BomRoot& _bomRoot;
00273     FlightPeriodStruct& _flightPeriod;
00274 };
00275
00276 }
00281
00282 //
00283 // Entry class for the file parser
00284 //
00286
00291 class FlightPeriodFileParser : public stdair::CmdAbstract {
00292 public:
00293     FlightPeriodFileParser (stdair::BomRoot& ioBomRoot,
00294                             const stdair::Filename_T& iFilename);
00295
00296     bool generateInventories ();
00297
00298 private:
00299     void init();
00300
00301 private:
00302     // Attributes
00303     stdair::Filename_T _filename;
00304
00305     iterator_t _startIterator;
00306
00307     iterator_t _endIterator;
00308
00309     stdair::BomRoot& _bomRoot;
00310
00311     FlightPeriodStruct _flightPeriod;
00312 };
00313
00314 }
00315
00316 #endif // __AIRSCHED_CMD_SCHEDULEPARSERHELPER_HPP

```

## 26.111 airsched/command/SegmentPathGenerator.cpp File Reference

```

#include <cassert>
#include <vector>
#include <stdair/basic/BasConst_Inventory.hpp>
#include <stdair/bom/BomManager.hpp>
#include <stdair/bom/BomRoot.hpp>
#include <stdair/bom/Inventory.hpp>
#include <stdair/bom/FlightPeriod.hpp>
#include <stdair/bom/SegmentPeriod.hpp>
#include <stdair/factory/FacBomManager.hpp>
#include <stdair/service/Logger.hpp>
#include <airsched/bom/ReachableUniverse.hpp>
#include <airsched/bom/OriginDestinationSet.hpp>
#include <airsched/bom/SegmentPathPeriod.hpp>
#include <airsched/command/SegmentPathGenerator.hpp>

```

## Namespaces

- namespace AIRSCHED

## 26.112 SegmentPathGenerator.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <vector>
00007 // StdAir
00008 #include <stdair/basic/BasConst_Inventory.hpp>
00009 #include <stdair/bom/BomManager.hpp>
00010 #include <stdair/bom/BomRoot.hpp>
00011 #include <stdair/bom/Inventory.hpp>
00012 #include <stdair/bom/FlightPeriod.hpp>
00013 #include <stdair/bom/SegmentPeriod.hpp>
00014 #include <stdair/factory/FacBomManager.hpp>
00015 #include <stdair/service/Logger.hpp>
00016 // AirSched
00017 #include <airsched/bom/ReachableUniverse.hpp>
00018 #include <airsched/bom/OriginDestinationSet.hpp>
00019 #include <airsched/bom/SegmentPathPeriod.hpp>
00020 #include <airsched/command/SegmentPathGenerator.hpp>
00021
00022 namespace AIRSCHED {
00023
00024 // //////////////////////////////////////
00025 void SegmentPathGenerator::
00026 createSegmentPathNetwork (const stdair::BomRoot& iBomRoot) {
00027
00028     // Build the list of single-segment segment path objects.
00029     const stdair::InventoryList_T& lInventoryList =
00030         stdair::BomManager::getList<stdair::Inventory> (iBomRoot);
00031     for (stdair::InventoryList_T::const_iterator itInv = lInventoryList.begin()
;
00032         itInv != lInventoryList.end(); ++itInv) {
00033         const stdair::Inventory* lCurrentInventory_ptr = *itInv;
00034         assert (lCurrentInventory_ptr != NULL);
00035
00036         //
00037         createSinglePaths (*lCurrentInventory_ptr);
00038     }
00039
00040     // Build the list of i-fixed-length segment path objects. In other words,
00041     // build the whole segment path network.
00042     for (stdair::NbOfSegments_T i = 2;
00043         i <= stdair::MAXIMAL_NUMBER_OF_SEGMENTS_IN_OND; ++i) {
00044         buildSegmentPathNetwork (iBomRoot, i);
00045     }
00046 }
00047
00048 // //////////////////////////////////////
00049 void SegmentPathGenerator::
00050 createSinglePaths (const stdair::Inventory& iInventory) {
00051
00052     const stdair::FlightPeriodList_T& lFlightPeriodList =
00053         stdair::BomManager::getList<stdair::FlightPeriod> (iInventory);
00054     for (stdair::FlightPeriodList_T::const_iterator itFlightPeriod =
00055         lFlightPeriodList.begin();
00056         itFlightPeriod != lFlightPeriodList.end(); ++itFlightPeriod) {
00057         const stdair::FlightPeriod* lCurrentFlightPeriod_ptr = *itFlightPeriod;
00058         assert (lCurrentFlightPeriod_ptr != NULL);
00059
00060         //
00061         createSinglePaths (*lCurrentFlightPeriod_ptr);
00062     }
00063 }
00064
00065 // //////////////////////////////////////
00066 void SegmentPathGenerator::
00067 createSinglePaths (const stdair::FlightPeriod& iFlightPeriod) {
00068
00069     const stdair::SegmentPeriodList_T& lSegmentPeriodList =
00070         stdair::BomManager::getList<stdair::SegmentPeriod> (iFlightPeriod);
00071     for (stdair::SegmentPeriodList_T::const_iterator itSegmentPeriod =
00072         lSegmentPeriodList.begin();
00073         itSegmentPeriod != lSegmentPeriodList.end(); ++itSegmentPeriod) {
00074         stdair::SegmentPeriod* lCurrentSegmentPeriod_ptr = *itSegmentPeriod;
00075         assert (lCurrentSegmentPeriod_ptr != NULL);
00076

```

```

00077         //
00078         createSinglePath (*lCurrentSegmentPeriod_ptr);
00079     }
00080 }
00081
00082 // //////////////////////////////////////
00083 void SegmentPathGenerator::
00084 createSinglePath (stdair::SegmentPeriod& ioSegmentPeriod) {
00085
00086     // Retrieve the BOM tree root
00087     const stdair::AirportCode_T& lOrigin = ioSegmentPeriod.getBoardingPoint();
00088     const stdair::FlightPeriod& lFlightPeriod =
00089         stdair::BomManager::getParent<stdair::FlightPeriod> (ioSegmentPeriod);
00090     const stdair::Inventory& lInventory =
00091         stdair::BomManager::getParent<stdair::Inventory> (lFlightPeriod);
00092     stdair::BomRoot& lBomRoot =
00093         stdair::BomManager::getParent<stdair::BomRoot> (lInventory);
00094
00095     // Retrieve the ReachableUniverse (if existing) which corresponds
00096     // to the origin. If it does not exist, then create one.
00097     ReachableUniverse* lReachableUniverse_ptr =
00098         stdair::BomManager::getObjectPtr<ReachableUniverse> (lBomRoot, lOrigin);
00099     if (lReachableUniverse_ptr == NULL) {
00100         ReachableUniverseKey lKey (lOrigin);
00101         lReachableUniverse_ptr =
00102             &stdair::FacBom<ReachableUniverse>::instance().create (lKey);
00103         stdair::FacBomManager::addToListAndMap (lBomRoot, *lReachableUniverse_ptr
00104     );
00105         stdair::FacBomManager::linkWithParent (lBomRoot, *lReachableUniverse_ptr)
00106     ;
00107     }
00108     assert (lReachableUniverse_ptr != NULL);
00109     //
00110     createSinglePath (*lReachableUniverse_ptr, ioSegmentPeriod);
00111 }
00112 // //////////////////////////////////////
00113 void SegmentPathGenerator::
00114 createSinglePath (ReachableUniverse& ioReachableUniverse,
00115                 stdair::SegmentPeriod& ioSegmentPeriod) {
00116
00117     const stdair::AirportCode_T& lDestination = ioSegmentPeriod.getOffPoint();
00118
00119     // Retrieve the origin-destination set (if existing) which corresponds
00120     // to the destination. If it does not exist, then create one.
00121     OriginDestinationSet* lOriginDestinationSet_ptr =
00122         stdair::BomManager::getObjectPtr<OriginDestinationSet> (
00123         ioReachableUniverse,
00124                                     lDestination);
00125     if (lOriginDestinationSet_ptr == NULL) {
00126         OriginDestinationSetKey lKey (lDestination);
00127         lOriginDestinationSet_ptr =
00128             &stdair::FacBom<OriginDestinationSet>::instance().create (lKey);
00129         stdair::FacBomManager::addToListAndMap (ioReachableUniverse,
00130                                     *lOriginDestinationSet_ptr);
00131         stdair::FacBomManager::linkWithParent (ioReachableUniverse,
00132                                     *lOriginDestinationSet_ptr);
00133     }
00134     assert (lOriginDestinationSet_ptr != NULL);
00135
00136     // Create a segment path period and add it to the corresponding
00137     // origin-destination set and reachable-universe.
00138     const stdair::FlightPeriod& lFlightPeriod =
00139         stdair::BomManager::getParent<stdair::FlightPeriod> (ioSegmentPeriod);
00140     const stdair::PeriodStruct& lPeriodOfFlight = lFlightPeriod.getPeriod();
00141
00142     // The departure period of the segment is the departure period of
00143     // the flight plus the boarding date offset of the segment.
00144     const stdair::DateOffset_T& lBoardingDateOffset =
00145         ioSegmentPeriod.getBoardingDateOffset();
00146
00147     const stdair::PeriodStruct lPeriodOfSegment =
00148         lPeriodOfFlight.addDateOffset (lBoardingDateOffset);
00149
00150     const stdair::Duration_T& lBoardingTime = ioSegmentPeriod.getBoardingTime()
00151 ;
00152     const stdair::Duration_T& lElapsed = ioSegmentPeriod.getElapsedTime();
00153     DateOffsetList_T lDateOffsetList;
00154     const stdair::DateOffset_T lFirstDateOffset (0);
00155     lDateOffsetList.push_back (lFirstDateOffset);
00156
00157     const SegmentPathPeriodKey lSegmentPathKey (lPeriodOfSegment,
00158                                     lBoardingTime, lElapsed,
00159                                     lDateOffsetList, 1);

```

```

00160
00161     SegmentPathPeriod& lSegmentPathPeriod =
00162         stdair::FacBom<SegmentPathPeriod>::instance().create (lSegmentPathKey);
00163
00170     addSegmentPathPeriod (ioReachableUniverse, lSegmentPathPeriod);
00171
00172     // Link the SegmentPathPeriod object with its parent, namely
00173     // OriginDestinationSet
00174     stdair::FacBomManager::addToList (*lOriginDestinationSet_ptr,
00175         lSegmentPathPeriod);
00176     stdair::FacBomManager::linkWithParent (*lOriginDestinationSet_ptr,
00177         lSegmentPathPeriod);
00178
00179     // Link the SegmentPathPeriod and SegmentPeriod objects. Note that
00180     // the SegmentPeriod object has already a parent, namely FlightPeriod.
00181     stdair::FacBomManager::addToList (lSegmentPathPeriod,
00182         ioSegmentPeriod);
00183 }
00184
00185 // //////////////////////////////////////
00186 void SegmentPathGenerator::
00187 addSegmentPathPeriod (ReachableUniverse& ioReachableUniverse,
00188     const SegmentPathPeriod& iSegmentPathPeriod) {
00189
00190     const stdair::NbOfSegments_T& lNbOfSegments =
00191         iSegmentPathPeriod.getNbOfSegments();
00192
00193     assert (lNbOfSegments > 0
00194         && lNbOfSegments <= stdair::MAXIMAL_NUMBER_OF_SEGMENTS_IN_OND);
00195
00196     // If needed, initialise the list of lists with empty fixed-length
00197     // segment path period lists.
00198
00199     SegmentPathPeriodListList_T& lSegmentPathPeriodListList =
00200         ioReachableUniverse._segmentPathPeriodListList;
00201     while (lSegmentPathPeriodListList.size() < lNbOfSegments) {
00202         SegmentPathPeriodLightList_T lSegmentPathPeriodList;
00203         lSegmentPathPeriodListList.push_back (lSegmentPathPeriodList);
00204     }
00205
00206     // Retrieve the i-fixed-length segment path period list (i = number of
00207     // segments).
00208     SegmentPathPeriodLightList_T& lSegmentPathPeriodList =
00209         lSegmentPathPeriodListList.at (lNbOfSegments-1);
00210
00211     // Add the SegmentPathPeriod to that fixed-length-path list.
00212     lSegmentPathPeriodList.push_back (&iSegmentPathPeriod);
00213 }
00214
00215 // //////////////////////////////////////
00216 void SegmentPathGenerator::
00217 buildSegmentPathNetwork (const stdair::BomRoot& iBomRoot,
00218     const stdair::NbOfSegments_T& lNbOfSegments) {
00219
00220     const ReachableUniverseList_T& lReachableUniverseList =
00221         stdair::BomManager::getList<ReachableUniverse> (iBomRoot);
00222     for (ReachableUniverseList_T::const_iterator itReachableUniverse =
00223         lReachableUniverseList.begin();
00224         itReachableUniverse != lReachableUniverseList.end();
00225         ++itReachableUniverse) {
00226         ReachableUniverse* lReachableUniverse_ptr = *itReachableUniverse;
00227         assert (lReachableUniverse_ptr != NULL);
00228
00229         //
00230         buildSegmentPathNetwork (*lReachableUniverse_ptr, lNbOfSegments);
00231     }
00232 }
00233
00234 // //////////////////////////////////////
00235 void SegmentPathGenerator::
00236 buildSegmentPathNetwork (ReachableUniverse& ioReachableUniverse,
00237     const stdair::NbOfSegments_T& iNbOfSegments) {
00238
00239     // The goal of that method is to build the i-fixed-length
00240     // segment path period objects, knowing that all the
00241     // lower-fixed-length segment path period objects have already been
00242     // built during the previous steps. Once an i-fixed-length
00243     // segment path period object is created, it is added to the list of
00244     // the (fixed-length segment path period object) lists.
00245
00246     // Hence, at that iteration, by construction, the list of the
00247     // (fixed-length segment path period object) lists should already get
00248     // a size of i-1, if there were such possibilities (in terms of
00249     // segment path period). In that case, at the end of the method, its
00250     // size should be of i.
00251
00252     // If the size of the list of the (fixed-length segment path period

```

```

00258 // object) lists is (strictly) less than i-1, it means that that
00259 // reachable universe has no more possibilities of destinations. We
00260 // are thus done at that stage.
00261 const SegmentPathPeriodListList_T& lSegmentPathPeriodListList =
00262     ioReachableUniverse.getSegmentPathPeriodListList();
00263 const unsigned short lNbOfSegments_m1 = lNbOfSegments - 1;
00264 assert (lNbOfSegments_m1 >= 0);
00265 if (lSegmentPathPeriodListList.size() < lNbOfSegments_m1) {
00266     return;
00267 }
00268
00269 // Retrieve the (i-1)-fixed-length segment path period list (i = number of
00270 // segments).
00271
00272 // Note that a STL vector starts at 0, whereas the number of segments
00273 // starts at 1. Hence, (i-1) for the length (in number of segments)
00274 // corresponds to [lNbOfSegments-2] for the STL vector.
00275
00276 // As the lSegmentPathPeriodListList may change during the next loop
00277 // iterations (as some SegmentPathPeriod objects are created and linked to
00278 // ReachableUniverse), we need to take the initial copy of that list.
00279 const SegmentPathPeriodLightList_T lSegmentPathPeriodLightList_im1 =
00280     lSegmentPathPeriodListList.at (lNbOfSegments-2);
00281
00282 // Iterate on the (i-1)-fixed-length segment path period objects, in order
00283 // to build a i-fixed-length segment path period objects.
00284 // There are two steps:
00285 // 1. Retrieve the airport-dates at a (i-1) length (in number of segments)
00286 //    of the origin airport-date.
00287 // 2. From each of such (i-1) airport-date, add the single-segment paths
00288 //    to the (i-1)-length pathes, so as to make i-length pathes.
00289 for (SegmentPathPeriodLightList_T::const_iterator itSegmentPathPeriodList =
00290     lSegmentPathPeriodLightList_im1.begin();
00291     itSegmentPathPeriodList != lSegmentPathPeriodLightList_im1.end();
00292     ++itSegmentPathPeriodList) {
00293     const SegmentPathPeriod* lSegmentPathPeriod_im1_ptr =
00294         *itSegmentPathPeriodList;
00295     assert (lSegmentPathPeriod_im1_ptr != NULL);
00296
00297     // Get the reachable-universe departing from the destination of
00298     // the current segment path period.
00299     const stdair::AirportCode_T& lDestination_im1 =
00300         lSegmentPathPeriod_im1_ptr->getDestination();
00301     const stdair::BomRoot& lBomRoot =
00302         stdair::BomManager::getParent<stdair::BomRoot> (ioReachableUniverse);
00303     const ReachableUniverse* lReachableUniverseFromDestination_im1_ptr =
00304         stdair::BomManager::getObjectPtr<ReachableUniverse> (lBomRoot,
00305             lDestination_im1);
00306
00307     // If there is no ReachableUniverse corresponding to the destination (off
00308     // point of the last SegmentDate), it means that the destination is
00309     // an end point (no other SegmentDate is starting from there).
00310     // Hence, there is nothing else to do for now for that (final)
00311     // destination, and we can process the next (i-1)-segment path period.
00312     if (lReachableUniverseFromDestination_im1_ptr == NULL) {
00313         continue;
00314     }
00315     assert (lReachableUniverseFromDestination_im1_ptr != NULL);
00316
00317     // Retrieve the single-segment segment path period list,
00318     // so as to make a i-length SegmentPathPeriod.
00319     const SegmentPathPeriodListList_T&
00320         lSegmentPathPeriodListListFromDestination_im1 =
00321         lReachableUniverseFromDestination_im1_ptr->
00322         getSegmentPathPeriodListList();
00323     assert (lSegmentPathPeriodListListFromDestination_im1.size() >= 1);
00324
00325     // As the lSegmentPathPeriodListListFromDestination_im1 may change during
00326     // the next loop iterations (as some SegmentPathPeriod objects are
00327     // created and linked to ReachableUniverse), we need to take the initial
00328     // copy of that list.
00329     const SegmentPathPeriodLightList_T
00330         lSingleSegmentPathPeriodLightListFromDestination_im1 =
00331         lSegmentPathPeriodListListFromDestination_im1.at (0);
00332
00333     for (SegmentPathPeriodLightList_T::const_iterator
00334         itSegmentPathPeriodFromDestination_im1 =
00335         lSingleSegmentPathPeriodLightListFromDestination_im1.begin();
00336         itSegmentPathPeriodFromDestination_im1
00337             != lSingleSegmentPathPeriodLightListFromDestination_im1.end();
00338         ++itSegmentPathPeriodFromDestination_im1) {
00339         const SegmentPathPeriod*
00340             lSingleSegmentPathPeriodFromDestination_im1_ptr =
00341             *itSegmentPathPeriodFromDestination_im1;
00342         assert (lSingleSegmentPathPeriodFromDestination_im1_ptr != NULL);
00343
00344         // Check if the (i-1)-length segment path period can be fused with the

```

```

00343         // single segment segment path period in order to create an i-length
00344         // segment path period. The function will return a valid or non-valid
00345         // segment path period key.
00346
00347         // The two segment path period above can be fused (and will produce a
00348         // valid new segment path period key) if:
00349         // 1. A passenger can connect from the last segment of the
00350         // first segment path and the first segment of the next segment path.
00351         // These two segments should not create another segment.
00352         // 2. There is no circle within the new segment path.
00353         // 3. The intersection of the two periods is non-empty.
00354         SegmentPathPeriodKey lSegmentPathPeriodKey_i =
00355         lSingleSegmentPathPeriodFromDestination_iml_ptr->connectWithAnotherSegment (*
00356         lSingleSegmentPathPeriodFromDestination_iml_ptr);
00357
00358         if (lSegmentPathPeriodKey_i.isValid () == false) {
00359             continue;
00360         }
00361
00362         // Get the off point of the single-segment SegmentPathPeriod
00363         // attached to the intermediate destination (iml). That off point is
00364         // at a length i of the initial ReachableUniverse: (i-1) + 1.
00365         const stdair::AirportCode_T& lDestination_i =
00366         lSingleSegmentPathPeriodFromDestination_iml_ptr->getDestination();
00367
00368         // Build the i-length SegmentPathPeriod
00369         // Get the parameters of the last segment
00370         stdair::SegmentPeriod* lSegmentPeriod_l_ptr =
00371         lSingleSegmentPathPeriodFromDestination_iml_ptr->
00372         getFirstSegmentPeriod();
00373         assert (lSegmentPeriod_l_ptr != NULL);
00374
00375         // Calculate the number of airlines flown by the i-length
00376         // segment path period
00377         const stdair::FlightPeriod& lFlightPeriod = stdair::BomManager::
00378         getParent<stdair::FlightPeriod> (*lSegmentPeriod_l_ptr);
00379         const stdair::Inventory& lInventory =
00380         stdair::BomManager::getParent<stdair::Inventory> (lFlightPeriod);
00381         const stdair::AirlineCode_T& lAirlineCode_l = lInventory.getAirlineCode()
00382     );
00383     stdair::NbOfAirlines_T lNbOfAirlines_i =
00384     lSegmentPathPeriod_iml_ptr->getNbOfAirlines();
00385     if (lSegmentPathPeriod_iml_ptr->isAirlineFlown(lAirlineCode_l) == false
00386 ) {
00387         ++lNbOfAirlines_i;
00388     }
00389     lSegmentPathPeriodKey_i.setNbOfAirlines (lNbOfAirlines_i);
00390
00391     // Create the new segment path and add it to the dedicated lists.
00392     OriginDestinationSet* lOriginDestinationSet_ptr = stdair::BomManager::
00393     getObjectPtr<OriginDestinationSet>(ioReachableUniverse, lDestination_i
00394 );
00395     if (lOriginDestinationSet_ptr == NULL) {
00396         OriginDestinationSetKey lKey (lDestination_i);
00397         lOriginDestinationSet_ptr =
00398         &stdair::FacBom<OriginDestinationSet>::instance().create (lKey);
00399         stdair::FacBomManager::addToListAndMap (ioReachableUniverse,
00400             *lOriginDestinationSet_ptr);
00401         stdair::FacBomManager::linkWithParent (ioReachableUniverse,
00402             *lOriginDestinationSet_ptr);
00403     }
00404     assert (lOriginDestinationSet_ptr != NULL);
00405
00406     SegmentPathPeriod& lSegmentPathPeriod_i = stdair::
00407     FacBom<SegmentPathPeriod>::instance().create (lSegmentPathPeriodKey_i
00408 );
00409     stdair::FacBomManager::addToList (*lOriginDestinationSet_ptr,
00410         lSegmentPathPeriod_i);
00411     stdair::FacBomManager::linkWithParent (*lOriginDestinationSet_ptr,
00412         lSegmentPathPeriod_i);
00413
00414     // Clone the list of SegmentPeriod references of the given
00415     // SegmentPathPeriod object (passed as the second parameter).
00416     stdair::FacBomManager::
00417     cloneHolder<stdair::SegmentPeriod> (lSegmentPathPeriod_i,
00418         *lSegmentPathPeriod_iml_ptr);
00419
00420     // Add the SegmentPeriod reference to the dedicated list within
00421     // the SegmentPathPeriod. Note that this must be done before
00422     // the link between the SegmentPathPeriod and
00423     // ReachableUniverse, as that latter method uses the number of
00424     // segments within the SegmentPathPeriod object.
00425     stdair::FacBomManager::addToList (lSegmentPathPeriod_i,
00426         *lSegmentPeriod_l_ptr);
00427

```



```

00431         addSegmentPathPeriod (ioReachableUniverse, lSegmentPathPeriod_i);
00432     }
00433 }
00434 }
00435 }

```

## 26.113 airsched/command/SegmentPathGenerator.hpp File Reference

```

#include <vector>
#include <stdair/stdair_basic_types.hpp>
#include <stdair/command/CmdAbstract.hpp>
#include <airsched/AIRSCHEDED_Types.hpp>

```

### Classes

- class [AIRSCHEDED::SegmentPathGenerator](#)  
Class handling the generation / instantiation of the network BOM.

### Namespaces

- namespace [stdair](#)  
Forward declarations.
- namespace [AIRSCHEDED](#)

## 26.114 SegmentPathGenerator.hpp

```

00001 #ifndef __AIRSCHEDED_CMD_SEGMENTPATHGENERATOR_HPP
00002 #define __AIRSCHEDED_CMD_SEGMENTPATHGENERATOR_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <vector>
00009 // StdAir
00010 #include <stdair/stdair_basic_types.hpp>
00011 #include <stdair/command/CmdAbstract.hpp>
00012 // AirSched
00013 #include <airsched/AIRSCHEDED_Types.hpp>
00014
00016 namespace stdair {
00017     class BomRoot;
00018     class Inventory;
00019     class FlightPeriod;
00020     class SegmentPeriod;
00021 }
00022
00023 namespace AIRSCHEDED {
00024
00026     class ReachableUniverse;
00027     class OriginDestinationSet;
00028     class SegmentPathPeriod;
00029
00030
00034     class SegmentPathGenerator : public stdair::CmdAbstract {
00035     public:
00039         static void createSegmentPathNetwork (const stdair::BomRoot&);
00040
00041     private:
00046         static void createSinglePaths (const stdair::Inventory&);
00047         static void createSinglePaths (const stdair::FlightPeriod&);
00048
00053         static void createSinglePath (stdair::SegmentPeriod&);
00054         static void createSinglePath (ReachableUniverse&, stdair::SegmentPeriod&);
00055
00059         static void buildSegmentPathNetwork (const stdair::BomRoot&,
00060                                             const stdair::NbOfSegments_T&);
00061         static void buildSegmentPathNetwork (ReachableUniverse&,
00062                                             const stdair::NbOfSegments_T&);
00063

```

```

00067     static void addSegmentPathPeriod (ReachableUniverse&,
00068                                     const SegmentPathPeriod&);
00069 };
00070
00071 }
00072 #endif // __AIRSCHED_CMD_SEGMENTPATHGENERATOR_HPP

```

## 26.115 airsched/command/SegmentPathProvider.cpp File Reference

```

#include <cassert>
#include <string>
#include <sstream>
#include <stdair/basic/BasConst_BomDisplay.hpp>
#include <stdair/bom/BomManager.hpp>
#include <stdair/bom/BomRoot.hpp>
#include <stdair/bom/Inventory.hpp>
#include <stdair/bom/FlightPeriod.hpp>
#include <stdair/bom/SegmentPeriod.hpp>
#include <stdair/bom/BookingRequestStruct.hpp>
#include <stdair/bom/TravelSolutionStruct.hpp>
#include <stdair/service/Logger.hpp>
#include <airsched/bom/ReachableUniverse.hpp>
#include <airsched/bom/OriginDestinationSet.hpp>
#include <airsched/bom/SegmentPathPeriod.hpp>
#include <airsched/command/SegmentPathProvider.hpp>

```

### Namespaces

- namespace [AIRSCHED](#)

## 26.116 SegmentPathProvider.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <string>
00007 #include <sstream>
00008 // StdAir
00009 #include <stdair/basic/BasConst_BomDisplay.hpp>
00010 #include <stdair/bom/BomManager.hpp>
00011 #include <stdair/bom/BomRoot.hpp>
00012 #include <stdair/bom/Inventory.hpp>
00013 #include <stdair/bom/FlightPeriod.hpp>
00014 #include <stdair/bom/SegmentPeriod.hpp>
00015 #include <stdair/bom/BookingRequestStruct.hpp>
00016 #include <stdair/bom/TravelSolutionStruct.hpp>
00017 #include <stdair/service/Logger.hpp>
00018 // AirSched
00019 #include <airsched/bom/ReachableUniverse.hpp>
00020 #include <airsched/bom/OriginDestinationSet.hpp>
00021 #include <airsched/bom/SegmentPathPeriod.hpp>
00022 #include <airsched/command/SegmentPathProvider.hpp>
00023
00024 namespace AIRSCHED {
00025
00026 // //////////////////////////////////////
00027 void SegmentPathProvider::
00028     buildSegmentPathList (stdair::TravelSolutionList_T& ioTravelSolutionList,
00029                          const stdair::BomRoot& iBomRoot,
00030                          const stdair::BookingRequestStruct& iBookingRequest) {
00031     // Retrieve the reachable universe object corresponding to the
00032     // origin of the booking request.
00033     const stdair::AirportCode_T& lOrigin = iBookingRequest.getOrigin ();
00034     const ReachableUniverse* lReachableUniverse_ptr =
00035         stdair::BomManager::getObjectPtr<ReachableUniverse> (iBomRoot, lOrigin);
00036     if (lReachableUniverse_ptr != NULL) {
00037         buildSegmentPathList (ioTravelSolutionList, *lReachableUniverse_ptr,

```

```

00038             iBookingRequest);
00039     }
00040 }
00041
00042 // //////////////////////////////////////
00043 void SegmentPathProvider::
00044 buildSegmentPathList (stdair::TravelSolutionList_T& ioTravelSolutionList,
00045                      const ReachableUniverse& iReachableUniverse,
00046                      const stdair::BookingRequestStruct& iBookingRequest) {
00047     // Retrieve the origin-destination set objet correponding to the
00048     // destination of the booking request.
00049     const stdair::AirportCode_T& lDestination = iBookingRequest.getDestination(
);
00050     const OriginDestinationSet* lOriginDestinationSet_ptr =
00051     stdair::BomManager::getObjectPtr<OriginDestinationSet> (
iReachableUniverse,
00052                                                         lDestination);
00053     if (lOriginDestinationSet_ptr != NULL) {
00054         buildSegmentPathList (ioTravelSolutionList, *lOriginDestinationSet_ptr,
00055                               iBookingRequest);
00056     }
00057 }
00058
00059 // //////////////////////////////////////
00060 void SegmentPathProvider::
00061 buildSegmentPathList (stdair::TravelSolutionList_T& ioTravelSolutionList,
00062                      const OriginDestinationSet& iOriginDestinationSet,
00063                      const stdair::BookingRequestStruct& iBookingRequest) {
00064     // Retrieve the departure date of the booking request.
00065     const stdair::Date_T& lPreferredDepartureDate =
00066     iBookingRequest.getPreferedDepartureDate ();
00067
00068     // Browse the list of segment path periods and find those which content
00069     // the prefered departure date.
00070     const SegmentPathPeriodList_T& lSegmentPathPeriodList =
00071     stdair::BomManager::getList<SegmentPathPeriod> (iOriginDestinationSet);
00072     for (SegmentPathPeriodList_T::const_iterator itSegmentPath =
00073          lSegmentPathPeriodList.begin ();
00074          itSegmentPath != lSegmentPathPeriodList.end (); ++itSegmentPath) {
00075         const SegmentPathPeriod* lCurrentSegmentPath_ptr = *itSegmentPath;
00076         assert (lCurrentSegmentPath_ptr != NULL);
00077         if (lCurrentSegmentPath_ptr->isDepartureDateValid(lPreferredDepartureDate)
){
00078             buildSegmentPathList (ioTravelSolutionList, *lCurrentSegmentPath_ptr,
00079                                   iBookingRequest);
00080         }
00081     }
00082 }
00083
00084 // //////////////////////////////////////
00085 void SegmentPathProvider::
00086 buildSegmentPathList (stdair::TravelSolutionList_T& ioTravelSolutionList,
00087                      const SegmentPathPeriod& iSegmentPathPeriod,
00088                      const stdair::BookingRequestStruct& iBookingRequest) {
00089     // Create a new travel solution.
00090     stdair::TravelSolutionStruct lTravelSolution;
00091
00092     // Browse the list of segments and retrieve the necessary informations
00093     // for identifying the corresponding segment-date.
00094     const stdair::Date_T& lPreferredDepartureDate =
00095     iBookingRequest.getPreferedDepartureDate ();
00096     const stdair::SegmentPeriodList_T& lSegmentPeriodList =
00097     stdair::BomManager::getList<stdair::SegmentPeriod> (iSegmentPathPeriod);
00098     const DateOffsetList_T& lBoardingDateOffsetList =
00099     iSegmentPathPeriod.getBoardingDateOffsetList ();
00100     assert (lSegmentPeriodList.size() == lBoardingDateOffsetList.size());
00101     DateOffsetList_T::const_iterator itOffset = lBoardingDateOffsetList.begin()
;
00102     for (stdair::SegmentPeriodList_T::const_iterator itSegment =
00103          lSegmentPeriodList.begin();
00104          itSegment != lSegmentPeriodList.end(); ++itSegment) {
00105         const stdair::SegmentPeriod* lSegmentPeriod_ptr = *itSegment;
00106         assert (lSegmentPeriod_ptr != NULL);
00107         const stdair::DateOffset_T& lBoardingDateOffset = *itOffset;
00108
00109         // Find the corresponding segment-date within the segment period.
00110         const stdair::DateOffset_T& lSegmentBoardingDateOffset =
00111         lSegmentPeriod_ptr->getBoardingDateOffset();
00112         const stdair::Date_T& lReferenceFlightDate = lPreferredDepartureDate
00113         + lBoardingDateOffset - lSegmentBoardingDateOffset;
00114
00115         // Build the whole segment-date key string.
00116         const stdair::FlightPeriod& lFlightPeriod =
00117         stdair::BomManager::getParent<stdair::FlightPeriod>
(*lSegmentPeriod_ptr);
00118         const stdair::Inventory& lInventory =
00119         stdair::BomManager::getParent<stdair::Inventory> (lFlightPeriod);

```

```

00120         const stdair::Duration_T lBoardingTime = lSegmentPeriod_ptr->
getBoardingTime();
00121         std::ostringstream oStr;
00122         oStr << lInventory.getAirlineCode()
00123             << stdair::DEFAULT_KEY_FLD_DELIMITER
00124             << lFlightPeriod.getFlightNumber()
00125             << stdair::DEFAULT_KEY_SUB_FLD_DELIMITER
00126             << boost::gregorian::to_simple_string(lReferenceFlightDate)
00127             << stdair::DEFAULT_KEY_FLD_DELIMITER
00128             << lSegmentPeriod_ptr->getBoardingPoint()
00129             << stdair::DEFAULT_KEY_SUB_FLD_DELIMITER
00130             << lSegmentPeriod_ptr->getOffPoint()
00131             << stdair::DEFAULT_KEY_FLD_DELIMITER
00132             << lBoardingTime;
00133
00134         lTravelSolution.addSegment(oStr.str());
00135
00136         ++itOffset;
00137     }
00138     ioTravelSolutionList.push_back(lTravelSolution);
00139 }
00140
00141 }

```

## 26.117 airsched/command/SegmentPathProvider.hpp File Reference

```

#include <stdair/bom/TravelSolutionTypes.hpp>
#include <stdair/command/CmdAbstract.hpp>

```

### Classes

- class [AIRSCHEd::SegmentPathProvider](#)  
*Class building the travel solutions from airline schedules.*

### Namespaces

- namespace [stdair](#)  
*Forward declarations.*
- namespace [AIRSCHEd](#)

## 26.118 SegmentPathProvider.hpp

```

00001 #ifndef __AIRSCHEd_COM_CMD_SEGMENTPATHPROVIDER_HPP
00002 #define __AIRSCHEd_COM_CMD_SEGMENTPATHPROVIDER_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // StdAir
00008 #include <stdair/bom/TravelSolutionTypes.hpp>
00009 #include <stdair/command/CmdAbstract.hpp>
00010
00012 namespace stdair {
00013     class BomRoot;
00014     struct BookingRequestStruct;
00015 }
00016
00017 namespace AIRSCHEd {
00018
00020     class ReachableUniverse;
00021     class OriginDestinationSet;
00022     class SegmentPathPeriod;
00023
00027     class SegmentPathProvider : public stdair::CmdAbstract {
00028     friend class AIRSCHEd_Service;
00029
00030     private:
00031         // ////////////////////////////////// Business Methods //////////////////////////////////
00042         static void buildSegmentPathList (stdair::TravelSolutionList_T&,
00043                                         const stdair::BomRoot&,
00044                                         const stdair::BookingRequestStruct&);

```

```

00045
00056     static void buildSegmentPathList (stdair::TravelSolutionList_T&,
00057                                     const ReachableUniverse&,
00058                                     const stdair::BookingRequestStruct&);
00059
00070     static void buildSegmentPathList (stdair::TravelSolutionList_T&,
00071                                     const OriginDestinationSet&,
00072                                     const stdair::BookingRequestStruct&);
00073
00084     static void buildSegmentPathList (stdair::TravelSolutionList_T&,
00085                                     const SegmentPathPeriod&,
00086                                     const stdair::BookingRequestStruct&);
00087 };
00088
00089 }
00090 #endif // __AIRSCHED_COM_CMD_SEGMENTPATHPROVIDER_HPP

```

## 26.119 airsched/command/Simulator.cpp File Reference

```

#include <cassert>
#include <string>
#include <sstream>
#include <stdair/basic/BasConst_General.hpp>
#include <stdair/bom/BomManager.hpp>
#include <stdair/bom/BookingRequestStruct.hpp>
#include <stdair/service/Logger.hpp>
#include <airsched/command/Simulator.hpp>

```

### Namespaces

- namespace [AIRSCHED](#)

## 26.120 Simulator.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <string>
00007 #include <sstream>
00008 // StdAir
00009 #include <stdair/basic/BasConst_General.hpp>
00010 #include <stdair/bom/BomManager.hpp>
00011 #include <stdair/bom/BookingRequestStruct.hpp>
00012 #include <stdair/service/Logger.hpp>
00013 // AIRSCHED
00014 #include <airsched/command/Simulator.hpp>
00015
00016 namespace AIRSCHED {
00017
00018     // //////////////////////////////////////
00019     void Simulator::simulate (stdair::BomRoot& ioBomRoot) {
00020
00021         // Delegate to the dedicated StdAir utility class
00022         // std::ostringstream oStream;
00023         // stdair::BomManager::display (oStream, ioBomRoot);
00024
00025         // DEBUG
00026         // STDAIR_LOG_DEBUG ("BOM Tree: ");
00027         // STDAIR_LOG_DEBUG (oStream.str());
00028
00029         // TODO: do not hardcode the booking request (get it from the
00030         // demand generation module instead).
00031         // stdair::BookingRequestStruct ("LHR", "JFK", stdair::Date_T (2009, 01,
00032         16),
00033         //                                stdair::DEFAULT_DATETIME, "Y", 1);
00034     }
00035 }

```

## 26.121 airsched/command/Simulator.hpp File Reference

```
#include <stdair/command/CmdAbstract.hpp>
```

### Classes

- class [AIRSCHEd::Simulator](#)

### Namespaces

- namespace [stdair](#)  
*Forward declarations.*
- namespace [AIRSCHEd](#)

## 26.122 Simulator.hpp

```
00001 #ifndef __AIRSCHEd_COM_CMD_SIMULATOR_HPP
00002 #define __AIRSCHEd_COM_CMD_SIMULATOR_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // StdAir
00008 #include <stdair/command/CmdAbstract.hpp>
00009
00010 // Forward declarations
00011 namespace stdair {
00012     class BomRoot;
00013 }
00014
00015 namespace AIRSCHEd {
00016
00017     class Simulator : public stdair::CmdAbstract {
00018     public:
00019
00020         // ////////// Business Methods //////////
00021         static void simulate (stdair::BomRoot&);
00022     };
00023
00024 }
00025 #endif // __AIRSCHEd_COM_CMD_SIMULATOR_HPP
```

## 26.123 airsched/command/TravelSolutionParser.cpp File Reference

```
#include <sstream>
#include <fstream>
#include <cassert>
#include <stdair/stdair_exceptions.hpp>
#include <stdair/basic/BasConst_TravelSolution.hpp>
#include <stdair/basic/BasFileMgr.hpp>
#include <stdair/bom/BomRoot.hpp>
#include <stdair/service/Logger.hpp>
#include <airsched/command/TravelSolutionParser.hpp>
```

### Namespaces

- namespace [AIRSCHEd](#)

## 26.124 TravelSolutionParser.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <sstream>
00006 #include <fstream>
00007 #include <cassert>
00008 // StdAir
00009 #include <stdair/stdair_exceptions.hpp>
00010 #include <stdair/basic/BasConst_TravelSolution.hpp>
00011 #include <stdair/basic/BasFileMgr.hpp>
00012 #include <stdair/bom/BomRoot.hpp>
00013 #include <stdair/service/Logger.hpp>
00014 // AirSched
00015 #include <airsched/command/TravelSolutionParser.hpp>
00016
00017 namespace AIRSCHED {
00018
00019 // //////////////////////////////////////
00020 bool TravelSolutionParser::
00021 parseInputFileAndBuildBom (const std::string& iInputFileName) {
00022     bool hasReadBeenSuccessful = false;
00023
00024     // Check that the file path given as input corresponds to an actual file
00025     const bool doesExistAndIsReadable =
00026         stdair::BasFileMgr::doesExistAndIsReadable (iInputFileName);
00027     if (doesExistAndIsReadable == false) {
00028         std::ostringstream oMessage;
00029         oMessage << "The input file, '" << iInputFileName
00030             << "', can not be retrieved on the file-system";
00031         throw stdair::FileNotFoundException (oMessage.str());
00032     }
00033
00034     // Open the input file
00035     std::ifstream inputFile (iInputFileName.c_str());
00036     if (! inputFile) {
00037         STDAIR_LOG_ERROR ("Can not open input file '" << iInputFileName << "'");
00038         throw new stdair::FileNotFoundException ("Can not open input file '"
00039             + iInputFileName + "'");
00040     }
00041
00042     char buffer[80];
00043     double dval = 0.0;
00044     std::string dvalStr;
00045     short i = 1;
00046     bool hasAllPParams = true;
00047
00048     stdair::AirportCode_T dAirport;
00049     stdair::AirportCode_T aAirport;
00050     stdair::Date_T depDate;
00051     stdair::Duration_T depTime;
00052     stdair::Duration_T arTime;
00053     stdair::Duration_T dur;
00054     //bool Ref;
00055     stdair::AirlineCode_T airline;
00056     stdair::CabinCode_T cabin;
00057     //stdair::FlightNumber_T flightNum;
00058     //stdair::Fare_T fare;
00059     //int lagsNum;
00060     //bool SNS;
00061     //bool change;
00062
00063     while (inputFile.getline (buffer, sizeof (buffer), ';')) {
00064         std::istringstream iStringStr (buffer);
00065
00066         bool hasRead = false;
00067
00068         if (i == 1) {
00069             hasAllPParams = true;
00070         }
00071
00072         if (i>=1 && i<=14) {
00073             hasRead = (iStringStr >> dvalStr);
00074         }
00075
00076         if (i == 15) {
00077             hasRead = (iStringStr >> dval);
00078         }
00079
00080         if (hasRead) {
00081             if (i == 1) {
00082                 dAirport = dvalStr;
00083             } else if (i == 2) {
00084                 aAirport = dvalStr;
00085             }
00086         }
00087     }

```

```

00086         // std::cout << "City Pair = '" << dAiport
00087         // << "-" << aAirport << "'" << std::endl;
00088
00089     } else if (i == 3) {
00090         depDate = boost::gregorian::from_simple_string (dvalStr);
00091         // std::cout << "Date = '" << depDate << "'" << std::endl;
00092
00093     } else if (i == 4) {
00094         depTime = boost::posix_time::duration_from_string (dvalStr);
00095
00096     } else if (i == 5) {
00097         arTime = boost::posix_time::duration_from_string (dvalStr);
00098
00099     } else if (i == 6) {
00100         dur = boost::posix_time::duration_from_string (dvalStr);
00101
00102     } else if (i == 7) {
00103         //if (dvalStr == "refundable fare")
00104         //    Ref = true;
00105         //else Ref = false;
00106
00107     } else if (i == 8) {
00108         airline = dvalStr;
00109
00110     } else if (i == 9) {
00111         cabin = dvalStr;
00112
00113     } else if (i == 10) {
00114         //flightNum = dval;
00115
00116     } else if (i == 11) {
00117         //fare = dval;
00118
00119     } else if (i == 12) {
00120         //lagsNum = dval;
00121
00122     } else if (i == 13) {
00123         //if (dvalStr == "Saturday Nigth Stay mandatory")
00124         //    SNS = true;
00125         //else SNS = false;
00126
00127     } else if (i == 14) {
00128         //if (dvalStr == "changeable fare")
00129         //    change = true;
00130         //else change = false;
00131         i = 0;
00132     }
00133
00134     //
00135     ++i;
00136
00137 } else {
00138     hasAllParams = false;
00139 }
00140 }
00141
00142 if (hasAllParams && i == 1) {
00143     STDAIR_LOG_DEBUG ("Successfully read");
00144 }
00145
00146 //
00147 if (!inputFile.eof()) {
00148     STDAIR_LOG_ERROR ("Problem when reading input file '" << iInputFileName
00149                     << "'");
00150     return hasReadBeenSuccessful;
00151 }
00152
00153 //
00154 hasReadBeenSuccessful = true;
00155 return hasReadBeenSuccessful;
00156 }
00157
00158 }

```

## 26.125 airsched/command/TravelSolutionParser.hpp File Reference

```

#include <string>
#include <stdair/stdair_basic_types.hpp>
#include <stdair/command/CmdAbstract.hpp>

```



## Classes

- class AIRSCHED::TravelSolutionParser

*Class filling the TravelSolutionHolder structure (representing a list of classes/travelSolutions) from a given input file.*

## Namespaces

- namespace AIRSCHED

## 26.126 TravelSolutionParser.hpp

```

00001 #ifndef __AIRSCHED_CMD_TRAVELSOLUTIONPARSER_HPP
00002 #define __AIRSCHED_CMD_TRAVELSOLUTIONPARSER_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <string>
00009 // StdAir
00010 #include <stdair/stdair_basic_types.hpp>
00011 #include <stdair/command/CmdAbstract.hpp>
00012
00013 namespace AIRSCHED {
00014
00019     class TravelSolutionParser : public stdair::CmdAbstract {
00020     public:
00028         static bool parseInputFileAndBuildBom (const stdair::Filename_T&);
00029     };
00030 }
00031 #endif // __AIRSCHED_CMD_TRAVELSOLUTIONPARSER_HPP

*/
#ifndef <strong>AIRSCHED_PATHS_HPP</strong>
#define <strong>AIRSCHED_PATHS_HPP</strong>

#define PACKAGE "airsched"
#define PACKAGE_NAME "AIRSCHED"
#define PACKAGE_VERSION "0.1.4"
#define PREFIXDIR "/usr"
#define EXEC_PREFIX "/usr"
#define BINDIR "/usr/bin"
#define LIBDIR "/usr/lib"
#define LIBEXECDIR "/usr/libexec"
#define SBINDIR "/usr/sbin"
#define SYSCONFDIR "/usr/etc"
#define INCLUDEDIR "/usr/include"
#define DATAROOTDIR "/usr/share"
#define DATADIR "/usr/share"
#define DOCDIR "/usr/share/doc/airsched-0.1.4"
#define MANDIR "/usr/share/man"
#define INFODIR "/usr/share/info"
#define HTMLEDIR "/usr/share/doc/airsched-0.1.4/html"
#define PDFDIR "/usr/share/doc/airsched-0.1.4/html"
#define STDAIR_SAMPLE_DIR "/usr/share/stdair/samples"

#endif // <strong>AIRSCHED_PATHS_HPP</strong>

/*!

*/
#ifndef <strong>AIRSCHED_PATHS_HPP</strong>
#define <strong>AIRSCHED_PATHS_HPP</strong>

#define PACKAGE "@PACKAGE@"
#define PACKAGE_NAME "@PACKAGE_NAME@"
#define PACKAGE_VERSION "@PACKAGE_VERSION@"
#define PREFIXDIR "@prefix@"
#define EXEC_PREFIX "@exec_prefix@"
#define BINDIR "@bindir@"
#define LIBDIR "@libdir@"
#define LIBEXECDIR "@libexecdir@"
#define SBINDIR "@sbindir@"
#define SYSCONFDIR "@sysconfdir@"
#define INCLUDEDIR "@includedir@"
#define DATAROOTDIR "@datarootdir@"
#define DATADIR "@datadir@"
#define DOCDIR "@docdir@"

```

```

#define MANDIR "@mandir@"
#define INFODIR "@infodir@"
#define HTMLDIR "@htmldir@"
#define PDFDIR "@pdfdir@"
#define STDAIR_SAMPLE_DIR "@sampledir@"

#endif // <strong>AIRSCHEDED_PATHS_HPP</strong>

/*!

```

## 26.127 airsched-paths.hpp

```

00001
00005 #ifndef __AIRSCHEDED_PATHS_HPP__
00006 #define __AIRSCHEDED_PATHS_HPP__
00007
00008 #define PACKAGE "airsched"
00009 #define PACKAGE_NAME "AIRSCHEDED"
00010 #define PACKAGE_VERSION "0.1.4"
00011 #define PREFIXDIR "/usr"
00012 #define EXEC_PREFIX "/usr"
00013 #define BINDIR "/usr/bin"
00014 #define LIBDIR "/usr/lib"
00015 #define LIBEXECDIR "/usr/libexec"
00016 #define SBINDIR "/usr/sbin"
00017 #define SYSCONFDIR "/usr/etc"
00018 #define INCLUDEDIR "/usr/include"
00019 #define DATAROOTDIR "/usr/share"
00020 #define DATADIR "/usr/share"
00021 #define DOCDIR "/usr/share/doc/airsched-0.1.4"
00022 #define MANDIR "/usr/share/man"
00023 #define INFODIR "/usr/share/info"
00024 #define HTMLDIR "/usr/share/doc/airsched-0.1.4/html"
00025 #define PDFDIR "/usr/share/doc/airsched-0.1.4/html"
00026 #define STDAIR_SAMPLE_DIR "/usr/share/stdair/samples"
00027
00028 #endif // __AIRSCHEDED_PATHS_HPP__
00029

```

## 26.128 airsched/config/airsched-paths.hpp.in File Reference

### 26.129 airsched-paths.hpp.in

```

00001
00005 #ifndef __AIRSCHEDED_PATHS_HPP__
00006 #define __AIRSCHEDED_PATHS_HPP__
00007
00008 #define PACKAGE "@PACKAGE@"
00009 #define PACKAGE_NAME "@PACKAGE_NAME@"
00010 #define PACKAGE_VERSION "@PACKAGE_VERSION@"
00011 #define PREFIXDIR "@prefix@"
00012 #define EXEC_PREFIX "@exec_prefix@"
00013 #define BINDIR "@bindir@"
00014 #define LIBDIR "@libdir@"
00015 #define LIBEXECDIR "@libexecdir@"
00016 #define SBINDIR "@sbindir@"
00017 #define SYSCONFDIR "@sysconfdir@"
00018 #define INCLUDEDIR "@includedir@"
00019 #define DATAROOTDIR "@datarootdir@"
00020 #define DATADIR "@datadir@"
00021 #define DOCDIR "@docdir@"
00022 #define MANDIR "@mandir@"
00023 #define INFODIR "@infodir@"
00024 #define HTMLDIR "@htmldir@"
00025 #define PDFDIR "@pdfdir@"
00026 #define STDAIR_SAMPLE_DIR "@sampledir@"
00027
00028 #endif // __AIRSCHEDED_PATHS_HPP__
00029

```

**26.130 airsched/factory/FacAIRSCHEDServiceContext.cpp File Reference**

```
#include <cassert>
#include <stdair/service/FacSupervisor.hpp>
#include <airsched/factory/FacAIRSCHEDServiceContext.hpp>
#include <airsched/service/AIRSCHED_ServiceContext.hpp>
```

**Namespaces**

- namespace [AIRSCHED](#)

**26.131 FacAIRSCHEDServiceContext.cpp**

```
00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 // StdAir
00007 #include <stdair/service/FacSupervisor.hpp>
00008 // AirSched
00009 #include <airsched/factory/FacAIRSCHEDServiceContext.hpp>
00010 #include <airsched/service/AIRSCHED_ServiceContext.hpp>
00011
00012 namespace AIRSCHED {
00013
00014     FacAIRSCHEDServiceContext* FacAIRSCHEDServiceContext::_instance = NULL;
00015
00016     // //////////////////////////////////////
00017     FacAIRSCHEDServiceContext::~FacAIRSCHEDServiceContext () {
00018         _instance = NULL;
00019     }
00020
00021     // //////////////////////////////////////
00022     FacAIRSCHEDServiceContext& FacAIRSCHEDServiceContext::instance () {
00023
00024         if (_instance == NULL) {
00025             _instance = new FacAIRSCHEDServiceContext();
00026             assert (_instance != NULL);
00027
00028             stdair::FacSupervisor::instance().registerServiceFactory (_instance);
00029         }
00030         return *_instance;
00031     }
00032
00033     // //////////////////////////////////////
00034     AIRSCHED_ServiceContext& FacAIRSCHEDServiceContext::create () {
00035         AIRSCHED_ServiceContext* aServiceContext_ptr = NULL;
00036
00037         aServiceContext_ptr = new AIRSCHED_ServiceContext();
00038         assert (aServiceContext_ptr != NULL);
00039
00040         // The new object is added to the Bom pool
00041         _pool.push_back (aServiceContext_ptr);
00042
00043         return *aServiceContext_ptr;
00044     }
00045 }
00046 }
```

**26.132 airsched/factory/FacAIRSCHEDServiceContext.hpp File Reference**

```
#include <stdair/stdair_basic_types.hpp>
#include <stdair/service/FacServiceAbstract.hpp>
```

**Classes**

- class [AIRSCHED::FacAIRSCHEDServiceContext](#)

*Factory for the service context.*

## Namespaces

- namespace [AIRSCHED](#)

## 26.133 FacAIRSCHEDServiceContext.hpp

```

00001 #ifndef __AIRSCHED_FAC_FACAIRSCHEDSERVICECONTEXT_HPP
00002 #define __AIRSCHED_FAC_FACAIRSCHEDSERVICECONTEXT_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // StdAir
00008 #include <stdair/stdair_basic_types.hpp>
00009 #include <stdair/service/FacServiceAbstract.hpp>
00010
00011 namespace AIRSCHED {
00012
00013     class AIRSCHED_ServiceContext;
00014
00015     class FacAIRSCHEDServiceContext : public stdair::FacServiceAbstract {
00016     public:
00017
00018         static FacAIRSCHEDServiceContext& instance();
00019
00020         ~FacAIRSCHEDServiceContext();
00021
00022         AIRSCHED_ServiceContext& create();
00023
00024     protected:
00025         FacAIRSCHEDServiceContext() {}
00026
00027     private:
00028         static FacAIRSCHEDServiceContext* _instance;
00029     };
00030 }
00031 #endif // __AIRSCHED_FAC_FACAIRSCHEDSERVICECONTEXT_HPP

```

## 26.134 airsched/factory/FacServiceAbstract.cpp File Reference

```

#include <assert.h>
#include <airsched/service/ServiceAbstract.hpp>
#include <airsched/factory/FacServiceAbstract.hpp>

```

## Namespaces

- namespace [AIRSCHED](#)

## 26.135 FacServiceAbstract.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // C
00005 #include <assert.h>
00006 // TRAVEL-CCM
00007 #include <airsched/service/ServiceAbstract.hpp>
00008 #include <airsched/factory/FacServiceAbstract.hpp>
00009
00010 namespace AIRSCHED {
00011
00012     // //////////////////////////////////////
00013     FacServiceAbstract::~FacServiceAbstract() {
00014         clean();
00015     }

```

```

00016
00017 // //////////////////////////////////////
00018 void FacServiceAbstract::clean() {
00019     for (ServicePool_T::iterator itService = _pool.begin();
00020          itService != _pool.end(); itService++) {
00021         ServiceAbstract* currentService_ptr = *itService;
00022         assert (currentService_ptr != NULL);
00023
00024         delete (currentService_ptr); currentService_ptr = NULL;
00025     }
00026
00027     // Empty the pool of Service Factories
00028     _pool.clear();
00029 }
00030
00031 }

```

## 26.136 airsched/factory/FacServiceAbstract.hpp File Reference

```
#include <vector>
```

### Classes

- class [AIRSCHED::FacServiceAbstract](#)

### Namespaces

- namespace [AIRSCHED](#)

## 26.137 FacServiceAbstract.hpp

```

00001 #ifndef __AIRSCHED_FAC_FACSERVICEABSTRACT_HPP
00002 #define __AIRSCHED_FAC_FACSERVICEABSTRACT_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <vector>
00009
00010 namespace AIRSCHED {
00011
00012     // Forward declarations
00013     class ServiceAbstract;
00014
00015     class FacServiceAbstract {
00016     public:
00017
00020         typedef std::vector<ServiceAbstract*> ServicePool_T;
00021
00023         virtual ~FacServiceAbstract();
00024
00026         void clean();
00027
00028     protected:
00031         FacServiceAbstract() {}
00032
00034         ServicePool_T _pool;
00035     };
00036 }
00037 #endif // __AIRSCHED_FAC_FACSERVICEABSTRACT_HPP

```

## 26.138 airsched/service/AIRSCHEd\_Service.cpp File Reference

```

#include <cassert>
#include <sstream>
#include <boost/make_shared.hpp>
#include <stdair/basic/BasChronometer.hpp>
#include <stdair/bom/BomManager.hpp>
#include <stdair/bom/BookingRequestStruct.hpp>
#include <stdair/bom/TravelSolutionStruct.hpp>
#include <stdair/service/Logger.hpp>
#include <stdair/STDAIR_Service.hpp>
#include <airsched/basic/BasConst_AIRSCHEd_Service.hpp>
#include <airsched/factory/FacAIRSCHEdServiceContext.hpp>
#include <airsched/command/Simulator.hpp>
#include <airsched/command/ScheduleParser.hpp>
#include <airsched/command/OnDParser.hpp>
#include <airsched/command/SegmentPathProvider.hpp>
#include <airsched/command/InventoryGenerator.hpp>
#include <airsched/command/SegmentPathGenerator.hpp>
#include <airsched/service/AIRSCHEd_ServiceContext.hpp>
#include <airsched/AIRSCHEd_Service.hpp>

```

## Namespaces

- namespace [AIRSCHEd](#)

## 26.139 AIRSCHEd\_Service.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <sstream>
00007 // Boost
00008 #include <boost/make_shared.hpp>
00009 // StdAir
00010 #include <stdair/basic/BasChronometer.hpp>
00011 #include <stdair/bom/BomManager.hpp>
00012 #include <stdair/bom/BookingRequestStruct.hpp>
00013 #include <stdair/bom/TravelSolutionStruct.hpp>
00014 #include <stdair/service/Logger.hpp>
00015 #include <stdair/STDAIR_Service.hpp>
00016 // AirSched
00017 #include <airsched/basic/BasConst_AIRSCHEd_Service.hpp>
00018 #include <airsched/factory/FacAIRSCHEdServiceContext.hpp>
00019 #include <airsched/command/Simulator.hpp>
00020 #include <airsched/command/ScheduleParser.hpp>
00021 #include <airsched/command/OnDParser.hpp>
00022 #include <airsched/command/SegmentPathProvider.hpp>
00023 #include <airsched/command/InventoryGenerator.hpp>
00024 #include <airsched/command/SegmentPathGenerator.hpp>
00025 #include <airsched/service/AIRSCHEd_ServiceContext.hpp>
00026 #include <airsched/AIRSCHEd_Service.hpp>
00027
00028 namespace AIRSCHEd {
00029
00030 // //////////////////////////////////////
00031 AIRSCHEd_Service::AIRSCHEd_Service() : _airschedServiceContext (NULL) {
00032     assert (false);
00033 }
00034
00035 // //////////////////////////////////////
00036 AIRSCHEd_Service::AIRSCHEd_Service (const AIRSCHEd_Service& iService)
00037 : _airschedServiceContext (NULL) {
00038     assert (false);
00039 }
00040
00041 // //////////////////////////////////////
00042 AIRSCHEd_Service::AIRSCHEd_Service (const stdair::BasLogParams& iLogParams)

```

```

00043 : _airschedServiceContext (NULL) {
00044
00045     // Initialise the STDAIR service handler
00046     stdair::STDAIR_ServicePtr_T lSTDAIR_Service_ptr =
00047         initStdAirService (iLogParams);
00048
00049     // Initialise the service context
00050     initServiceContext();
00051
00052     // Add the StdAir service context to the AirSched service context
00053     // \note AirSched owns the STDAIR service resources here.
00054     const bool ownStdairService = true;
00055     addStdAirService (lSTDAIR_Service_ptr, ownStdairService);
00056
00057     // Initialise the (remaining of the) context
00058     initAirschedService();
00059 }
00060
00061 // //////////////////////////////////////
00062 AIRSCHED_Service::AIRSCHED_Service (const stdair::BasLogParams& iLogParams,
00063                                     const stdair::BasDBParams& iDBParams)
00064 : _airschedServiceContext (NULL) {
00065
00066     // Initialise the STDAIR service handler
00067     stdair::STDAIR_ServicePtr_T lSTDAIR_Service_ptr =
00068         initStdAirService (iLogParams, iDBParams);
00069
00070     // Initialise the service context
00071     initServiceContext();
00072
00073     // Add the StdAir service context to the AirSched service context
00074     // \note AirSched owns the STDAIR service resources here.
00075     const bool ownStdairService = true;
00076     addStdAirService (lSTDAIR_Service_ptr, ownStdairService);
00077
00078     // Initialise the (remaining of the) context
00079     initAirschedService();
00080 }
00081
00082 // //////////////////////////////////////
00083 AIRSCHED_Service::
00084 AIRSCHED_Service (stdair::STDAIR_ServicePtr_T ioSTDAIRServicePtr)
00085 : _airschedServiceContext (NULL) {
00086
00087     // Initialise the service context
00088     initServiceContext();
00089
00090     // Add the StdAir service context to the AirSched service context.
00091     // \note AirSched does not own the STDAIR service resources here.
00092     const bool doesNotOwnStdairService = false;
00093     addStdAirService (ioSTDAIRServicePtr, doesNotOwnStdairService);
00094
00095     // Initialise the context
00096     initAirschedService();
00097 }
00098
00099 // //////////////////////////////////////
00100 AIRSCHED_Service::~AIRSCHED_Service() {
00101     // Delete/Clean all the objects from memory
00102     finalise();
00103 }
00104
00105 // //////////////////////////////////////
00106 void AIRSCHED_Service::finalise() {
00107     assert (_airschedServiceContext != NULL);
00108     // Reset the (Boost.)Smart pointer pointing on the STDAIR_Service object.
00109     _airschedServiceContext->reset();
00110 }
00111
00112 // //////////////////////////////////////
00113 void AIRSCHED_Service::initServiceContext() {
00114     // Initialise the service context
00115     AIRSCHED_ServiceContext& lAIRSCHED_ServiceContext =
00116         FacAIRSCHEDServiceContext::instance().create();
00117     _airschedServiceContext = &lAIRSCHED_ServiceContext;
00118 }
00119
00120 // //////////////////////////////////////
00121 void AIRSCHED_Service::
00122 addStdAirService (stdair::STDAIR_ServicePtr_T ioSTDAIR_Service_ptr,
00123                 const bool iOwnStdairService) {
00124
00125     // Retrieve the AirSched service context
00126     assert (_airschedServiceContext != NULL);
00127     AIRSCHED_ServiceContext& lAIRSCHED_ServiceContext =
00128         *_airschedServiceContext;
00129 }

```

```

00130 // Store the STDAIR service object within the (AirSched) service context
00131 lAIRSCHED_ServiceContext.setSTDAIR_Service (ioSTDAIR_Service_ptr,
00132                                             iOwnStdairService);
00133 }
00134
00135 // //////////////////////////////////////
00136 stdair::STDAIR_ServicePtr_T AIRSCHED_Service::
00137 initStdAirService (const stdair::BasLogParams& iLogParams) {
00138
00146     stdair::STDAIR_ServicePtr_T lSTDAIR_Service_ptr =
00147         boost::make_shared<stdair::STDAIR_Service> (iLogParams);
00148
00149     return lSTDAIR_Service_ptr;
00150 }
00151
00152 // //////////////////////////////////////
00153 stdair::STDAIR_ServicePtr_T AIRSCHED_Service::
00154 initStdAirService (const stdair::BasLogParams& iLogParams,
00155                   const stdair::BasDBParams& iDBParams) {
00156
00164     stdair::STDAIR_ServicePtr_T lSTDAIR_Service_ptr =
00165         boost::make_shared<stdair::STDAIR_Service> (iLogParams, iDBParams);
00166
00167     return lSTDAIR_Service_ptr;
00168 }
00169
00170 // //////////////////////////////////////
00171 void AIRSCHED_Service::initAirschedService() {
00172     // Do nothing at this stage. A sample BOM tree may be built by
00173     // calling the buildSampleBom() method
00174 }
00175
00176 // //////////////////////////////////////
00177 void AIRSCHED_Service::
00178 parseAndLoad (const stdair::Filename_T& iScheduleInputFilename) {
00179
00180     // Retrieve the BOM root object.
00181     assert (_airschedServiceContext != NULL);
00182     AIRSCHED_ServiceContext& lAIRSCHED_ServiceContext =
00183         *_airschedServiceContext;
00184     stdair::STDAIR_Service& lSTDAIR_Service =
00185         lAIRSCHED_ServiceContext.getSTDAIR_Service();
00186     stdair::BomRoot& lBomRoot = lSTDAIR_Service.getBomRoot();
00187
00188     // Parse the schedule input file, and generate the Inventories
00189     stdair::BasChronometer lINVGeneration; lINVGeneration.start();
00190     ScheduleParser::generateInventories (iScheduleInputFilename, lBomRoot);
00191     const double lGenerationMeasure = lINVGeneration.elapsed();
00192
00193     // DEBUG
00194     STDAIR_LOG_DEBUG ("Inventory generation time: " << lGenerationMeasure);
00195 }
00196
00197 // //////////////////////////////////////
00198 void AIRSCHED_Service::
00199 parseAndLoad (const stdair::Filename_T& iScheduleInputFilename,
00200              const stdair::Filename_T& iODInputFilename) {
00201
00202     // First, build the airline inventories from the schedule file
00203     parseAndLoad (iScheduleInputFilename);
00204
00205     // Retrieve the BOM tree root
00206     assert (_airschedServiceContext != NULL);
00207     AIRSCHED_ServiceContext& lAIRSCHED_ServiceContext =
00208         *_airschedServiceContext;
00209     stdair::STDAIR_Service& lSTDAIR_Service =
00210         lAIRSCHED_ServiceContext.getSTDAIR_Service();
00211     stdair::BomRoot& lBomRoot = lSTDAIR_Service.getBomRoot();
00212
00213     // Parse the O&D input file, and generate the O&D periods
00214     stdair::BasChronometer lOnDGeneration; lOnDGeneration.start();
00215     OnDParser::generateOnDPeriods (iODInputFilename, lBomRoot);
00216     const double lGenerationMeasure = lOnDGeneration.elapsed();
00217
00218     // DEBUG
00219     STDAIR_LOG_DEBUG ("O&D generation time: " << lGenerationMeasure);
00220 }
00221
00222 // //////////////////////////////////////
00223 void AIRSCHED_Service::buildSampleBom() {
00224
00225     // Retrieve the AirSched service context
00226     if (_airschedServiceContext == NULL) {
00227         throw stdair::NonInitialisedServiceException ("The AirSched service has "
00228                                                       "not been initialised");
00229     }
00230     assert (_airschedServiceContext != NULL);

```



```

00231
00232 // Retrieve the AirSched service context and whether it owns the Stdair
00233 // service
00234 AIRSCHED_ServiceContext& lAIRSCHED_ServiceContext =
00235 *_airschedServiceContext;
00236 const bool doesOwnStdairService =
00237     lAIRSCHED_ServiceContext.getOwnStdairServiceFlag();
00238
00239 // Retrieve the StdAir service object from the (AirSched) service context
00240 stdair::STDAIR_Service& lSTDAIR_Service =
00241     lAIRSCHED_ServiceContext.getSTDAIR_Service();
00242
00243 if (doesOwnStdairService == true) {
00244     //
00245     lSTDAIR_Service.buildSampleBom();
00246 }
00247
00248 stdair::BomRoot& lBomRoot = lSTDAIR_Service.getBomRoot();
00249 SegmentPathGenerator::createSegmentPathNetwork (lBomRoot);
00250 }
00251
00252 // //////////////////////////////////////
00253 std::string AIRSCHED_Service::
00254 jsonExport (const stdair::AirlineCode_T& iAirlineCode,
00255             const stdair::FlightNumber_T& iFlightNumber,
00256             const stdair::Date_T& iDepartureDate) const {
00257
00258     // Retrieve the AirSched service context
00259     if (_airschedServiceContext == NULL) {
00260         throw stdair::NonInitialisedServiceException ("The AirSched service "
00261             "has not been initialised")
00262     ;
00263     }
00264     assert (_airschedServiceContext != NULL);
00265
00266     // Retrieve the StdAir service object from the (AirSched) service context
00267     AIRSCHED_ServiceContext& lAIRSCHED_ServiceContext =
00268         *_airschedServiceContext;
00269     stdair::STDAIR_Service& lSTDAIR_Service =
00270         lAIRSCHED_ServiceContext.getSTDAIR_Service();
00271
00272     // Delegate the JSON export to the dedicated service
00273     return lSTDAIR_Service.jsonExport (iAirlineCode, iFlightNumber,
00274         iDepartureDate);
00275 }
00276
00277 // //////////////////////////////////////
00278 std::string AIRSCHED_Service::csvDisplay() const {
00279
00280     // Retrieve the AirSched service context
00281     if (_airschedServiceContext == NULL) {
00282         throw stdair::NonInitialisedServiceException ("The AirSched service has "
00283             "not been initialised");
00284     }
00285     assert (_airschedServiceContext != NULL);
00286
00287     // Retrieve the STDAIR service object from the (AirSched) service context
00288     AIRSCHED_ServiceContext& lAIRSCHED_ServiceContext =
00289         *_airschedServiceContext;
00290     stdair::STDAIR_Service& lSTDAIR_Service =
00291         lAIRSCHED_ServiceContext.getSTDAIR_Service();
00292
00293     // Delegate the BOM building to the dedicated service
00294     return lSTDAIR_Service.csvDisplay();
00295 }
00296
00297 // //////////////////////////////////////
00298 std::string AIRSCHED_Service::
00299 csvDisplay (const stdair::AirlineCode_T& iAirlineCode,
00300             const stdair::FlightNumber_T& iFlightNumber,
00301             const stdair::Date_T& iDepartureDate) const {
00302
00303     // Retrieve the AirSched service context
00304     if (_airschedServiceContext == NULL) {
00305         throw stdair::NonInitialisedServiceException ("The AirSched service has "
00306             "not been initialised");
00307     }
00308     assert (_airschedServiceContext != NULL);
00309
00310     // Retrieve the STDAIR service object from the (AirSched) service context
00311     AIRSCHED_ServiceContext& lAIRSCHED_ServiceContext =
00312         *_airschedServiceContext;
00313     stdair::STDAIR_Service& lSTDAIR_Service =
00314         lAIRSCHED_ServiceContext.getSTDAIR_Service();
00315
00316     // Delegate the BOM display to the dedicated service
00317     return lSTDAIR_Service.csvDisplay (iAirlineCode, iFlightNumber,

```

```

00337                                     iDepartureDate);
00338     }
00339
00340     // //////////////////////////////////////
00341     void AIRSCHEd_Service::simulate() {
00342
00343         // Retrieve the AirSched service context
00344         if (_airschedServiceContext == NULL) {
00345             throw stdair::NonInitialisedServiceException ("The AirSched service has "
00346                                                         "not been initialised");
00347         }
00348         assert (_airschedServiceContext != NULL);
00349
00350         // Retrieve the BOM tree root
00351         AIRSCHEd_ServiceContext& lAIRSCHEd_ServiceContext =
00352             *_airschedServiceContext;
00353         stdair::STDAIR_Service& lSTDAIR_Service =
00354             lAIRSCHEd_ServiceContext.getSTDAIR_Service();
00355         stdair::BomRoot& lBomRoot = lSTDAIR_Service.getBomRoot();
00356
00357         // Call the underlying Use Case (command)
00358         stdair::BasChronometer lSimulateChronometer; lSimulateChronometer.start();
00359         Simulator::simulate (lBomRoot);
00360         const double lSimulateMeasure = lSimulateChronometer.elapsed();
00361
00362         // DEBUG
00363         STDAIR_LOG_DEBUG ("Simulation: " << lSimulateMeasure << " - "
00364                         << lAIRSCHEd_ServiceContext.display());
00365     }
00366
00367     // //////////////////////////////////////
00368     void AIRSCHEd_Service::
00369     buildSegmentPathList (stdair::TravelSolutionList_T& ioTravelSolutionList,
00370                          const stdair::BookingRequestStruct& iBookingRequest) {
00371
00372         if (_airschedServiceContext == NULL) {
00373             throw stdair::NonInitialisedServiceException ("The AirSched service has "
00374                                                         "not been initialised");
00375         }
00376         assert (_airschedServiceContext != NULL);
00377
00378         // Retrieve the BOM tree root
00379         AIRSCHEd_ServiceContext& lAIRSCHEd_ServiceContext =
00380             *_airschedServiceContext;
00381         stdair::STDAIR_Service& lSTDAIR_Service =
00382             lAIRSCHEd_ServiceContext.getSTDAIR_Service();
00383         stdair::BomRoot& lBomRoot = lSTDAIR_Service.getBomRoot();
00384
00385         // Delegate the call to the dedicated command
00386         stdair::BasChronometer lBuildChronometer; lBuildChronometer.start();
00387         SegmentPathProvider::buildSegmentPathList (ioTravelSolutionList,
00388                                                    lBomRoot, iBookingRequest);
00389         const double lBuildMeasure = lBuildChronometer.elapsed();
00390
00391         // DEBUG
00392         STDAIR_LOG_DEBUG ("Segment-path build: " << lBuildMeasure << " - "
00393                         << lAIRSCHEd_ServiceContext.display());
00394     }
00395
00396 }

```

## 26.140 airsched/service/AIRSCHEd\_ServiceContext.cpp File Reference

```

#include <cassert>
#include <sstream>
#include <stdair/STDAIR_Service.hpp>
#include <airsched/basic/BasConst_AIRSCHEd_Service.hpp>
#include <airsched/service/AIRSCHEd_ServiceContext.hpp>

```

### Namespaces

- namespace [AIRSCHEd](#)

## 26.141 AIRSCHED\_ServiceContext.cpp

```

00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // STL
00005 #include <cassert>
00006 #include <sstream>
00007 // StdAir
00008 #include <stdair/STDAIR_Service.hpp>
00009 // AirSched
00010 #include <airsched/basic/BasConst_AIRSCHED_Service.hpp>
00011 #include <airsched/service/AIRSCHED_ServiceContext.hpp>
00012
00013 namespace AIRSCHED {
00014
00015 // //////////////////////////////////////
00016 AIRSCHED_ServiceContext::AIRSCHED_ServiceContext()
00017     : _ownStdairService (false) {
00018 }
00019
00020 // //////////////////////////////////////
00021 AIRSCHED_ServiceContext::
00022 AIRSCHED_ServiceContext (const AIRSCHED_ServiceContext&) {
00023     assert (false);
00024 }
00025
00026 // //////////////////////////////////////
00027 AIRSCHED_ServiceContext::~AIRSCHED_ServiceContext() {
00028 }
00029
00030 // //////////////////////////////////////
00031 stdair::STDAIR_Service& AIRSCHED_ServiceContext::getSTDAIR_Service() const {
00032     assert (_stdairService != NULL);
00033     return *_stdairService;
00034 }
00035
00036 // //////////////////////////////////////
00037 const std::string AIRSCHED_ServiceContext::shortDisplay() const {
00038     std::ostringstream ostr;
00039     ostr << "AIRSCHED_ServiceContext -- Owns StdAir service: "
00040         << _ownStdairService;
00041     return ostr.str();
00042 }
00043
00044 // //////////////////////////////////////
00045 const std::string AIRSCHED_ServiceContext::display() const {
00046     std::ostringstream ostr;
00047     ostr << shortDisplay();
00048     return ostr.str();
00049 }
00050
00051 // //////////////////////////////////////
00052 const std::string AIRSCHED_ServiceContext::describe() const {
00053     return shortDisplay();
00054 }
00055
00056 // //////////////////////////////////////
00057 void AIRSCHED_ServiceContext::reset() {
00058     if (_ownStdairService == true) {
00059         _stdairService.reset();
00060     }
00061 }
00062
00063 }

```

## 26.142 airsched/service/AIRSCHED\_ServiceContext.hpp File Reference

```

#include <string>
#include <boost/shared_ptr.hpp>
#include <stdair/stdair_service_types.hpp>
#include <stdair/service/ServiceAbstract.hpp>
#include <airsched/AIRSCHED_Types.hpp>

```

## Classes

- class [AIRSCHED::AIRSCHED\\_ServiceContext](#)

*Class holding the context of the AirSched services.*

## Namespaces

- namespace [AIRSCHED](#)

## 26.143 AIRSCHED\_ServiceContext.hpp

```

00001 #ifndef __AIRSCHED_SVC_AIRSCHED_SERVICE_CONTEXT_HPP
00002 #define __AIRSCHED_SVC_AIRSCHED_SERVICE_CONTEXT_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <string>
00009 // Boost
00010 #include <boost/shared_ptr.hpp>
00011 // StdAir
00012 #include <stdair/stdair_service_types.hpp>
00013 #include <stdair/service/ServiceAbstract.hpp>
00014 // AirSched
00015 #include <airsched/AIRSCHED_Types.hpp>
00016
00017 namespace AIRSCHED {
00018
00019     class AIRSCHED_ServiceContext : public stdair::ServiceAbstract {
00020     friend class AIRSCHED_Service;
00021     friend class FacAIRSCHEDServiceContext;
00022
00023     private:
00024         // ////////////////////////////////// Getters //////////////////////////////////
00025         stdair::STDAIR_ServicePtr_T getSTDAIR_ServicePtr() const {
00026             return _stdairService;
00027         }
00028
00029         stdair::STDAIR_Service& getSTDAIR_Service() const;
00030
00031         const bool getOwnStdairServiceFlag() const {
00032             return _ownStdairService;
00033         }
00034
00035     private:
00036         // ////////////////////////////////// Setters //////////////////////////////////
00037         void setSTDAIR_Service (stdair::STDAIR_ServicePtr_T ioSTDAIR_ServicePtr,
00038                                 const bool iOwnStdairService) {
00039             _stdairService = ioSTDAIR_ServicePtr;
00040             _ownStdairService = iOwnStdairService;
00041         }
00042
00043     private:
00044         // ////////////////////////////////// Display Methods //////////////////////////////////
00045         const std::string shortDisplay() const;
00046
00047         const std::string display() const;
00048
00049         const std::string describe() const;
00050
00051     private:
00052         AIRSCHED_ServiceContext();
00053
00054         AIRSCHED_ServiceContext (const AIRSCHED_ServiceContext&);
00055
00056         void init();
00057
00058         ~AIRSCHED_ServiceContext();
00059
00060         void reset();
00061
00062     private:
00063         // ////////////////////////////////// Children //////////////////////////////////
00064         stdair::STDAIR_ServicePtr_T _stdairService;
00065
00066         bool _ownStdairService;
00067     };
00068
00069
00070

```

```
00124 }
00125 #endif // __AIRSCHED_SVC_AIRSCHED_SERVICE_CONTEXT_HPP
```

## 26.144 airsched/service/ServiceAbstract.cpp File Reference

```
#include <airsched/service/ServiceAbstract.hpp>
```

### Namespaces

- namespace [AIRSCHED](#)

## 26.145 ServiceAbstract.cpp

```
00001 // //////////////////////////////////////
00002 // Import section
00003 // //////////////////////////////////////
00004 // AIRSCHED
00005 #include <airsched/service/ServiceAbstract.hpp>
00006
00007 namespace AIRSCHED {
00008
00009 }
```

## 26.146 airsched/service/ServiceAbstract.hpp File Reference

```
#include <iostream>
#include <sstream>
```

### Classes

- class [AIRSCHED::ServiceAbstract](#)

### Namespaces

- namespace [AIRSCHED](#)

### Functions

- template<class charT , class traits >  
std::basic\_ostream< charT,  
traits > & [operator<<](#) (std::basic\_ostream< charT, traits > &ioOut, const [AIRSCHED::ServiceAbstract](#) &i-  
Service)
- template<class charT , class traits >  
std::basic\_istream< charT,  
traits > & [operator>>](#) (std::basic\_istream< charT, traits > &ioIn, [AIRSCHED::ServiceAbstract](#) &ioService)

### 26.146.1 Function Documentation

**26.146.1.1** template<class charT , class traits > std::basic\_ostream<charT, traits>& operator<< ( std::basic\_ostream< charT, traits > &ioOut, const [AIRSCHED::ServiceAbstract](#) &iService ) [inline]

Piece of code given by Nicolai M. Josuttis, Section 13.12.1 "Implementing Output Operators" (p653) of his book "The C++ Standard Library: A Tutorial and Reference", published by Addison-Wesley.

Definition at line 42 of file [ServiceAbstract.hpp](#).

26.146.1.2 `template<class charT , class traits > std::basic_istream<charT, traits>& operator>> ( std::basic_istream<charT, traits > & ioin, AIRSCHED::ServiceAbstract & ioService ) [inline]`

Piece of code given by Nicolai M. Josuttis, Section 13.12.1 "Implementing Output Operators" (pp655-657) of his book "The C++ Standard Library: A Tutorial and Reference", published by Addison-Wesley.

Definition at line 70 of file [ServiceAbstract.hpp](#).

References [AIRSCHED::ServiceAbstract::fromStream\(\)](#).

## 26.147 ServiceAbstract.hpp

```
00001 #ifndef __AIRSCHED_SERVICEABSTRACT_HPP
00002 #define __AIRSCHED_SERVICEABSTRACT_HPP
00003
00004 // //////////////////////////////////////
00005 // Import section
00006 // //////////////////////////////////////
00007 // STL
00008 #include <iostream>
00009 #include <sstream>
00010
00011 namespace AIRSCHED {
00012
00013     class ServiceAbstract {
00014     public:
00015
00016         virtual ~ServiceAbstract() {}
00017
00018         virtual void toStream (std::ostream& ioOut) const {}
00019
00020         virtual void fromStream (std::istream& ioIn) {}
00021
00022     protected:
00023         ServiceAbstract() {}
00024     };
00025 }
00026
00027 template <class charT, class traits>
00028 inline
00029 std::basic_ostream<charT, traits>&
00030 operator<< (std::basic_ostream<charT, traits>& ioOut,
00031           const AIRSCHED::ServiceAbstract& iService) {
00032     std::basic_ostringstream<charT,traits> ostr;
00033     ostr.copyfmt (ioOut);
00034     ostr.width (0);
00035
00036     // Fill string stream
00037     iService.toStream (ostr);
00038
00039     // Print string stream
00040     ioOut << ostr.str();
00041
00042     return ioOut;
00043 }
00044
00045 template <class charT, class traits>
00046 inline
00047 std::basic_istream<charT, traits>&
00048 operator>> (std::basic_istream<charT, traits>& ioIn,
00049           AIRSCHED::ServiceAbstract& ioService) {
00050     // Fill Service object with input stream
00051     ioService.fromStream (ioIn);
00052     return ioIn;
00053 }
00054
00055 #endif // __AIRSCHED_SERVICEABSTRACT_HPP
```

26.148 [doc/local/authors.doc](#) File Reference

26.149 [doc/local/codingrules.doc](#) File Reference

26.150 [doc/local/copyright.doc](#) File Reference

26.151 [doc/local/documentation.doc](#) File Reference

26.152 doc/local/features.doc File Reference

26.153 doc/local/help\_wanted.doc File Reference

26.154 doc/local/howto\_release.doc File Reference

26.155 doc/local/index.doc File Reference

26.156 doc/local/installation.doc File Reference

26.157 doc/local/linking.doc File Reference

26.158 doc/local/test.doc File Reference

26.159 doc/local/users\_guide.doc File Reference

26.160 doc/local/verification.doc File Reference

26.161 doc/tutorial/tutorial.doc File Reference

26.162 test/airsched/AirlineScheduleTestSuite.cpp File Reference

26.163 AirlineScheduleTestSuite.cpp

```

00001
00005 // //////////////////////////////////////
00006 // Import section
00007 // //////////////////////////////////////
00008 // STL
00009 #include <sstream>
00010 #include <fstream>
00011 #include <string>
00012 // Boost Unit Test Framework (UTF)
00013 #define BOOST_TEST_DYN_LINK
00014 #define BOOST_TEST_MAIN
00015 #define BOOST_TEST_MODULE InventoryTestSuite
00016 #include <boost/test/unit_test.hpp>
00017 // StdAir
00018 #include <stdair/basic/BasLogParams.hpp>
00019 #include <stdair/basic/BasDBParams.hpp>
00020 #include <stdair/basic/BasFileMgr.hpp>
00021 #include <stdair/bom/TravelSolutionStruct.hpp>
00022 #include <stdair/bom/BookingRequestStruct.hpp>
00023 #include <stdair/service/Logger.hpp>
00024 // AirSched
00025 #include <airsched/AIRSCHED_Service.hpp>
00026 #include <airsched/config/airsched-paths.hpp>
00027
00028 namespace boost_utf = boost::unit_test;
00029
00030 // (Boost) Unit Test XML Report
00031 std::ofstream utfReportStream ("AirlineScheduleTestSuite_utfresults.xml");
00032
00036 struct UnitTestConfig {
00037     UnitTestConfig() {
00038         boost_utf::unit_test_log.set_stream (utfReportStream);
00039         boost_utf::unit_test_log.set_format (boost_utf::XML);
00040         boost_utf::unit_test_log.set_threshold_level (boost_utf::log_test_units);
00041         //boost_utf::unit_test_log.set_threshold_level
00042         (boost_utf::log_successful_tests);
00043     }
00044
00046     ~UnitTestConfig() {
00047     }
00048 };
00049
00050
00051 // ////////////////////////////////// Main: Unit Test Suite //////////////////////////////////
00052
00053 // Set the UTF configuration (re-direct the output to a specific file)
00054 BOOST_GLOBAL_FIXTURE (UnitTestConfig);
00055

```

```

00056 // Start the test suite
00057 BOOST_AUTO_TEST_SUITE (master_test_suite)
00058
00059
00062 BOOST_AUTO_TEST_CASE (airsched_simple_inventory_sell) {
00063
00064     // Input file name
00065     const stdair::Filename_T lScheduleInputFilename (STDAIR_SAMPLE_DIR
00066                                                         "/schedule03.csv");
00067
00068     // Output log File
00069     const stdair::Filename_T lLogFilename ("AirlineScheduleTestSuite.log");
00070
00071     // Check that the file path given as input corresponds to an actual file
00072     bool doesExistAndIsReadable =
00073         stdair::BasFileMgr::doesExistAndIsReadable (lScheduleInputFilename);
00074     BOOST_CHECK_MESSAGE (doesExistAndIsReadable == true,
00075                         "The '" << lScheduleInputFilename
00076                         << "' input file can not be open and read");
00077
00078     // Set the log parameters
00079     std::ofstream logOutputFile;
00080     // Open and clean the log outputfile
00081     logOutputFile.open (lLogFilename.c_str());
00082     logOutputFile.clear();
00083
00084     // Instantiate the AirSched service
00085     const stdair::BasLogParams lLogParams (stdair::LOG::DEBUG, logOutputFile);
00086     AIRSCHED:~AIRSCHED_Service airschedService (lLogParams);
00087
00088     // Build the BOM tree from parsing input files
00089     airschedService.parseAndLoad (lScheduleInputFilename);
00090
00091     // Create an empty booking request structure
00092     // \todo: fill the booking request structure from the input parameters
00093     const stdair::AirportCode_T lOrigin ("NCE");
00094     const stdair::AirportCode_T lDestination ("BKK");
00095     const stdair::AirportCode_T lPOS ("NCE");
00096     const stdair::Date_T lPreferredDepartureDate(2007, boost::gregorian::Apr, 21)
00097 ;
00098     const stdair::Date_T lRequestDate (2007, boost::gregorian::Mar, 21);
00099     const stdair::Duration_T lRequestTime (boost::posix_time::hours(8));
00100     const stdair::DateTime_T lRequestDateTime (lRequestDate, lRequestTime);
00101     const stdair::CabinCode_T lPreferredCabin ("Bus");
00102     const stdair::PartySize_T lPartySize (3);
00103     const stdair::ChannelLabel_T lChannel ("DF");
00104     const stdair::TripType_T lTripType ("RO");
00105     const stdair::DayDuration_T lStayDuration (5);
00106     const stdair::FrequentFlyer_T lFrequentFlyerType ("NONE");
00107     const stdair::Duration_T lPreferredDepartureTime (boost::posix_time::hours(10)
00108 );
00109     const stdair::WTP_T lWTP (2000.0);
00110     const stdair::PriceValue_T lValueOfTime (20.0);
00111     const stdair::BookingRequestStruct lBookingRequest (lOrigin, lDestination,
00112                                                         lPOS,
00113                                                         lPreferredDepartureDate,
00114                                                         lRequestDateTime,
00115                                                         lPreferredCabin,
00116                                                         lPartySize, lChannel,
00117                                                         lTripType, lStayDuration,
00118                                                         lFrequentFlyerType,
00119                                                         lPreferredDepartureTime,
00120                                                         lWTP, lValueOfTime);
00121
00122     //
00123     stdair::TravelSolutionList_T lTravelSolutionList;
00124     airschedService.buildSegmentPathList (lTravelSolutionList, lBookingRequest);
00125     const unsigned int lNbOfTravelSolutions = lTravelSolutionList.size();
00126
00127     // \todo: change the expected number of travel solutions to the actual number
00128     const unsigned int lExpectedNbOfTravelSolutions = 4;
00129
00130     // DEBUG
00131     STDAIR_LOG_DEBUG ("Number of travel solutions for the booking request '"
00132                     << lBookingRequest.describe() << "': "
00133                     << lNbOfTravelSolutions << ". It is expected to be "
00134                     << lExpectedNbOfTravelSolutions << ".");
00135
00136     BOOST_CHECK_EQUAL (lNbOfTravelSolutions, lExpectedNbOfTravelSolutions);
00137
00138     BOOST_CHECK_MESSAGE (lNbOfTravelSolutions == lExpectedNbOfTravelSolutions,
00139                         "The number of travel solutions for the booking request '"
00140                         << lBookingRequest.describe() << "' is equal to "
00141                         << lNbOfTravelSolutions << ", but it should be equal to "
00142                         << lExpectedNbOfTravelSolutions);
00143
00144

```



```

00142 // Close the Log outputFile
00143 logOutputFile.close();
00144 }
00145
00146 // End the test suite
00147 BOOST_AUTO_TEST_SUITE_END()
00148
00149

```

## 26.164 test/airsched/AirlineScheduleTestSuite.hpp File Reference

```

#include <sstream>
#include <cppunit/extensions/HelperMacros.h>

```

### Classes

- class [AirlineScheduleTestSuite](#)

### Functions

- [CPPUNIT\\_TEST\\_SUITE\\_REGISTRATION](#) ([AirlineScheduleTestSuite](#))

#### 26.164.1 Function Documentation

##### 26.164.1.1 CPPUNIT\_TEST\_SUITE\_REGISTRATION ( AirlineScheduleTestSuite )

## 26.165 AirlineScheduleTestSuite.hpp

```

00001 // STL
00002 #include <sstream>
00003 // CPPUNIT
00004 #include <cppunit/extensions/HelperMacros.h>
00005
00006 class AirlineScheduleTestSuite : public CppUnit::TestFixture {
00007     CPPUNIT_TEST_SUITE (AirlineScheduleTestSuite);
00008     // CPPUNIT_TEST (externalMemoryManagement);
00009     CPPUNIT_TEST (scheduleParsing);
00010     CPPUNIT_TEST_SUITE_END ();
00011 public:
00012
00019     void externalMemoryManagement ();
00020     void scheduleParsing ();
00021
00023     AirlineScheduleTestSuite ();
00024
00025 protected:
00026     std::stringstream _describeKey;
00027 };
00028 CPPUNIT_TEST_SUITE_REGISTRATION (AirlineScheduleTestSuite);

```

## Index

- ~AIRSCHED\_Service
  - AIRSCHED::AIRSCHED\_Service, [118](#)
- ~FacServiceAbstract
  - AIRSCHED::FacServiceAbstract, [138](#)
- ~FlagSaver
  - AIRSCHED::FlagSaver, [140](#)
- ~OriginDestinationSet
  - AIRSCHED::OriginDestinationSet, [162](#)
- ~OriginDestinationSetKey
  - AIRSCHED::OriginDestinationSetKey, [165](#)
- ~ReachableUniverse
  - AIRSCHED::ReachableUniverse, [174](#)
- ~ReachableUniverseKey
  - AIRSCHED::ReachableUniverseKey, [177](#)
- ~SegmentPathPeriod
  - AIRSCHED::SegmentPathPeriod, [187](#)
- ~SegmentPathPeriodKey
  - AIRSCHED::SegmentPathPeriodKey, [192](#)
- ~ServiceAbstract
  - AIRSCHED::ServiceAbstract, [198](#)
- \_airlineCode
  - AIRSCHED::FlightPeriodStruct, [146](#)
  - AIRSCHED::OnDPeriodStruct, [160](#)
- \_airlineCodeList
  - AIRSCHED::OnDPeriodStruct, [160](#)
- \_airlineList
  - airsched::SearchString\_T, [181](#)
- \_airportList
  - AIRSCHED::FlightPeriodStruct, [148](#)
- \_airportOrderedList
  - AIRSCHED::FlightPeriodStruct, [148](#)
- \_areSegmentDefinitionsSpecific
  - AIRSCHED::FlightPeriodStruct, [148](#)
- \_boardingDate
  - AIRSCHED::SegmentStruct, [197](#)
- \_boardingDateOffset
  - AIRSCHED::LegStruct, [152](#)
- \_boardingPoint
  - AIRSCHED::LegStruct, [152](#)
  - AIRSCHED::SegmentStruct, [197](#)
- \_boardingTime
  - AIRSCHED::LegStruct, [152](#)
  - AIRSCHED::SegmentStruct, [197](#)
- \_bomRoot
  - AIRSCHED::OnDParserHelper::doEndOnD, [135](#)
  - AIRSCHED::OnDParserHelper::OnDParser, [155](#)
  - AIRSCHED::ScheduleParserHelper::doEndFlight, [134](#)
  - AIRSCHED::ScheduleParserHelper::FlightPeriod-Parser, [143](#)
- \_cabinCode
  - AIRSCHED::LegCabinStruct, [151](#)
  - AIRSCHED::SegmentCabinStruct, [183](#)
- \_cabinList
  - AIRSCHED::LegStruct, [153](#)
  - AIRSCHED::SegmentStruct, [198](#)
- \_capacity
  - AIRSCHED::LegCabinStruct, [151](#)
- \_classCode
  - AIRSCHED::OnDPeriodStruct, [160](#)
- \_classCodeList
  - AIRSCHED::OnDPeriodStruct, [160](#)
- \_classes
  - AIRSCHED::FareFamilyStruct, [140](#)
  - AIRSCHED::SegmentCabinStruct, [183](#)
- \_code
  - airsched::Airline\_T, [116](#)
  - airsched::Place\_T, [172](#)
- \_date
  - airsched::Date\_T, [124](#)
- \_dateList
  - airsched::SearchString\_T, [181](#)
- \_dateOffset
  - AIRSCHED::FlightPeriodStruct, [147](#)
- \_datePeriod
  - AIRSCHED::OnDPeriodStruct, [159](#)
- \_dateRange
  - AIRSCHED::FlightPeriodStruct, [146](#)
- \_dateRangeEnd
  - AIRSCHED::FlightPeriodStruct, [147](#)
  - AIRSCHED::OnDPeriodStruct, [160](#)
- \_dateRangeStart
  - AIRSCHED::FlightPeriodStruct, [147](#)
  - AIRSCHED::OnDPeriodStruct, [160](#)
- \_day
  - airsched::Date\_T, [124](#)
- \_describeKey
  - AirlineScheduleTestSuite, [117](#)
- \_destination
  - AIRSCHED::OnDPeriodStruct, [159](#)
- \_dow
  - AIRSCHED::FlightPeriodStruct, [146](#)
- \_elapsed
  - AIRSCHED::LegStruct, [153](#)
  - AIRSCHED::SegmentStruct, [197](#)
- \_familyCode
  - AIRSCHED::FareFamilyStruct, [140](#)
- \_fareFamilies
  - AIRSCHED::SegmentCabinStruct, [184](#)
- \_flightNumber
  - AIRSCHED::FlightPeriodStruct, [146](#)
- \_flightPeriod
  - AIRSCHED::ScheduleParserHelper::doEndFlight, [134](#)
  - AIRSCHED::ScheduleParserHelper::FlightPeriod-Parser, [143](#)
  - AIRSCHED::ScheduleParserHelper::Parser-SemanticAction, [169](#)
  - AIRSCHED::ScheduleParserHelper::storeAirline-Code, [208](#)

- AIRSCHEd::ScheduleParserHelper::storeBoarding-  
Time, [211](#)
- AIRSCHEd::ScheduleParserHelper::storeCapacity,  
[212](#)
- AIRSCHEd::ScheduleParserHelper::storeClasses,  
[215](#)
- AIRSCHEd::ScheduleParserHelper::storeDate-  
RangeEnd, [216](#)
- AIRSCHEd::ScheduleParserHelper::storeDate-  
RangeStart, [220](#)
- AIRSCHEd::ScheduleParserHelper::storeDow,  
[222](#)
- AIRSCHEd::ScheduleParserHelper::storeElapsed-  
Time, [224](#)
- AIRSCHEd::ScheduleParserHelper::storeFamily-  
Code, [226](#)
- AIRSCHEd::ScheduleParserHelper::storeF-  
Classes, [227](#)
- AIRSCHEd::ScheduleParserHelper::storeFlight-  
Number, [229](#)
- AIRSCHEd::ScheduleParserHelper::storeLeg-  
BoardingPoint, [230](#)
- AIRSCHEd::ScheduleParserHelper::storeLeg-  
CabinCode, [231](#)
- AIRSCHEd::ScheduleParserHelper::storeLegOff-  
Point, [233](#)
- AIRSCHEd::ScheduleParserHelper::storeOffTime,  
[234](#)
- AIRSCHEd::ScheduleParserHelper::storeSegment-  
BoardingPoint, [237](#)
- AIRSCHEd::ScheduleParserHelper::storeSegment-  
CabinCode, [238](#)
- AIRSCHEd::ScheduleParserHelper::storeSegment-  
OffPoint, [239](#)
- AIRSCHEd::ScheduleParserHelper::storeSegment-  
Specificity, [241](#)
- \_holderMap
  - AIRSCHEd::OriginDestinationSet, [164](#)
  - AIRSCHEd::ReachableUniverse, [176](#)
  - AIRSCHEd::SegmentPathPeriod, [191](#)
- \_isPreferred
  - airsched::Airline\_T, [116](#)
- \_itDay
  - AIRSCHEd::FlightPeriodStruct, [147](#)
  - AIRSCHEd::OnDPeriodStruct, [160](#)
- \_itFamilyCode
  - AIRSCHEd::SegmentCabinStruct, [183](#)
- \_itHours
  - AIRSCHEd::FlightPeriodStruct, [147](#)
  - AIRSCHEd::OnDPeriodStruct, [161](#)
- \_itLeg
  - AIRSCHEd::FlightPeriodStruct, [146](#)
- \_itLegCabin
  - AIRSCHEd::FlightPeriodStruct, [147](#)
- \_itMinutes
  - AIRSCHEd::FlightPeriodStruct, [147](#)
  - AIRSCHEd::OnDPeriodStruct, [161](#)
- \_itMonth
  - AIRSCHEd::FlightPeriodStruct, [147](#)
  - AIRSCHEd::OnDPeriodStruct, [160](#)
- \_itSeconds
  - AIRSCHEd::FlightPeriodStruct, [148](#)
  - AIRSCHEd::OnDPeriodStruct, [161](#)
- \_itSegment
  - AIRSCHEd::FlightPeriodStruct, [148](#)
- \_itSegmentCabin
  - AIRSCHEd::FlightPeriodStruct, [148](#)
- \_itYear
  - AIRSCHEd::FlightPeriodStruct, [147](#)
  - AIRSCHEd::OnDPeriodStruct, [160](#)
- \_key
  - AIRSCHEd::OriginDestinationSet, [164](#)
  - AIRSCHEd::ReachableUniverse, [176](#)
  - AIRSCHEd::SegmentPathPeriod, [190](#)
- \_labels
  - airsched::Passenger\_T, [171](#)
- \_legAlreadyDefined
  - AIRSCHEd::FlightPeriodStruct, [146](#)
- \_legList
  - AIRSCHEd::FlightPeriodStruct, [146](#)
- \_month
  - airsched::Date\_T, [124](#)
- \_name
  - airsched::Airline\_T, [116](#)
  - airsched::Place\_T, [172](#)
- \_nbOfAirlines
  - AIRSCHEd::OnDPeriodStruct, [160](#)
- \_number
  - airsched::Passenger\_T, [171](#)
- \_offDate
  - AIRSCHEd::SegmentStruct, [197](#)
- \_offDateOffset
  - AIRSCHEd::LegStruct, [153](#)
- \_offPoint
  - AIRSCHEd::LegStruct, [152](#)
  - AIRSCHEd::SegmentStruct, [197](#)
- \_offTime
  - AIRSCHEd::LegStruct, [153](#)
  - AIRSCHEd::SegmentStruct, [197](#)
- \_onDPeriod
  - AIRSCHEd::OnDParserHelper::doEndOnD, [135](#)
  - AIRSCHEd::OnDParserHelper::OnDParser, [155](#)
  - AIRSCHEd::OnDParserHelper::ParserSemantic-  
Action, [168](#)
  - AIRSCHEd::OnDParserHelper::storeAirlineCode,  
[210](#)
  - AIRSCHEd::OnDParserHelper::storeClassCode,  
[213](#)
  - AIRSCHEd::OnDParserHelper::storeDateRange-  
End, [217](#)
  - AIRSCHEd::OnDParserHelper::storeDateRange-  
Start, [219](#)
  - AIRSCHEd::OnDParserHelper::storeDestination,  
[221](#)
  - AIRSCHEd::OnDParserHelper::storeEndRange-  
Time, [225](#)

- AIRSCHEd::OnDParserHelper::storeOrigin, 235
- AIRSCHEd::OnDParserHelper::storeStartRangeTime, 242
- \_origin
  - AIRSCHEd::OnDPeriodStruct, 159
- \_parent
  - AIRSCHEd::OriginDestinationSet, 164
  - AIRSCHEd::ReachableUniverse, 176
  - AIRSCHEd::SegmentPathPeriod, 190
- \_passengerList
  - airsched::SearchString\_T, 181
- \_placeList
  - airsched::SearchString\_T, 181
- \_pool
  - AIRSCHEd::FacServiceAbstract, 138
- \_reldays
  - airsched::Date\_T, 124
- \_searchString
  - airsched::SearchStringParser, 182
  - airsched::store\_adult\_passenger\_type, 201
  - airsched::store\_airline\_code, 201
  - airsched::store\_airline\_name, 202
  - airsched::store\_airline\_sign, 203
  - airsched::store\_child\_passenger\_type, 204
  - airsched::store\_date, 205
  - airsched::store\_passenger\_number, 206
  - airsched::store\_pet\_passenger\_type, 206
  - airsched::store\_place\_element, 207
- \_segmentList
  - AIRSCHEd::FlightPeriodStruct, 146
- \_segmentPathPeriodListList
  - AIRSCHEd::ReachableUniverse, 176
- \_timeRangeEnd
  - AIRSCHEd::OnDPeriodStruct, 159
- \_timeRangeStart
  - AIRSCHEd::OnDPeriodStruct, 159
- \_tmpAirline
  - airsched::SearchString\_T, 181
- \_tmpDate
  - airsched::SearchString\_T, 181
- \_tmpPassenger
  - airsched::SearchString\_T, 181
- \_tmpPlace
  - airsched::SearchString\_T, 181
- \_type
  - airsched::Passenger\_T, 171
- \_year
  - airsched::Date\_T, 124
- ADULT
  - airsched::Passenger\_T, 171
- AIRSCHEd, 104
  - AIRSCHEd\_ServicePtr\_T, 107
  - AirportList\_T, 108
  - AirportOrderedList\_T, 108
  - bounded1\_4\_p\_t, 108
  - bounded2\_p\_t, 108
  - bounded4\_p\_t, 108
  - char\_t, 107
  - chset\_t, 107
  - DateOffsetList\_T, 109
  - FareFamilyStructList\_T, 108
  - int1\_p\_t, 107
  - iterator\_t, 107
  - LegCabinStructList\_T, 108
  - LegStructList\_T, 108
  - OriginDestinationSet::serialize< ba::text\_iarchive >, 109
  - OriginDestinationSet::serialize< ba::text\_oarchive >, 109
  - OriginDestinationSetKey::serialize< ba::text\_iarchive >, 109
  - OriginDestinationSetKey::serialize< ba::text\_oarchive >, 109
  - OriginDestinationSetList\_T, 108
  - OriginDestinationSetMap\_T, 108
  - ReachableUniverse::serialize< ba::text\_iarchive >, 110
  - ReachableUniverse::serialize< ba::text\_oarchive >, 110
  - ReachableUniverseKey::serialize< ba::text\_iarchive >, 110
  - ReachableUniverseKey::serialize< ba::text\_oarchive >, 110
  - ReachableUniverseList\_T, 108
  - ReachableUniverseMap\_T, 109
  - repeat\_p\_t, 108
  - rule\_t, 107
  - scanner\_t, 107
  - SegmentCabinStructList\_T, 109
  - SegmentPathPeriod::serialize< ba::text\_iarchive >, 110
  - SegmentPathPeriod::serialize< ba::text\_oarchive >, 110
  - SegmentPathPeriodKey::serialize< ba::text\_iarchive >, 110
  - SegmentPathPeriodKey::serialize< ba::text\_oarchive >, 110
  - SegmentPathPeriodLightList\_T, 109
  - SegmentPathPeriodList\_T, 109
  - SegmentPathPeriodListList\_T, 109
  - SegmentPathPeriodMultimap\_T, 109
  - SegmentStructList\_T, 109
  - uint1\_4\_p\_t, 107
  - uint2\_p\_t, 107
  - uint4\_p\_t, 107
- AIRSCHEd::AIRSCHEd\_Service, 117
  - buildSampleBom, 119
  - csvDisplay, 120
  - jsonExport, 120
  - parseAndLoad, 119
  - simulate, 119
- AIRSCHEd::AIRSCHEd\_ServiceContext, 120
- AIRSCHEd::BomDisplay, 121
  - csvDisplay, 122
- AIRSCHEd::FacAIRSCHEdServiceContext, 135
  - create, 137

- instance, 136
- AIRSCHEd::FacServiceAbstract, 137
  - ~FacServiceAbstract, 138
  - \_pool, 138
  - clean, 138
  - FacServiceAbstract, 138
  - ServicePool\_T, 138
- AIRSCHEd::FareFamilyStruct, 139
  - \_classes, 140
  - \_familyCode, 140
  - describe, 139
  - FareFamilyStruct, 139
- AIRSCHEd::FlagSaver, 140
  - ~FlagSaver, 140
  - FlagSaver, 140
- AIRSCHEd::FlightPeriodFileParser, 141
  - FlightPeriodFileParser, 141
  - generateInventories, 141
- AIRSCHEd::FlightPeriodStruct, 143
  - \_airlineCode, 146
  - \_airportList, 148
  - \_airportOrderedList, 148
  - \_areSegmentDefinitionsSpecific, 148
  - \_dateOffset, 147
  - \_dateRange, 146
  - \_dateRangeEnd, 147
  - \_dateRangeStart, 147
  - \_dow, 146
  - \_flightNumber, 146
  - \_itDay, 147
  - \_itHours, 147
  - \_itLeg, 146
  - \_itLegCabin, 147
  - \_itMinutes, 147
  - \_itMonth, 147
  - \_itSeconds, 148
  - \_itSegment, 148
  - \_itSegmentCabin, 148
  - \_itYear, 147
  - \_legAlreadyDefined, 146
  - \_legList, 146
  - \_segmentList, 146
  - addAirport, 145
  - addFareFamily, 145, 146
  - addSegmentCabin, 145
  - buildSegments, 145
  - describe, 144
  - FlightPeriodStruct, 144
  - getDate, 144
  - getTime, 144
- AIRSCHEd::InventoryGenerator, 149
  - FFFlightPeriodFileParser, 149
  - FlightPeriodFileParser, 149
  - ScheduleParser, 149
  - ScheduleParserHelper::doEndFlight, 149
- AIRSCHEd::LegCabinStruct, 150
  - \_cabinCode, 151
  - \_capacity, 151
  - describe, 150
  - fill, 150
- AIRSCHEd::LegStruct, 151
  - \_boardingDateOffset, 152
  - \_boardingPoint, 152
  - \_boardingTime, 152
  - \_cabinList, 153
  - \_elapsed, 153
  - \_offDateOffset, 153
  - \_offPoint, 152
  - \_offTime, 153
  - describe, 152
  - fill, 152
  - LegStruct, 152
- AIRSCHEd::OnDInputFileNotFoundException, 153
- AIRSCHEd::OnDParser, 154
  - generateOnDPeriods, 154
- AIRSCHEd::OnDParserHelper, 110
  - airline\_code\_p, 111
  - airport\_p, 111
  - alpha\_cap\_set\_p, 111
  - class\_code\_p, 112
  - day\_p, 111
  - hours\_p, 111
  - minutes\_p, 111
  - month\_p, 111
  - seconds\_p, 111
  - uint1\_4\_p, 112
  - uint2\_p, 112
  - uint4\_p, 112
  - year\_p, 111
- AIRSCHEd::OnDParserHelper::OnDParser, 155
  - \_bomRoot, 155
  - \_onDPeriod, 155
  - OnDParser, 155
- AIRSCHEd::OnDParserHelper::OnDParser::definition
  - date, 126
  - definition, 125
  - ond, 126
  - ond\_end, 126
  - ond\_key, 126
  - ond\_list, 126
  - segment, 126
  - start, 125
  - time, 126
- AIRSCHEd::OnDParserHelper::OnDParser::definition<ScannerT >, 125
- AIRSCHEd::OnDParserHelper::ParserSemanticAction, 167
  - \_onDPeriod, 168
  - ParserSemanticAction, 168
- AIRSCHEd::OnDParserHelper::doEndOnD, 134
  - \_bomRoot, 135
  - \_onDPeriod, 135
  - doEndOnD, 135
  - operator(), 135
- AIRSCHEd::OnDParserHelper::storeAirlineCode, 209
  - \_onDPeriod, 210

- operator(), 209
- storeAirlineCode, 209
- AIRSCHEd::OnDParserHelper::storeClassCode, 213
  - \_onDPeriod, 213
  - operator(), 213
  - storeClassCode, 213
- AIRSCHEd::OnDParserHelper::storeDateRangeEnd, 216
  - \_onDPeriod, 217
  - operator(), 217
  - storeDateRangeEnd, 217
- AIRSCHEd::OnDParserHelper::storeDateRangeStart, 218
  - \_onDPeriod, 219
  - operator(), 218
  - storeDateRangeStart, 218
- AIRSCHEd::OnDParserHelper::storeDestination, 220
  - \_onDPeriod, 221
  - operator(), 221
  - storeDestination, 221
- AIRSCHEd::OnDParserHelper::storeEndRangeTime, 224
  - \_onDPeriod, 225
  - operator(), 225
  - storeEndRangeTime, 225
- AIRSCHEd::OnDParserHelper::storeOrigin, 235
  - \_onDPeriod, 235
  - operator(), 235
  - storeOrigin, 235
- AIRSCHEd::OnDParserHelper::storeStartRangeTime, 241
  - \_onDPeriod, 242
  - operator(), 242
  - storeStartRangeTime, 242
- AIRSCHEd::OnDPeriodFileParser, 156
  - generateOnDPeriods, 156
  - OnDPeriodFileParser, 156
- AIRSCHEd::OnDPeriodGenerator, 156
  - OnDParser, 157
  - OnDParserHelper::doEndOnD, 157
  - OnDPeriodFileParser, 157
- AIRSCHEd::OnDPeriodStruct, 157
  - \_airlineCode, 160
  - \_airlineCodeList, 160
  - \_classCode, 160
  - \_classCodeList, 160
  - \_datePeriod, 159
  - \_dateRangeEnd, 160
  - \_dateRangeStart, 160
  - \_destination, 159
  - \_itDay, 160
  - \_itHours, 161
  - \_itMinutes, 161
  - \_itMonth, 160
  - \_itSeconds, 161
  - \_itYear, 160
  - \_nbOfAirlines, 160
  - \_origin, 159
  - \_timeRangeEnd, 159
  - \_timeRangeStart, 159
  - describe, 159
  - describeTSKey, 159
  - getDate, 158
  - getFirstAirlineCode, 158
  - getTime, 159
  - OnDPeriodStruct, 158
- AIRSCHEd::OriginDestinationSet, 161
  - ~OriginDestinationSet, 162
  - \_holderMap, 164
  - \_key, 164
  - \_parent, 164
  - boost::serialization::access, 164
  - describeKey, 163
  - fromStream, 163
  - getDestination, 163
  - getHolderMap, 163
  - getKey, 163
  - getParent, 163
  - Key\_T, 162
  - OriginDestinationSet, 162
  - serialize, 164
  - stdair::FacBom, 164
  - stdair::FacBomManager, 164
  - toStream, 163
  - toString, 163
- AIRSCHEd::OriginDestinationSetKey, 165
  - ~OriginDestinationSetKey, 165
  - boost::serialization::access, 166
  - fromStream, 166
  - getOffPoint, 166
  - OriginDestinationSetKey, 165
  - serialize, 166
  - toStream, 166
  - toString, 166
- AIRSCHEd::ReachableUniverse, 173
  - ~ReachableUniverse, 174
  - \_holderMap, 176
  - \_key, 176
  - \_parent, 176
  - \_segmentPathPeriodListList, 176
  - boost::serialization::access, 176
  - describeKey, 175
  - fromStream, 175
  - getHolderMap, 174
  - getKey, 174
  - getOrigin, 174
  - getParent, 174
  - getSegmentPathPeriodListList, 175
  - Key\_T, 174
  - ReachableUniverse, 174
  - SegmentPathGenerator, 176
  - serialize, 175
  - stdair::FacBom, 175
  - stdair::FacBomManager, 176
  - toStream, 175
  - toString, 175

- AIRSCHEd::ReachableUniverseKey, 176
  - ~ReachableUniverseKey, 177
  - boost::serialization::access, 178
  - fromStream, 178
  - getBoardingPoint, 177
  - ReachableUniverseKey, 177
  - serialize, 178
  - toStream, 178
  - toString, 178
- AIRSCHEd::ScheduleInputFileNotFoundException, 178
  - ScheduleInputFileNotFoundException, 179
- AIRSCHEd::ScheduleParser, 179
  - generateInventories, 180
- AIRSCHEd::ScheduleParserHelper, 112
  - airline\_code\_p, 113
  - airport\_p, 113
  - cabin\_code\_p, 114
  - class\_code\_list\_p, 114
  - day\_p, 113
  - dow\_p, 113
  - family\_code\_p, 114
  - flight\_number\_p, 113
  - hours\_p, 114
  - int1\_p, 114
  - minutes\_p, 114
  - month\_p, 113
  - seconds\_p, 114
  - uint1\_4\_p, 114
  - uint2\_p, 114
  - uint4\_p, 114
  - year\_p, 113
- AIRSCHEd::ScheduleParserHelper::FlightPeriod-  
Parser, 142
  - \_bomRoot, 143
  - \_flightPeriod, 143
  - FlightPeriodParser, 142
- AIRSCHEd::ScheduleParserHelper::FlightPeriod-  
Parser::definition
  - airline\_code, 128
  - date, 128
  - date\_offset, 129
  - definition, 127
  - dow, 129
  - flight\_key, 128
  - flight\_number, 128
  - flight\_period, 128
  - generic\_segment, 130
  - leg, 129
  - leg\_details, 129
  - leg\_key, 129
  - segment\_key, 129
  - segment\_section, 129
  - start, 128
  - time, 129
- AIRSCHEd::ScheduleParserHelper::FlightPeriod-  
Parser::definition< ScannerT >, 126
- AIRSCHEd::ScheduleParserHelper::ParserSemantic-  
Action, 168
  - \_flightPeriod, 169
  - ParserSemanticAction, 169
- AIRSCHEd::ScheduleParserHelper::doEndFlight, 133
  - \_bomRoot, 134
  - \_flightPeriod, 134
  - doEndFlight, 133
  - operator(), 133
- AIRSCHEd::ScheduleParserHelper::storeAirlineCode, 207
  - \_flightPeriod, 208
  - operator(), 208
  - storeAirlineCode, 208
- AIRSCHEd::ScheduleParserHelper::storeBoarding-  
Time, 210
  - \_flightPeriod, 211
  - operator(), 211
  - storeBoardingTime, 210
- AIRSCHEd::ScheduleParserHelper::storeCapacity, 211
  - \_flightPeriod, 212
  - operator(), 212
  - storeCapacity, 212
- AIRSCHEd::ScheduleParserHelper::storeClasses, 214
  - \_flightPeriod, 215
  - operator(), 214
  - storeClasses, 214
- AIRSCHEd::ScheduleParserHelper::storeDateRange-  
End, 215
  - \_flightPeriod, 216
  - operator(), 216
  - storeDateRangeEnd, 216
- AIRSCHEd::ScheduleParserHelper::storeDateRange-  
Start, 219
  - \_flightPeriod, 220
  - operator(), 220
  - storeDateRangeStart, 219
- AIRSCHEd::ScheduleParserHelper::storeDow, 221
  - \_flightPeriod, 222
  - operator(), 222
  - storeDow, 222
- AIRSCHEd::ScheduleParserHelper::storeElapsedTime, 223
  - \_flightPeriod, 224
  - operator(), 223
  - storeElapsedTime, 223
- AIRSCHEd::ScheduleParserHelper::storeFCClasses, 227
  - \_flightPeriod, 227
  - operator(), 227
  - storeFCClasses, 227
- AIRSCHEd::ScheduleParserHelper::storeFamilyCode, 225
  - \_flightPeriod, 226
  - operator(), 226
  - storeFamilyCode, 226
- AIRSCHEd::ScheduleParserHelper::storeFlightNumber, 228
  - \_flightPeriod, 229
  - operator(), 229



- storeFlightNumber, 228
- AIRSCHEd::ScheduleParserHelper::storeLegBoarding-  
Point, 229
  - \_flightPeriod, 230
  - operator(), 230
  - storeLegBoardingPoint, 230
- AIRSCHEd::ScheduleParserHelper::storeLegCabin-  
Code, 231
  - \_flightPeriod, 231
  - operator(), 231
  - storeLegCabinCode, 231
- AIRSCHEd::ScheduleParserHelper::storeLegOffPoint,  
232
  - \_flightPeriod, 233
  - operator(), 233
  - storeLegOffPoint, 232
- AIRSCHEd::ScheduleParserHelper::storeOffTime, 233
  - \_flightPeriod, 234
  - operator(), 234
  - storeOffTime, 234
- AIRSCHEd::ScheduleParserHelper::storeSegment-  
BoardingPoint, 236
  - \_flightPeriod, 237
  - operator(), 236
  - storeSegmentBoardingPoint, 236
- AIRSCHEd::ScheduleParserHelper::storeSegment-  
CabinCode, 237
  - \_flightPeriod, 238
  - operator(), 238
  - storeSegmentCabinCode, 238
- AIRSCHEd::ScheduleParserHelper::storeSegmentOff-  
Point, 238
  - \_flightPeriod, 239
  - operator(), 239
  - storeSegmentOffPoint, 239
- AIRSCHEd::ScheduleParserHelper::storeSegment-  
Specificity, 240
  - \_flightPeriod, 241
  - operator(), 240
  - storeSegmentSpecificity, 240
- AIRSCHEd::SegmentCabinStruct, 182
  - \_cabinCode, 183
  - \_classes, 183
  - \_fareFamilies, 184
  - \_itFamilyCode, 183
  - describe, 183
  - fill, 183
- AIRSCHEd::SegmentDateNotFoundExcepTion, 184
  - SegmentDateNotFoundExcepTion, 184
- AIRSCHEd::SegmentPathGenerator, 184
  - createSegmentPathNetwork, 185
- AIRSCHEd::SegmentPathPeriod, 185
  - ~SegmentPathPeriod, 187
  - \_holderMap, 191
  - \_key, 190
  - \_parent, 190
  - boost::serialization::access, 190
  - checkCircle, 189
  - connectWithAnotherSegment, 189
  - describeKey, 190
  - fromStream, 189
  - getBoardingDateOffsetList, 187
  - getBoardingTime, 188
  - getDeparturePeriod, 187
  - getDestination, 188
  - getElapsedTime, 188
  - getFirstSegmentPeriod, 188
  - getHolderMap, 188
  - getKey, 187
  - getLastSegmentPeriod, 188
  - getNbOfAirlines, 188
  - getNbOfSegments, 187
  - getParent, 187
  - isAirlineFlown, 189
  - isDepartureDateValid, 189
  - Key\_T, 187
  - SegmentPathPeriod, 187
  - serialize, 190
  - stdair::FacBom, 190
  - stdair::FacBomManager, 190
  - toStream, 189
  - toString, 190
- AIRSCHEd::SegmentPathPeriodKey, 191
  - ~SegmentPathPeriodKey, 192
  - boost::serialization::access, 194
  - fromStream, 194
  - getBoardingDateOffsetList, 192
  - getBoardingTime, 193
  - getElapsedTime, 193
  - getNbOfAirlines, 193
  - getNbOfSegments, 192
  - getPeriod, 192
  - isValid, 194
  - SegmentPathPeriodKey, 192
  - serialize, 194
  - setBoardingDateOffsetList, 193
  - setBoardingTime, 193
  - setElapsedTime, 193
  - setNbOfAirlines, 193
  - setPeriod, 193
  - toStream, 194
  - toString, 194
- AIRSCHEd::SegmentPathProvider, 195
- AIRSCHEd::SegmentPeriodHelper, 195
  - fill, 196
- AIRSCHEd::SegmentStruct, 196
  - \_boardingDate, 197
  - \_boardingPoint, 197
  - \_boardingTime, 197
  - \_cabinList, 198
  - \_elapsed, 197
  - \_offDate, 197
  - \_offPoint, 197
  - \_offTime, 197
  - describe, 197
  - fill, 197



- AIRSCHEd::ServiceAbstract, 198
  - ~ServiceAbstract, 198
  - fromStream, 199
  - ServiceAbstract, 198
  - toStream, 198
- AIRSCHEd::Simulator, 199
  - simulate, 200
- AIRSCHEd::TravelSolutionParser, 243
  - parseInputFileAndBuildBom, 243
- AIRSCHEd\_Service
  - AIRSCHEd::AIRSCHEd\_Service, 118
  - AIRSCHEd::AIRSCHEd\_ServiceContext, 121
  - AIRSCHEd::SegmentPathProvider, 195
- AIRSCHEd\_ServicePtr\_T
  - AIRSCHEd, 107
- addAirport
  - AIRSCHEd::FlightPeriodStruct, 145
- addFareFamily
  - AIRSCHEd::FlightPeriodStruct, 145, 146
- addSegmentCabin
  - AIRSCHEd::FlightPeriodStruct, 145
- Airline\_T
  - airsched::Airline\_T, 116
- airline\_code
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-Parser::definition, 128
  - airsched::SearchStringParser::definition, 132
- airline\_code\_p
  - AIRSCHEd::OnDParserHelper, 111
  - AIRSCHEd::ScheduleParserHelper, 113
- airline\_name
  - airsched::SearchStringParser::definition, 132
- AirlineList\_T
  - airsched, 102
- AirlineScheduleTestSuite, 116
  - \_describeKey, 117
  - AirlineScheduleTestSuite, 117
  - AirlineScheduleTestSuite, 117
  - externalMemoryManagement, 117
  - scheduleParsing, 117
- airport\_p
  - AIRSCHEd::OnDParserHelper, 111
  - AIRSCHEd::ScheduleParserHelper, 113
- AirportList\_T
  - AIRSCHEd, 108
- AirportOrderedList\_T
  - AIRSCHEd, 108
- airsched, 101
  - AirlineList\_T, 102
  - DateList\_T, 102
  - int1\_p, 103
  - parseBookingRequest, 103
  - PassengerList\_T, 103
  - PlaceList\_T, 102
  - uint1\_2\_p, 103
  - uint1\_4\_p, 104
  - uint1\_p, 103
  - uint2\_4\_p, 103
  - uint2\_p, 103
  - uint4\_p, 104
- airsched.cpp
  - createStringFromWordList, 250
  - main, 251
  - operator<<, 250
  - parseBookingRequest, 251
  - readConfiguration, 251
  - WordList\_T, 250
- airsched/ Directory Reference, 99
- airsched/AIRSCHEd\_Service.hpp, 244
- airsched/AIRSCHEd\_Types.hpp, 245, 246
- airsched/basic/ Directory Reference, 99
- airsched/basic/BasConst.cpp, 246
- airsched/basic/BasConst\_AIRSCHEd\_Service.hpp, 247
- airsched/basic/BasConst\_General.hpp, 247
- airsched/basic/BasParserTypes.hpp, 247, 248
- airsched/batches/ Directory Reference, 99
- airsched/batches/BookingRequestParser.cpp, 256, 258
- airsched/batches/BookingRequestParser.hpp, 262, 263
- airsched/batches/airsched.cpp, 249, 251
- airsched/bom/ Directory Reference, 100
- airsched/bom/AirportList.hpp, 264, 265
- airsched/bom/BomDisplay.cpp, 265
- airsched/bom/BomDisplay.hpp, 266, 267
- airsched/bom/FareFamilyStruct.cpp, 267
- airsched/bom/FareFamilyStruct.hpp, 268
- airsched/bom/FlightPeriodStruct.cpp, 269
- airsched/bom/FlightPeriodStruct.hpp, 272
- airsched/bom/LegCabinStruct.cpp, 273
- airsched/bom/LegCabinStruct.hpp, 274
- airsched/bom/LegStruct.cpp, 275
- airsched/bom/LegStruct.hpp, 276
- airsched/bom/OnDPeriodStruct.cpp, 277
- airsched/bom/OnDPeriodStruct.hpp, 278
- airsched/bom/OriginDestinationSet.cpp, 279
- airsched/bom/OriginDestinationSet.hpp, 280, 281
- airsched/bom/OriginDestinationSetKey.cpp, 282, 283
- airsched/bom/OriginDestinationSetKey.hpp, 284
- airsched/bom/OriginDestinationSetTypes.hpp, 285
- airsched/bom/ReachableUniverse.cpp, 286
- airsched/bom/ReachableUniverse.hpp, 287, 288
- airsched/bom/ReachableUniverseKey.cpp, 289
- airsched/bom/ReachableUniverseKey.hpp, 290, 291
- airsched/bom/ReachableUniverseTypes.hpp, 292
- airsched/bom/SegmentCabinStruct.cpp, 292, 293
- airsched/bom/SegmentCabinStruct.hpp, 293
- airsched/bom/SegmentPathPeriod.cpp, 294
- airsched/bom/SegmentPathPeriod.hpp, 298, 299
- airsched/bom/SegmentPathPeriodKey.cpp, 301
- airsched/bom/SegmentPathPeriodKey.hpp, 303
- airsched/bom/SegmentPathPeriodTypes.hpp, 305
- airsched/bom/SegmentPeriodHelper.cpp, 306
- airsched/bom/SegmentPeriodHelper.hpp, 307
- airsched/bom/SegmentStruct.cpp, 308
- airsched/bom/SegmentStruct.hpp, 308, 309
- airsched/command/ Directory Reference, 100

- airsched/command/InventoryGenerator.cpp, 310
- airsched/command/InventoryGenerator.hpp, 311, 312
- airsched/command/OnDParser.cpp, 312
- airsched/command/OnDParser.hpp, 313
- airsched/command/OnDParserHelper.cpp, 314
- airsched/command/OnDParserHelper.hpp, 319, 320
- airsched/command/OnDPeriodGenerator.cpp, 321, 322
- airsched/command/OnDPeriodGenerator.hpp, 322
- airsched/command/ScheduleParser.cpp, 323
- airsched/command/ScheduleParser.hpp, 324
- airsched/command/ScheduleParserHelper.cpp, 324, 325
- airsched/command/ScheduleParserHelper.hpp, 333, 334
- airsched/command/SegmentPathGenerator.cpp, 336, 337
- airsched/command/SegmentPathGenerator.hpp, 342
- airsched/command/SegmentPathProvider.cpp, 343
- airsched/command/SegmentPathProvider.hpp, 345
- airsched/command/Simulator.cpp, 346
- airsched/command/Simulator.hpp, 347
- airsched/command/TravelSolutionParser.cpp, 347, 348
- airsched/command/TravelSolutionParser.hpp, 349, 350
- airsched/config/ Directory Reference, 101
- airsched/config/airsched-paths.hpp, 351
- airsched/config/airsched-paths.hpp.in, 351
- airsched/factory/ Directory Reference, 101
- airsched/factory/FacAIRSCHEDServiceContext.cpp, 352
- airsched/factory/FacAIRSCHEDServiceContext.hpp, 352, 353
- airsched/factory/FacServiceAbstract.cpp, 353
- airsched/factory/FacServiceAbstract.hpp, 354
- airsched/service/ Directory Reference, 101
- airsched/service/AIRSCHED\_Service.cpp, 355
- airsched/service/AIRSCHED\_ServiceContext.cpp, 359, 360
- airsched/service/AIRSCHED\_ServiceContext.hpp, 360, 361
- airsched/service/ServiceAbstract.cpp, 362
- airsched/service/ServiceAbstract.hpp, 362, 363
- airsched::Passenger\_T
  - ADULT, 171
  - CHILD, 171
  - LAST\_VALUE, 171
  - PET, 171
- airsched::Airline\_T, 115
  - \_code, 116
  - \_isPreferred, 116
  - \_name, 116
  - Airline\_T, 116
  - display, 116
- airsched::Date\_T, 123
  - \_date, 124
  - \_day, 124
  - \_month, 124
  - \_reldays, 124
  - \_year, 124
- Date\_T, 124
- display, 124
- getDate, 124
- airsched::Passenger\_T, 170
  - \_labels, 171
  - \_number, 171
  - \_type, 171
  - display, 171
  - Passenger\_T, 171
  - PassengerType\_T, 171
- airsched::Place\_T, 172
  - \_code, 172
  - \_name, 172
  - display, 172
  - Place\_T, 172
- airsched::SearchString\_T, 180
  - \_airlineList, 181
  - \_dateList, 181
  - \_passengerList, 181
  - \_placeList, 181
  - \_tmpAirline, 181
  - \_tmpDate, 181
  - \_tmpPassenger, 181
  - \_tmpPlace, 181
  - display, 181
  - SearchString\_T, 180
- airsched::SearchStringParser, 182
  - \_searchString, 182
  - SearchStringParser, 182
- airsched::SearchStringParser::definition
  - airline\_code, 132
  - airline\_name, 132
  - date, 131
  - dates, 131
  - day, 132
  - definition, 131
  - month, 132
  - passenger\_adult\_type, 132
  - passenger\_child\_type, 132
  - passenger\_number, 132
  - passenger\_pet\_type, 132
  - passenger\_type, 132
  - passengers, 132
  - place\_element, 131
  - places, 131
  - preferred\_airlines, 132
  - search\_string, 131
  - start, 131
  - year, 132
- airsched::SearchStringParser::definition< ScannerT >, 130
- airsched::store\_adult\_passenger\_type, 200
  - \_searchString, 201
  - operator(), 200
  - store\_adult\_passenger\_type, 200
- airsched::store\_airline\_code, 201
  - \_searchString, 201
  - operator(), 201

- store\_airline\_code, [201](#)
- airsched::store\_airline\_name, [202](#)
  - \_searchString, [202](#)
  - operator(), [202](#)
  - store\_airline\_name, [202](#)
- airsched::store\_airline\_sign, [202](#)
  - \_searchString, [203](#)
  - operator(), [203](#)
  - store\_airline\_sign, [203](#)
- airsched::store\_child\_passenger\_type, [203](#)
  - \_searchString, [204](#)
  - operator(), [204](#)
  - store\_child\_passenger\_type, [204](#)
- airsched::store\_date, [204](#)
  - \_searchString, [205](#)
  - operator(), [205](#)
  - store\_date, [204](#)
- airsched::store\_passenger\_number, [205](#)
  - \_searchString, [206](#)
  - operator(), [205](#)
  - store\_passenger\_number, [205](#)
- airsched::store\_pet\_passenger\_type, [206](#)
  - \_searchString, [206](#)
  - operator(), [206](#)
  - store\_pet\_passenger\_type, [206](#)
- airsched::store\_place\_element, [207](#)
  - \_searchString, [207](#)
  - operator(), [207](#)
  - store\_place\_element, [207](#)
- alpha\_cap\_set\_p
  - AIRSCHEd::OnDParserHelper, [111](#)
- BOOST\_SPIRIT\_DEBUG
  - BookingRequestParser.cpp, [258](#)
- BomAbstract, [121](#)
- BookingRequestParser.cpp
  - char\_t, [258](#)
  - iterator\_t, [258](#)
  - rule\_t, [258](#)
  - scanner\_t, [258](#)
- boost, [115](#)
- boost::serialization, [115](#)
- boost::serialization::access
  - AIRSCHEd::OriginDestinationSet, [164](#)
  - AIRSCHEd::OriginDestinationSetKey, [166](#)
  - AIRSCHEd::ReachableUniverse, [176](#)
  - AIRSCHEd::ReachableUniverseKey, [178](#)
  - AIRSCHEd::SegmentPathPeriod, [190](#)
  - AIRSCHEd::SegmentPathPeriodKey, [194](#)
- bounded1\_4\_p\_t
  - AIRSCHEd, [108](#)
- bounded2\_p\_t
  - AIRSCHEd, [108](#)
- bounded4\_p\_t
  - AIRSCHEd, [108](#)
- buildSampleBom
  - AIRSCHEd::AIRSCHEd\_Service, [119](#)
- buildSegmentPathList
  - AIRSCHEd::AIRSCHEd\_Service, [119](#)
- buildSegments
  - AIRSCHEd::FlightPeriodStruct, [145](#)
- CHILD
  - airsched::Passenger\_T, [171](#)
- cabin\_code\_p
  - AIRSCHEd::ScheduleParserHelper, [114](#)
- char\_t
  - AIRSCHEd, [107](#)
  - BookingRequestParser.cpp, [258](#)
- checkCircle
  - AIRSCHEd::SegmentPathPeriod, [189](#)
- chset\_t
  - AIRSCHEd, [107](#)
- class\_code\_list\_p
  - AIRSCHEd::ScheduleParserHelper, [114](#)
- class\_code\_p
  - AIRSCHEd::OnDParserHelper, [112](#)
- clean
  - AIRSCHEd::FacServiceAbstract, [138](#)
- CmdAbstract, [122](#)
- connectWithAnotherSegment
  - AIRSCHEd::SegmentPathPeriod, [189](#)
- create
  - AIRSCHEd::FacAIRSCHEdServiceContext, [137](#)
- createSegmentPathNetwork
  - AIRSCHEd::SegmentPathGenerator, [185](#)
- createStringFromWordList
  - airsched.cpp, [250](#)
- csvDisplay
  - AIRSCHEd::AIRSCHEd\_Service, [120](#)
  - AIRSCHEd::BomDisplay, [122](#)
- date
  - AIRSCHEd::OnDParserHelper::OnDParser-  
::definition, [126](#)
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-  
Parser::definition, [128](#)
  - airsched::SearchStringParser::definition, [131](#)
- Date\_T
  - airsched::Date\_T, [124](#)
- date\_offset
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-  
Parser::definition, [129](#)
- DateList\_T
  - airsched, [102](#)
- DateOffsetList\_T
  - AIRSCHEd, [109](#)
- dates
  - airsched::SearchStringParser::definition, [131](#)
- day
  - airsched::SearchStringParser::definition, [132](#)
- day\_p
  - AIRSCHEd::OnDParserHelper, [111](#)
  - AIRSCHEd::ScheduleParserHelper, [113](#)
- definition
  - AIRSCHEd::OnDParserHelper::OnDParser-  
::definition, [125](#)

- AIRSCHEd::ScheduleParserHelper::FlightPeriod-Parser::definition, [127](#)
- airsched::SearchStringParser::definition, [131](#)
- describe
  - AIRSCHEd::FareFamilyStruct, [139](#)
  - AIRSCHEd::FlightPeriodStruct, [144](#)
  - AIRSCHEd::LegCabinStruct, [150](#)
  - AIRSCHEd::LegStruct, [152](#)
  - AIRSCHEd::OnDPeriodStruct, [159](#)
  - AIRSCHEd::SegmentCabinStruct, [183](#)
  - AIRSCHEd::SegmentStruct, [197](#)
- describeKey
  - AIRSCHEd::OriginDestinationSet, [163](#)
  - AIRSCHEd::ReachableUniverse, [175](#)
  - AIRSCHEd::SegmentPathPeriod, [190](#)
- describeTSKey
  - AIRSCHEd::OnDPeriodStruct, [159](#)
- display
  - airsched::Airline\_T, [116](#)
  - airsched::Date\_T, [124](#)
  - airsched::Passenger\_T, [171](#)
  - airsched::Place\_T, [172](#)
  - airsched::SearchString\_T, [181](#)
- doEndFlight
  - AIRSCHEd::ScheduleParserHelper::doEndFlight, [133](#)
- doEndOnD
  - AIRSCHEd::OnDParserHelper::doEndOnD, [135](#)
- doc/local/authors.doc, [363](#)
- doc/local/codingrules.doc, [363](#)
- doc/local/copyright.doc, [363](#)
- doc/local/documentation.doc, [363](#)
- doc/local/features.doc, [364](#)
- doc/local/help\_wanted.doc, [364](#)
- doc/local/howto\_release.doc, [364](#)
- doc/local/index.doc, [364](#)
- doc/local/installation.doc, [364](#)
- doc/local/linking.doc, [364](#)
- doc/local/test.doc, [364](#)
- doc/local/users\_guide.doc, [364](#)
- doc/local/verification.doc, [364](#)
- doc/tutorial/tutorial.doc, [364](#)
- dow
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-Parser::definition, [129](#)
- dow\_p
  - AIRSCHEd::ScheduleParserHelper, [113](#)
- externalMemoryManagement
  - AirlineScheduleTestSuite, [117](#)
- FFFlightPeriodFileParser
  - AIRSCHEd::InventoryGenerator, [149](#)
- FacAIRSCHEdServiceContext
  - AIRSCHEd::AIRSCHEd\_ServiceContext, [121](#)
  - AIRSCHEd::FacAIRSCHEdServiceContext, [136](#)
- FacServiceAbstract, [138](#)
  - AIRSCHEd::FacServiceAbstract, [138](#)
- family\_cabin\_details
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-Parser::definition, [130](#)
- family\_code\_p
  - AIRSCHEd::ScheduleParserHelper, [114](#)
- FareFamilyStruct
  - AIRSCHEd::FareFamilyStruct, [139](#)
- FareFamilyStructList\_T
  - AIRSCHEd, [108](#)
- FileNotFoundException, [140](#)
- fill
  - AIRSCHEd::LegCabinStruct, [150](#)
  - AIRSCHEd::LegStruct, [152](#)
  - AIRSCHEd::SegmentCabinStruct, [183](#)
  - AIRSCHEd::SegmentPeriodHelper, [196](#)
  - AIRSCHEd::SegmentStruct, [197](#)
- FlagSaver
  - AIRSCHEd::FlagSaver, [140](#)
- flight\_key
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-Parser::definition, [128](#)
- flight\_number
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-Parser::definition, [128](#)
- flight\_number\_p
  - AIRSCHEd::ScheduleParserHelper, [113](#)
- flight\_period
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-Parser::definition, [128](#)
- flight\_period\_end
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-Parser::definition, [128](#)
- flight\_period\_list
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-Parser::definition, [128](#)
- FlightPeriodFileParser
  - AIRSCHEd::FlightPeriodFileParser, [141](#)
  - AIRSCHEd::InventoryGenerator, [149](#)
- FlightPeriodParser
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-Parser, [142](#)
- FlightPeriodStruct
  - AIRSCHEd::FlightPeriodStruct, [144](#)
- fromStream
  - AIRSCHEd::OriginDestinationSet, [163](#)
  - AIRSCHEd::OriginDestinationSetKey, [166](#)
  - AIRSCHEd::ReachableUniverse, [175](#)
  - AIRSCHEd::ReachableUniverseKey, [178](#)
  - AIRSCHEd::SegmentPathPeriod, [189](#)
  - AIRSCHEd::SegmentPathPeriodKey, [194](#)
  - AIRSCHEd::ServiceAbstract, [199](#)
- full\_family\_cabin\_details
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-Parser::definition, [129](#)
- full\_segment\_cabin\_details
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-Parser::definition, [129](#)
- generateInventories
  - AIRSCHEd::FlightPeriodFileParser, [141](#)

- AIRSCHEd::ScheduleParser, 180
- generateOnDPeriods
  - AIRSCHEd::OnDParser, 154
  - AIRSCHEd::OnDPeriodFileParser, 156
- generic\_segment
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-Parser::definition, 130
- getBoardingDateOffsetList
  - AIRSCHEd::SegmentPathPeriod, 187
  - AIRSCHEd::SegmentPathPeriodKey, 192
- getBoardingPoint
  - AIRSCHEd::ReachableUniverseKey, 177
- getBoardingTime
  - AIRSCHEd::SegmentPathPeriod, 188
  - AIRSCHEd::SegmentPathPeriodKey, 193
- getDate
  - airsched::Date\_T, 124
  - AIRSCHEd::FlightPeriodStruct, 144
  - AIRSCHEd::OnDPeriodStruct, 158
- getDeparturePeriod
  - AIRSCHEd::SegmentPathPeriod, 187
- getDestination
  - AIRSCHEd::OriginDestinationSet, 163
  - AIRSCHEd::SegmentPathPeriod, 188
- getElapsedTime
  - AIRSCHEd::SegmentPathPeriod, 188
  - AIRSCHEd::SegmentPathPeriodKey, 193
- getFirstAirlineCode
  - AIRSCHEd::OnDPeriodStruct, 158
- getFirstSegmentPeriod
  - AIRSCHEd::SegmentPathPeriod, 188
- getHolderMap
  - AIRSCHEd::OriginDestinationSet, 163
  - AIRSCHEd::ReachableUniverse, 174
  - AIRSCHEd::SegmentPathPeriod, 188
- getKey
  - AIRSCHEd::OriginDestinationSet, 163
  - AIRSCHEd::ReachableUniverse, 174
  - AIRSCHEd::SegmentPathPeriod, 187
- getLastSegmentPeriod
  - AIRSCHEd::SegmentPathPeriod, 188
- getNbOfAirlines
  - AIRSCHEd::SegmentPathPeriod, 188
  - AIRSCHEd::SegmentPathPeriodKey, 193
- getNbOfSegments
  - AIRSCHEd::SegmentPathPeriod, 187
  - AIRSCHEd::SegmentPathPeriodKey, 192
- getOffPoint
  - AIRSCHEd::OriginDestinationSetKey, 166
- getOrigin
  - AIRSCHEd::ReachableUniverse, 174
- getParent
  - AIRSCHEd::OriginDestinationSet, 163
  - AIRSCHEd::ReachableUniverse, 174
  - AIRSCHEd::SegmentPathPeriod, 187
- getPeriod
  - AIRSCHEd::SegmentPathPeriodKey, 192
- getSegmentPathPeriodListList
  - AIRSCHEd::ReachableUniverse, 175
- getTime
  - AIRSCHEd::FlightPeriodStruct, 144
  - AIRSCHEd::OnDPeriodStruct, 159
- grammar, 148
- hours\_p
  - AIRSCHEd::OnDParserHelper, 111
  - AIRSCHEd::ScheduleParserHelper, 114
- instance
  - AIRSCHEd::FacAIRSCHEdServiceContext, 136
- int1\_p
  - airsched, 103
  - AIRSCHEd::ScheduleParserHelper, 114
- int1\_p\_t
  - AIRSCHEd, 107
- isAirlineFlown
  - AIRSCHEd::SegmentPathPeriod, 189
- isDepartureDateValid
  - AIRSCHEd::SegmentPathPeriod, 189
- isValid
  - AIRSCHEd::SegmentPathPeriodKey, 194
- iterator\_t
  - AIRSCHEd, 107
  - BookingRequestParser.cpp, 258
- jsonExport
  - AIRSCHEd::AIRSCHEd\_Service, 120
- Key\_T
  - AIRSCHEd::OriginDestinationSet, 162
  - AIRSCHEd::ReachableUniverse, 174
  - AIRSCHEd::SegmentPathPeriod, 187
- KeyAbstract, 150
- LAST\_VALUE
  - airsched::Passenger\_T, 171
- leg
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-Parser::definition, 129
- leg\_cabin\_details
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-Parser::definition, 129
- leg\_details
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-Parser::definition, 129
- leg\_key
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-Parser::definition, 129
- LegCabinStructList\_T
  - AIRSCHEd, 108
- LegStruct
  - AIRSCHEd::LegStruct, 152
- LegStructList\_T
  - AIRSCHEd, 108
- main
  - airsched.cpp, 251
- minutes\_p

- AIRSCHEd::OnDParserHelper, [111](#)
- AIRSCHEd::ScheduleParserHelper, [114](#)
- month
  - airsched::SearchStringParser::definition, [132](#)
- month\_p
  - AIRSCHEd::OnDParserHelper, [111](#)
  - AIRSCHEd::ScheduleParserHelper, [113](#)
- not\_to\_be\_parsed
  - AIRSCHEd::ScheduleParserHelper::FlightPeriodParser::definition, [128](#)
- OnDInputFileNotFoundExcePtion
  - AIRSCHEd::OnDInputFileNotFoundExcePtion, [154](#)
- OnDParser
  - AIRSCHEd::OnDParserHelper::OnDParser, [155](#)
  - AIRSCHEd::OnDPeriodGenerator, [157](#)
- OnDParserHelper::doEndOnD
  - AIRSCHEd::OnDPeriodGenerator, [157](#)
- OnDPeriodFileParser
  - AIRSCHEd::OnDPeriodFileParser, [156](#)
  - AIRSCHEd::OnDPeriodGenerator, [157](#)
- OnDPeriodStruct
  - AIRSCHEd::OnDPeriodStruct, [158](#)
- ond
  - AIRSCHEd::OnDParserHelper::OnDParser::definition, [126](#)
- ond\_end
  - AIRSCHEd::OnDParserHelper::OnDParser::definition, [126](#)
- ond\_key
  - AIRSCHEd::OnDParserHelper::OnDParser::definition, [126](#)
- ond\_list
  - AIRSCHEd::OnDParserHelper::OnDParser::definition, [126](#)
- operator<<
  - airsched.cpp, [250](#)
  - ServiceAbstract.hpp, [362](#)
- operator>>
  - ServiceAbstract.hpp, [362](#)
- operator()
  - AIRSCHEd::OnDParserHelper::doEndOnD, [135](#)
  - AIRSCHEd::OnDParserHelper::storeAirlineCode, [209](#)
  - AIRSCHEd::OnDParserHelper::storeClassCode, [213](#)
  - AIRSCHEd::OnDParserHelper::storeDateRangeEnd, [217](#)
  - AIRSCHEd::OnDParserHelper::storeDateRangeStart, [218](#)
  - AIRSCHEd::OnDParserHelper::storeDestination, [221](#)
  - AIRSCHEd::OnDParserHelper::storeEndRangeTime, [225](#)
  - AIRSCHEd::OnDParserHelper::storeOrigin, [235](#)
  - AIRSCHEd::OnDParserHelper::storeStartRangeTime, [242](#)
  - AIRSCHEd::ScheduleParserHelper::doEndFlight, [133](#)
  - AIRSCHEd::ScheduleParserHelper::storeAirlineCode, [208](#)
  - AIRSCHEd::ScheduleParserHelper::storeBoardingTime, [211](#)
  - AIRSCHEd::ScheduleParserHelper::storeCapacity, [212](#)
  - AIRSCHEd::ScheduleParserHelper::storeClasses, [214](#)
  - AIRSCHEd::ScheduleParserHelper::storeDateRangeEnd, [216](#)
  - AIRSCHEd::ScheduleParserHelper::storeDateRangeStart, [220](#)
  - AIRSCHEd::ScheduleParserHelper::storeDow, [222](#)
  - AIRSCHEd::ScheduleParserHelper::storeElapsedTime, [223](#)
  - AIRSCHEd::ScheduleParserHelper::storeFamilyCode, [226](#)
  - AIRSCHEd::ScheduleParserHelper::storeFClasses, [227](#)
  - AIRSCHEd::ScheduleParserHelper::storeFlightNumber, [229](#)
  - AIRSCHEd::ScheduleParserHelper::storeLegBoardingPoint, [230](#)
  - AIRSCHEd::ScheduleParserHelper::storeLegCabinCode, [231](#)
  - AIRSCHEd::ScheduleParserHelper::storeLegOffPoint, [233](#)
  - AIRSCHEd::ScheduleParserHelper::storeOffTime, [234](#)
  - AIRSCHEd::ScheduleParserHelper::storeSegmentBoardingPoint, [236](#)
  - AIRSCHEd::ScheduleParserHelper::storeSegmentCabinCode, [238](#)
  - AIRSCHEd::ScheduleParserHelper::storeSegmentOffPoint, [239](#)
  - AIRSCHEd::ScheduleParserHelper::storeSegmentSpecificity, [240](#)
  - airsched::store\_adult\_passenger\_type, [200](#)
  - airsched::store\_airline\_code, [201](#)
  - airsched::store\_airline\_name, [202](#)
  - airsched::store\_airline\_sign, [203](#)
  - airsched::store\_child\_passenger\_type, [204](#)
  - airsched::store\_date, [205](#)
  - airsched::store\_passenger\_number, [205](#)
  - airsched::store\_pet\_passenger\_type, [206](#)
  - airsched::store\_place\_element, [207](#)
- OriginDestinationSet
  - AIRSCHEd::OriginDestinationSet, [162](#)
- OriginDestinationSet::serialize< ba::text\_iarchive >
  - AIRSCHEd, [109](#)
- OriginDestinationSet::serialize< ba::text\_oarchive >
  - AIRSCHEd, [109](#)
- OriginDestinationSetKey
  - AIRSCHEd::OriginDestinationSetKey, [165](#)
- OriginDestinationSetKey::serialize< ba::text\_iarchive >



- AIRSCHEd, [109](#)
- OriginDestinationSetKey::serialize< ba::text\_oarchive >  
AIRSCHEd, [109](#)
- OriginDestinationSetList\_T  
AIRSCHEd, [108](#)
- OriginDestinationSetMap\_T  
AIRSCHEd, [108](#)
- PET
  - airsched::Passenger\_T, [171](#)
- parseAndLoad
  - AIRSCHEd::AIRSCHEd\_Service, [119](#)
- parseBookingRequest
  - airsched, [103](#)
  - airsched.cpp, [251](#)
- parseInputFileAndBuildBom
  - AIRSCHEd::TravelSolutionParser, [243](#)
- ParserException, [167](#)
- ParserSemanticAction
  - AIRSCHEd::OnDParserHelper::ParserSemanticAction, [168](#)
  - AIRSCHEd::ScheduleParserHelper::ParserSemanticAction, [169](#)
- Passenger\_T
  - airsched::Passenger\_T, [171](#)
- passenger\_adult\_type
  - airsched::SearchStringParser::definition, [132](#)
- passenger\_child\_type
  - airsched::SearchStringParser::definition, [132](#)
- passenger\_number
  - airsched::SearchStringParser::definition, [132](#)
- passenger\_pet\_type
  - airsched::SearchStringParser::definition, [132](#)
- passenger\_type
  - airsched::SearchStringParser::definition, [132](#)
- PassengerList\_T
  - airsched, [103](#)
- PassengerType\_T
  - airsched::Passenger\_T, [171](#)
- passengers
  - airsched::SearchStringParser::definition, [132](#)
- Place\_T
  - airsched::Place\_T, [172](#)
- place\_element
  - airsched::SearchStringParser::definition, [131](#)
- PlaceList\_T
  - airsched, [102](#)
- places
  - airsched::SearchStringParser::definition, [131](#)
- preferred\_airlines
  - airsched::SearchStringParser::definition, [132](#)
- ReachableUniverse
  - AIRSCHEd::ReachableUniverse, [174](#)
- ReachableUniverse::serialize< ba::text\_iarchive >  
AIRSCHEd, [110](#)
- ReachableUniverse::serialize< ba::text\_oarchive >  
AIRSCHEd, [110](#)
- ReachableUniverseKey
  - AIRSCHEd::ReachableUniverseKey, [177](#)
- ReachableUniverseKey::serialize< ba::text\_iarchive >  
AIRSCHEd, [110](#)
- ReachableUniverseKey::serialize< ba::text\_oarchive >  
AIRSCHEd, [110](#)
- ReachableUniverseList\_T  
AIRSCHEd, [108](#)
- ReachableUniverseMap\_T  
AIRSCHEd, [109](#)
- readConfiguration
  - airsched.cpp, [251](#)
- repeat\_p\_t  
AIRSCHEd, [108](#)
- rule\_t  
AIRSCHEd, [107](#)
- BookingRequestParser.cpp, [258](#)
- scanner\_t  
AIRSCHEd, [107](#)
- BookingRequestParser.cpp, [258](#)
- ScheduleInputFileNotFoundExcepTion  
AIRSCHEd::ScheduleInputFileNotFoundExcepTion, [179](#)
- ScheduleParser
  - AIRSCHEd::InventoryGenerator, [149](#)
- ScheduleParserHelper::doEndFlight  
AIRSCHEd::InventoryGenerator, [149](#)
- scheduleParsing  
AirlineScheduleTestSuite, [117](#)
- search\_string
  - airsched::SearchStringParser::definition, [131](#)
- SearchString\_T  
airsched::SearchString\_T, [180](#)
- SearchStringParser  
airsched::SearchStringParser, [182](#)
- seconds\_p  
AIRSCHEd::OnDParserHelper, [111](#)
- AIRSCHEd::ScheduleParserHelper, [114](#)
- segment
  - AIRSCHEd::OnDParserHelper::OnDParser::definition, [126](#)
- segment\_cabin\_details  
AIRSCHEd::ScheduleParserHelper::FlightPeriodParser::definition, [129](#)
- segment\_key  
AIRSCHEd::ScheduleParserHelper::FlightPeriodParser::definition, [129](#)
- segment\_section  
AIRSCHEd::ScheduleParserHelper::FlightPeriodParser::definition, [129](#)
- SegmentCabinStructList\_T  
AIRSCHEd, [109](#)
- SegmentDateNotFoundExcepTion  
AIRSCHEd::SegmentDateNotFoundExcepTion, [184](#)
- SegmentPathGenerator  
AIRSCHEd::ReachableUniverse, [176](#)
- SegmentPathPeriod

- AIRSCHEd::SegmentPathPeriod, [187](#)
- SegmentPathPeriod::serialize< ba::text\_iarchive >
  - AIRSCHEd, [110](#)
- SegmentPathPeriod::serialize< ba::text\_oarchive >
  - AIRSCHEd, [110](#)
- SegmentPathPeriodKey
  - AIRSCHEd::SegmentPathPeriodKey, [192](#)
- SegmentPathPeriodKey::serialize< ba::text\_iarchive >
  - AIRSCHEd, [110](#)
- SegmentPathPeriodKey::serialize< ba::text\_oarchive >
  - AIRSCHEd, [110](#)
- SegmentPathPeriodLightList\_T
  - AIRSCHEd, [109](#)
- SegmentPathPeriodList\_T
  - AIRSCHEd, [109](#)
- SegmentPathPeriodListList\_T
  - AIRSCHEd, [109](#)
- SegmentPathPeriodMultimap\_T
  - AIRSCHEd, [109](#)
- SegmentStructList\_T
  - AIRSCHEd, [109](#)
- serialize
  - AIRSCHEd::OriginDestinationSet, [164](#)
  - AIRSCHEd::OriginDestinationSetKey, [166](#)
  - AIRSCHEd::ReachableUniverse, [175](#)
  - AIRSCHEd::ReachableUniverseKey, [178](#)
  - AIRSCHEd::SegmentPathPeriod, [190](#)
  - AIRSCHEd::SegmentPathPeriodKey, [194](#)
- ServiceAbstract, [199](#)
  - AIRSCHEd::ServiceAbstract, [198](#)
- ServiceAbstract.hpp
  - operator<<, [362](#)
  - operator>>, [362](#)
- ServicePool\_T
  - AIRSCHEd::FacServiceAbstract, [138](#)
- setBoardingDateOffsetList
  - AIRSCHEd::SegmentPathPeriodKey, [193](#)
- setBoardingTime
  - AIRSCHEd::SegmentPathPeriodKey, [193](#)
- setElapsedTime
  - AIRSCHEd::SegmentPathPeriodKey, [193](#)
- setNbOfAirlines
  - AIRSCHEd::SegmentPathPeriodKey, [193](#)
- setPeriod
  - AIRSCHEd::SegmentPathPeriodKey, [193](#)
- simulate
  - AIRSCHEd::AIRSCHEd\_Service, [119](#)
  - AIRSCHEd::Simulator, [200](#)
- specific\_segment\_list
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-Parser::definition, [130](#)
- start
  - AIRSCHEd::OnDParserHelper::OnDParser-::definition, [125](#)
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-Parser::definition, [128](#)
  - airsched::SearchStringParser::definition, [131](#)
- stdair, [115](#)
- stdair::FacBom
  - AIRSCHEd::OriginDestinationSet, [164](#)
  - AIRSCHEd::ReachableUniverse, [175](#)
  - AIRSCHEd::SegmentPathPeriod, [190](#)
- stdair::FacBomManager
  - AIRSCHEd::OriginDestinationSet, [164](#)
  - AIRSCHEd::ReachableUniverse, [176](#)
  - AIRSCHEd::SegmentPathPeriod, [190](#)
- store\_adult\_passenger\_type
  - airsched::store\_adult\_passenger\_type, [200](#)
- store\_airline\_code
  - airsched::store\_airline\_code, [201](#)
- store\_airline\_name
  - airsched::store\_airline\_name, [202](#)
- store\_airline\_sign
  - airsched::store\_airline\_sign, [203](#)
- store\_child\_passenger\_type
  - airsched::store\_child\_passenger\_type, [204](#)
- store\_date
  - airsched::store\_date, [204](#)
- store\_passenger\_number
  - airsched::store\_passenger\_number, [205](#)
- store\_pet\_passenger\_type
  - airsched::store\_pet\_passenger\_type, [206](#)
- store\_place\_element
  - airsched::store\_place\_element, [207](#)
- storeAirlineCode
  - AIRSCHEd::OnDParserHelper::storeAirlineCode, [209](#)
  - AIRSCHEd::ScheduleParserHelper::storeAirline-Code, [208](#)
- storeBoardingTime
  - AIRSCHEd::ScheduleParserHelper::storeBoarding-Time, [210](#)
- storeCapacity
  - AIRSCHEd::ScheduleParserHelper::storeCapacity, [212](#)
- storeClassCode
  - AIRSCHEd::OnDParserHelper::storeClassCode, [213](#)
- storeClasses
  - AIRSCHEd::ScheduleParserHelper::storeClasses, [214](#)
- storeDateRangeEnd
  - AIRSCHEd::OnDParserHelper::storeDateRange-End, [217](#)
  - AIRSCHEd::ScheduleParserHelper::storeDate-RangeEnd, [216](#)
- storeDateRangeStart
  - AIRSCHEd::OnDParserHelper::storeDateRange-Start, [218](#)
  - AIRSCHEd::ScheduleParserHelper::storeDate-RangeStart, [219](#)
- storeDestination
  - AIRSCHEd::OnDParserHelper::storeDestination, [221](#)
- storeDow
  - AIRSCHEd::ScheduleParserHelper::storeDow,



- 222
- storeElapsedTime
  - AIRSCHEd::ScheduleParserHelper::storeElapsed-  
Time, 223
- storeEndRangeTime
  - AIRSCHEd::OnDParserHelper::storeEndRange-  
Time, 225
- storeFClasses
  - AIRSCHEd::ScheduleParserHelper::storeF-  
Classes, 227
- storeFamilyCode
  - AIRSCHEd::ScheduleParserHelper::storeFamily-  
Code, 226
- storeFlightNumber
  - AIRSCHEd::ScheduleParserHelper::storeFlight-  
Number, 228
- storeLegBoardingPoint
  - AIRSCHEd::ScheduleParserHelper::storeLeg-  
BoardingPoint, 230
- storeLegCabinCode
  - AIRSCHEd::ScheduleParserHelper::storeLeg-  
CabinCode, 231
- storeLegOffPoint
  - AIRSCHEd::ScheduleParserHelper::storeLegOff-  
Point, 232
- storeOffTime
  - AIRSCHEd::ScheduleParserHelper::storeOffTime,  
234
- storeOrigin
  - AIRSCHEd::OnDParserHelper::storeOrigin, 235
- storeSegmentBoardingPoint
  - AIRSCHEd::ScheduleParserHelper::storeSegment-  
BoardingPoint, 236
- storeSegmentCabinCode
  - AIRSCHEd::ScheduleParserHelper::storeSegment-  
CabinCode, 238
- storeSegmentOffPoint
  - AIRSCHEd::ScheduleParserHelper::storeSegment-  
OffPoint, 239
- storeSegmentSpecificity
  - AIRSCHEd::ScheduleParserHelper::storeSegment-  
Specificity, 240
- storeStartRangeTime
  - AIRSCHEd::OnDParserHelper::storeStartRange-  
Time, 242
- StructAbstract, 242
- test/ Directory Reference, 101
- test/airsched/ Directory Reference, 99
- test/airsched/AirlineScheduleTestSuite.cpp, 364
- test/airsched/AirlineScheduleTestSuite.hpp, 366
- TestFixture, 242
- time
  - AIRSCHEd::OnDParserHelper::OnDParser-  
::definition, 126
  - AIRSCHEd::ScheduleParserHelper::FlightPeriod-  
Parser::definition, 129
- toStream
  - AIRSCHEd::OriginDestinationSet, 163
- AIRSCHEd::OriginDestinationSetKey, 166
- AIRSCHEd::ReachableUniverse, 175
- AIRSCHEd::ReachableUniverseKey, 178
- AIRSCHEd::SegmentPathPeriod, 189
- AIRSCHEd::SegmentPathPeriodKey, 194
- AIRSCHEd::ServiceAbstract, 198
- toString
  - AIRSCHEd::OriginDestinationSet, 163
  - AIRSCHEd::OriginDestinationSetKey, 166
  - AIRSCHEd::ReachableUniverse, 175
  - AIRSCHEd::ReachableUniverseKey, 178
  - AIRSCHEd::SegmentPathPeriod, 190
  - AIRSCHEd::SegmentPathPeriodKey, 194
- uint1\_2\_p
  - airsched, 103
- uint1\_4\_p
  - airsched, 104
  - AIRSCHEd::OnDParserHelper, 112
  - AIRSCHEd::ScheduleParserHelper, 114
- uint1\_4\_p\_t
  - AIRSCHEd, 107
- uint1\_p
  - airsched, 103
- uint2\_4\_p
  - airsched, 103
- uint2\_p
  - airsched, 103
  - AIRSCHEd::OnDParserHelper, 112
  - AIRSCHEd::ScheduleParserHelper, 114
- uint2\_p\_t
  - AIRSCHEd, 107
- uint4\_p
  - airsched, 104
  - AIRSCHEd::OnDParserHelper, 112
  - AIRSCHEd::ScheduleParserHelper, 114
- uint4\_p\_t
  - AIRSCHEd, 107
- WordList\_T
  - airsched.cpp, 250
- year
  - airsched::SearchStringParser::definition, 132
- year\_p
  - AIRSCHEd::OnDParserHelper, 111
  - AIRSCHEd::ScheduleParserHelper, 113