

GNU Awk

GAWK: Effective AWK Programming

A User's Guide for GNU Awk

Edition 4.1

August, 2016

Arnold D. Robbins

“To boldly go where no man has gone before” is a Registered Trademark of Paramount Pictures Corporation.

Published by:

Free Software Foundation
51 Franklin Street, Fifth Floor
Boston, MA 02110-1301 USA
Phone: +1-617-542-5942
Fax: +1-617-542-2652
Email: gnu@gnu.org
URL: <http://www.gnu.org/>

ISBN 1-882114-28-0

Copyright © 1989, 1991, 1992, 1993, 1996–2005, 2007, 2009–2016
Free Software Foundation, Inc.

This is Edition 4.1 of *GAWK: Effective AWK Programming: A User’s Guide for GNU Awk*, for the 4.1.4 (or later) version of the GNU implementation of AWK.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.3 or any later version published by the Free Software Foundation; with the Invariant Sections being “GNU General Public License”, with the Front-Cover Texts being “A GNU Manual”, and with the Back-Cover Texts as in (a) below. A copy of the license is included in the section entitled “GNU Free Documentation License”.

- a. The FSF’s Back-Cover Text is: “You have the freedom to copy and modify this GNU manual.”

To my parents, for their love, and for the wonderful example they set for me.

To my wife, Miriam, for making me complete. Thank you for building your life together with me.

To our children, Chana, Rivka, Nachum, and Malka, for enrichening our lives in innumerable ways.

Short Contents

Foreword to the Third Edition	1
Foreword to the Fourth Edition	3
Preface	5

Part I: The `awk` Language

1 Getting Started with <code>awk</code>	17
2 Running <code>awk</code> and <code>gawk</code>	31
3 Regular Expressions	45
4 Reading Input Files	59
5 Printing Output	89
6 Expressions	107
7 Patterns, Actions, and Variables	131
8 Arrays in <code>awk</code>	159
9 Functions	175

Part II: Problem Solving with `awk`

10 A Library of <code>awk</code> Functions	219
11 Practical <code>awk</code> Programs	253

Part III: Moving Beyond Standard `awk` with `gawk`

12 Advanced Features of <code>gawk</code>	301
13 Internationalization with <code>gawk</code>	317
14 Debugging <code>awk</code> Programs	327
15 Arithmetic and Arbitrary-Precision Arithmetic with <code>gawk</code> . . .	343
16 Writing Extensions for <code>gawk</code>	357

Part IV: Appendices

A The Evolution of the <code>awk</code> Language	415
B Installing <code>gawk</code>	431
C Implementation Notes	451
D Basic Programming Concepts	463
Glossary	467
GNU General Public License	479
GNU Free Documentation License	491
Index	499

Table of Contents

Foreword to the Third Edition	1
Foreword to the Fourth Edition	3
Preface	5
History of awk and gawk	6
A Rose by Any Other Name	6
Using This Book	7
Typographical Conventions	9
Dark Corners	10
The GNU Project and This Book	10
How to Contribute	11
Acknowledgments	11
 Part I: The awk Language	
1 Getting Started with awk	17
1.1 How to Run awk Programs	17
1.1.1 One-Shot Throwaway awk Programs	17
1.1.2 Running awk Without Input Files	18
1.1.3 Running Long Programs	18
1.1.4 Executable awk Programs	19
1.1.5 Comments in awk Programs	20
1.1.6 Shell Quoting Issues	21
1.1.6.1 Quoting in MS-Windows Batch Files	23
1.2 Data files for the Examples	23
1.3 Some Simple Examples	24
1.4 An Example with Two Rules	26
1.5 A More Complex Example	26
1.6 awk Statements Versus Lines	27
1.7 Other Features of awk	29
1.8 When to Use awk	29
1.9 Summary	30
 2 Running awk and gawk	31
2.1 Invoking awk	31
2.2 Command-Line Options	31
2.3 Other Command-Line Arguments	37
2.4 Naming Standard Input	38
2.5 The Environment Variables gawk Uses	39
2.5.1 The AWKPATH Environment Variable	39

2.5.2	The AWKLIBPATH Environment Variable	40
2.5.3	Other Environment Variables	40
2.6	gawk 's Exit Status	41
2.7	Including Other Files into Your Program	42
2.8	Loading Dynamic Extensions into Your Program	43
2.9	Obsolete Options and/or Features	44
2.10	Undocumented Options and Features	44
2.11	Summary	44
3	Regular Expressions	45
3.1	How to Use Regular Expressions	45
3.2	Escape Sequences	46
3.3	Regular Expression Operators	48
3.4	Using Bracket Expressions	50
3.5	How Much Text Matches?	52
3.6	Using Dynamic Regexp's	53
3.7	gawk -Specific Regexp Operators	54
3.8	Case Sensitivity in Matching	55
3.9	Summary	56
4	Reading Input Files	59
4.1	How Input Is Split into Records	59
4.1.1	Record Splitting with Standard awk	59
4.1.2	Record Splitting with gawk	61
4.2	Examining Fields	63
4.3	Nonconstant Field Numbers	64
4.4	Changing the Contents of a Field	65
4.5	Specifying How Fields Are Separated	67
4.5.1	Whitespace Normally Separates Fields	68
4.5.2	Using Regular Expressions to Separate Fields	68
4.5.3	Making Each Character a Separate Field	69
4.5.4	Setting FS from the Command Line	69
4.5.5	Making the Full Line Be a Single Field	71
4.5.6	Field-Splitting Summary	71
4.6	Reading Fixed-Width Data	72
4.7	Defining Fields by Content	74
4.8	Multiple-Line Records	76
4.9	Explicit Input with getline	78
4.9.1	Using getline with No Arguments	78
4.9.2	Using getline into a Variable	79
4.9.3	Using getline from a File	80
4.9.4	Using getline into a Variable from a File	80
4.9.5	Using getline from a Pipe	81
4.9.6	Using getline into a Variable from a Pipe	82
4.9.7	Using getline from a Coprocess	82
4.9.8	Using getline into a Variable from a Coprocess	83
4.9.9	Points to Remember About getline	83

4.9.10	Summary of <code>getline</code> Variants	84
4.10	Reading Input with a Timeout	84
4.11	Directories on the Command Line	86
4.12	Summary	86
4.13	Exercises	87
5	Printing Output	89
5.1	The <code>print</code> Statement	89
5.2	<code>print</code> Statement Examples	89
5.3	Output Separators	91
5.4	Controlling Numeric Output with <code>print</code>	92
5.5	Using <code>printf</code> Statements for Fancier Printing	92
5.5.1	Introduction to the <code>printf</code> Statement	92
5.5.2	Format-Control Letters	93
5.5.3	Modifiers for <code>printf</code> Formats	94
5.5.4	Examples Using <code>printf</code>	96
5.6	Redirecting Output of <code>print</code> and <code>printf</code>	97
5.7	Special Files for Standard Preopened Data Streams	100
5.8	Special File names in <code>gawk</code>	101
5.8.1	Accessing Other Open Files with <code>gawk</code>	101
5.8.2	Special Files for Network Communications	101
5.8.3	Special File name Caveats	102
5.9	Closing Input and Output Redirections	102
5.10	Summary	104
5.11	Exercises	105
6	Expressions	107
6.1	Constants, Variables, and Conversions	107
6.1.1	Constant Expressions	107
6.1.1.1	Numeric and String Constants	107
6.1.1.2	Octal and Hexadecimal Numbers	107
6.1.1.3	Regular Expression Constants	108
6.1.2	Using Regular Expression Constants	109
6.1.3	Variables	110
6.1.3.1	Using Variables in a Program	110
6.1.3.2	Assigning Variables on the Command Line	111
6.1.4	Conversion of Strings and Numbers	111
6.1.4.1	How <code>awk</code> Converts Between Strings and Numbers ...	111
6.1.4.2	Locales Can Influence Conversion	112
6.2	Operators: Doing Something with Values	113
6.2.1	Arithmetic Operators	114
6.2.2	String Concatenation	115
6.2.3	Assignment Expressions	116
6.2.4	Increment and Decrement Operators	119
6.3	Truth Values and Conditions	120
6.3.1	True and False in <code>awk</code>	120
6.3.2	Variable Typing and Comparison Expressions	120

6.3.2.1	String Type versus Numeric Type	121
6.3.2.2	Comparison Operators	122
6.3.2.3	String Comparison with POSIX Rules	124
6.3.3	Boolean Expressions	124
6.3.4	Conditional Expressions	125
6.4	Function Calls	126
6.5	Operator Precedence (How Operators Nest)	128
6.6	Where You Are Makes a Difference	129
6.7	Summary	129
7	Patterns, Actions, and Variables	131
7.1	Pattern Elements	131
7.1.1	Regular Expressions as Patterns	131
7.1.2	Expressions as Patterns	131
7.1.3	Specifying Record Ranges with Patterns	133
7.1.4	The BEGIN and END Special Patterns	134
7.1.4.1	Startup and Cleanup Actions	134
7.1.4.2	Input/Output from BEGIN and END Rules	135
7.1.5	The BEGINFILE and ENDFILE Special Patterns	135
7.1.6	The Empty Pattern	136
7.2	Using Shell Variables in Programs	136
7.3	Actions	137
7.4	Control Statements in Actions	138
7.4.1	The if-else Statement	138
7.4.2	The while Statement	139
7.4.3	The do-while Statement	140
7.4.4	The for Statement	140
7.4.5	The switch Statement	141
7.4.6	The break Statement	142
7.4.7	The continue Statement	143
7.4.8	The next Statement	144
7.4.9	The nextfile Statement	145
7.4.10	The exit Statement	146
7.5	Predefined Variables	147
7.5.1	Built-in Variables That Control awk	147
7.5.2	Built-in Variables That Convey Information	149
7.5.3	Using ARGC and ARGV	155
7.6	Summary	157
8	Arrays in awk	159
8.1	The Basics of Arrays	159
8.1.1	Introduction to Arrays	159
8.1.2	Referring to an Array Element	161
8.1.3	Assigning Array Elements	162
8.1.4	Basic Array Example	162
8.1.5	Scanning All Elements of an Array	163
8.1.6	Using Predefined Array Scanning Orders with gawk	164

8.2	Using Numbers to Subscript Arrays.....	167
8.3	Using Uninitialized Variables as Subscripts.....	167
8.4	The <code>delete</code> Statement	168
8.5	Multidimensional Arrays	169
8.5.1	Scanning Multidimensional Arrays.....	171
8.6	Arrays of Arrays	171
8.7	Summary	173
9	Functions	175
9.1	Built-in Functions	175
9.1.1	Calling Built-in Functions	175
9.1.2	Numeric Functions	176
9.1.3	String-Manipulation Functions.....	177
9.1.3.1	More about ‘\’ and ‘&’ with <code>sub()</code> , <code>gsub()</code> , and <code>gensub()</code>	186
9.1.4	Input/Output Functions.....	189
9.1.5	Time Functions.....	192
9.1.6	Bit-Manipulation Functions.....	197
9.1.7	Getting Type Information	199
9.1.8	String-Translation Functions.....	199
9.2	User-Defined Functions	200
9.2.1	Function Definition Syntax	200
9.2.2	Function Definition Examples.....	202
9.2.3	Calling User-Defined Functions	203
9.2.3.1	Writing a Function Call.....	203
9.2.3.2	Controlling Variable Scope.....	203
9.2.3.3	Passing Function Arguments by Value Or by Reference ..	206
9.2.4	The <code>return</code> Statement	207
9.2.5	Functions and Their Effects on Variable Typing.....	208
9.3	Indirect Function Calls	209
9.4	Summary	214

Part II: Problem Solving with `awk`

10	A Library of <code>awk</code> Functions	219
10.1	Naming Library Function Global Variables	220
10.2	General Programming.....	221
10.2.1	Converting Strings to Numbers	221
10.2.2	Assertions.....	222
10.2.3	Rounding Numbers.....	224
10.2.4	The Cliff Random Number Generator.....	225
10.2.5	Translating Between Characters and Numbers	225
10.2.6	Merging an Array into a String.....	227
10.2.7	Managing the Time of Day	227
10.2.8	Reading a Whole File at Once.....	229
10.2.9	Quoting Strings to Pass to the Shell	230
10.3	Data file Management.....	231

10.3.1	Noting Data file Boundaries	231
10.3.2	Rereading the Current File	232
10.3.3	Checking for Readable Data files	234
10.3.4	Checking for Zero-Length Files	234
10.3.5	Treating Assignments as File names	235
10.4	Processing Command-Line Options	236
10.5	Reading the User Database	241
10.6	Reading the Group Database	245
10.7	Traversing Arrays of Arrays	249
10.8	Summary	251
10.9	Exercises	251
11	Practical awk Programs	253
11.1	Running the Example Programs	253
11.2	Reinventing Wheels for Fun and Profit	253
11.2.1	Cutting Out Fields and Columns	253
11.2.2	Searching for Regular Expressions in Files	258
11.2.3	Printing Out User Information	262
11.2.4	Splitting a Large File into Pieces	264
11.2.5	Duplicating Output into Multiple Files	265
11.2.6	Printing Nonduplicated Lines of Text	267
11.2.7	Counting Things	271
11.3	A Grab Bag of awk Programs	273
11.3.1	Finding Duplicated Words in a Document	273
11.3.2	An Alarm Clock Program	274
11.3.3	Transliterating Characters	276
11.3.4	Printing Mailing Labels	278
11.3.5	Generating Word-Usage Counts	280
11.3.6	Removing Duplicates from Unsorted Text	282
11.3.7	Extracting Programs from Texinfo Source Files	283
11.3.8	A Simple Stream Editor	286
11.3.9	An Easy Way to Use Library Functions	287
11.3.10	Finding Anagrams from a Dictionary	294
11.3.11	And Now for Something Completely Different	295
11.4	Summary	296
11.5	Exercises	296
 Part III: Moving Beyond Standard awk with gawk		
12	Advanced Features of gawk	301
12.1	Allowing Nondecimal Input Data	301
12.2	Controlling Array Traversal and Array Sorting	302
12.2.1	Controlling Array Traversal	302
12.2.2	Sorting Array Values and Indices with gawk	306
12.3	Two-Way Communications with Another Process	308
12.4	Using gawk for Network Programming	311
12.5	Profiling Your awk Programs	312
12.6	Summary	316

13	Internationalization with gawk	317
13.1	Internationalization and Localization	317
13.2	GNU <code>gettext</code>	317
13.3	Internationalizing <code>awk</code> Programs	319
13.4	Translating <code>awk</code> Programs	321
13.4.1	Extracting Marked Strings	321
13.4.2	Rearranging <code>printf</code> Arguments	322
13.4.3	<code>awk</code> Portability Issues	323
13.5	A Simple Internationalization Example	324
13.6	<code>gawk</code> Can Speak Your Language	325
13.7	Summary	325
14	Debugging <code>awk</code> Programs	327
14.1	Introduction to the <code>gawk</code> Debugger	327
14.1.1	Debugging in General	327
14.1.2	Debugging Concepts	327
14.1.3	<code>awk</code> Debugging	328
14.2	Sample <code>gawk</code> Debugging Session	328
14.2.1	How to Start the Debugger	329
14.2.2	Finding the Bug	329
14.3	Main Debugger Commands	332
14.3.1	Control of Breakpoints	332
14.3.2	Control of Execution	334
14.3.3	Viewing and Changing Data	335
14.3.4	Working with the Stack	336
14.3.5	Obtaining Information About the Program and the Debugger State	337
14.3.6	Miscellaneous Commands	339
14.4	Readline Support	340
14.5	Limitations	341
14.6	Summary	341
15	Arithmetic and Arbitrary-Precision Arithmetic with <code>gawk</code>	343
15.1	A General Description of Computer Arithmetic	343
15.2	Other Stuff to Know	344
15.3	Arbitrary-Precision Arithmetic Features in <code>gawk</code>	346
15.4	Floating-Point Arithmetic: Caveat Emptor!	346
15.4.1	Floating-Point Arithmetic Is Not Exact	347
15.4.1.1	Many Numbers Cannot Be Represented Exactly	347
15.4.1.2	Be Careful Comparing Values	347
15.4.1.3	Errors Accumulate	348
15.4.2	Getting the Accuracy You Need	348
15.4.3	Try a Few Extra Bits of Precision and Rounding	349
15.4.4	Setting the Precision	350
15.4.5	Setting the Rounding Mode	351

15.5	Arbitrary-Precision Integer Arithmetic with gawk	352
15.6	Standards Versus Existing Practice	353
15.7	Summary	354

16 Writing Extensions for gawk..... 357

16.1	Introduction	357
16.2	Extension Licensing	357
16.3	How It Works at a High Level	357
16.4	API Description	359
16.4.1	Introduction	359
16.4.2	General-Purpose Data Types	361
16.4.3	Memory Allocation Functions and Convenience Macros ..	364
16.4.4	Constructor Functions	365
16.4.5	Registration Functions	365
16.4.5.1	Registering An Extension Function	365
16.4.5.2	Registering An Exit Callback Function	366
16.4.5.3	Registering An Extension Version String	367
16.4.5.4	Customized Input Parsers	367
16.4.5.5	Customized Output Wrappers	370
16.4.5.6	Customized Two-way Processors	372
16.4.6	Printing Messages	373
16.4.7	Updating ERRNO	373
16.4.8	Requesting Values	374
16.4.9	Accessing and Updating Parameters	374
16.4.10	Symbol Table Access	375
16.4.10.1	Variable Access and Update by Name	375
16.4.10.2	Variable Access and Update by Cookie	375
16.4.10.3	Creating and Using Cached Values	377
16.4.11	Array Manipulation	379
16.4.11.1	Array Data Types	379
16.4.11.2	Array Functions	380
16.4.11.3	Working With All The Elements of an Array	381
16.4.11.4	How To Create and Populate Arrays	385
16.4.12	API Variables	387
16.4.12.1	API Version Constants and Variables	387
16.4.12.2	Informational Variables	388
16.4.13	Boilerplate Code	388
16.5	How gawk Finds Extensions	390
16.6	Example: Some File Functions	390
16.6.1	Using chdir() and stat()	390
16.6.2	C Code for chdir() and stat()	392
16.6.3	Integrating the Extensions	399
16.7	The Sample Extensions in the gawk Distribution	400
16.7.1	File-Related Functions	400
16.7.2	Interface to fnmatch()	403
16.7.3	Interface to fork() , wait() , and waitpid()	404
16.7.4	Enabling In-Place File Editing	404
16.7.5	Character and Numeric values: ord() and chr()	406

16.7.6	Reading Directories	406
16.7.7	Reversing Output	407
16.7.8	Two-Way I/O Example	407
16.7.9	Dumping and Restoring an Array	408
16.7.10	Reading an Entire File	408
16.7.11	Extension Time Functions	409
16.7.12	API Tests	409
16.8	The gawkextlib Project	409
16.9	Summary	410
16.10	Exercises	411

Part IV: Appendices

Appendix A The Evolution of the **awk** Language .. 415

A.1	Major Changes Between V7 and SVR3.1	415
A.2	Changes Between SVR3.1 and SVR4	416
A.3	Changes Between SVR4 and POSIX awk	416
A.4	Extensions in Brian Kernighan's awk	417
A.5	Extensions in gawk Not in POSIX awk	417
A.6	History of gawk Features	419
A.7	Common Extensions Summary	425
A.8	Regex Ranges and Locales: A Long Sad Story	426
A.9	Major Contributors to gawk	427
A.10	Summary	429

Appendix B Installing **gawk**..... 431

B.1	The gawk Distribution	431
B.1.1	Getting the gawk Distribution	431
B.1.2	Extracting the Distribution	431
B.1.3	Contents of the gawk Distribution	432
B.2	Compiling and Installing gawk on Unix-Like Systems	435
B.2.1	Compiling gawk for Unix-Like Systems	435
B.2.2	Additional Configuration Options	435
B.2.3	The Configuration Process	436
B.3	Installation on Other Operating Systems	437
B.3.1	Installation on PC Operating Systems	437
B.3.1.1	Installing a Prepared Distribution for PC Systems ..	437
B.3.1.2	Compiling gawk for PC Operating Systems	437
B.3.1.3	Testing gawk on PC Operating Systems	439
B.3.1.4	Using gawk on PC Operating Systems	439
B.3.1.5	Using gawk In The Cygwin Environment	440
B.3.1.6	Using gawk In The MSYS Environment	441
B.3.2	Compiling and Installing gawk on Vax/VMS and OpenVMS ..	441
B.3.2.1	Compiling gawk on VMS	441
B.3.2.2	Compiling gawk Dynamic Extensions on VMS	441
B.3.2.3	Installing gawk on VMS	442
B.3.2.4	Running gawk on VMS	443

xii **GAWK: Effective AWK Programming**

B.3.2.5	The VMS GNV Project	444
B.3.2.6	Some VMS Systems Have An Old Version of gawk ..	445
B.4	Reporting Problems and Bugs.....	445
B.5	Other Freely Available awk Implementations.....	446
B.6	Summary	448
Appendix C Implementation Notes.....		451
C.1	Downward Compatibility and Debugging	451
C.2	Making Additions to gawk	451
C.2.1	Accessing The gawk Git Repository	451
C.2.2	Adding New Features	452
C.2.3	Porting gawk to a New Operating System	453
C.2.4	Why Generated Files Are Kept In Git.....	455
C.3	Probable Future Extensions.....	457
C.4	Some Limitations of the Implementation	457
C.5	Extension API Design	457
C.5.1	Problems With The Old Mechanism.....	458
C.5.2	Goals For A New Mechanism.....	458
C.5.3	Other Design Decisions.....	459
C.5.4	Room For Future Growth	460
C.6	Compatibility For Old Extensions.....	460
C.7	Summary	461
Appendix D Basic Programming Concepts ...		463
D.1	What a Program Does	463
D.2	Data Values in a Computer	464
Glossary		467
GNU General Public License		479
GNU Free Documentation License		491
ADDENDUM: How to use this License for your documents.....		497
Index		499

Foreword to the Third Edition

Arnold Robbins and I are good friends. We were introduced in 1990 by circumstances—and our favorite programming language, AWK. The circumstances started a couple of years earlier. I was working at a new job and noticed an unplugged Unix computer sitting in the corner. No one knew how to use it, and neither did I. However, a couple of days later, it was running, and I was `root` and the one-and-only user. That day, I began the transition from statistician to Unix programmer.

On one of many trips to the library or bookstore in search of books on Unix, I found the gray AWK book, a.k.a. Alfred V. Aho, Brian W. Kernighan, and Peter J. Weinberger's *The AWK Programming Language* (Addison-Wesley, 1988). `awk`'s simple programming paradigm—find a pattern in the input and then perform an action—often reduced complex or tedious data manipulations to a few lines of code. I was excited to try my hand at programming in AWK.

Alas, the `awk` on my computer was a limited version of the language described in the gray book. I discovered that my computer had “old `awk`” and the book described “new `awk`.” I learned that this was typical; the old version refused to step aside or relinquish its name. If a system had a new `awk`, it was invariably called `nawk`, and few systems had it. The best way to get a new `awk` was to `ftp` the source code for `gawk` from `prep.ai.mit.edu`. `gawk` was a version of new `awk` written by David Trueman and Arnold, and available under the GNU General Public License.

(Incidentally, it's no longer difficult to find a new `awk`. `gawk` ships with GNU/Linux, and you can download binaries or source code for almost any system; my wife uses `gawk` on her VMS box.)

My Unix system started out unplugged from the wall; it certainly was not plugged into a network. So, oblivious to the existence of `gawk` and the Unix community in general, and desiring a new `awk`, I wrote my own, called `mawk`. Before I was finished, I knew about `gawk`, but it was too late to stop, so I eventually posted to a `comp.sources` newsgroup.

A few days after my posting, I got a friendly email from Arnold introducing himself. He suggested we share design and algorithms and attached a draft of the POSIX standard so that I could update `mawk` to support language extensions added after publication of *The AWK Programming Language*.

Frankly, if our roles had been reversed, I would not have been so open and we probably would have never met. I'm glad we did meet. He is an AWK expert's AWK expert and a genuinely nice person. Arnold contributes significant amounts of his expertise and time to the Free Software Foundation.

This book is the `gawk` reference manual, but at its core it is a book about AWK programming that will appeal to a wide audience. It is a definitive reference to the AWK language as defined by the 1987 Bell Laboratories release and codified in the 1992 POSIX Utilities standard.

On the other hand, the novice AWK programmer can study a wealth of practical programs that emphasize the power of AWK's basic idioms: data-driven control flow, pattern matching with regular expressions, and associative arrays. Those looking for something new can try out `gawk`'s interface to network protocols via special `/inet` files.

2 GAWK: Effective AWK Programming

The programs in this book make clear that an AWK program is typically much smaller and faster to develop than a counterpart written in C. Consequently, there is often a payoff to prototyping an algorithm or design in AWK to get it running quickly and expose problems early. Often, the interpreted performance is adequate and the AWK prototype becomes the product.

The new `pgawk` (profiling `gawk`), produces program execution counts. I recently experimented with an algorithm that for n lines of input, exhibited $\sim Cn^2$ performance, while theory predicted $\sim Cn \log n$ behavior. A few minutes poring over the `awkprof.out` profile pinpointed the problem to a single line of code. `pgawk` is a welcome addition to my programmer's toolbox.

Arnold has distilled over a decade of experience writing and using AWK programs, and developing `gawk`, into this book. If you use AWK or want to learn how, then read this book.

Michael Brennan
Author of `mawk`
March 2001

Foreword to the Fourth Edition

Some things don't change. Thirteen years ago I wrote: "If you use AWK or want to learn how, then read this book." True then, and still true today.

Learning to use a programming language is about more than mastering the syntax. One needs to acquire an understanding of how to use the features of the language to solve practical programming problems. A focus of this book is many examples that show how to use AWK.

Some things do change. Our computers are much faster and have more memory. Consequently, speed and storage inefficiencies of a high-level language matter less. Prototyping in AWK and then rewriting in C for performance reasons happens less, because more often the prototype is fast enough.

Of course, there are computing operations that are best done in C or C++. With `gawk` 4.1 and later, you do not have to choose between writing your program in AWK or in C/C++. You can write most of your program in AWK and the aspects that require C/C++ capabilities can be written in C/C++, and then the pieces glued together when the `gawk` module loads the C/C++ module as a dynamic plug-in. [Chapter 16 \[Writing Extensions for gawk\]](#), [page 357](#), has all the details, and, as expected, many examples to help you learn the ins and outs.

I enjoy programming in AWK and had fun (re)reading this book. I think you will too.

Michael Brennan
Author of `mawk`
October 2014

Preface

Several kinds of tasks occur repeatedly when working with text files. You might want to extract certain lines and discard the rest. Or you may need to make changes wherever certain patterns appear, but leave the rest of the file alone. Such jobs are often easy with `awk`. The `awk` utility interprets a special-purpose programming language that makes it easy to handle simple data-reformatting jobs.

The GNU implementation of `awk` is called `gawk`; if you invoke it with the proper options or environment variables, it is fully compatible with the POSIX¹ specification of the `awk` language and with the Unix version of `awk` maintained by Brian Kernighan. This means that all properly written `awk` programs should work with `gawk`. So most of the time, we don't distinguish between `gawk` and other `awk` implementations.

Using `awk` you can:

- Manage small, personal databases
- Generate reports
- Validate data
- Produce indexes and perform other document-preparation tasks
- Experiment with algorithms that you can adapt later to other computer languages

In addition, `gawk` provides facilities that make it easy to:

- Extract bits and pieces of data for processing
- Sort data
- Perform simple network communications
- Profile and debug `awk` programs
- Extend the language with functions written in C or C++

This book teaches you about the `awk` language and how you can use it effectively. You should already be familiar with basic system commands, such as `cat` and `ls`,² as well as basic shell facilities, such as input/output (I/O) redirection and pipes.

Implementations of the `awk` language are available for many different computing environments. This book, while describing the `awk` language in general, also describes the particular implementation of `awk` called `gawk` (which stands for “GNU `awk`”). `gawk` runs on a broad range of Unix systems, ranging from Intel-architecture PC-based computers up through large-scale systems. `gawk` has also been ported to Mac OS X, Microsoft Windows (all versions) and OS/2 PCs, and OpenVMS.³

¹ The 2008 POSIX standard is accessible online at <http://www.opengroup.org/onlinepubs/9699919799/>.

² These utilities are available on POSIX-compliant systems, as well as on traditional Unix-based systems. If you are using some other operating system, you still need to be familiar with the ideas of I/O redirection and pipes.

³ Some other, obsolete systems to which `gawk` was once ported are no longer supported and the code for those systems has been removed.

History of awk and gawk

Recipe for a Programming Language

1 part **egrep** 1 part **snobol**
 2 parts **ed** 3 parts **C**

Blend all parts well using **lex** and **yacc**. Document minimally and release.

After eight years, add another part **egrep** and two more parts **C**. Document very well and release.

The name **awk** comes from the initials of its designers: Alfred V. Aho, Peter J. Weinberger, and Brian W. Kernighan. The original version of **awk** was written in 1977 at AT&T Bell Laboratories. In 1985, a new version made the programming language more powerful, introducing user-defined functions, multiple input streams, and computed regular expressions. This new version became widely available with Unix System V Release 3.1 (1987). The version in System V Release 4 (1989) added some new features and cleaned up the behavior in some of the “dark corners” of the language. The specification for **awk** in the POSIX Command Language and Utilities standard further clarified the language. Both the **gawk** designers and the original **awk** designers at Bell Laboratories provided feedback for the POSIX specification.

Paul Rubin wrote **gawk** in 1986. Jay Fenlason completed it, with advice from Richard Stallman. John Woods contributed parts of the code as well. In 1988 and 1989, David Trueman, with help from me, thoroughly reworked **gawk** for compatibility with the newer **awk**. Circa 1994, I became the primary maintainer. Current development focuses on bug fixes, performance improvements, standards compliance, and, occasionally, new features.

In May 1997, Jürgen Kahrs felt the need for network access from **awk**, and with a little help from me, set about adding features to do this for **gawk**. At that time, he also wrote the bulk of *TCP/IP Internetworking with gawk* (a separate document, available as part of the **gawk** distribution). His code finally became part of the main **gawk** distribution with **gawk** version 3.1.

John Haque rewrote the **gawk** internals, in the process providing an **awk**-level debugger. This version became available as **gawk** version 4.0 in 2011.

See [Section A.9 \[Major Contributors to gawk\]](#), page 427, for a full list of those who have made important contributions to **gawk**.

A Rose by Any Other Name

The **awk** language has evolved over the years. Full details are provided in [Appendix A \[The Evolution of the awk Language\]](#), page 415. The language described in this book is often referred to as “new **awk**.” By analogy, the original version of **awk** is referred to as “old **awk**.”

On most current systems, when you run the **awk** utility you get some version of new **awk**.⁴ If your system’s standard **awk** is the old one, you will see something like this if you try the test program:

```
$ awk 1 /dev/null
```

⁴ Only Solaris systems still use an old **awk** for the default **awk** utility. A more modern **awk** lives in `/usr/xpg6/bin` on these systems.


```

error  awk: syntax error near line 1
error  awk: bailing out near line 1

```

In this case, you should find a version of new **awk**, or just install **gawk**!

Throughout this book, whenever we refer to a language feature that should be available in any complete implementation of POSIX **awk**, we simply use the term **awk**. When referring to a feature that is specific to the GNU implementation, we use the term **gawk**.

Using This Book

The term **awk** refers to a particular program as well as to the language you use to tell this program what to do. When we need to be careful, we call the language “the **awk** language,” and the program “the **awk** utility.” This book explains both how to write programs in the **awk** language and how to run the **awk** utility. The term “**awk** program” refers to a program written by you in the **awk** programming language.

Primarily, this book explains the features of **awk** as defined in the POSIX standard. It does so in the context of the **gawk** implementation. While doing so, it also attempts to describe important differences between **gawk** and other **awk** implementations.⁵ Finally, it notes any **gawk** features that are not in the POSIX standard for **awk**.

This book has the difficult task of being both a tutorial and a reference. If you are a novice, feel free to skip over details that seem too complex. You should also ignore the many cross-references; they are for the expert user and for the Info and [HTML](#) versions of the book.

There are sidebars scattered throughout the book. They add a more complete explanation of points that are relevant, but not likely to be of interest on first reading. All appear in the index, under the heading “sidebar.”

Most of the time, the examples use complete **awk** programs. Some of the more advanced sections show only the part of the **awk** program that illustrates the concept being described.

Although this book is aimed principally at people who have not been exposed to **awk**, there is a lot of information here that even the **awk** expert should find useful. In particular, the description of POSIX **awk** and the example programs in [Chapter 10 \[A Library of **awk** Functions\]](#), [page 219](#), and in [Chapter 11 \[Practical **awk** Programs\]](#), [page 253](#), should be of interest.

This book is split into several parts, as follows:

- Part I describes the **awk** language and the **gawk** program in detail. It starts with the basics, and continues through all of the features of **awk**. It contains the following chapters:
 - [Chapter 1 \[Getting Started with **awk**\]](#), [page 17](#), provides the essentials you need to know to begin using **awk**.
 - [Chapter 2 \[Running **awk** and **gawk**\]](#), [page 31](#), describes how to run **gawk**, the meaning of its command-line options, and how it finds **awk** program source files.
 - [Chapter 3 \[Regular Expressions\]](#), [page 45](#), introduces regular expressions in general, and in particular the flavors supported by POSIX **awk** and **gawk**.

⁵ All such differences appear in the index under the entry “differences in **awk** and **gawk**.”

8 GAWK: Effective AWK Programming

- Chapter 4 [Reading Input Files], page 59, describes how `awk` reads your data. It introduces the concepts of records and fields, as well as the `getline` command. I/O redirection is first described here. Network I/O is also briefly introduced here.
- Chapter 5 [Printing Output], page 89, describes how `awk` programs can produce output with `print` and `printf`.
- Chapter 6 [Expressions], page 107, describes expressions, which are the basic building blocks for getting most things done in a program.
- Chapter 7 [Patterns, Actions, and Variables], page 131, describes how to write patterns for matching records, actions for doing something when a record is matched, and the predefined variables `awk` and `gawk` use.
- Chapter 8 [Arrays in `awk`], page 159, covers `awk`'s one-and-only data structure: the associative array. Deleting array elements and whole arrays is described, as well as sorting arrays in `gawk`. The chapter also describes how `gawk` provides arrays of arrays.
- Chapter 9 [Functions], page 175, describes the built-in functions `awk` and `gawk` provide, as well as how to define your own functions. It also discusses how `gawk` lets you call functions indirectly.
- Part II shows how to use `awk` and `gawk` for problem solving. There is lots of code here for you to read and learn from. This part contains the following chapters:
 - Chapter 10 [A Library of `awk` Functions], page 219, provides a number of functions meant to be used from main `awk` programs.
 - Chapter 11 [Practical `awk` Programs], page 253, provides many sample `awk` programs.

Reading these two chapters allows you to see `awk` solving real problems.

- Part III focuses on features specific to `gawk`. It contains the following chapters:
 - Chapter 12 [Advanced Features of `gawk`], page 301, describes a number of advanced features. Of particular note are the abilities to control the order of array traversal, have two-way communications with another process, perform TCP/IP networking, and profile your `awk` programs.
 - Chapter 13 [Internationalization with `gawk`], page 317, describes special features for translating program messages into different languages at runtime.
 - Chapter 14 [Debugging `awk` Programs], page 327, describes the `gawk` debugger.
 - Chapter 15 [Arithmetic and Arbitrary-Precision Arithmetic with `gawk`], page 343, describes advanced arithmetic facilities.
 - Chapter 16 [Writing Extensions for `gawk`], page 357, describes how to add new variables and functions to `gawk` by writing extensions in C or C++.
- Part IV provides the appendices, the Glossary, and two licenses that cover the `gawk` source code and this book, respectively. It contains the following appendices:
 - Appendix A [The Evolution of the `awk` Language], page 415, describes how the `awk` language has evolved since its first release to the present. It also describes how `gawk` has acquired features over time.
 - Appendix B [Installing `gawk`], page 431, describes how to get `gawk`, how to compile it on POSIX-compatible systems, and how to compile and use it on different non-

POSIX systems. It also describes how to report bugs in **gawk** and where to get other freely available **awk** implementations.

- [Appendix C \[Implementation Notes\]](#), page 451, describes how to disable **gawk**’s extensions, as well as how to contribute new code to **gawk**, and some possible future directions for **gawk** development.
- [Appendix D \[Basic Programming Concepts\]](#), page 463, provides some very cursory background material for those who are completely unfamiliar with computer programming.

The [\[Glossary\]](#), page 467, defines most, if not all, of the significant terms used throughout the book. If you find terms that you aren’t familiar with, try looking them up here.

- [\[GNU General Public License\]](#), page 479, and [\[GNU Free Documentation License\]](#), page 491, present the licenses that cover the **gawk** source code and this book, respectively.

Typographical Conventions

This book is written in **Texinfo**, the GNU documentation formatting language. A single Texinfo source file is used to produce both the printed and online versions of the documentation. Because of this, the typographical conventions are slightly different than in other books you may have read.

Examples you would type at the command line are preceded by the common shell primary and secondary prompts, ‘\$’ and ‘>’. Input that you type is shown *like this*. Output from the command is preceded by the glyph “+”. This typically represents the command’s standard output. Error messages and other output on the command’s standard error are preceded by the glyph “error”. For example:

```
$ echo hi on stdout
+ hi on stdout
$ echo hello on stderr 1>&2
error hello on stderr
```

In the text, almost anything related to programming, such as command names, variable and function names, and string, numeric and regexp constants appear in **this font**. Code fragments appear in the same font and quoted, ‘*like this*’. Things that are replaced by the user or programmer appear in *this font*. Options look like this: **-f**. File names are indicated like this: **/path/to/ourfile**. Some things are emphasized *like this*, and if a point needs to be made strongly, it is done **like this**. The first occurrence of a new term is usually its *definition* and appears in the same font as the previous occurrence of “definition” in this sentence.

Characters that you type at the keyboard look *like this*. In particular, there are special characters called “control characters.” These are characters that you type by holding down both the **CONTROL** key and another key, at the same time. For example, a **Ctrl-d** is typed by first pressing and holding the **CONTROL** key, next pressing the **d** key, and finally releasing both keys.

For the sake of brevity, throughout this book, we refer to Brian Kernighan’s version of **awk** as “**BWK awk**.” (See [Section B.5 \[Other Freely Available awk Implementations\]](#), page 446, for information on his and other versions.)

Dark Corners

Dark corners are basically fractal—no matter how much you illuminate, there’s always a smaller but darker one.

—Brian Kernighan

Until the POSIX standard (and *GAWK: Effective AWK Programming*), many features of `awk` were either poorly documented or not documented at all. Descriptions of such features (often called “dark corners”) are noted in this book with the picture of a flashlight in the margin, as shown here. They also appear in the index under the heading “dark corner.”



But, as noted by the opening quote, any coverage of dark corners is by definition incomplete.

Extensions to the standard `awk` language that are supported by more than one `awk` implementation are marked “(c.e.),” and listed in the index under “common extensions” and “extensions, common.”

The GNU Project and This Book

The Free Software Foundation (FSF) is a nonprofit organization dedicated to the production and distribution of freely distributable software. It was founded by Richard M. Stallman, the author of the original Emacs editor. GNU Emacs is the most widely used version of Emacs today.

The GNU⁶ Project is an ongoing effort on the part of the Free Software Foundation to create a complete, freely distributable, POSIX-compliant computing environment. The FSF uses the GNU General Public License (GPL) to ensure that its software’s source code is always available to the end user. A copy of the GPL is included in this book for your reference (see [\[GNU General Public License\]](#), page 479). The GPL applies to the C language source code for `gawk`. To find out more about the FSF and the GNU Project online, see [the GNU Project’s home page](#). This book may also be read from [GNU’s website](#).

A shell, an editor (Emacs), highly portable optimizing C, C++, and Objective-C compilers, a symbolic debugger and dozens of large and small utilities (such as `gawk`), have all been completed and are freely available. The GNU operating system kernel (the HURD), has been released but remains in an early stage of development.

Until the GNU operating system is more fully developed, you should consider using GNU/Linux, a freely distributable, Unix-like operating system for Intel, Power Architecture, Sun SPARC, IBM S/390, and other systems.⁷ Many GNU/Linux distributions are available for download from the Internet.

The book you are reading is actually free—at least, the information in it is free to anyone. The machine-readable source code for the book comes with `gawk`. (Take a moment to check the Free Documentation License in [\[GNU Free Documentation License\]](#), page 491.)

The book itself has gone through multiple previous editions. Paul Rubin wrote the very first draft of *The GAWK Manual*; it was around 40 pages long. Diane Close and Richard Stallman improved it, yielding a version that was around 90 pages and barely described the original, “old” version of `awk`.

⁶ GNU stands for “GNU’s Not Unix.”

⁷ The terminology “GNU/Linux” is explained in the [\[Glossary\]](#), page 467.

I started working with that version in the fall of 1988. As work on it progressed, the FSF published several preliminary versions (numbered 0.x). In 1996, edition 1.0 was released with `gawk` 3.0.0. The FSF published the first two editions under the title *The GNU Awk User's Guide*.

This edition maintains the basic structure of the previous editions. For FSF edition 4.0, the content was thoroughly reviewed and updated. All references to `gawk` versions prior to 4.0 were removed. Of significant note for that edition was the addition of [Chapter 14 \[Debugging `awk` Programs\]](#), page 327.

For FSF edition 4.1, the content has been reorganized into parts, and the major new additions are [Chapter 15 \[Arithmetic and Arbitrary-Precision Arithmetic with `gawk`\]](#), page 343, and [Chapter 16 \[Writing Extensions for `gawk`\]](#), page 357.

This book will undoubtedly continue to evolve. If you find an error in the book, please report it! See [Section B.4 \[Reporting Problems and Bugs\]](#), page 445, for information on submitting problem reports electronically.

How to Contribute

As the maintainer of GNU `awk`, I once thought that I would be able to manage a collection of publicly available `awk` programs and I even solicited contributions. Making things available on the Internet helps keep the `gawk` distribution down to manageable size.

The initial collection of material, such as it is, is still available at [ftp://ftp.freefriends.org/arnold/Awkstuff](http://ftp.freefriends.org/arnold/Awkstuff). In the hopes of doing something more broad, I acquired the `awk.info` domain.

However, I found that I could not dedicate enough time to managing contributed code: the archive did not grow and the domain went unused for several years.

Late in 2008, a volunteer took on the task of setting up an `awk`-related website—<http://awk.info>—and did a very nice job.

If you have written an interesting `awk` program, or have written a `gawk` extension that you would like to share with the rest of the world, please see <http://awk.info/?contribute> for how to contribute it to the website.

Acknowledgments

The initial draft of *The GAWK Manual* had the following acknowledgments:

Many people need to be thanked for their assistance in producing this manual. Jay Fenlason contributed many ideas and sample programs. Richard Mlynarik and Robert Chassell gave helpful comments on drafts of this manual. The paper *A Supplemental Document for AWK* by John W. Pierce of the Chemistry Department at UC San Diego, pinpointed several issues relevant both to `awk` implementation and to this manual, that would otherwise have escaped us.

I would like to acknowledge Richard M. Stallman, for his vision of a better world and for his courage in founding the FSF and starting the GNU Project.

Earlier editions of this book had the following acknowledgements:

The following people (in alphabetical order) provided helpful comments on various versions of this book: Rick Adams, Dr. Nelson H.F. Beebe, Karl Berry,

Dr. Michael Brennan, Rich Burridge, Claire Cloutier, Diane Close, Scott Deifik, Christopher (“Topher”) Eliot, Jeffrey Friedl, Dr. Darrel Hankerson, Michal Jaegermann, Dr. Richard J. LeBlanc, Michael Lijewski, Pat Rankin, Miriam Robbins, Mary Sheehan, and Chuck Toporek.

Robert J. Chassell provided much valuable advice on the use of Texinfo. He also deserves special thanks for convincing me *not* to title this book *How to Gawk Politely*. Karl Berry helped significantly with the T_EX part of Texinfo.

I would like to thank Marshall and Elaine Hartholz of Seattle and Dr. Bert and Rita Schreiber of Detroit for large amounts of quiet vacation time in their homes, which allowed me to make significant progress on this book and on **gawk** itself.

Phil Hughes of SSC contributed in a very important way by loaning me his laptop GNU/Linux system, not once, but twice, which allowed me to do a lot of work while away from home.

David Trueman deserves special credit; he has done a yeoman job of evolving **gawk** so that it performs well and without bugs. Although he is no longer involved with **gawk**, working with him on this project was a significant pleasure.

The intrepid members of the GNITS mailing list, and most notably Ulrich Drepper, provided invaluable help and feedback for the design of the internationalization features.

Chuck Toporek, Mary Sheehan, and Claire Cloutier of O’Reilly & Associates contributed significant editorial help for this book for the 3.1 release of **gawk**.

Dr. Nelson Beebe, Andreas Buening, Dr. Manuel Collado, Antonio Colombo, Stephen Davies, Scott Deifik, Akim Demaille, Daniel Richard G., Darrel Hankerson, Michal Jaegermann, Jürgen Kahrs, Stepan Kasal, John Malmberg, Dave Pitts, Chet Ramey, Pat Rankin, Andrew Schorr, Corinna Vinschen, and Eli Zaretskii (in alphabetical order) make up the current **gawk** “crack portability team.” Without their hard work and help, **gawk** would not be nearly the robust, portable program it is today. It has been and continues to be a pleasure working with this team of fine people.

Notable code and documentation contributions were made by a number of people. See [Section A.9 \[Major Contributors to **gawk**\]](#), page 427, for the full list.

Thanks to Michael Brennan for the Forewords.

Thanks to Patrice Dumas for the new **makeinfo** program. Thanks to Karl Berry, who continues to work to keep the Texinfo markup language sane.

Robert P.J. Day, Michael Brennan, and Brian Kernighan kindly acted as reviewers for the 2015 edition of this book. Their feedback helped improve the final work.

I would also like to thank Brian Kernighan for his invaluable assistance during the testing and debugging of **gawk**, and for his ongoing help and advice in clarifying numerous points about the language. We could not have done nearly as good a job on either **gawk** or its documentation without his help.

Brian is in a class by himself as a programmer and technical author. I have to thank him (yet again) for his ongoing friendship and for being a role model to me for close to 30 years! Having him as a reviewer is an exciting privilege. It has also been extremely humbling. . .

I must thank my wonderful wife, Miriam, for her patience through the many versions of this project, for her proofreading, and for sharing me with the computer. I would like to thank my parents for their love, and for the grace with which they raised and educated me. Finally, I also must acknowledge my gratitude to G-d, for the many opportunities He has sent my way, as well as for the gifts He has given me with which to take advantage of those opportunities.

Arnold Robbins
Nof Ayalon
Israel
February 2015

Part I:

The awk Language

1 Getting Started with awk

The basic function of **awk** is to search files for lines (or other units of text) that contain certain patterns. When a line matches one of the patterns, **awk** performs specified actions on that line. **awk** continues to process input lines in this way until it reaches the end of the input files.

Programs in **awk** are different from programs in most other languages, because **awk** programs are *data driven* (i.e., you describe the data you want to work with and then what to do when you find it). Most other languages are *procedural*; you have to describe, in great detail, every step the program should take. When working with procedural languages, it is usually much harder to clearly describe the data your program will process. For this reason, **awk** programs are often refreshingly easy to read and write.

When you run **awk**, you specify an **awk program** that tells **awk** what to do. The program consists of a series of *rules* (it may also contain *function definitions*, an advanced feature that we will ignore for now; see [Section 9.2 \[User-Defined Functions\]](#), page 200). Each rule specifies one pattern to search for and one action to perform upon finding the pattern.

Syntactically, a rule consists of a *pattern* followed by an *action*. The action is enclosed in braces to separate it from the pattern. Newlines usually separate rules. Therefore, an **awk** program looks like this:

```
pattern { action }
pattern { action }
...
```

1.1 How to Run awk Programs

There are several ways to run an **awk** program. If the program is short, it is easiest to include it in the command that runs **awk**, like this:

```
awk 'program' input-file1 input-file2 ...
```

When the program is long, it is usually more convenient to put it in a file and run it with a command like this:

```
awk -f program-file input-file1 input-file2 ...
```

This section discusses both mechanisms, along with several variations of each.

1.1.1 One-Shot Throwaway awk Programs

Once you are familiar with **awk**, you will often type in simple programs the moment you want to use them. Then you can write the program as the first argument of the **awk** command, like this:

```
awk 'program' input-file1 input-file2 ...
```

where *program* consists of a series of patterns and actions, as described earlier.

This command format instructs the *shell*, or command interpreter, to start **awk** and use the *program* to process records in the input file(s). There are single quotes around *program* so the shell won't interpret any **awk** characters as special shell characters. The quotes also cause the shell to treat all of *program* as a single argument for **awk**, and allow *program* to be more than one line long.

This format is also useful for running short or medium-sized `awk` programs from shell scripts, because it avoids the need for a separate file for the `awk` program. A self-contained shell script is more reliable because there are no other files to misplace.

Later in this chapter, in [Section 1.3 \[Some Simple Examples\]](#), page 24, we'll see examples of several short, self-contained programs.

1.1.2 Running `awk` Without Input Files

You can also run `awk` without any input files. If you type the following command line:

```
awk 'program'
```

`awk` applies the *program* to the *standard input*, which usually means whatever you type on the keyboard. This continues until you indicate end-of-file by typing `Ctrl-d`. (On non-POSIX operating systems, the end-of-file character may be different. For example, on OS/2, it is `Ctrl-z`.)

As an example, the following program prints a friendly piece of advice (from Douglas Adams's *The Hitchhiker's Guide to the Galaxy*), to keep you from worrying about the complexities of computer programming:

```
$ awk 'BEGIN { print "Don\47t Panic!" }'
→ Don't Panic!
```

`awk` executes statements associated with `BEGIN` before reading any input. If there are no other statements in your program, as is the case here, `awk` just stops, instead of trying to read input it doesn't know how to process. The `\47` is a magic way (explained later) of getting a single quote into the program, without having to engage in ugly shell quoting tricks.

NOTE: If you use Bash as your shell, you should execute the command `'set +H'` before running this program interactively, to disable the C shell-style command history, which treats `'!` as a special character. We recommend putting this command into your personal startup file.

This next simple `awk` program emulates the `cat` utility; it copies whatever you type on the keyboard to its standard output (why this works is explained shortly):

```
$ awk '{ print }'
Now is the time for all good men
→ Now is the time for all good men
to come to the aid of their country.
→ to come to the aid of their country.
Four score and seven years ago, ...
→ Four score and seven years ago, ...
What, me worry?
→ What, me worry?
Ctrl-d
```

1.1.3 Running Long Programs

Sometimes `awk` programs are very long. In these cases, it is more convenient to put the program into a separate file. In order to tell `awk` to use that file for its program, you type:

```
awk -f source-file input-file1 input-file2 ...
```

The `-f` instructs the `awk` utility to get the `awk` program from the file *source-file* (see [Section 2.2 \[Command-Line Options\]](#), page 31). Any file name can be used for *source-file*. For example, you could put the program:

```
BEGIN { print "Don't Panic!" }
```

into the file `advice`. Then this command:

```
awk -f advice
```

does the same thing as this one:

```
awk 'BEGIN { print "Don\47t Panic!" }'
```

This was explained earlier (see [Section 1.1.2 \[Running awk Without Input Files\]](#), page 18). Note that you don't usually need single quotes around the file name that you specify with `-f`, because most file names don't contain any of the shell's special characters. Notice that in `advice`, the `awk` program did not have single quotes around it. The quotes are only needed for programs that are provided on the `awk` command line. (Also, placing the program in a file allows us to use a literal single quote in the program text, instead of the magic `\47'`.)

If you want to clearly identify an `awk` program file as such, you can add the extension `.awk` to the file name. This doesn't affect the execution of the `awk` program but it does make "housekeeping" easier.

1.1.4 Executable awk Programs

Once you have learned `awk`, you may want to write self-contained `awk` scripts, using the `#!` script mechanism. You can do this on many systems.¹ For example, you could update the file `advice` to look like this:

```
#!/bin/awk -f

BEGIN { print "Don't Panic!" }
```

After making this file executable (with the `chmod` utility), simply type `'advice'` at the shell and the system arranges to run `awk` as if you had typed `'awk -f advice'`:

```
$ chmod +x advice
$ advice
-| Don't Panic!
```

(We assume you have the current directory in your shell's search path variable [typically `$PATH`]. If not, you may need to type `'./advice'` at the shell.)

Self-contained `awk` scripts are useful when you want to write a program that users can invoke without their having to know that the program is written in `awk`.

¹ The `#!` mechanism works on GNU/Linux systems, BSD-based systems, and commercial Unix systems.

Understanding ‘#!’

awk is an *interpreted* language. This means that the **awk** utility reads your program and then processes your data according to the instructions in your program. (This is different from a *compiled* language such as C, where your program is first compiled into machine code that is executed directly by your system’s processor.) The **awk** utility is thus termed an *interpreter*. Many modern languages are interpreted.

The line beginning with ‘#!’ lists the full file name of an interpreter to run and a single optional initial command-line argument to pass to that interpreter. The operating system then runs the interpreter with the given argument and the full argument list of the executed program. The first argument in the list is the full file name of the **awk** program. The rest of the argument list contains either options to **awk**, or data files, or both. (Note that on many systems **awk** may be found in `/usr/bin` instead of in `/bin`.)

Some systems limit the length of the interpreter name to 32 characters. Often, this can be dealt with by using a symbolic link.

You should not put more than one argument on the ‘#!’ line after the path to **awk**. It does not work. The operating system treats the rest of the line as a single argument and passes it to **awk**. Doing this leads to confusing behavior—most likely a usage diagnostic of some sort from **awk**.

Finally, the value of `ARGV[0]` (see [Section 7.5 \[Predefined Variables\]](#), page 147) varies depending upon your operating system. Some systems put ‘**awk**’ there, some put the full pathname of **awk** (such as `/bin/awk`), and some put the name of your script (‘*advice*’). Don’t rely on the value of `ARGV[0]` to provide your script name.

**1.1.5 Comments in awk Programs**

A *comment* is some text that is included in a program for the sake of human readers; it is not really an executable part of the program. Comments can explain what the program does and how it works. Nearly all programming languages have provisions for comments, as programs are typically hard to understand without them.

In the **awk** language, a comment starts with the number sign character (‘#’) and continues to the end of the line. The ‘#’ does not have to be the first character on the line. The **awk** language ignores the rest of a line following a number sign. For example, we could have put the following into *advice*:

```
# This program prints a nice, friendly message. It helps
# keep novice users from being afraid of the computer.
BEGIN    { print "Don't Panic!" }
```

You can put comment lines into keyboard-composed throwaway **awk** programs, but this usually isn’t very useful; the purpose of a comment is to help you or another person understand the program when reading it at a later time.

CAUTION: As mentioned in [Section 1.1.1 \[One-Shot Throwaway awk Programs\]](#), page 17, you can enclose short to medium-sized programs in single quotes, in order to keep your shell scripts self-contained. When doing so, *don’t* put an apostrophe (i.e., a single quote) into a comment (or anywhere else in your program). The shell interprets the quote as the closing quote for the entire program. As a result, usually the shell prints a message about mismatched

quotes, and if `awk` actually runs, it will probably print strange messages about syntax errors. For example, look at the following:

```
$ awk 'BEGIN { print "hello" } # let's be cute'
>
```

The shell sees that the first two quotes match, and that a new quoted object begins at the end of the command line. It therefore prompts with the secondary prompt, waiting for more input. With Unix `awk`, closing the quoted string produces this result:

```
$ awk '{ print "hello" } # let's be cute'
> '
[error] awk: can't open file be
[error] source line number 1
```

Putting a backslash before the single quote in `'let's'` wouldn't help, because backslashes are not special inside single quotes. The next subsection describes the shell's quoting rules.

1.1.6 Shell Quoting Issues

For short to medium-length `awk` programs, it is most convenient to enter the program on the `awk` command line. This is best done by enclosing the entire program in single quotes. This is true whether you are entering the program interactively at the shell prompt, or writing it as part of a larger shell script:

```
awk 'program text' input-file1 input-file2 ...
```

Once you are working with the shell, it is helpful to have a basic knowledge of shell quoting rules. The following rules apply only to POSIX-compliant, Bourne-style shells (such as Bash, the GNU Bourne-Again Shell). If you use the C shell, you're on your own.

Before diving into the rules, we introduce a concept that appears throughout this book, which is that of the *null*, or empty, string.

The null string is character data that has no value. In other words, it is empty. It is written in `awk` programs like this: `""`. In the shell, it can be written using single or double quotes: `""` or `''`. Although the null string has no characters in it, it does exist. For example, consider this command:

```
$ echo ""
```

Here, the `echo` utility receives a single argument, even though that argument has no characters in it. In the rest of this book, we use the terms *null string* and *empty string* interchangeably. Now, on to the quoting rules:

- Quoted items can be concatenated with nonquoted items as well as with other quoted items. The shell turns everything into one argument for the command.
- Preceding any single character with a backslash (`\`) quotes that character. The shell removes the backslash and passes the quoted character on to the command.
- Single quotes protect everything between the opening and closing quotes. The shell does no interpretation of the quoted text, passing it on verbatim to the command. It is *impossible* to embed a single quote inside single-quoted text. Refer back to [Section 1.1.5 \[Comments in awk Programs\]](#), page 20, for an example of what happens if you try.

- Double quotes protect most things between the opening and closing quotes. The shell does at least variable and command substitution on the quoted text. Different shells may do additional kinds of processing on double-quoted text.

Because certain characters within double-quoted text are processed by the shell, they must be *escaped* within the text. Of note are the characters '\$', "'", '\', and '"', all of which must be preceded by a backslash within double-quoted text if they are to be passed on literally to the program. (The leading backslash is stripped first.) Thus, the example seen previously in [Section 1.1.2 \[Running awk Without Input Files\]](#), page 18:

```
awk 'BEGIN { print "Don\47t Panic!" }'
```

could instead be written this way:

```
$ awk "BEGIN { print \"Don't Panic!\" }"
→ Don't Panic!
```

Note that the single quote is not special within double quotes.

- Null strings are removed when they occur as part of a non-null command-line argument, while explicit null objects are kept. For example, to specify that the field separator FS should be set to the null string, use:

```
awk -F "" 'program' files # correct
```

Don't use this:

```
awk -F"" 'program' files # wrong!
```

In the second case, `awk` attempts to use the text of the program as the value of FS, and the first file name as the text of the program! This results in syntax errors at best, and confusing behavior at worst.

Mixing single and double quotes is difficult. You have to resort to shell quoting tricks, like this:

```
$ awk 'BEGIN { print "Here is a single quote <'>" }'
→ Here is a single quote <'>
```

This program consists of three concatenated quoted strings. The first and the third are single-quoted, and the second is double-quoted.

This can be “simplified” to:

```
$ awk 'BEGIN { print "Here is a single quote <'\>" }'
→ Here is a single quote <'\>
```

Judge for yourself which of these two is the more readable.

Another option is to use double quotes, escaping the embedded, `awk`-level double quotes:

```
$ awk "BEGIN { print \"Here is a single quote <'>\" }"
→ Here is a single quote <'>
```

This option is also painful, because double quotes, backslashes, and dollar signs are very common in more advanced `awk` programs.

A third option is to use the octal escape sequence equivalents (see [Section 3.2 \[Escape Sequences\]](#), page 46) for the single- and double-quote characters, like so:

```
$ awk 'BEGIN { print "Here is a single quote <\47>" }'
→ Here is a single quote <'>
$ awk 'BEGIN { print "Here is a double quote <\42>" }'
```



```
└─ Here is a double quote <">
```

This works nicely, but you should comment clearly what the escapes mean.

A fourth option is to use command-line variable assignment, like this:

```
$ awk -v sq="'" 'BEGIN { print "Here is a single quote <" sq ">" }'
└─ Here is a single quote <'>
```

(Here, the two string constants and the value of `sq` are concatenated into a single string that is printed by `print`.)

If you really need both single and double quotes in your `awk` program, it is probably best to move it into a separate file, where the shell won't be part of the picture and you can say what you mean.

1.1.6.1 Quoting in MS-Windows Batch Files

Although this book generally only worries about POSIX systems and the POSIX shell, the following issue arises often enough for many users that it is worth addressing.

The “shells” on Microsoft Windows systems use the double-quote character for quoting, and make it difficult or impossible to include an escaped double-quote character in a command-line script. The following example, courtesy of Jeroen Brink, shows how to print all lines in a file surrounded by double quotes:

```
gawk "{ print \"\042\" $0 \"\042\" }" file
```

1.2 Data files for the Examples

Many of the examples in this book take their input from two sample data files. The first, `mail-list`, represents a list of peoples' names together with their email addresses and information about those people. The second data file, called `inventory-shipped`, contains information about monthly shipments. In both files, each line is considered to be one *record*.

In `mail-list`, each record contains the name of a person, his/her phone number, his/her email address, and a code for his/her relationship with the author of the list. The columns are aligned using spaces. An 'A' in the last column means that the person is an acquaintance. An 'F' in the last column means that the person is a friend. An 'R' means that the person is a relative:

Amelia	555-5553	amelia.zodiacusque@gmail.com	F
Anthony	555-3412	anthony.asserturo@hotmail.com	A
Becky	555-7685	becky.algebrarum@gmail.com	A
Bill	555-1675	bill.drowning@hotmail.com	A
Broderick	555-0542	broderick.aliquotiens@yahoo.com	R
Camilla	555-2912	camilla.infusarum@skynet.be	R
Fabius	555-1234	fabius.undevicesimus@ucb.edu	F
Julie	555-6699	julie.perscrutabor@skeeve.com	F
Martin	555-6480	martin.codicibus@hotmail.com	A
Samuel	555-3430	samuel.lanceolis@shu.edu	A
Jean-Paul	555-2127	jeanpaul.campanorum@nyu.edu	R

The data file `inventory-shipped` represents information about shipments during the year. Each record contains the month, the number of green crates shipped, the number of red boxes shipped, the number of orange bags shipped, and the number of blue packages

shipped, respectively. There are 16 entries, covering the 12 months of last year and the first four months of the current year. An empty line separates the data for the two years:

```
Jan 13 25 15 115
Feb 15 32 24 226
Mar 15 24 34 228
Apr 31 52 63 420
May 16 34 29 208
Jun 31 42 75 492
Jul 24 34 67 436
Aug 15 34 47 316
Sep 13 55 37 277
Oct 29 54 68 525
Nov 20 87 82 577
Dec 17 35 61 401
```

```
Jan 21 36 64 620
Feb 26 58 80 652
Mar 24 75 70 495
Apr 21 70 74 514
```

The sample files are included in the `gawk` distribution, in the directory `awklib/eg/data`.

1.3 Some Simple Examples

The following command runs a simple `awk` program that searches the input file `mail-list` for the character string ‘`li`’ (a grouping of characters is usually called a *string*; the term *string* is based on similar usage in English, such as “a string of pearls” or “a string of cars in a train”):

```
awk '/li/ { print $0 }' mail-list
```

When lines containing ‘`li`’ are found, they are printed because ‘`print $0`’ means print the current line. (Just ‘`print`’ by itself means the same thing, so we could have written that instead.)

You will notice that slashes (‘`/`’) surround the string ‘`li`’ in the `awk` program. The slashes indicate that ‘`li`’ is the pattern to search for. This type of pattern is called a *regular expression*, which is covered in more detail later (see [Chapter 3 \[Regular Expressions\]](#), [page 45](#)). The pattern is allowed to match parts of words. There are single quotes around the `awk` program so that the shell won’t interpret any of it as special shell characters.

Here is what this program prints:

```
$ awk '/li/ { print $0 }' mail-list
+ Amelia          555-5553      amelia.zodiacusque@gmail.com    F
+ Broderick       555-0542      broderick.aliquotiens@yahoo.com R
+ Julie          555-6699      julie.perscrutabor@skeeve.com   F
+ Samuel         555-3430      samuel.lanceolis@shu.edu        A
```

In an `awk` rule, either the pattern or the action can be omitted, but not both. If the pattern is omitted, then the action is performed for *every* input line. If the action is omitted, the default action is to print all lines that match the pattern.

Thus, we could leave out the action (the `print` statement and the braces) in the previous example and the result would be the same: `awk` prints all lines matching the pattern `'li'`. By comparison, omitting the `print` statement but retaining the braces makes an empty action that does nothing (i.e., no lines are printed).

Many practical `awk` programs are just a line or two long. Following is a collection of useful, short programs to get you started. Some of these programs contain constructs that haven't been covered yet. (The description of the program will give you a good idea of what is going on, but you'll need to read the rest of the book to become an `awk` expert!) Most of the examples use a data file named `data`. This is just a placeholder; if you use these programs yourself, substitute your own file names for `data`. For future reference, note that there is often more than one way to do things in `awk`. At some point, you may want to look back at these examples and see if you can come up with different ways to do the same things shown here:

- Print every line that is longer than 80 characters:

```
awk 'length($0) > 80' data
```

The sole rule has a relational expression as its pattern and has no action—so it uses the default action, printing the record.

- Print the length of the longest input line:

```
awk '{ if (length($0) > max) max = length($0) }
      END { print max }' data
```

The code associated with `END` executes after all input has been read; it's the other side of the coin to `BEGIN`.

- Print the length of the longest line in `data`:

```
expand data | awk '{ if (x < length($0)) x = length($0) }
                  END { print "maximum line length is " x }'
```

This example differs slightly from the previous one: the input is processed by the `expand` utility to change TABs into spaces, so the widths compared are actually the right-margin columns, as opposed to the number of input characters on each line.

- Print every line that has at least one field:

```
awk 'NF > 0' data
```

This is an easy way to delete blank lines from a file (or rather, to create a new file similar to the old file but from which the blank lines have been removed).

- Print seven random numbers from 0 to 100, inclusive:

```
awk 'BEGIN { for (i = 1; i <= 7; i++)
              print int(101 * rand()) }'
```

- Print the total number of bytes used by `files`:

```
ls -l files | awk '{ x += $5 }
                  END { print "total bytes: " x }'
```

- Print the total number of kilobytes used by `files`:

```
ls -l files | awk '{ x += $5 }
                  END { print "total K-bytes:", x / 1024 }'
```

- Print a sorted list of the login names of all users:

```
awk -F: '{ print $1 }' /etc/passwd | sort
```

- Count the lines in a file:

```
awk 'END { print NR }' data
```

- Print the even-numbered lines in the data file:

```
awk 'NR % 2 == 0' data
```

If you used the expression `'NR % 2 == 1'` instead, the program would print the odd-numbered lines.

1.4 An Example with Two Rules

The `awk` utility reads the input files one line at a time. For each line, `awk` tries the patterns of each rule. If several patterns match, then several actions execute in the order in which they appear in the `awk` program. If no patterns match, then no actions run.

After processing all the rules that match the line (and perhaps there are none), `awk` reads the next line. (However, see [Section 7.4.8 \[The `next` Statement\]](#), page 144, and also see [Section 7.4.9 \[The `nextfile` Statement\]](#), page 145.) This continues until the program reaches the end of the file. For example, the following `awk` program contains two rules:

```
/12/ { print $0 }
/21/ { print $0 }
```

The first rule has the string `'12'` as the pattern and `'print $0'` as the action. The second rule has the string `'21'` as the pattern and also has `'print $0'` as the action. Each rule's action is enclosed in its own pair of braces.

This program prints every line that contains the string `'12'` *or* the string `'21'`. If a line contains both strings, it is printed twice, once by each rule.

This is what happens if we run this program on our two sample data files, `mail-list` and `inventory-shipped`:

```
$ awk '/12/ { print $0 }
>      /21/ { print $0 }' mail-list inventory-shipped
+ Anthony      555-3412      anthony.asserturo@hotmail.com    A
+ Camilla      555-2912      camilla.infusarum@skynet.be      R
+ Fabius       555-1234      fabius.undevicesimus@ucb.edu      F
+ Jean-Paul    555-2127      jeanpaul.campanorum@nyu.edu       R
+ Jean-Paul    555-2127      jeanpaul.campanorum@nyu.edu       R
+ Jan  21  36  64  620
+ Apr  21  70  74  514
```

Note how the line beginning with `'Jean-Paul'` in `mail-list` was printed twice, once for each rule.

1.5 A More Complex Example

Now that we've mastered some simple tasks, let's look at what typical `awk` programs do. This example shows how `awk` can be used to summarize, select, and rearrange the output of another utility. It uses features that haven't been covered yet, so don't worry if you don't understand all the details:

```
ls -l | awk '$6 == "Nov" { sum += $5 }
            END { print sum }'
```

This command prints the total number of bytes in all the files in the current directory that were last modified in November (of any year). The ‘`ls -l`’ part of this example is a system command that gives you a listing of the files in a directory, including each file’s size and the date the file was last modified. Its output looks like this:

```
-rw-r--r-- 1 arnold user 1933 Nov 7 13:05 Makefile
-rw-r--r-- 1 arnold user 10809 Nov 7 13:03 awk.h
-rw-r--r-- 1 arnold user 983 Apr 13 12:14 awk.tab.h
-rw-r--r-- 1 arnold user 31869 Jun 15 12:20 awkgram.y
-rw-r--r-- 1 arnold user 22414 Nov 7 13:03 awk1.c
-rw-r--r-- 1 arnold user 37455 Nov 7 13:03 awk2.c
-rw-r--r-- 1 arnold user 27511 Dec 9 13:07 awk3.c
-rw-r--r-- 1 arnold user 7989 Nov 7 13:03 awk4.c
```

The first field contains read-write permissions, the second field contains the number of links to the file, and the third field identifies the file’s owner. The fourth field identifies the file’s group. The fifth field contains the file’s size in bytes. The sixth, seventh, and eighth fields contain the month, day, and time, respectively, that the file was last modified. Finally, the ninth field contains the file name.

The ‘`$6 == "Nov"`’ in our `awk` program is an expression that tests whether the sixth field of the output from ‘`ls -l`’ matches the string ‘`Nov`’. Each time a line has the string ‘`Nov`’ for its sixth field, `awk` performs the action ‘`sum += $5`’. This adds the fifth field (the file’s size) to the variable `sum`. As a result, when `awk` has finished reading all the input lines, `sum` is the total of the sizes of the files whose lines matched the pattern. (This works because `awk` variables are automatically initialized to zero.)

After the last line of output from `ls` has been processed, the `END` rule executes and prints the value of `sum`. In this example, the value of `sum` is 80600.

These more advanced `awk` techniques are covered in later sections (see [Section 7.3 \[Actions\]](#), page 137). Before you can move on to more advanced `awk` programming, you have to know how `awk` interprets your input and displays your output. By manipulating fields and using `print` statements, you can produce some very useful and impressive-looking reports.

1.6 awk Statements Versus Lines

Most often, each line in an `awk` program is a separate statement or separate rule, like this:

```
awk '/12/ { print $0 }
    /21/ { print $0 }' mail-list inventory-shipped
```

However, `gawk` ignores newlines after any of the following symbols and keywords:

```
, { ? : || && do else
```

A newline at any other point is considered the end of the statement.²

If you would like to split a single statement into two lines at a point where a newline would terminate it, you can *continue* it by ending the first line with a backslash character (‘`\`’). The backslash must be the final character on the line in order to be recognized as

² The ‘`?`’ and ‘`:`’ referred to here is the three-operand conditional expression described in [Section 6.3.4 \[Conditional Expressions\]](#), page 125. Splitting lines after ‘`?`’ and ‘`:`’ is a minor `gawk` extension; if `--posix` is specified (see [Section 2.2 \[Command-Line Options\]](#), page 31), then this extension is disabled.

a continuation character. A backslash is allowed anywhere in the statement, even in the middle of a string or regular expression. For example:

```
awk '/This regular expression is too long, so continue it\
on the next line/ { print $1 }'
```

We have generally not used backslash continuation in our sample programs. **gawk** places no limit on the length of a line, so backslash continuation is never strictly necessary; it just makes programs more readable. For this same reason, as well as for clarity, we have kept most statements short in the programs presented throughout the book. Backslash continuation is most useful when your **awk** program is in a separate source file instead of entered from the command line. You should also note that many **awk** implementations are more particular about where you may use backslash continuation. For example, they may not allow you to split a string constant using backslash continuation. Thus, for maximum portability of your **awk** programs, it is best not to split your lines in the middle of a regular expression or a string.

CAUTION: *Backslash continuation does not work as described with the C shell.*

It works for **awk** programs in files and for one-shot programs, *provided* you are using a POSIX-compliant shell, such as the Unix Bourne shell or Bash. But the C shell behaves differently! There you must use two backslashes in a row, followed by a newline. Note also that when using the C shell, *every* newline in your **awk** program must be escaped with a backslash. To illustrate:

```
% awk 'BEGIN { \
?      print \\
?      "hello, world" \
? }'
-| hello, world
```

Here, the ‘%’ and ‘?’ are the C shell’s primary and secondary prompts, analogous to the standard shell’s ‘\$’ and ‘>’.

Compare the previous example to how it is done with a POSIX-compliant shell:

```
$ awk 'BEGIN {
>   print \
>   "hello, world"
> }'
-| hello, world
```

awk is a line-oriented language. Each rule’s action has to begin on the same line as the pattern. To have the pattern and action on separate lines, you *must* use backslash continuation; there is no other option.

Another thing to keep in mind is that backslash continuation and comments do not mix. As soon as **awk** sees the ‘#’ that starts a comment, it ignores *everything* on the rest of the line. For example:

```
$ gawk 'BEGIN { print "dont panic" # a friendly \
>                                     BEGIN rule
> }'
[error] gawk: cmd. line:2: BEGIN rule
[error] gawk: cmd. line:2: ^ syntax error
```

In this case, it looks like the backslash would continue the comment onto the next line. However, the backslash-newline combination is never even noticed because it is “hidden” inside the comment. Thus, the `BEGIN` is noted as a syntax error.

When `awk` statements within one rule are short, you might want to put more than one of them on a line. This is accomplished by separating the statements with a semicolon (;). This also applies to the rules themselves. Thus, the program shown at the start of this section could also be written this way:

```
/12/ { print $0 } ; /21/ { print $0 }
```

NOTE: The requirement that states that rules on the same line must be separated with a semicolon was not in the original `awk` language; it was added for consistency with the treatment of statements within an action.

1.7 Other Features of awk

The `awk` language provides a number of predefined, or *built-in*, variables that your programs can use to get information from `awk`. There are other variables your program can set as well to control how `awk` processes your data.

In addition, `awk` provides a number of built-in functions for doing common computational and string-related operations. `gawk` provides built-in functions for working with timestamps, performing bit manipulation, for runtime string translation (internationalization), determining the type of a variable, and array sorting.

As we develop our presentation of the `awk` language, we will introduce most of the variables and many of the functions. They are described systematically in [Section 7.5 \[Predefined Variables\]](#), page 147, and in [Section 9.1 \[Built-in Functions\]](#), page 175.

1.8 When to Use awk

Now that you’ve seen some of what `awk` can do, you might wonder how `awk` could be useful for you. By using utility programs, advanced patterns, field separators, arithmetic statements, and other selection criteria, you can produce much more complex output. The `awk` language is very useful for producing reports from large amounts of raw data, such as summarizing information from the output of other utility programs like `ls`. (See [Section 1.5 \[A More Complex Example\]](#), page 26.)

Programs written with `awk` are usually much smaller than they would be in other languages. This makes `awk` programs easy to compose and use. Often, `awk` programs can be quickly composed at your keyboard, used once, and thrown away. Because `awk` programs are interpreted, you can avoid the (usually lengthy) compilation part of the typical edit-compile-test-debug cycle of software development.

Complex programs have been written in `awk`, including a complete retargetable assembler for eight-bit microprocessors (see [\[Glossary\]](#), page 467, for more information), and a microcode assembler for a special-purpose Prolog computer. The original `awk`’s capabilities were strained by tasks of such complexity, but modern versions are more capable.

If you find yourself writing `awk` scripts of more than, say, a few hundred lines, you might consider using a different programming language. The shell is good at string and pattern

matching; in addition, it allows powerful use of the system utilities. Python offers a nice balance between high-level ease of programming and access to system facilities.³

1.9 Summary

- Programs in **awk** consist of *pattern–action* pairs.
- An *action* without a *pattern* always runs. The default *action* for a pattern without one is ‘{ print \$0 }’.
- Use either ‘awk *program* *files*’ or ‘awk -f *program-file* *files*’ to run **awk**.
- You may use the special ‘#!’ header line to create **awk** programs that are directly executable.
- Comments in **awk** programs start with ‘#’ and continue to the end of the same line.
- Be aware of quoting issues when writing **awk** programs as part of a larger shell script (or MS-Windows batch file).
- You may use backslash continuation to continue a source line. Lines are automatically continued after a comma, open brace, question mark, colon, ‘||’, ‘&&’, **do**, and **else**.

³ Other popular scripting languages include Ruby and Perl.

2 Running `awk` and `gawk`

This chapter covers how to run `awk`, both POSIX-standard and `gawk`-specific command-line options, and what `awk` and `gawk` do with nonoption arguments. It then proceeds to cover how `gawk` searches for source files, reading standard input along with other files, `gawk`'s environment variables, `gawk`'s exit status, using include files, and obsolete and undocumented options and/or features.

Many of the options and features described here are discussed in more detail later in the book; feel free to skip over things in this chapter that don't interest you right now.

2.1 Invoking `awk`

There are two ways to run `awk`—with an explicit program or with one or more program files. Here are templates for both of them; items enclosed in [...] in these templates are optional:

```
awk [options] -f progfile [--] file ...
awk [options] [--] 'program' file ...
```

In addition to traditional one-letter POSIX-style options, `gawk` also supports GNU long options.

It is possible to invoke `awk` with an empty program:

```
awk '' datafile1 datafile2
```

Doing so makes little sense, though; `awk` exits silently when given an empty program. If `--lint` has been specified on the command line, `gawk` issues a warning that the program is empty.



2.2 Command-Line Options

Options begin with a dash and consist of a single character. GNU-style long options consist of two dashes and a keyword. The keyword can be abbreviated, as long as the abbreviation allows the option to be uniquely identified. If the option takes an argument, either the keyword is immediately followed by an equals sign ('=') and the argument's value, or the keyword and the argument's value are separated by whitespace. If a particular option with a value is given more than once, it is the last value that counts.

Each long option for `gawk` has a corresponding POSIX-style short option. The long and short options are interchangeable in all contexts. The following list describes options mandated by the POSIX standard:

`-F fs`

`--field-separator fs`

Set the FS variable to *fs* (see [Section 4.5 \[Specifying How Fields Are Separated\]](#), [page 67](#)).

`-f source-file`

`--file source-file`

Read the `awk` program source from *source-file* instead of in the first nonoption argument. This option may be given multiple times; the `awk` program consists of the concatenation of the contents of each specified *source-file*.

`-v var=val`

`--assign var=val`

Set the variable *var* to the value *val* *before* execution of the program begins. Such variable values are available inside the **BEGIN** rule (see [Section 2.3 \[Other Command-Line Arguments\]](#), page 37).

The `-v` option can only set one variable, but it can be used more than once, setting another variable each time, like this: `awk -v foo=1 -v bar=2 ...`.

CAUTION: Using `-v` to set the values of the built-in variables may lead to surprising results. **awk** will reset the values of those variables as it needs to, possibly ignoring any initial value you may have given.

`-W gawk-opt`

Provide an implementation-specific option. This is the POSIX convention for providing implementation-specific options. These options also have corresponding GNU-style long options. Note that the long options may be abbreviated, as long as the abbreviations remain unique. The full list of **gawk**-specific options is provided next.

`--` Signal the end of the command-line options. The following arguments are not treated as options even if they begin with `-`. This interpretation of `--` follows the POSIX argument parsing conventions.

This is useful if you have file names that start with `-`, or in shell scripts, if you have file names that will be specified by the user that could start with `-`. It is also useful for passing options on to the **awk** program; see [Section 10.4 \[Processing Command-Line Options\]](#), page 236.

The following list describes **gawk**-specific options:

`-b`

`--characters-as-bytes`

Cause **gawk** to treat all input data as single-byte characters. In addition, all output written with **print** or **printf** is treated as single-byte characters.

Normally, **gawk** follows the POSIX standard and attempts to process its input data according to the current locale (see [Section 6.6 \[Where You Are Makes a Difference\]](#), page 129). This can often involve converting multibyte characters into wide characters (internally), and can lead to problems or confusion if the input data does not contain valid multibyte characters. This option is an easy way to tell **gawk**, “Hands off my data!”

`-c`

`--traditional`

Specify *compatibility mode*, in which the GNU extensions to the **awk** language are disabled, so that **gawk** behaves just like **BWK awk**. See [Section A.5 \[Extensions in gawk Not in POSIX awk\]](#), page 417, which summarizes the extensions. Also see [Section C.1 \[Downward Compatibility and Debugging\]](#), page 451.

`-C`

`--copyright`

Print the short version of the General Public License and then exit.

`-d[file]`

`--dump-variables[=file]`

Print a sorted list of global variables, their types, and final values to *file*. If no *file* is provided, print this list to a file named `awkvars.out` in the current directory. No space is allowed between the `-d` and *file*, if *file* is supplied.

Having a list of all global variables is a good way to look for typographical errors in your programs. You would also use this option if you have a large program with a lot of functions, and you want to be sure that your functions don't inadvertently use global variables that you meant to be local. (This is a particularly easy mistake to make with simple variable names like *i*, *j*, etc.)

`-D[file]`

`--debug[=file]`

Enable debugging of `awk` programs (see [Section 14.1 \[Introduction to the gawk Debugger\]](#), page 327). By default, the debugger reads commands interactively from the keyboard (standard input). The optional *file* argument allows you to specify a file with a list of commands for the debugger to execute noninteractively. No space is allowed between the `-D` and *file*, if *file* is supplied.

`-e program-text`

`--source program-text`

Provide program source code in the *program-text*. This option allows you to mix source code in files with source code that you enter on the command line. This is particularly useful when you have library functions that you want to use from your command-line programs (see [Section 2.5.1 \[The AWKPATH Environment Variable\]](#), page 39).

`-E file`

`--exec file`

Similar to `-f`, read `awk` program text from *file*. There are two differences from `-f`:

- This option terminates option processing; anything else on the command line is passed on directly to the `awk` program.
- Command-line variable assignments of the form '`var=value`' are disallowed.

This option is particularly necessary for World Wide Web CGI applications that pass arguments through the URL; using this option prevents a malicious (or other) user from passing in options, assignments, or `awk` source code (via `-e`) to the CGI application.¹ This option should be used with '`#!`' scripts (see [Section 1.1.4 \[Executable awk Programs\]](#), page 19), like so:

```
#!/usr/local/bin/gawk -E
```

```
awk program here ...
```

¹ For more detail, please see Section 4.4 of [RFC 3875](#). Also see the [explanatory note sent to the gawk bug mailing list](#).

- g**
--gen-pot Analyze the source program and generate a GNU `gettext` portable object template file on standard output for all string constants that have been marked for translation. See [Chapter 13 \[Internationalization with gawk\]](#), page 317, for information about this option.
- h**
--help Print a “usage” message summarizing the short- and long-style options that `gawk` accepts and then exit.
- i source-file**
--include source-file Read an `awk` source library from *source-file*. This option is completely equivalent to using the `@include` directive inside your program. It is very similar to the `-f` option, but there are two important differences. First, when `-i` is used, the program source is not loaded if it has been previously loaded, whereas with `-f`, `gawk` always loads the file. Second, because this option is intended to be used with code libraries, `gawk` does not recognize such files as constituting main program input. Thus, after processing an `-i` argument, `gawk` still expects to find the main source code via the `-f` option or on the command line.
- l ext**
--load ext Load a dynamic extension named *ext*. Extensions are stored as system shared libraries. This option searches for the library using the `AWKLIBPATH` environment variable. The correct library suffix for your platform will be supplied by default, so it need not be specified in the extension name. The extension initialization routine should be named `dl_load()`. An alternative is to use the `@load` keyword inside the program to load a shared library. This advanced feature is described in detail in [Chapter 16 \[Writing Extensions for gawk\]](#), page 357.
- L[value]**
--lint[=value] Warn about constructs that are dubious or nonportable to other `awk` implementations. No space is allowed between the `-L` and *value*, if *value* is supplied. Some warnings are issued when `gawk` first reads your program. Others are issued at runtime, as your program executes. With an optional argument of ‘fatal’, lint warnings become fatal errors. This may be drastic, but its use will certainly encourage the development of cleaner `awk` programs. With an optional argument of ‘invalid’, only warnings about things that are actually invalid are issued. (This is not fully implemented yet.)
- Some warnings are only printed once, even if the dubious constructs they warn about occur multiple times in your `awk` program. Thus, when eliminating problems pointed out by `--lint`, you should take care to search for all occurrences of each inappropriate construct. As `awk` programs are usually short, doing so is not burdensome.

- M**
- bignum** Select arbitrary-precision arithmetic on numbers. This option has no effect if **gawk** is not compiled to use the GNU MPFR and MP libraries (see [Chapter 15 \[Arithmetic and Arbitrary-Precision Arithmetic with gawk\]](#), page 343).
- n**
- non-decimal-data**
 Enable automatic interpretation of octal and hexadecimal values in input data (see [Section 12.1 \[Allowing Nondecimal Input Data\]](#), page 301).
- CAUTION:** This option can severely break old programs. Use with care. Also note that this option may disappear in a future version of **gawk**.
- N**
- use-lc-numeric**
 Force the use of the locale's decimal point character when parsing numeric input data (see [Section 6.6 \[Where You Are Makes a Difference\]](#), page 129).
- o[file]**
- pretty-print[=file]**
 Enable pretty-printing of **awk** programs. By default, the output program is created in a file named **awkprof.out** (see [Section 12.5 \[Profiling Your awk Programs\]](#), page 312). The optional *file* argument allows you to specify a different file name for the output. No space is allowed between the **-o** and *file*, if *file* is supplied.
- NOTE:** Due to the way **gawk** has evolved, with this option your program still executes. This will change in the next major release, such that **gawk** will only pretty-print the program and not run it.
- O**
- optimize**
 Enable some optimizations on the internal representation of the program. At the moment, this includes just simple constant folding.
- p[file]**
- profile[=file]**
 Enable profiling of **awk** programs (see [Section 12.5 \[Profiling Your awk Programs\]](#), page 312). By default, profiles are created in a file named **awkprof.out**. The optional *file* argument allows you to specify a different file name for the profile file. No space is allowed between the **-p** and *file*, if *file* is supplied.
- The profile contains execution counts for each statement in the program in the left margin, and function call counts for each function.
- P**
- posix** Operate in strict POSIX mode. This disables all **gawk** extensions (just like **--traditional**) and disables all extensions not allowed by POSIX. See [Section A.7 \[Common Extensions Summary\]](#), page 425, for a summary of the extensions in **gawk** that are disabled by this option. Also, the following additional restrictions apply:

- Newlines do not act as whitespace to separate fields when `FS` is equal to a single space (see [Section 4.2 \[Examining Fields\]](#), page 63).
- Newlines are not allowed after ‘?’ or ‘:’ (see [Section 6.3.4 \[Conditional Expressions\]](#), page 125).
- Specifying ‘-Ft’ on the command line does not set the value of `FS` to be a single TAB character (see [Section 4.5 \[Specifying How Fields Are Separated\]](#), page 67).
- The locale’s decimal point character is used for parsing input data (see [Section 6.6 \[Where You Are Makes a Difference\]](#), page 129).

If you supply both `--traditional` and `--posix` on the command line, `--posix` takes precedence. `gawk` issues a warning if both options are supplied.

`-r`

`--re-interval`

Allow interval expressions (see [Section 3.3 \[Regular Expression Operators\]](#), page 48) in regexps. This is now `gawk`’s default behavior. Nevertheless, this option remains (both for backward compatibility and for use in combination with `--traditional`).

`-S`

`--sandbox`

Disable the `system()` function, input redirections with `getline`, output redirections with `print` and `printf`, and dynamic extensions. This is particularly useful when you want to run `awk` scripts from questionable sources and need to make sure the scripts can’t access your system (other than the specified input data file).

`-t`

`--lint-old`

Warn about constructs that are not available in the original version of `awk` from Version 7 Unix (see [Section A.1 \[Major Changes Between V7 and SVR3.1\]](#), page 415).

`-V`

`--version`

Print version information for this particular copy of `gawk`. This allows you to determine if your copy of `gawk` is up to date with respect to whatever the Free Software Foundation is currently distributing. It is also useful for bug reports (see [Section B.4 \[Reporting Problems and Bugs\]](#), page 445).

As long as program text has been supplied, any other options are flagged as invalid with a warning message but are otherwise ignored.

In compatibility mode, as a special case, if the value of `fs` supplied to the `-F` option is ‘t’, then `FS` is set to the TAB character (“\t”). This is true only for `--traditional` and not for `--posix` (see [Section 4.5 \[Specifying How Fields Are Separated\]](#), page 67).

The `-f` option may be used more than once on the command line. If it is, `awk` reads its program source from all of the named files, as if they had been concatenated together into one big file. This is useful for creating libraries of `awk` functions. These functions can

be written once and then retrieved from a standard place, instead of having to be included in each individual program. The `-i` option is similar in this regard. (As mentioned in [Section 9.2.1 \[Function Definition Syntax\]](#), page 200, function names must be unique.)

With standard `awk`, library functions can still be used, even if the program is entered at the keyboard, by specifying `'-f /dev/tty'`. After typing your program, type `Ctrl-d` (the end-of-file character) to terminate it. (You may also use `'-f -'` to read program source from the standard input, but then you will not be able to also use the standard input as a source of data.)

Because it is clumsy using the standard `awk` mechanisms to mix source file and command-line `awk` programs, `gawk` provides the `-e` option. This does not require you to preempt the standard input for your source code; it allows you to easily mix command-line and library source code (see [Section 2.5.1 \[The AWKPATH Environment Variable\]](#), page 39). As with `-f`, the `-e` and `-i` options may also be used multiple times on the command line.

If no `-f` or `-e` option is specified, then `gawk` uses the first nooption command-line argument as the text of the program source code.

If the environment variable `POSIXLY_CORRECT` exists, then `gawk` behaves in strict POSIX mode, exactly as if you had supplied `--posix`. Many GNU programs look for this environment variable to suppress extensions that conflict with POSIX, but `gawk` behaves differently: it suppresses all extensions, even those that do not conflict with POSIX, and behaves in strict POSIX mode. If `--lint` is supplied on the command line and `gawk` turns on POSIX mode because of `POSIXLY_CORRECT`, then it issues a warning message indicating that POSIX mode is in effect. You would typically set this variable in your shell's startup file. For a Bourne-compatible shell (such as Bash), you would add these lines to the `.profile` file in your home directory:

```
POSIXLY_CORRECT=true
export POSIXLY_CORRECT
```

For a C shell-compatible shell,² you would add this line to the `.login` file in your home directory:

```
setenv POSIXLY_CORRECT true
```

Having `POSIXLY_CORRECT` set is not recommended for daily use, but it is good for testing the portability of your programs to other environments.

2.3 Other Command-Line Arguments

Any additional arguments on the command line are normally treated as input files to be processed in the order specified. However, an argument that has the form `var=value`, assigns the value `value` to the variable `var`—it does not specify a file at all. (See [Section 6.1.3.2 \[Assigning Variables on the Command Line\]](#), page 111.) In the following example, `count=1` is a variable assignment, not a file name:

```
awk -f program.awk file1 count=1 file2
```

All the command-line arguments are made available to your `awk` program in the `ARGV` array (see [Section 7.5 \[Predefined Variables\]](#), page 147). Command-line options and the program text (if present) are omitted from `ARGV`. All other arguments, including variable

² Not recommended.

assignments, are included. As each element of `ARGV` is processed, `gawk` sets `ARGIND` to the index in `ARGV` of the current element.

Changing `ARGC` and `ARGV` in your `awk` program lets you control how `awk` processes the input files; this is described in more detail in [Section 7.5.3 \[Using `ARGC` and `ARGV`\]](#), page 155.

The distinction between file name arguments and variable-assignment arguments is made when `awk` is about to open the next input file. At that point in execution, it checks the file name to see whether it is really a variable assignment; if so, `awk` sets the variable instead of reading a file.

Therefore, the variables actually receive the given values after all previously specified files have been read. In particular, the values of variables assigned in this fashion are *not* available inside a `BEGIN` rule (see [Section 7.1.4 \[The `BEGIN` and `END` Special Patterns\]](#), page 134), because such rules are run before `awk` begins scanning the argument list.

The variable values given on the command line are processed for escape sequences (see [Section 3.2 \[Escape Sequences\]](#), page 46).



In some very early implementations of `awk`, when a variable assignment occurred before any file names, the assignment would happen *before* the `BEGIN` rule was executed. `awk`'s behavior was thus inconsistent; some command-line assignments were available inside the `BEGIN` rule, while others were not. Unfortunately, some applications came to depend upon this “feature.” When `awk` was changed to be more consistent, the `-v` option was added to accommodate applications that depended upon the old behavior.

The variable assignment feature is most useful for assigning to variables such as `RS`, `OFS`, and `ORS`, which control input and output formats, before scanning the data files. It is also useful for controlling state if multiple passes are needed over a data file. For example:

```
awk 'pass == 1 { pass 1 stuff }
    pass == 2 { pass 2 stuff }' pass=1 mydata pass=2 mydata
```

Given the variable assignment feature, the `-F` option for setting the value of `FS` is not strictly necessary. It remains for historical compatibility.

2.4 Naming Standard Input

Often, you may wish to read standard input together with other files. For example, you may wish to read one file, read standard input coming from a pipe, and then read another file.

The way to name the standard input, with all versions of `awk`, is to use a single, stand-alone minus sign or dash, ‘-’. For example:

```
some_command | awk -f myprog.awk file1 - file2
```

Here, `awk` first reads `file1`, then it reads the output of `some_command`, and finally it reads `file2`.

You may also use “-” to name standard input when reading files with `getline` (see [Section 4.9.3 \[Using `getline` from a File\]](#), page 80).

In addition, `gawk` allows you to specify the special file name `/dev/stdin`, both on the command line and with `getline`. Some other versions of `awk` also support this, but it is not standard. (Some operating systems provide a `/dev/stdin` file in the filesystem; however, `gawk` always processes this file name itself.)

2.5 The Environment Variables `gawk` Uses

A number of environment variables influence how `gawk` behaves.

2.5.1 The `AWKPATH` Environment Variable

In most `awk` implementations, you must supply a precise pathname for each program file, unless the file is in the current directory. But with `gawk`, if the file name supplied to the `-f` or `-i` options does not contain a directory separator `/`, then `gawk` searches a list of directories (called the *search path*) one by one, looking for a file with the specified name.

The search path is a string consisting of directory names separated by colons.³ `gawk` gets its search path from the `AWKPATH` environment variable. If that variable does not exist, or if it has an empty value, `gawk` uses a default path (described shortly).

The search path feature is particularly helpful for building libraries of useful `awk` functions. The library files can be placed in a standard directory in the default path and then specified on the command line with a short file name. Otherwise, you would have to type the full file name for each file.

By using the `-i` or `-f` options, your command-line `awk` programs can use facilities in `awk` library files (see [Chapter 10 \[A Library of `awk` Functions\]](#), page 219). Path searching is not done if `gawk` is in compatibility mode. This is true for both `--traditional` and `--posix`. See [Section 2.2 \[Command-Line Options\]](#), page 31.

If the source code file is not found after the initial search, the path is searched again after adding the suffix `.awk` to the file name.

`gawk`'s path search mechanism is similar to the shell's. (See *The Bourne-Again SHell manual*.) It treats a null entry in the path as indicating the current directory. (A null entry is indicated by starting or ending the path with a colon or by placing two colons next to each other `['::']`.)

NOTE: To include the current directory in the path, either place `.` as an entry in the path or write a null entry in the path.

Different past versions of `gawk` would also look explicitly in the current directory, either before or after the path search. As of version 4.1.2, this no longer happens; if you wish to look in the current directory, you must include `.` either as a separate entry or as a null entry in the search path.

The default value for `AWKPATH` is `./usr/local/share/awk`.⁴ Since `.` is included at the beginning, `gawk` searches first in the current directory and then in `/usr/local/share/awk`. In practice, this means that you will rarely need to change the value of `AWKPATH`.

`gawk` places the value of the search path that it used into `ENVIRON["AWKPATH"]`. This provides access to the actual search path value from within an `awk` program.

Although you can change `ENVIRON["AWKPATH"]` within your `awk` program, this has no effect on the running program's behavior. This makes sense: the `AWKPATH` environment variable is used to find the program source files. Once your program is running, all the files have been found, and `gawk` no longer needs to use `AWKPATH`.

³ Semicolons on MS-Windows and MS-DOS.

⁴ Your version of `gawk` may use a different directory; it will depend upon how `gawk` was built and installed. The actual directory is the value of `$(datadir)` generated when `gawk` was configured. You probably don't need to worry about this, though.

2.5.2 The AWKLIBPATH Environment Variable

The `AWKLIBPATH` environment variable is similar to the `AWKPATH` variable, but it is used to search for loadable extensions (stored as system shared libraries) specified with the `-l` option rather than for source files. If the extension is not found, the path is searched again after adding the appropriate shared library suffix for the platform. For example, on GNU/Linux systems, the suffix `.so` is used. The search path specified is also used for extensions loaded via the `@load` keyword (see [Section 2.8 \[Loading Dynamic Extensions into Your Program\]](#), [page 43](#)).

If `AWKLIBPATH` does not exist in the environment, or if it has an empty value, `gawk` uses a default path; this is typically `/usr/local/lib/gawk`, although it can vary depending upon how `gawk` was built.

`gawk` places the value of the search path that it used into `ENVIRON["AWKLIBPATH"]`. This provides access to the actual search path value from within an `awk` program.

2.5.3 Other Environment Variables

A number of other environment variables affect `gawk`'s behavior, but they are more specialized. Those in the following list are meant to be used by regular users:

`GAWK_MSEC_SLEEP`

Specifies the interval between connection retries, in milliseconds. On systems that do not support the `usleep()` system call, the value is rounded up to an integral number of seconds.

`GAWK_READ_TIMEOUT`

Specifies the time, in milliseconds, for `gawk` to wait for input before returning with an error. See [Section 4.10 \[Reading Input with a Timeout\]](#), [page 84](#).

`GAWK_SOCKET_RETRIES`

Controls the number of times `gawk` attempts to retry a two-way TCP/IP (socket) connection before giving up. See [Section 12.4 \[Using gawk for Network Programming\]](#), [page 311](#).

`POSIXLY_CORRECT`

Causes `gawk` to switch to POSIX-compatibility mode, disabling all traditional and GNU extensions. See [Section 2.2 \[Command-Line Options\]](#), [page 31](#).

The environment variables in the following list are meant for use by the `gawk` developers for testing and tuning. They are subject to change. The variables are:

`AWKBUFSIZE`

This variable only affects `gawk` on POSIX-compliant systems. With a value of `'exact'`, `gawk` uses the size of each input file as the size of the memory buffer to allocate for I/O. Otherwise, the value should be a number, and `gawk` uses that number as the size of the buffer to allocate. (When this variable is not set, `gawk` uses the smaller of the file's size and the "default" blocksize, which is usually the filesystem's I/O blocksize.)

`AWK_HASH`

If this variable exists with a value of `'gst'`, `gawk` switches to using the hash function from GNU Smalltalk for managing arrays. This function may be marginally faster than the standard function.

AWKREADFUNC

If this variable exists, **gawk** switches to reading source files one line at a time, instead of reading in blocks. This exists for debugging problems on filesystems on non-POSIX operating systems where I/O is performed in records, not in blocks.

GAWK_MSG_SRC

If this variable exists, **gawk** includes the file name and line number within the **gawk** source code from which warning and/or fatal messages are generated. Its purpose is to help isolate the source of a message, as there are multiple places that produce the same warning or error message.

GAWK_LOCALE_DIR

Specifies the location of compiled message object files for **gawk** itself. This is passed to the `bindtextdomain()` function when **gawk** starts up.

GAWK_NO_DFA

If this variable exists, **gawk** does not use the DFA regexp matcher for “does it match” kinds of tests. This can cause **gawk** to be slower. Its purpose is to help isolate differences between the two regexp matchers that **gawk** uses internally. (There aren’t supposed to be differences, but occasionally theory and practice don’t coordinate with each other.)

GAWK_NO_PP_RUN

When **gawk** is invoked with the `--pretty-print` option, it will not run the program if this environment variable exists.

CAUTION: This variable will not survive into the next major release.

GAWK_STACKSIZE

This specifies the amount by which **gawk** should grow its internal evaluation stack, when needed.

INT_CHAIN_MAX

This specifies intended maximum number of items **gawk** will maintain on a hash chain for managing arrays indexed by integers.

STR_CHAIN_MAX

This specifies intended maximum number of items **gawk** will maintain on a hash chain for managing arrays indexed by strings.

TIDYMEM

If this variable exists, **gawk** uses the `mtrace()` library calls from the GNU C library to help track down possible memory leaks.

2.6 gawk’s Exit Status

If the `exit` statement is used with a value (see [Section 7.4.10 \[The exit Statement\]](#), [page 146](#)), then **gawk** exits with the numeric value given to it.

Otherwise, if there were no problems during execution, **gawk** exits with the value of the C constant `EXIT_SUCCESS`. This is usually zero.

If an error occurs, **gawk** exits with the value of the C constant `EXIT_FAILURE`. This is usually one.

If **gawk** exits because of a fatal error, the exit status is two. On non-POSIX systems, this value may be mapped to **EXIT_FAILURE**.

2.7 Including Other Files into Your Program

This section describes a feature that is specific to **gawk**.

The **@include** keyword can be used to read external **awk** source files. This gives you the ability to split large **awk** source files into smaller, more manageable pieces, and also lets you reuse common **awk** code from various **awk** scripts. In other words, you can group together **awk** functions used to carry out specific tasks into external files. These files can be used just like function libraries, using the **@include** keyword in conjunction with the **AWKPATH** environment variable. Note that source files may also be included using the **-i** option.

Let's see an example. We'll start with two (trivial) **awk** scripts, namely **test1** and **test2**. Here is the **test1** script:

```
BEGIN {
    print "This is script test1."
}
```

and here is **test2**:

```
@include "test1"
BEGIN {
    print "This is script test2."
}
```

Running **gawk** with **test2** produces the following result:

```
$ gawk -f test2
+ This is script test1.
+ This is script test2.
```

gawk runs the **test2** script, which includes **test1** using the **@include** keyword. So, to include external **awk** source files, you just use **@include** followed by the name of the file to be included, enclosed in double quotes.

NOTE: Keep in mind that this is a language construct and the file name cannot be a string variable, but rather just a literal string constant in double quotes.

The files to be included may be nested; e.g., given a third script, namely **test3**:

```
@include "test2"
BEGIN {
    print "This is script test3."
}
```

Running **gawk** with the **test3** script produces the following results:

```
$ gawk -f test3
+ This is script test1.
+ This is script test2.
+ This is script test3.
```

The file name can, of course, be a pathname. For example:

```
@include "../io_funcs"
```

and:

```
@include "/usr/awklib/network"
```

are both valid. The `AWKPATH` environment variable can be of great value when using `@include`. The same rules for the use of the `AWKPATH` variable in command-line file searches (see [Section 2.5.1 \[The `AWKPATH` Environment Variable\]](#), page 39) apply to `@include` also.

This is very helpful in constructing `gawk` function libraries. If you have a large script with useful, general-purpose `awk` functions, you can break it down into library files and put those files in a special directory. You can then include those “libraries,” either by using the full pathnames of the files, or by setting the `AWKPATH` environment variable accordingly and then using `@include` with just the file part of the full pathname. Of course, you can keep library files in more than one directory; the more complex the working environment is, the more directories you may need to organize the files to be included.

Given the ability to specify multiple `-f` options, the `@include` mechanism is not strictly necessary. However, the `@include` keyword can help you in constructing self-contained `gawk` programs, thus reducing the need for writing complex and tedious command lines. In particular, `@include` is very useful for writing CGI scripts to be run from web pages.

As mentioned in [Section 2.5.1 \[The `AWKPATH` Environment Variable\]](#), page 39, the current directory is always searched first for source files, before searching in `AWKPATH`; this also applies to files named with `@include`.

2.8 Loading Dynamic Extensions into Your Program

This section describes a feature that is specific to `gawk`.

The `@load` keyword can be used to read external `awk` extensions (stored as system shared libraries). This allows you to link in compiled code that may offer superior performance and/or give you access to extended capabilities not supported by the `awk` language. The `AWKLIBPATH` variable is used to search for the extension. Using `@load` is completely equivalent to using the `-l` command-line option.

If the extension is not initially found in `AWKLIBPATH`, another search is conducted after appending the platform’s default shared library suffix to the file name. For example, on GNU/Linux systems, the suffix `‘.so’` is used:

```
$ gawk '@load "ordchr"; BEGIN {print chr(65)}'
+ A
```

This is equivalent to the following example:

```
$ gawk -lordchr 'BEGIN {print chr(65)}'
+ A
```

For command-line usage, the `-l` option is more convenient, but `@load` is useful for embedding inside an `awk` source file that requires access to an extension.

[Chapter 16 \[Writing Extensions for `gawk`\]](#), page 357, describes how to write extensions (in C or C++) that can be loaded with either `@load` or the `-l` option. It also describes the `ordchr` extension.

2.9 Obsolete Options and/or Features

This section describes features and/or command-line options from previous releases of **gawk** that either are not available in the current version or are still supported but deprecated (meaning that they will *not* be in the next release).

The process-related special files `/dev/pid`, `/dev/ppid`, `/dev/pgrpid`, and `/dev/user` were deprecated in **gawk** 3.1, but still worked. As of version 4.0, they are no longer interpreted specially by **gawk**. (Use `PROCINFO` instead; see [Section 7.5.2 \[Built-in Variables That Convey Information\]](#), page 149.)

2.10 Undocumented Options and Features

Use the Source, Luke!
—Obi-Wan

This section intentionally left blank.

2.11 Summary

- Use either `'awk 'program' files'` or `'awk -f program-file files'` to run **awk**.
- The three standard options for all versions of **awk** are `-f`, `-F`, and `-v`. **gawk** supplies these and many others, as well as corresponding GNU-style long options.
- Nonoption command-line arguments are usually treated as file names, unless they have the form `'var=value'`, in which case they are taken as variable assignments to be performed at that point in processing the input.
- All nonoption command-line arguments, excluding the program text, are placed in the `ARGV` array. Adjusting `ARGC` and `ARGV` affects how **awk** processes input.
- You can use a single minus sign (`'-'`) to refer to standard input on the command line. **gawk** also lets you use the special file name `/dev/stdin`.
- **gawk** pays attention to a number of environment variables. `AWKPATH`, `AWKLIBPATH`, and `POSIXLY_CORRECT` are the most important ones.
- **gawk**'s exit status conveys information to the program that invoked it. Use the `exit` statement from within an **awk** program to set the exit status.
- **gawk** allows you to include other **awk** source files into your program using the `@include` statement and/or the `-i` and `-f` command-line options.
- **gawk** allows you to load additional functions written in C or C++ using the `@load` statement and/or the `-l` option. (This advanced feature is described later, in [Chapter 16 \[Writing Extensions for gawk\]](#), page 357.)

3 Regular Expressions

A *regular expression*, or *regex*, is a way of describing a set of strings. Because regular expressions are such a fundamental part of `awk` programming, their format and use deserve a separate chapter.

A regular expression enclosed in slashes (‘/’) is an `awk` pattern that matches every input record whose text belongs to that set. The simplest regular expression is a sequence of letters, numbers, or both. Such a regex matches any string that contains that sequence. Thus, the regex `‘foo’` matches any string containing `‘foo’`. Thus, the pattern `/foo/` matches any input record containing the three adjacent characters `‘foo’` *anywhere* in the record. Other kinds of regexs let you specify more complicated classes of strings.

Initially, the examples in this chapter are simple. As we explain more about how regular expressions work, we present more complicated instances.

3.1 How to Use Regular Expressions

A regular expression can be used as a pattern by enclosing it in slashes. Then the regular expression is tested against the entire text of each record. (Normally, it only needs to match some part of the text in order to succeed.) For example, the following prints the second field of each record where the string `‘li’` appears anywhere in the record:

```
$ awk '/li/ { print $2 }' mail-list
+ 555-5553
+ 555-0542
+ 555-6699
+ 555-3430
```

Regular expressions can also be used in matching expressions. These expressions allow you to specify the string to match against; it need not be the entire current input record. The two operators `‘~’` and `‘!~’` perform regular expression comparisons. Expressions using these operators can be used as patterns, or in `if`, `while`, `for`, and `do` statements. (See [Section 7.4 \[Control Statements in Actions\]](#), page 138.) For example, the following is true if the expression `exp` (taken as a string) matches `regex`:

```
exp ~ /regex/
```

This example matches, or selects, all input records with the uppercase letter `‘J’` somewhere in the first field:

```
$ awk '$1 ~ /J/' inventory-shipped
+ Jan 13 25 15 115
+ Jun 31 42 75 492
+ Jul 24 34 67 436
+ Jan 21 36 64 620
```

So does this:

```
awk '{ if ($1 ~ /J/) print }' inventory-shipped
```

This next example is true if the expression `exp` (taken as a character string) does *not* match `regex`:

```
exp !~ /regex/
```

The following example matches, or selects, all input records whose first field *does not* contain the uppercase letter ‘J’:

```
$ awk '$1 !~ /J/' inventory-shipped
└ Feb  15  32  24 226
└ Mar  15  24  34 228
└ Apr  31  52  63 420
└ May  16  34  29 208
...
```

When a regexp is enclosed in slashes, such as `/foo/`, we call it a *regexp constant*, much like 5.27 is a numeric constant and `"foo"` is a string constant.

3.2 Escape Sequences

Some characters cannot be included literally in string constants (`"foo"`) or regexp constants (`/foo/`). Instead, they should be represented with *escape sequences*, which are character sequences beginning with a backslash (`\`). One use of an escape sequence is to include a double-quote character in a string constant. Because a plain double quote ends the string, you must use `\"` to represent an actual double-quote character as a part of the string. For example:

```
$ awk 'BEGIN { print "He said \"hi!\" to her." }'
└ He said "hi!" to her.
```

The backslash character itself is another character that cannot be included normally; you must write `\\` to put one backslash in the string or regexp. Thus, the string whose contents are the two characters `"` and `\` must be written `"\\"`.

Other escape sequences represent unprintable characters such as TAB or newline. There is nothing to stop you from entering most unprintable characters directly in a string constant or regexp constant, but they may look ugly.

The following list presents all the escape sequences used in `awk` and what they represent. Unless noted otherwise, all these escape sequences apply to both string constants and regexp constants:

<code>\\</code>	A literal backslash, <code>\</code> .
<code>\a</code>	The “alert” character, <i>Ctrl-g</i> , ASCII code 7 (BEL). (This often makes some sort of audible noise.)
<code>\b</code>	Backspace, <i>Ctrl-h</i> , ASCII code 8 (BS).
<code>\f</code>	Formfeed, <i>Ctrl-l</i> , ASCII code 12 (FF).
<code>\n</code>	Newline, <i>Ctrl-j</i> , ASCII code 10 (LF).
<code>\r</code>	Carriage return, <i>Ctrl-m</i> , ASCII code 13 (CR).
<code>\t</code>	Horizontal TAB, <i>Ctrl-i</i> , ASCII code 9 (HT).
<code>\v</code>	Vertical TAB, <i>Ctrl-k</i> , ASCII code 11 (VT).
<code>\nnn</code>	The octal value <i>nnn</i> , where <i>nnn</i> stands for 1 to 3 digits between ‘0’ and ‘7’. For example, the code for the ASCII ESC (escape) character is <code>\033</code> .

`\xhh...` The hexadecimal value *hh*, where *hh* stands for a sequence of hexadecimal digits ('0'–'9', and either 'A'–'F' or 'a'–'f'). Like the same construct in ISO C, the escape sequence continues until the first nonhexadecimal digit is seen. (c.e.) However, using more than two hexadecimal digits produces undefined results. (The '`\x`' escape sequence is not allowed in POSIX `awk`.)

CAUTION: The next major release of `gawk` will change, such that a maximum of two hexadecimal digits following the '`\x`' will be used.

`\/` A literal slash (necessary for regexp constants only). This sequence is used when you want to write a regexp constant that contains a slash (such as `/.*/home\/[[:alnum:]]+.*;/`; the '`[[:alnum:]]`' notation is discussed in [Section 3.4 \[Using Bracket Expressions\]](#), page 50). Because the regexp is delimited by slashes, you need to escape any slash that is part of the pattern, in order to tell `awk` to keep processing the rest of the regexp.

`\"` A literal double quote (necessary for string constants only). This sequence is used when you want to write a string constant that contains a double quote (such as `"He said \"hi!\" to her."`). Because the string is delimited by double quotes, you need to escape any quote that is part of the string, in order to tell `awk` to keep processing the rest of the string.

In `gawk`, a number of additional two-character sequences that begin with a backslash have special meaning in regexps. See [Section 3.7 \[gawk-Specific Regexp Operators\]](#), page 54.

In a regexp, a backslash before any character that is not in the previous list and not listed in [Section 3.7 \[gawk-Specific Regexp Operators\]](#), page 54, means that the next character should be taken literally, even if it would normally be a regexp operator. For example, `/a\+b/` matches the three characters '`a+b`'.

For complete portability, do not use a backslash before any character not shown in the previous list or that is not an operator.

Backslash Before Regular Characters

If you place a backslash in a string constant before something that is not one of the characters previously listed, POSIX `awk` purposely leaves what happens as undefined. There are two choices:

Strip the backslash out

This is what BWK `awk` and `gawk` both do. For example, `"a\qc"` is the same as `"aqc"`. (Because this is such an easy bug both to introduce and to miss, `gawk` warns you about it.) Consider '`FS = "[\t]+\|[\t]+"`' to use vertical bars surrounded by whitespace as the field separator. There should be two backslashes in the string: '`FS = "[\t]+\|[\t]+"`'.)

Leave the backslash alone

Some other `awk` implementations do this. In such implementations, typing `"a\qc"` is the same as typing `"a\\qc"`.

To summarize:

- The escape sequences in the preceding list are always processed first, for both string constants and regexp constants. This happens very early, as soon as **awk** reads your program.
- **gawk** processes both regexp constants and dynamic regexps (see [Section 3.6 \[Using Dynamic Regexps\]](#), page 53), for the special operators listed in [Section 3.7 \[gawk-Specific Regexp Operators\]](#), page 54.
- A backslash before any other character means to treat that character literally.

Escape Sequences for Metacharacters

Suppose you use an octal or hexadecimal escape to represent a regexp metacharacter. (See [Section 3.3 \[Regular Expression Operators\]](#), page 48.) Does **awk** treat the character as a literal character or as a regexp operator?

Historically, such characters were taken literally. However, the POSIX standard indicates that they should be treated as real metacharacters, which is what **gawk** does. In compatibility mode (see [Section 2.2 \[Command-Line Options\]](#), page 31), **gawk** treats the characters represented by octal and hexadecimal escape sequences literally when used in regexp constants. Thus, `/a\52b/` is equivalent to `/a*b/`.

3.3 Regular Expression Operators

You can combine regular expressions with special characters, called *regular expression operators* or *metacharacters*, to increase the power and versatility of regular expressions.

The escape sequences described earlier in [Section 3.2 \[Escape Sequences\]](#), page 46, are valid inside a regexp. They are introduced by a ‘\’ and are recognized and converted into corresponding real characters as the very first step in processing regexps.

Here is a list of metacharacters. All characters that are not escape sequences and that are not listed here stand for themselves:

**** This suppresses the special meaning of a character when matching. For example, ‘\\$’ matches the character ‘\$’.

^ This matches the beginning of a string. ‘^@chapter’ matches ‘@chapter’ at the beginning of a string, for example, and can be used to identify chapter beginnings in Texinfo source files. The ‘^’ is known as an *anchor*, because it anchors the pattern to match only at the beginning of the string.

It is important to realize that ‘^’ does not match the beginning of a line (the point right after a ‘\n’ newline character) embedded in a string. The condition is not true in the following example:

```
if ("line1\nLINE 2" ~ /^L/) ...
```

\$ This is similar to ‘^’, but it matches only at the end of a string. For example, ‘p\$’ matches a record that ends with a ‘p’. The ‘\$’ is an anchor and does not match the end of a line (the point right before a ‘\n’ newline character) embedded in a string. The condition in the following example is not true:

```
if ("line1\nLINE 2" ~ /1$/) ...
```

- . (period) This matches any single character, *including* the newline character. For example, `‘.P’` matches any single character followed by a ‘P’ in a string. Using concatenation, we can make a regular expression such as `‘U.A’`, which matches any three-character sequence that begins with ‘U’ and ends with ‘A’.

In strict POSIX mode (see [Section 2.2 \[Command-Line Options\]](#), page 31), `‘.’` does not match the NUL character, which is a character with all bits equal to zero. Otherwise, NUL is just another character. Other versions of `awk` may not be able to match the NUL character.

- [...] This is called a *bracket expression*.¹ It matches any *one* of the characters that are enclosed in the square brackets. For example, `‘[MVX]’` matches any one of the characters ‘M’, ‘V’, or ‘X’ in a string. A full discussion of what can be inside the square brackets of a bracket expression is given in [Section 3.4 \[Using Bracket Expressions\]](#), page 50.

- [^...] This is a *complemented bracket expression*. The first character after the ‘[’ *must* be a ‘^’. It matches any characters *except* those in the square brackets. For example, `‘[^awk]’` matches any character that is not an ‘a’, ‘w’, or ‘k’.

- | This is the *alternation operator* and it is used to specify alternatives. The ‘|’ has the lowest precedence of all the regular expression operators. For example, `‘^P|[aeiouy]’` matches any string that matches either ‘^P’ or ‘[aeiouy]’. This means it matches any string that starts with ‘P’ or contains (anywhere within it) a lowercase English vowel.

The alternation applies to the largest possible regexps on either side.

- (...) Parentheses are used for grouping in regular expressions, as in arithmetic. They can be used to concatenate regular expressions containing the alternation operator, ‘|’. For example, `‘@ (samp|code) \{ [^}] + \} ’` matches both `‘@code{foo}’` and `‘@samp{bar}’`. (These are Texinfo formatting control sequences. The ‘+’ is explained further on in this list.)

- * This symbol means that the preceding regular expression should be repeated as many times as necessary to find a match. For example, `‘ph*’` applies the ‘*’ symbol to the preceding ‘h’ and looks for matches of one ‘p’ followed by any number of ‘h’s. This also matches just ‘p’ if no ‘h’s are present.

There are two subtle points to understand about how ‘*’ works. First, the ‘*’ applies only to the single preceding regular expression component (e.g., in `‘ph*’`, it applies just to the ‘h’). To cause ‘*’ to apply to a larger subexpression, use parentheses: `‘(ph)*’` matches ‘ph’, ‘phph’, ‘phphph’, and so on.

Second, ‘*’ finds as many repetitions as possible. If the text to be matched is `‘phhhhhhhhhhhhhhoey’`, `‘ph*’` matches all of the ‘h’s.

- + This symbol is similar to ‘*’, except that the preceding expression must be matched at least once. This means that `‘wh+y’` would match `‘why’` and `‘whhy’`, but not `‘wy’`, whereas `‘wh*y’` would match all three.

¹ In other literature, you may see a bracket expression referred to as either a *character set*, a *character class*, or a *character list*.

? This symbol is similar to ‘*’, except that the preceding expression can be matched either once or not at all. For example, ‘fe?d’ matches ‘fed’ and ‘fd’, but nothing else.

{*n*}

{*n*,}

{*n*,*m*}

One or two numbers inside braces denote an *interval expression*. If there is one number in the braces, the preceding regexp is repeated *n* times. If there are two numbers separated by a comma, the preceding regexp is repeated *n* to *m* times. If there is one number followed by a comma, then the preceding regexp is repeated at least *n* times:

wh{3}y Matches ‘whhhy’, but not ‘why’ or ‘whhhhhy’.

wh{3,5}y Matches ‘whhhy’, ‘whhhhhy’, or ‘whhhhhhhy’ only.

wh{2,}y Matches ‘whhy’, ‘whhhy’, and so on.

Interval expressions were not traditionally available in **awk**. They were added as part of the POSIX standard to make **awk** and **egrep** consistent with each other.

Initially, because old programs may use ‘{’ and ‘}’ in regexp constants, **gawk** did *not* match interval expressions in regexps.

However, beginning with version 4.0, **gawk** does match interval expressions by default. This is because compatibility with POSIX has become more important to most **gawk** users than compatibility with old programs.

For programs that use ‘{’ and ‘}’ in regexp constants, it is good practice to always escape them with a backslash. Then the regexp constants are valid and work the way you want them to, using any version of **awk**.²

Finally, when ‘{’ and ‘}’ appear in regexp constants in a way that cannot be interpreted as an interval expression (such as /q{a}/), then they stand for themselves.

In regular expressions, the ‘*’, ‘+’, and ‘?’ operators, as well as the braces ‘{’ and ‘}’, have the highest precedence, followed by concatenation, and finally by ‘|’. As in arithmetic, parentheses can change how operators are grouped.

In POSIX **awk** and **gawk**, the ‘*’, ‘+’, and ‘?’ operators stand for themselves when there is nothing in the regexp that precedes them. For example, /+/ matches a literal plus sign. However, many other versions of **awk** treat such a usage as a syntax error.

If **gawk** is in compatibility mode (see [Section 2.2 \[Command-Line Options\]](#), page 31), interval expressions are not available in regular expressions.

3.4 Using Bracket Expressions

As mentioned earlier, a bracket expression matches any character among those listed between the opening and closing square brackets.

Within a bracket expression, a *range expression* consists of two characters separated by a hyphen. It matches any single character that sorts between the two characters, based upon

² Use two backslashes if you’re using a string constant with a regexp operator or function.

the system’s native character set. For example, ‘[0-9]’ is equivalent to ‘[0123456789]’. (See [Section A.8 \[Regex Ranges and Locales: A Long Sad Story\]](#), page 426, for an explanation of how the POSIX standard and `gawk` have changed over time. This is mainly of historical interest.)

With the increasing popularity of the [Unicode character standard](#), there is an additional wrinkle to consider. Octal and hexadecimal escape sequences inside bracket expressions are taken to represent only single-byte characters (characters whose values fit within the range 0–256). To match a range of characters where the endpoints of the range are larger than 256, enter the multibyte encodings of the characters directly.

To include one of the characters ‘\’, ‘]’, ‘-’, or ‘^’ in a bracket expression, put a ‘\’ in front of it. For example:

```
[d\]]
```

matches either ‘d’ or ‘]’. Additionally, if you place ‘]’ right after the opening ‘[’, the closing bracket is treated as one of the characters to be matched.

The treatment of ‘\’ in bracket expressions is compatible with other `awk` implementations and is also mandated by POSIX. The regular expressions in `awk` are a superset of the POSIX specification for Extended Regular Expressions (EREs). POSIX EREs are based on the regular expressions accepted by the traditional `egrep` utility.

Character classes are a feature introduced in the POSIX standard. A character class is a special notation for describing lists of characters that have a specific attribute, but the actual characters can vary from country to country and/or from character set to character set. For example, the notion of what is an alphabetic character differs between the United States and France.

A character class is only valid in a regexp *inside* the brackets of a bracket expression. Character classes consist of ‘[:’, a keyword denoting the class, and ‘:]’. [Table 3.1](#) lists the character classes defined by the POSIX standard.

Class	Meaning
<code>[:alnum:]</code>	Alphanumeric characters
<code>[:alpha:]</code>	Alphabetic characters
<code>[:blank:]</code>	Space and TAB characters
<code>[:cntrl:]</code>	Control characters
<code>[:digit:]</code>	Numeric characters
<code>[:graph:]</code>	Characters that are both printable and visible (a space is printable but not visible, whereas an ‘a’ is both)
<code>[:lower:]</code>	Lowercase alphabetic characters
<code>[:print:]</code>	Printable characters (characters that are not control characters)
<code>[:punct:]</code>	Punctuation characters (characters that are not letters, digits, control characters, or space characters)
<code>[:space:]</code>	Space characters (such as space, TAB, and formfeed, to name a few)
<code>[:upper:]</code>	Uppercase alphabetic characters
<code>[:xdigit:]</code>	Characters that are hexadecimal digits

Table 3.1: POSIX character classes

For example, before the POSIX standard, you had to write `/[A-Za-z0-9]/` to match alphanumeric characters. If your character set had other alphabetic characters in it, this would not match them. With the POSIX character classes, you can write `/[[:alnum:]]/` to match the alphabetic and numeric characters in your character set.

Some utilities that match regular expressions provide a nonstandard `[:ascii:]` character class; `awk` does not. However, you can simulate such a construct using `[\x00-\x7F]`. This matches all values numerically between zero and 127, which is the defined range of the ASCII character set. Use a complemented character list (`[\x00-\x7F]`) to match any single-byte characters that are not in the ASCII range.

Two additional special sequences can appear in bracket expressions. These apply to non-ASCII character sets, which can have single symbols (called *collating elements*) that are represented with more than one character. They can also have several characters that are equivalent for *collating*, or sorting, purposes. (For example, in French, a plain “e” and a grave-accented “è” are equivalent.) These sequences are:

Collating symbols

Multicharacter collating elements enclosed between `[.` and `.]`. For example, if `ch` is a collating element, then `[[.ch.]]` is a regexp that matches this collating element, whereas `[ch]` is a regexp that matches either `c` or `h`.

Equivalence classes

Locale-specific names for a list of characters that are equal. The name is enclosed between `[=` and `=]`. For example, the name `e` might be used to represent all of “e,” “ê,” “è,” and “é.” In this case, `[[=e=]]` is a regexp that matches any of `e`, `ê`, `é`, or `è`.

These features are very valuable in non-English-speaking locales.

CAUTION: The library functions that `gawk` uses for regular expression matching currently recognize only POSIX character classes; they do not recognize collating symbols or equivalence classes.

Inside a bracket expression, an opening bracket (`[`) that does not start a character class, collating element or equivalence class is taken literally. This is also true of `.` and `*`.

3.5 How Much Text Matches?

Consider the following:

```
echo aaaabcd | awk '{ sub(/a+/, "<A>"); print }'
```

This example uses the `sub()` function to make a change to the input record. (`sub()` replaces the first instance of any text matched by the first argument with the string provided as the second argument; see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177.) Here, the regexp `/a+/` indicates “one or more ‘a’ characters,” and the replacement text is `<A>`.

The input contains four ‘a’ characters. `awk` (and POSIX) regular expressions always match the leftmost, *longest* sequence of input characters that can match. Thus, all four ‘a’ characters are replaced with `<A>` in this example:

```
$ echo aaaabcd | awk '{ sub(/a+/, "<A>"); print }'
-| <A>bcd
```

For simple match/no-match tests, this is not so important. But when doing text matching and substitutions with the `match()`, `sub()`, `gsub()`, and `gensub()` functions, it is very important. Understanding this principle is also important for regexp-based record and field splitting (see [Section 4.1 \[How Input Is Split into Records\]](#), page 59, and also see [Section 4.5 \[Specifying How Fields Are Separated\]](#), page 67).

3.6 Using Dynamic Regexps

The righthand side of a `'~'` or `'!~'` operator need not be a regexp constant (i.e., a string of characters between slashes). It may be any expression. The expression is evaluated and converted to a string if necessary; the contents of the string are then used as the regexp. A regexp computed in this way is called a *dynamic regexp* or a *computed regexp*:

```
BEGIN { digits_regexp = "[[:digit:]]+" }
$0 ~ digits_regexp    { print }
```

This sets `digits_regexp` to a regexp that describes one or more digits, and tests whether the input record matches this regexp.

NOTE: When using the `'~'` and `'!~'` operators, be aware that there is a difference between a regexp constant enclosed in slashes and a string constant enclosed in double quotes. If you are going to use a string constant, you have to understand that the string is, in essence, scanned *twice*: the first time when `awk` reads your program, and the second time when it goes to match the string on the lefthand side of the operator with the pattern on the right. This is true of any string-valued expression (such as `digits_regexp`, shown in the previous example), not just string constants.

What difference does it make if the string is scanned twice? The answer has to do with escape sequences, and particularly with backslashes. To get a backslash into a regular expression inside a string, you have to type two backslashes.

For example, `/*/` is a regexp constant for a literal `'*'`. Only one backslash is needed. To do the same thing with a string, you have to type `"*"`. The first backslash escapes the second one so that the string actually contains the two characters `'\'` and `'*'`.

Given that you can use both regexp and string constants to describe regular expressions, which should you use? The answer is “regexp constants,” for several reasons:

- String constants are more complicated to write and more difficult to read. Using regexp constants makes your programs less error-prone. Not understanding the difference between the two kinds of constants is a common source of errors.
- It is more efficient to use regexp constants. `awk` can note that you have supplied a regexp and store it internally in a form that makes pattern matching more efficient. When using a string constant, `awk` must first convert the string into this internal form and then perform the pattern matching.
- Using regexp constants is better form; it shows clearly that you intend a regexp match.

Using `\n` in Bracket Expressions of Dynamic Regexp

Some older versions of `awk` do not allow the newline character to be used inside a bracket expression for a dynamic regexp:

```
$ awk '$0 ~ "[ \t\n]"'
error awk: newline in character class [
error ]...
error source line number 1
error context is
error $0 ~ "[ >>> \t\n]" <<<
```

But a newline in a regexp constant works with no problem:

```
$ awk '$0 ~ /[ \t\n]/'
here is a sample line
+ here is a sample line
Ctrl-d
```

`gawk` does not have this problem, and it isn't likely to occur often in practice, but it's worth noting for future reference.

3.7 gawk-Specific Regexp Operators

GNU software that deals with regular expressions provides a number of additional regexp operators. These operators are described in this section and are specific to `gawk`; they are not available in other `awk` implementations. Most of the additional operators deal with word matching. For our purposes, a *word* is a sequence of one or more letters, digits, or underscores ('_'):

<code>\s</code>	Matches any whitespace character. Think of it as shorthand for <code>'[:space:]'</code> .
<code>\S</code>	Matches any character that is not whitespace. Think of it as shorthand for <code>'[^[:space:]'</code> .
<code>\w</code>	Matches any word-constituent character—that is, it matches any letter, digit, or underscore. Think of it as shorthand for <code>'[:alnum:]_'</code> .
<code>\W</code>	Matches any character that is not word-constituent. Think of it as shorthand for <code>'[^[:alnum:]_'</code> .
<code>\<</code>	Matches the empty string at the beginning of a word. For example, <code>/\<away/</code> matches <code>'away'</code> but not <code>'stowaway'</code> .
<code>\></code>	Matches the empty string at the end of a word. For example, <code>/stow\>/</code> matches <code>'stow'</code> but not <code>'stowaway'</code> .
<code>\y</code>	Matches the empty string at either the beginning or the end of a word (i.e., the word boundary). For example, <code>'\yballs?\y'</code> matches either <code>'ball'</code> or <code>'balls'</code> , as a separate word.
<code>\B</code>	Matches the empty string that occurs between two word-constituent characters. For example, <code>/\Brat\B/</code> matches <code>'crate'</code> , but it does not match <code>'dirty rat'</code> . <code>'\B'</code> is essentially the opposite of <code>'\y'</code> .

There are two other operators that work on buffers. In Emacs, a *buffer* is, naturally, an Emacs buffer. Other GNU programs, including **gawk**, consider the entire string to match as the buffer. The operators are:

- `\‘` Matches the empty string at the beginning of a buffer (string)
- `\’` Matches the empty string at the end of a buffer (string)

Because `^` and `$` always work in terms of the beginning and end of strings, these operators don’t add any new capabilities for **awk**. They are provided for compatibility with other GNU software.

In other GNU software, the word-boundary operator is `\b`. However, that conflicts with the **awk** language’s definition of `\b` as backspace, so **gawk** uses a different letter. An alternative method would have been to require two backslashes in the GNU operators, but this was deemed too confusing. The current method of using `\y` for the GNU `\b` appears to be the lesser of two evils.

The various command-line options (see [Section 2.2 \[Command-Line Options\]](#), page 31) control how **gawk** interprets characters in regexps:

No options

In the default case, **gawk** provides all the facilities of POSIX regexps and the previously described GNU regexp operators.

`--posix` Match only POSIX regexps; the GNU operators are not special (e.g., `\w` matches a literal `w`). Interval expressions are allowed.

`--traditional`

Match traditional Unix **awk** regexps. The GNU operators are not special, and interval expressions are not available. Because BWK **awk** supports them, the POSIX character classes (`[[[:alnum:]]`, etc.) are available. Characters described by octal and hexadecimal escape sequences are treated literally, even if they represent regexp metacharacters.

`--re-interval`

Allow interval expressions in regexps, if `--traditional` has been provided. Otherwise, interval expressions are available by default.

3.8 Case Sensitivity in Matching

Case is normally significant in regular expressions, both when matching ordinary characters (i.e., not metacharacters) and inside bracket expressions. Thus, a `w` in a regular expression matches only a lowercase `w` and not an uppercase `W`.

The simplest way to do a case-independent match is to use a bracket expression—for example, `[Ww]`. However, this can be cumbersome if you need to use it often, and it can make the regular expressions harder to read. There are two alternatives that you might prefer.

One way to perform a case-insensitive match at a particular point in the program is to convert the data to a single case, using the `tolower()` or `toupper()` built-in string functions (which we haven’t discussed yet; see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177). For example:

```
tolower($1) ~ /foo/ { ... }
```

converts the first field to lowercase before matching against it. This works in any POSIX-compliant `awk`.

Another method, specific to `gawk`, is to set the variable `IGNORECASE` to a nonzero value (see [Section 7.5 \[Predefined Variables\]](#), page 147). When `IGNORECASE` is not zero, *all* regexp and string operations ignore case.

Changing the value of `IGNORECASE` dynamically controls the case sensitivity of the program as it runs. Case is significant by default because `IGNORECASE` (like most variables) is initialized to zero:

```
x = "aB"
if (x ~ /ab/) ...    # this test will fail

IGNORECASE = 1
if (x ~ /ab/) ...    # now it will succeed
```

In general, you cannot use `IGNORECASE` to make certain rules case insensitive and other rules case sensitive, as there is no straightforward way to set `IGNORECASE` just for the pattern of a particular rule.³ To do this, use either bracket expressions or `tolower()`. However, one thing you can do with `IGNORECASE` only is dynamically turn case sensitivity on or off for all the rules at once.

`IGNORECASE` can be set on the command line or in a `BEGIN` rule (see [Section 2.3 \[Other Command-Line Arguments\]](#), page 37; also see [Section 7.1.4.1 \[Startup and Cleanup Actions\]](#), page 134). Setting `IGNORECASE` from the command line is a way to make a program case insensitive without having to edit it.

In multibyte locales, the equivalences between upper- and lowercase characters are tested based on the wide-character values of the locale's character set. Otherwise, the characters are tested based on the ISO-8859-1 (ISO Latin-1) character set. This character set is a superset of the traditional 128 ASCII characters, which also provides a number of characters suitable for use with European languages.⁴

The value of `IGNORECASE` has no effect if `gawk` is in compatibility mode (see [Section 2.2 \[Command-Line Options\]](#), page 31). Case is always significant in compatibility mode.

3.9 Summary

- Regular expressions describe sets of strings to be matched. In `awk`, regular expression constants are written enclosed between slashes: `/.../`.
- Regexp constants may be used standalone in patterns and in conditional expressions, or as part of matching expressions using the `'~'` and `'!~'` operators.
- Escape sequences let you represent nonprintable characters and also let you represent regexp metacharacters as literal characters to be matched.
- Regexp operators provide grouping, alternation, and repetition.

³ Experienced C and C++ programmers will note that it is possible, using something like `'IGNORECASE = 1 && /foObAr/ { ... }'` and `'IGNORECASE = 0 || /foobar/ { ... }'`. However, this is somewhat obscure and we don't recommend it.

⁴ If you don't understand this, don't worry about it; it just means that `gawk` does the right thing.

- Bracket expressions give you a shorthand for specifying sets of characters that can match at a particular point in a regexp. Within bracket expressions, POSIX character classes let you specify certain groups of characters in a locale-independent fashion.
- Regular expressions match the leftmost longest text in the string being matched. This matters for cases where you need to know the extent of the match, such as for text substitution and when the record separator is a regexp.
- Matching expressions may use dynamic regexps (i.e., string values treated as regular expressions).
- `gawk`'s `IGNORECASE` variable lets you control the case sensitivity of regexp matching. In other `awk` versions, use `tolower()` or `toupper()`.

4 Reading Input Files

In the typical `awk` program, `awk` reads all input either from the standard input (by default, this is the keyboard, but often it is a pipe from another command) or from files whose names you specify on the `awk` command line. If you specify input files, `awk` reads them in order, processing all the data from one before going on to the next. The name of the current input file can be found in the predefined variable `FILENAME` (see [Section 7.5 \[Predefined Variables\]](#), [page 147](#)).

The input is read in units called *records*, and is processed by the rules of your program one record at a time. By default, each record is one line. Each record is automatically split into chunks called *fields*. This makes it more convenient for programs to work on the parts of a record.

On rare occasions, you may need to use the `getline` command. The `getline` command is valuable both because it can do explicit input from any number of files, and because the files used with it do not have to be named on the `awk` command line (see [Section 4.9 \[Explicit Input with `getline`\]](#), [page 78](#)).

4.1 How Input Is Split into Records

`awk` divides the input for your program into records and fields. It keeps track of the number of records that have been read so far from the current input file. This value is stored in a predefined variable called `FNR`, which is reset to zero every time a new file is started. Another predefined variable, `NR`, records the total number of input records read so far from all data files. It starts at zero, but is never automatically reset to zero.

4.1.1 Record Splitting with Standard `awk`

Records are separated by a character called the *record separator*. By default, the record separator is the newline character. This is why records are, by default, single lines. To use a different character for the record separator, simply assign that character to the predefined variable `RS`.

Like any other variable, the value of `RS` can be changed in the `awk` program with the assignment operator, `=` (see [Section 6.2.3 \[Assignment Expressions\]](#), [page 116](#)). The new record-separator character should be enclosed in quotation marks, which indicate a string constant. Often, the right time to do this is at the beginning of execution, before any input is processed, so that the very first record is read with the proper separator. To do this, use the special `BEGIN` pattern (see [Section 7.1.4 \[The `BEGIN` and `END` Special Patterns\]](#), [page 134](#)). For example:

```
awk 'BEGIN { RS = "u" }
    { print $0 }' mail-list
```

changes the value of `RS` to `'u'`, before reading any input. The new value is a string whose first character is the letter `"u"`; as a result, records are separated by the letter `"u"`. Then the input file is read, and the second rule in the `awk` program (the action with no pattern) prints each record. Because each `print` statement adds a newline at the end of its output, this `awk` program copies the input with each `'u'` changed to a newline. Here are the results of running the program on `mail-list`:

```
$ awk 'BEGIN { RS = "u" }
```

```

> { print $0 }' mail-list
+ Amelia      555-5553      amelia.zodiac
+ sq
+ e@gmail.com  F
+ Anthony     555-3412      anthony.assert
+ ro@hotmail.com A
+ Becky       555-7685      becky.algebrar
+ m@gmail.com  A
+ Bill        555-1675      bill.drowning@hotmail.com    A
+ Broderick   555-0542      broderick.aliq
+ otiens@yahoo.com R
+ Camilla     555-2912      camilla.inf
+ sar
+ m@skynet.be  R
+ Fabi
+ s           555-1234      fabi
+ s.
+ nddevicesim
+ s@
+ cb.ed
+ F
+ J
+ lie         555-6699      j
+ lie.perscr
+ tabor@skeeve.com F
+ Martin      555-6480      martin.codicib
+ s@hotmail.com A
+ Sam
+ el          555-3430      sam
+ el.lanceolis@sh
+ .ed
+ A
+ Jean-Pa
+ l           555-2127      jeanpa
+ l.campanor
+ m@ny
+ .ed
+ R
+

```

Note that the entry for the name ‘Bill’ is not split. In the original data file (see [Section 1.2 \[Data files for the Examples\]](#), page 23), the line looks like this:

```
Bill      555-1675      bill.drowning@hotmail.com    A
```

It contains no ‘u’, so there is no reason to split the record, unlike the others, which each have one or more occurrences of the ‘u’. In fact, this record is treated as part of the previous record; the newline separating them in the output is the original newline in the data file, not the one added by `awk` when it printed the record!

Another way to change the record separator is on the command line, using the variable-assignment feature (see [Section 2.3 \[Other Command-Line Arguments\]](#), page 37):

```
awk '{ print $0 }' RS="u" mail-list
```

This sets `RS` to `'u'` before processing `mail-list`.

Using an alphabetic character such as `'u'` for the record separator is highly likely to produce strange results. Using an unusual character such as `'/'` is more likely to produce correct behavior in the majority of cases, but there are no guarantees. The moral is: Know Your Data.

When using regular characters as the record separator, there is one unusual case that occurs when `gawk` is being fully POSIX-compliant (see [Section 2.2 \[Command-Line Options\]](#), page 31). Then, the following (extreme) pipeline prints a surprising `'1'`:

```
$ echo | gawk --posix 'BEGIN { RS = "a" } ; { print NF }'
+ 1
```

There is one field, consisting of a newline. The value of the built-in variable `NF` is the number of fields in the current record. (In the normal case, `gawk` treats the newline as whitespace, printing `'0'` as the result. Most other versions of `awk` also act this way.)

Reaching the end of an input file terminates the current input record, even if the last character in the file is not the character in `RS`.



The empty string `""` (a string without any characters) has a special meaning as the value of `RS`. It means that records are separated by one or more blank lines and nothing else. See [Section 4.8 \[Multiple-Line Records\]](#), page 76, for more details.

If you change the value of `RS` in the middle of an `awk` run, the new value is used to delimit subsequent records, but the record currently being processed, as well as records already processed, are not affected.

After the end of the record has been determined, `gawk` sets the variable `RT` to the text in the input that matched `RS`.

4.1.2 Record Splitting with `gawk`

When using `gawk`, the value of `RS` is not limited to a one-character string. It can be any regular expression (see [Chapter 3 \[Regular Expressions\]](#), page 45). (c.e.) In general, each record ends at the next string that matches the regular expression; the next record starts at the end of the matching string. This general rule is actually at work in the usual case, where `RS` contains just a newline: a record ends at the beginning of the next matching string (the next newline in the input), and the following record starts just after the end of this string (at the first character of the following line). The newline, because it matches `RS`, is not part of either record.

When `RS` is a single character, `RT` contains the same single character. However, when `RS` is a regular expression, `RT` contains the actual input text that matched the regular expression.

If the input file ends without any text matching `RS`, `gawk` sets `RT` to the null string.

The following example illustrates both of these features. It sets `RS` equal to a regular expression that matches either a newline or a series of one or more uppercase letters with optional leading and/or trailing whitespace:

```
$ echo record 1 AAAA record 2 BBBB record 3 |
> gawk 'BEGIN { RS = "\n| ( *[:upper:]]+ *)" }'
```

```

>           { print "Record =", $0,"and RT = [" RT "]" }'
└ Record = record 1 and RT = [ AAAA ]
└ Record = record 2 and RT = [ BBBB ]
└ Record = record 3 and RT = [
└ ]

```

The square brackets delineate the contents of `RT`, letting you see the leading and trailing whitespace. The final value of `RT` is a newline. See [Section 11.3.8 \[A Simple Stream Editor\]](#), [page 286](#), for a more useful example of `RS` as a regexp and `RT`.

If you set `RS` to a regular expression that allows optional trailing text, such as `'RS = "abc(XYZ)?"'`, it is possible, due to implementation constraints, that `gawk` may match the leading part of the regular expression, but not the trailing part, particularly if the input text that could match the trailing part is fairly long. `gawk` attempts to avoid this problem, but currently, there's no guarantee that this will never happen.

NOTE: Remember that in `awk`, the `'^'` and `'$'` anchor metacharacters match the beginning and end of a *string*, and not the beginning and end of a *line*. As a result, something like `'RS = "^[:upper:]"'` can only match at the beginning of a file. This is because `gawk` views the input file as one long string that happens to contain newline characters. It is thus best to avoid anchor metacharacters in the value of `RS`.

The use of `RS` as a regular expression and the `RT` variable are `gawk` extensions; they are not available in compatibility mode (see [Section 2.2 \[Command-Line Options\]](#), [page 31](#)). In compatibility mode, only the first character of the value of `RS` determines the end of the record.

RS = "\0" Is Not Portable

There are times when you might want to treat an entire data file as a single record. The only way to make this happen is to give `RS` a value that you know doesn't occur in the input file. This is hard to do in a general way, such that a program always works for arbitrary input files.

You might think that for text files, the NUL character, which consists of a character with all bits equal to zero, is a good value to use for `RS` in this case:

```
BEGIN { RS = "\0" } # whole file becomes one record?
```

`gawk` in fact accepts this, and uses the NUL character for the record separator. This works for certain special files, such as `/proc/environ` on GNU/Linux systems, where the NUL character is in fact the record separator. However, this usage is *not* portable to most other `awk` implementations.

Almost all other `awk` implementations¹ store strings internally as C-style strings. C strings use the NUL character as the string terminator. In effect, this means that `'RS = "\0"'` is the same as `'RS = ""'`.

It happens that recent versions of `mawk` can use the NUL character as a record separator. However, this is a special case: `mawk` does not allow embedded NUL characters in strings. (This may change in a future version of `mawk`.)

See [Section 10.2.8 \[Reading a Whole File at Once\]](#), page 229, for an interesting way to read whole files. If you are using `gawk`, see [Section 16.7.10 \[Reading an Entire File\]](#), page 408, for another option.

4.2 Examining Fields

When `awk` reads an input record, the record is automatically *parsed* or separated by the `awk` utility into chunks called *fields*. By default, fields are separated by *whitespace*, like words in a line. Whitespace in `awk` means any string of one or more spaces, TABs, or newlines;² other characters that are considered whitespace by other languages (such as formfeed, vertical tab, etc.) are *not* considered whitespace by `awk`.

The purpose of fields is to make it more convenient for you to refer to these pieces of the record. You don't have to use them—you can operate on the whole record if you want—but fields are what make simple `awk` programs so powerful.

You use a dollar sign (`'$'`) to refer to a field in an `awk` program, followed by the number of the field you want. Thus, `$1` refers to the first field, `$2` to the second, and so on. (Unlike in the Unix shells, the field numbers are not limited to single digits. `$127` is the 127th field in the record.) For example, suppose the following is a line of input:

```
This seems like a pretty nice example.
```

Here the first field, or `$1`, is `'This'`, the second field, or `$2`, is `'seems'`, and so on. Note that the last field, `$7`, is `'example.'`. Because there is no space between the `'e'` and the `'.'`, the period is considered part of the seventh field.

`NF` is a predefined variable whose value is the number of fields in the current record. `awk` automatically updates the value of `NF` each time it reads a record. No matter how many

¹ At least that we know about.

² In POSIX `awk`, newlines are not considered whitespace for separating fields.

fields there are, the last field in a record can be represented by `$NF`. So, `$NF` is the same as `$7`, which is ‘example.’. If you try to reference a field beyond the last one (such as `$8` when the record has only seven fields), you get the empty string. (If used in a numeric operation, you get zero.)

The use of `$0`, which looks like a reference to the “zeroth” field, is a special case: it represents the whole input record. Use it when you are not interested in specific fields. Here are some more examples:

```
$ awk '$1 ~ /li/ { print $0 }' mail-list
+ Amelia      555-5553      amelia.zodiacusque@gmail.com    F
+ Julie       555-6699      julie.perscrutabor@skeeve.com    F
```

This example prints each record in the file `mail-list` whose first field contains the string ‘li’.

By contrast, the following example looks for ‘li’ in *the entire record* and prints the first and last fields for each matching input record:

```
$ awk '/li/ { print $1, $NF }' mail-list
+ Amelia F
+ Broderick R
+ Julie F
+ Samuel A
```

4.3 Nonconstant Field Numbers

A field number need not be a constant. Any expression in the `awk` language can be used after a ‘\$’ to refer to a field. The value of the expression specifies the field number. If the value is a string, rather than a number, it is converted to a number. Consider this example:

```
awk '{ print $NR }'
```

Recall that `NR` is the number of records read so far: one in the first record, two in the second, and so on. So this example prints the first field of the first record, the second field of the second record, and so on. For the twentieth record, field number 20 is printed; most likely, the record has fewer than 20 fields, so this prints a blank line. Here is another example of using expressions as field numbers:

```
awk '{ print $(2*2) }' mail-list
```

`awk` evaluates the expression ‘`(2*2)`’ and uses its value as the number of the field to print. The ‘`*`’ represents multiplication, so the expression ‘`2*2`’ evaluates to four. The parentheses are used so that the multiplication is done before the ‘\$’ operation; they are necessary whenever there is a binary operator³ in the field-number expression. This example, then, prints the type of relationship (the fourth field) for every line of the file `mail-list`. (All of the `awk` operators are listed, in order of decreasing precedence, in [Section 6.5 \[Operator Precedence \(How Operators Nest\)\]](#), page 128.)

If the field number you compute is zero, you get the entire record. Thus, ‘`$(2-2)`’ has the same value as `$0`. Negative field numbers are not allowed; trying to reference one usually terminates the program. (The POSIX standard does not define what happens when you

³ A *binary operator*, such as ‘`*`’ for multiplication, is one that takes two operands. The distinction is required because `awk` also has unary (one-operand) and ternary (three-operand) operators.

reference a negative field number. **gawk** notices this and terminates your program. Other **awk** implementations may behave differently.)

As mentioned in [Section 4.2 \[Examining Fields\]](#), page 63, **awk** stores the current record's number of fields in the built-in variable **NF** (also see [Section 7.5 \[Predefined Variables\]](#), page 147). Thus, the expression **\$NF** is not a special feature—it is the direct consequence of evaluating **NF** and using its value as a field number.

4.4 Changing the Contents of a Field

The contents of a field, as seen by **awk**, can be changed within an **awk** program; this changes what **awk** perceives as the current input record. (The actual input is untouched; **awk** *never* modifies the input file.) Consider the following example and its output:

```
$ awk '{ nboxes = $3 ; $3 = $3 - 10
>      print nboxes, $3 }' inventory-shipped
+ 25 15
+ 32 22
+ 24 14
...
```

The program first saves the original value of field three in the variable **nboxes**. The ‘-’ sign represents subtraction, so this program reassigns field three, **\$3**, as the original value of field three minus ten: ‘**\$3 - 10**’. (See [Section 6.2.1 \[Arithmetic Operators\]](#), page 114.) Then it prints the original and new values for field three. (Someone in the warehouse made a consistent mistake while inventorying the red boxes.)

For this to work, the text in **\$3** must make sense as a number; the string of characters must be converted to a number for the computer to do arithmetic on it. The number resulting from the subtraction is converted back to a string of characters that then becomes field three. See [Section 6.1.4 \[Conversion of Strings and Numbers\]](#), page 111.

When the value of a field is changed (as perceived by **awk**), the text of the input record is recalculated to contain the new field where the old one was. In other words, **\$0** changes to reflect the altered field. Thus, this program prints a copy of the input file, with 10 subtracted from the second field of each line:

```
$ awk '{ $2 = $2 - 10; print $0 }' inventory-shipped
+ Jan 3 25 15 115
+ Feb 5 32 24 226
+ Mar 5 24 34 228
...
```

It is also possible to assign contents to fields that are out of range. For example:

```
$ awk '{ $6 = ($5 + $4 + $3 + $2)
>      print $6 }' inventory-shipped
+ 168
+ 297
+ 301
...
```

We’ve just created **\$6**, whose value is the sum of fields **\$2**, **\$3**, **\$4**, and **\$5**. The ‘+’ sign represents addition. For the file **inventory-shipped**, **\$6** represents the total number of parcels shipped for a particular month.

Creating a new field changes `awk`'s internal copy of the current input record, which is the value of `$0`. Thus, if you do `'print $0'` after adding a field, the record printed includes the new field, with the appropriate number of field separators between it and the previously existing fields.

This recomputation affects and is affected by `NF` (the number of fields; see [Section 4.2 \[Examining Fields\]](#), page 63). For example, the value of `NF` is set to the number of the highest field you create. The exact format of `$0` is also affected by a feature that has not been discussed yet: the *output field separator*, `OFS`, used to separate the fields (see [Section 5.3 \[Output Separators\]](#), page 91).

Note, however, that merely *referencing* an out-of-range field does *not* change the value of either `$0` or `NF`. Referencing an out-of-range field only produces an empty string. For example:

```
if ($(NF+1) != "")
    print "can't happen"
else
    print "everything is normal"
```

should print `'everything is normal'`, because `NF+1` is certain to be out of range. (See [Section 7.4.1 \[The if-else Statement\]](#), page 138, for more information about `awk`'s `if-else` statements. See [Section 6.3.2 \[Variable Typing and Comparison Expressions\]](#), page 120, for more information about the `'!='` operator.)

It is important to note that making an assignment to an existing field changes the value of `$0` but does not change the value of `NF`, even when you assign the empty string to a field. For example:

```
$ echo a b c d | awk '{ OFS = ":"; $2 = ""
>                               print $0; print NF }'
+ a::c:d
+ 4
```

The field is still there; it just has an empty value, delimited by the two colons between `'a'` and `'c'`. This example shows what happens if you create a new field:

```
$ echo a b c d | awk '{ OFS = ":"; $2 = ""; $6 = "new"
>                               print $0; print NF }'
+ a::c:d::new
+ 6
```

The intervening field, `$5`, is created with an empty value (indicated by the second pair of adjacent colons), and `NF` is updated with the value six.

Decrementing `NF` throws away the values of the fields after the new value of `NF` and recomputes `$0`. Here is an example:

```
$ echo a b c d e f | awk '{ print "NF =", NF;
>                               NF = 3; print $0 }'
+ NF = 6
+ a b c
```

CAUTION: Some versions of `awk` don't rebuild `$0` when `NF` is decremented.

Finally, there are times when it is convenient to force `awk` to rebuild the entire record, using the current values of the fields and `OFS`. To do this, use the seemingly innocuous assignment:



```
$1 = $1    # force record to be reconstituted
print $0   # or whatever else with $0
```

This forces `awk` to rebuild the record. It does help to add a comment, as we’ve shown here.

There is a flip side to the relationship between `$0` and the fields. Any assignment to `$0` causes the record to be reparsed into fields using the *current* value of `FS`. This also applies to any built-in function that updates `$0`, such as `sub()` and `gsub()` (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177).

Understanding `$0`

It is important to remember that `$0` is the *full* record, exactly as it was read from the input. This includes any leading or trailing whitespace, and the exact whitespace (or other characters) that separates the fields.

It is a common error to try to change the field separators in a record simply by setting `FS` and `OFS`, and then expecting a plain ‘`print`’ or ‘`print $0`’ to print the modified record.

But this does not work, because nothing was done to change the record itself. Instead, you must force the record to be rebuilt, typically with a statement such as ‘`$1 = $1`’, as described earlier.

4.5 Specifying How Fields Are Separated

The *field separator*, which is either a single character or a regular expression, controls the way `awk` splits an input record into fields. `awk` scans the input record for character sequences that match the separator; the fields themselves are the text between the matches.

In the examples that follow, we use the bullet symbol (•) to represent spaces in the output. If the field separator is ‘`oo`’, then the following line:

```
moo goo gai pan
```

is split into three fields: ‘`m`’, ‘`•g`’, and ‘`•gai•pan`’. Note the leading spaces in the values of the second and third fields.

The field separator is represented by the predefined variable `FS`. Shell programmers take note: `awk` does *not* use the name `IFS` that is used by the POSIX-compliant shells (such as the Unix Bourne shell, `sh`, or `Bash`).

The value of `FS` can be changed in the `awk` program with the assignment operator, ‘`=`’ (see [Section 6.2.3 \[Assignment Expressions\]](#), page 116). Often, the right time to do this is at the beginning of execution before any input has been processed, so that the very first record is read with the proper separator. To do this, use the special `BEGIN` pattern (see [Section 7.1.4 \[The BEGIN and END Special Patterns\]](#), page 134). For example, here we set the value of `FS` to the string ‘`,`’:

```
awk 'BEGIN { FS = "," } ; { print $2 }'
```

Given the input line:

```
John Q. Smith, 29 Oak St., Walamazoo, MI 42139
```

this `awk` program extracts and prints the string ‘`•29•Oak•St.`’.

Sometimes the input data contains separator characters that don’t separate fields the way you thought they would. For instance, the person’s name in the example we just used might have a title or suffix attached, such as:

John Q. Smith, LXIX, 29 Oak St., Walamazoo, MI 42139

The same program would extract ‘●LXIX’ instead of ‘●29●Oak●St.’. If you were expecting the program to print the address, you would be surprised. The moral is to choose your data layout and separator characters carefully to prevent such problems. (If the data is not in a form that is easy to process, perhaps you can massage it first with a separate `awk` program.)

4.5.1 Whitespace Normally Separates Fields

Fields are normally separated by whitespace sequences (spaces, TABs, and newlines), not by single spaces. Two spaces in a row do not delimit an empty field. The default value of the field separator `FS` is a string containing a single space, " ". If `awk` interpreted this value in the usual way, each space character would separate fields, so two spaces in a row would make an empty field between them. The reason this does not happen is that a single space as the value of `FS` is a special case—it is taken to specify the default manner of delimiting fields.

If `FS` is any other single character, such as ",", then each occurrence of that character separates two fields. Two consecutive occurrences delimit an empty field. If the character occurs at the beginning or the end of the line, that too delimits an empty field. The space character is the only single character that does not follow these rules.

4.5.2 Using Regular Expressions to Separate Fields

The previous subsection discussed the use of single characters or simple strings as the value of `FS`. More generally, the value of `FS` may be a string containing any regular expression. In this case, each match in the record for the regular expression separates fields. For example, the assignment:

```
FS = ", \t"
```

makes every area of an input line that consists of a comma followed by a space and a TAB into a field separator.

For a less trivial example of a regular expression, try using single spaces to separate fields the way single commas are used. `FS` can be set to "[]" (left bracket, space, right bracket). This regular expression matches a single space and nothing else (see [Chapter 3 \[Regular Expressions\]](#), page 45).

There is an important difference between the two cases of ‘`FS = " "`’ (a single space) and ‘`FS = "[\t\n]+"`’ (a regular expression matching one or more spaces, TABs, or newlines). For both values of `FS`, fields are separated by *runs* (multiple adjacent occurrences) of spaces, TABs, and/or newlines. However, when the value of `FS` is " ", `awk` first strips leading and trailing whitespace from the record and then decides where the fields are. For example, the following pipeline prints ‘b’:

```
$ echo ' a b c d ' | awk '{ print $2 }'
+ b
```

However, this pipeline prints ‘a’ (note the extra spaces around each letter):

```
$ echo ' a b c d ' | awk 'BEGIN { FS = "[\t\n]+" }
> { print $2 }'
+ a
```

In this case, the first field is null, or empty.

The stripping of leading and trailing whitespace also comes into play whenever `$0` is recomputed. For instance, study this pipeline:

```
$ echo '  a b c d' | awk '{ print; $2 = $2; print }'
```

```
└─ a b c d
```

```
└─ a b c d
```

The first `print` statement prints the record as it was read, with leading whitespace intact. The assignment to `$2` rebuilds `$0` by concatenating `$1` through `$NF` together, separated by the value of `OFS` (which is a space by default). Because the leading whitespace was ignored when finding `$1`, it is not part of the new `$0`. Finally, the last `print` statement prints the new `$0`.

There is an additional subtlety to be aware of when using regular expressions for field splitting. It is not well specified in the POSIX standard, or anywhere else, what ‘`^`’ means when splitting fields. Does the ‘`^`’ match only at the beginning of the entire record? Or is each field separator a new string? It turns out that different `awk` versions answer this question differently, and you should not rely on any specific behavior in your programs.



As a point of information, BWK `awk` allows ‘`^`’ to match only at the beginning of the record. `gawk` also works this way. For example:

```
$ echo 'xxAA  xxBxx  C' |
```

```
> gawk -F ' (^x+)| ( +)' '{ for (i = 1; i <= NF; i++)
```

```
>                               printf "-->%s<--\n", $i }'
```

```
└─ --><--
```

```
└─ -->AA<--
```

```
└─ -->xxBxx<--
```

```
└─ -->C<--
```

4.5.3 Making Each Character a Separate Field

There are times when you may want to examine each character of a record separately. This can be done in `gawk` by simply assigning the null string (“”) to `FS`. (c.e.) In this case, each individual character in the record becomes a separate field. For example:

```
$ echo a b | gawk 'BEGIN { FS = "" }
```

```
> {
```

```
>     for (i = 1; i <= NF; i = i + 1)
```

```
>         print "Field", i, "is", $i
```

```
> }
```

```
└─ Field 1 is a
```

```
└─ Field 2 is
```

```
└─ Field 3 is b
```

Traditionally, the behavior of `FS` equal to “” was not defined. In this case, most versions of Unix `awk` simply treat the entire record as only having one field. In compatibility mode (see [Section 2.2 \[Command-Line Options\]](#), page 31), if `FS` is the null string, then `gawk` also behaves this way.



4.5.4 Setting FS from the Command Line

`FS` can be set on the command line. Use the `-F` option to do so. For example:

```
awk -F, 'program' input-files
```


sets `FS` to the `,` character. Notice that the option uses an uppercase `F` instead of a lowercase `f`. The latter option (`-f`) specifies a file containing an `awk` program.

The value used for the argument to `-F` is processed in exactly the same way as assignments to the predefined variable `FS`. Any special characters in the field separator must be escaped appropriately. For example, to use a `\` as the field separator on the command line, you would have to type:

```
# same as FS = "\\"
awk -F\\ '\\ '... ' files ...
```

Because `\` is used for quoting in the shell, `awk` sees `-F\\`. Then `awk` processes the `\\` for escape characters (see [Section 3.2 \[Escape Sequences\]](#), page 46), finally yielding a single `\` to use for the field separator.

As a special case, in compatibility mode (see [Section 2.2 \[Command-Line Options\]](#), page 31), if the argument to `-F` is `t`, then `FS` is set to the TAB character. If you type `-Ft` at the shell, without any quotes, the `\` gets deleted, so `awk` figures that you really want your fields to be separated with TABs and not `t`'s. Use `-v FS="t"` or `-F"[t]"` on the command line if you really do want to separate your fields with `t`'s. Use `-F '\t'` when not in compatibility mode to specify that TABs separate fields.

As an example, let's use an `awk` program file called `edu.awk` that contains the pattern `/edu/` and the action `print $1`:

```
/edu/ { print $1 }
```

Let's also set `FS` to be the `-` character and run the program on the file `mail-list`. The following command prints a list of the names of the people that work at or attend a university, and the first three digits of their phone numbers:

```
$ awk -F- -f edu.awk mail-list
-| Fabius          555
-| Samuel          555
-| Jean
```

Note the third line of output. The third line in the original file looked like this:

```
Jean-Paul      555-2127      jeanpaul.campanorum@nyu.edu      R
```

The `-` as part of the person's name was used as the field separator, instead of the `-` in the phone number that was originally intended. This demonstrates why you have to be careful in choosing your field and record separators.

Perhaps the most common use of a single character as the field separator occurs when processing the Unix system password file. On many Unix systems, each user has a separate entry in the system password file, with one line per user. The information in these lines is separated by colons. The first field is the user's login name and the second is the user's encrypted or shadow password. (A shadow password is indicated by the presence of a single `x` in the second field.) A password file entry might look like this:

```
arnold:x:2076:10:Arnold Robbins:/home/arnold:/bin/bash
```

The following program searches the system password file and prints the entries for users whose full name is not indicated:

```
awk -F: '$5 == ""' /etc/passwd
```


4.5.5 Making the Full Line Be a Single Field

Occasionally, it's useful to treat the whole input line as a single field. This can be done easily and portably simply by setting FS to "\n" (a newline):⁴

```
awk -F'\n' 'program' files ...
```

When you do this, \$1 is the same as \$0.

Changing FS Does Not Affect the Fields

According to the POSIX standard, **awk** is supposed to behave as if each record is split into fields at the time it is read. In particular, this means that if you change the value of FS after a record is read, the values of the fields (i.e., how they were split) should reflect the old value of FS, not the new one.

However, many older implementations of **awk** do not work this way. Instead, they defer splitting the fields until a field is actually referenced. The fields are split using the *current* value of FS! This behavior can be difficult to diagnose. The following example illustrates the difference between the two methods:

```
sed 1q /etc/passwd | awk '{ FS = ":" ; print $1 }'
```

which usually prints:

```
root
```

on an incorrect implementation of **awk**, while **gawk** prints the full first line of the file, something like:

```
root:x:0:0:Root:/:
```

(The **sed**⁵ command prints just the first line of */etc/passwd*.)



4.5.6 Field-Splitting Summary

It is important to remember that when you assign a string constant as the value of FS, it undergoes normal **awk** string processing. For example, with Unix **awk** and **gawk**, the assignment 'FS = "\. ."' assigns the character string ". ." to FS (the backslash is stripped). This creates a regexp meaning “fields are separated by occurrences of any two characters.” If instead you want fields to be separated by a literal period followed by any single character, use 'FS = "\\ . ."'.

The following list summarizes how fields are split, based on the value of FS ('==' means “is equal to”):

FS == " " Fields are separated by runs of whitespace. Leading and trailing whitespace are ignored. This is the default.

FS == any other single character

Fields are separated by each occurrence of the character. Multiple successive occurrences delimit empty fields, as do leading and trailing occurrences. The character can even be a regexp metacharacter; it does not need to be escaped.

⁴ Thanks to Andrew Schorr for this tip.

⁵ The **sed** utility is a “stream editor.” Its behavior is also defined by the POSIX standard.

`FS == regexp`

Fields are separated by occurrences of characters that match *regexp*. Leading and trailing matches of *regexp* delimit empty fields.

`FS == ""` Each individual character in the record becomes a separate field. (This is a common extension; it is not specified by the POSIX standard.)

FS and IGNORECASE

The `IGNORECASE` variable (see [Section 7.5.1 \[Built-in Variables That Control awk\]](#), [page 147](#)) affects field splitting *only* when the value of `FS` is a regexp. It has no effect when `FS` is a single character, even if that character is a letter. Thus, in the following code:

```
FS = "c"
IGNORECASE = 1
$0 = "aCa"
print $1
```

The output is 'aCa'. If you really want to split fields on an alphabetic character while ignoring case, use a regexp that will do it for you (e.g., `FS = "[c]"`). In this case, `IGNORECASE` will take effect.

4.6 Reading Fixed-Width Data

This section discusses an advanced feature of **gawk**. If you are a novice **awk** user, you might want to skip it on the first reading.

gawk provides a facility for dealing with fixed-width fields with no distinctive field separator. For example, data of this nature arises in the input for old Fortran programs where numbers are run together, or in the output of programs that did not anticipate the use of their output as input for other programs.

An example of the latter is a table where all the columns are lined up by the use of a variable number of spaces and *empty fields are just spaces*. Clearly, **awk**'s normal field splitting based on `FS` does not work well in this case. Although a portable **awk** program can use a series of `substr()` calls on `$0` (see [Section 9.1.3 \[String-Manipulation Functions\]](#), [page 177](#)), this is awkward and inefficient for a large number of fields.

The splitting of an input record into fixed-width fields is specified by assigning a string containing space-separated numbers to the built-in variable `FIELDWIDTHS`. Each number specifies the width of the field, *including* columns between fields. If you want to ignore the columns between fields, you can specify the width as a separate field that is subsequently ignored. It is a fatal error to supply a field width that has a negative value. The following data is the output of the Unix `w` utility. It is useful to illustrate the use of `FIELDWIDTHS`:

```

10:06pm  up 21 days, 14:04,  23 users
User      tty      login idle   JCPU  PCPU  what
hzuo      ttyV0      8:58pm      9      5  vi p24.tex
hzang     ttyV3      6:37pm    50      -csh
eklye     ttyV5      9:53pm      7      1  em thes.tex
dportein  ttyV6      8:17pm  1:47      -csh
gierd     ttyD3     10:00pm      1      elm
dave      ttyD4      9:47pm      4      4  w
brent     ttyp0     26Jun91  4:46  26:46  4:41  bash
dave      ttyq4     26Jun91 15days  46      46  wnewmail

```

The following program takes this input, converts the idle time to number of seconds, and prints out the first two fields and the calculated idle time:

```

BEGIN { FIELDWIDTHS = "9 6 10 6 7 7 35" }
NR > 2 {
    idle = $4
    sub(/^ +/, "", idle)    # strip leading spaces
    if (idle == "")
        idle = 0
    if (idle ~ /:/) {
        split(idle, t, ":")
        idle = t[1] * 60 + t[2]
    }
    if (idle ~ /days/)
        idle *= 24 * 60 * 60

    print $1, $2, idle
}

```

NOTE: The preceding program uses a number of **awk** features that haven't been introduced yet.

Running the program on the data produces the following results:

```

hzuo      ttyV0  0
hzang     ttyV3  50
eklye     ttyV5  0
dportein  ttyV6  107
gierd     ttyD3  1
dave      ttyD4  0
brent     ttyp0  286
dave      ttyq4  1296000

```

Another (possibly more practical) example of fixed-width input data is the input from a deck of balloting cards. In some parts of the United States, voters mark their choices by punching holes in computer cards. These cards are then processed to count the votes for any particular candidate or on any particular issue. Because a voter may choose not to vote on some issue, any column on the card may be empty. An **awk** program for processing such data could use the **FIELDWIDTHS** feature to simplify reading the data. (Of course, getting **gawk** to run on a system with card readers is another story!)

Assigning a value to `FS` causes `gawk` to use `FS` for field splitting again. Use `'FS = FS'` to make this happen, without having to know the current value of `FS`. In order to tell which kind of field splitting is in effect, use `PROCINFO["FS"]` (see [Section 7.5.2 \[Built-in Variables That Convey Information\]](#), page 149). The value is `"FS"` if regular field splitting is being used, or `"FIELDWIDTHS"` if fixed-width field splitting is being used:

```
if (PROCINFO["FS"] == "FS")
    regular field splitting ...
else if (PROCINFO["FS"] == "FIELDWIDTHS")
    fixed-width field splitting ...
else
    content-based field splitting ... (see next section)
```

This information is useful when writing a function that needs to temporarily change `FS` or `FIELDWIDTHS`, read some records, and then restore the original settings (see [Section 10.5 \[Reading the User Database\]](#), page 241, for an example of such a function).

4.7 Defining Fields by Content

This section discusses an advanced feature of `gawk`. If you are a novice `awk` user, you might want to skip it on the first reading.

Normally, when using `FS`, `gawk` defines the fields as the parts of the record that occur in between each field separator. In other words, `FS` defines what a field *is not*, instead of what a field *is*. However, there are times when you really want to define the fields by what they are, and not by what they are not.

The most notorious such case is so-called *comma-separated values* (CSV) data. Many spreadsheet programs, for example, can export their data into text files, where each record is terminated with a newline, and fields are separated by commas. If commas only separated the data, there wouldn't be an issue. The problem comes when one of the fields contains an *embedded* comma. In such cases, most programs embed the field in double quotes.⁶ So, we might have data like this:

```
Robbins,Arnold,"1234 A Pretty Street, NE",MyTown,MyState,12345-6789,USA
```

The `FPAT` variable offers a solution for cases like this. The value of `FPAT` should be a string that provides a regular expression. This regular expression describes the contents of each field.

In the case of CSV data as presented here, each field is either “anything that is not a comma,” or “a double quote, anything that is not a double quote, and a closing double quote.” If written as a regular expression constant (see [Chapter 3 \[Regular Expressions\]](#), page 45), we would have `/([^\,]+)|("[^"]+")/`. Writing this as a string requires us to escape the double quotes, leading to:

```
FPAT = "([^\,]+)|(\"[^\"]+\")"
```

Putting this to use, here is a simple program to parse the data:

```
BEGIN {
    FPAT = "([^\,]+)|(\"[^\"]+\")"
```

⁶ The CSV format lacked a formal standard definition for many years. [RFC 4180](#) standardizes the most common practices.

```

}

{
    print "NF = ", NF
    for (i = 1; i <= NF; i++) {
        printf("%d = <%s>\n", i, $i)
    }
}

```

When run, we get the following:

```

$ gawk -f simple-csv.awk addresses.csv
NF = 7
$1 = <Robbins>
$2 = <Arnold>
$3 = <"1234 A Pretty Street, NE">
$4 = <MyTown>
$5 = <MyState>
$6 = <12345-6789>
$7 = <USA>

```

Note the embedded comma in the value of \$3.

A straightforward improvement when processing CSV data of this sort would be to remove the quotes when they occur, with something like this:

```

if (substr($i, 1, 1) == "\"") {
    len = length($i)
    $i = substr($i, 2, len - 2)    # Get text within the two quotes
}

```

As with FS, the IGNORECASE variable (see [Section 7.5.1 \[Built-in Variables That Control awk\]](#), page 147) affects field splitting with FPAT.

Assigning a value to FPAT overrides field splitting with FS and with FIELDWIDTHS. Similar to FIELDWIDTHS, the value of PROCINFO["FS"] will be "FPAT" if content-based field splitting is being used.

NOTE: Some programs export CSV data that contains embedded newlines between the double quotes. `gawk` provides no way to deal with this. Even though a formal specification for CSV data exists, there isn't much more to be done; the FPAT mechanism provides an elegant solution for the majority of cases, and the `gawk` developers are satisfied with that.

As written, the regexp used for FPAT requires that each field contain at least one character. A straightforward modification (changing the first '+' to '*') allows fields to be empty:

```
FPAT = "([^\,]*)|(\"[^\"]+\")"
```

Finally, the `patsplit()` function makes the same functionality available for splitting regular strings (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177).

To recap, `gawk` provides three independent methods to split input records into fields. The mechanism used is based on which of the three variables—FS, FIELDWIDTHS, or FPAT—was last assigned to.

4.8 Multiple-Line Records

In some databases, a single line cannot conveniently hold all the information in one entry. In such cases, you can use multiline records. The first step in doing this is to choose your data format.

One technique is to use an unusual character or string to separate records. For example, you could use the formfeed character (written `\f` in `awk`, as in C) to separate them, making each record a page of the file. To do this, just set the variable `RS` to `"\f"` (a string containing the formfeed character). Any other character could equally well be used, as long as it won't be part of the data in a record.

Another technique is to have blank lines separate records. By a special dispensation, an empty string as the value of `RS` indicates that records are separated by one or more blank lines. When `RS` is set to the empty string, each record always ends at the first blank line encountered. The next record doesn't start until the first nonblank line that follows. No matter how many blank lines appear in a row, they all act as one record separator. (Blank lines must be completely empty; lines that contain only whitespace do not count.)

You can achieve the same effect as `RS = ""` by assigning the string `"\n\n+"` to `RS`. This regexp matches the newline at the end of the record and one or more blank lines after the record. In addition, a regular expression always matches the longest possible sequence when there is a choice (see [Section 3.5 \[How Much Text Matches?\]](#), page 52). So, the next record doesn't start until the first nonblank line that follows—no matter how many blank lines appear in a row, they are considered one record separator.

However, there is an important difference between `RS = ""` and `RS = "\n\n+"`. In the first case, leading newlines in the input data file are ignored, and if a file ends without extra blank lines after the last record, the final newline is removed from the record. In the second case, this special processing is not done.



Now that the input is separated into records, the second step is to separate the fields in the records. One way to do this is to divide each of the lines into fields in the normal manner. This happens by default as the result of a special feature. When `RS` is set to the empty string *and* `FS` is set to a single character, the newline character *always* acts as a field separator. This is in addition to whatever field separations result from `FS`.⁷

The original motivation for this special exception was probably to provide useful behavior in the default case (i.e., `FS` is equal to `" "`). This feature can be a problem if you really don't want the newline character to separate fields, because there is no way to prevent it. However, you can work around this by using the `split()` function to break up the record manually (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177). If you have a single-character field separator, you can work around the special feature in a different way, by making `FS` into a regexp for that single character. For example, if the field separator is a percent character, instead of `FS = "%"`, use `FS = "[%]"`.

Another way to separate fields is to put each field on a separate line: to do this, just set the variable `FS` to the string `"\n"`. (This single-character separator matches a single newline.) A practical example of a data file organized this way might be a mailing list,

⁷ When `FS` is the null string (`"`) or a regexp, this special feature of `RS` does not apply. It does apply to the default field separator of a single space: `FS = " "`.

where blank lines separate the entries. Consider a mailing list in a file named `addresses`, which looks like this:

```
Jane Doe
123 Main Street
Anywhere, SE 12345-6789

John Smith
456 Tree-lined Avenue
Smallville, MW 98765-4321
...
```

A simple program to process this file is as follows:

```
# addr.s.awk --- simple mailing list program

# Records are separated by blank lines.
# Each line is one field.
BEGIN { RS = "" ; FS = "\n" }

{
    print "Name is:", $1
    print "Address is:", $2
    print "City and State are:", $3
    print ""
}
```

Running the program produces the following output:

```
$ awk -f addr.s.awk addresses
+ Name is: Jane Doe
+ Address is: 123 Main Street
+ City and State are: Anywhere, SE 12345-6789
+
+ Name is: John Smith
+ Address is: 456 Tree-lined Avenue
+ City and State are: Smallville, MW 98765-4321
+
...
```

See [Section 11.3.4 \[Printing Mailing Labels\], page 278](#), for a more realistic program dealing with address lists. The following list summarizes how records are split, based on the value of `RS`:

`RS == "\n"`

Records are separated by the newline character (`'\n'`). In effect, every line in the data file is a separate record, including blank lines. This is the default.

`RS == any single character`

Records are separated by each occurrence of the character. Multiple successive occurrences delimit empty records.

`RS == ""` Records are separated by runs of blank lines. When `FS` is a single character, then the newline character always serves as a field separator, in addition to whatever value `FS` may have. Leading and trailing newlines in a file are ignored.

`RS == regexp` Records are separated by occurrences of characters that match *regexp*. Leading and trailing matches of *regexp* delimit empty records. (This is a **gawk** extension; it is not specified by the POSIX standard.)

If not in compatibility mode (see [Section 2.2 \[Command-Line Options\]](#), page 31), **gawk** sets `RT` to the input text that matched the value specified by `RS`. But if the input file ended without any text that matches `RS`, then **gawk** sets `RT` to the null string.

4.9 Explicit Input with `getline`

So far we have been getting our input data from **awk**'s main input stream—either the standard input (usually your keyboard, sometimes the output from another program) or the files specified on the command line. The **awk** language has a special built-in command called `getline` that can be used to read input under your explicit control.

The `getline` command is used in several different ways and should *not* be used by beginners. The examples that follow the explanation of the `getline` command include material that has not been covered yet. Therefore, come back and study the `getline` command *after* you have reviewed the rest of Parts I and II and have a good knowledge of how **awk** works.

The `getline` command returns 1 if it finds a record and 0 if it encounters the end of the file. If there is some error in getting a record, such as a file that cannot be opened, then `getline` returns `-1`. In this case, **gawk** sets the variable `ERRNO` to a string describing the error that occurred.

In the following examples, *command* stands for a string value that represents a shell command.

NOTE: When `--sandbox` is specified (see [Section 2.2 \[Command-Line Options\]](#), page 31), reading lines from files, pipes, and coprocesses is disabled.

4.9.1 Using `getline` with No Arguments

The `getline` command can be used without arguments to read input from the current input file. All it does in this case is read the next input record and split it up into fields. This is useful if you've finished processing the current record, but want to do some special processing on the next record *right now*. For example:

```
# Remove text between /* and */, inclusive
{
    if ((i = index($0, "/*")) != 0) {
        out = substr($0, 1, i - 1) # leading part of the string
        rest = substr($0, i + 2)   # ... */ ...
        j = index(rest, "*/")      # is */ in trailing part?
        if (j > 0) {
            rest = substr(rest, j + 2) # remove comment
        } else {
```



```

while (j == 0) {
    # get more text
    if (getline <= 0) {
        print("unexpected EOF or error:", ERRNO) > "/dev/stderr"
        exit
    }
    # build up the line using string concatenation
    rest = rest $0
    j = index(rest, "*/")    # is */ in trailing part?
    if (j != 0) {
        rest = substr(rest, j + 2)
        break
    }
}
# build up the output line using string concatenation
$0 = out rest
}
print $0
}

```

This `awk` program deletes C-style comments (`/* ... */`) from the input. It uses a number of features we haven't covered yet, including string concatenation (see [Section 6.2.2 \[String Concatenation\]](#), page 115) and the `index()` and `substr()` built-in functions (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177). By replacing the `'print $0'` with other statements, you could perform more complicated processing on the decommented input, such as searching for matches of a regular expression. (This program has a subtle problem—it does not work if one comment ends and another begins on the same line.)

This form of the `getline` command sets `NF`, `NR`, `FNR`, `RT`, and the value of `$0`.

NOTE: The new value of `$0` is used to test the patterns of any subsequent rules. The original value of `$0` that triggered the rule that executed `getline` is lost. By contrast, the `next` statement reads a new record but immediately begins processing it normally, starting with the first rule in the program. See [Section 7.4.8 \[The next Statement\]](#), page 144.

4.9.2 Using `getline` into a Variable

You can use `'getline var'` to read the next record from `awk`'s input into the variable `var`. No other processing is done. For example, suppose the next line is a comment or a special string, and you want to read it without triggering any rules. This form of `getline` allows you to read that line and store it in a variable so that the main read-a-line-and-check-each-rule loop of `awk` never sees it. The following example swaps every two lines of input:

```

{
    if ((getline tmp) > 0) {
        print tmp
        print $0
    } else
        print $0
}

```

```
}

```

It takes the following list:

```
wan
tew
free
phore

```

and produces these results:

```
tew
wan
phore
free

```

The `getline` command used in this way sets only the variables `NR`, `FNR`, and `RT` (and, of course, `var`). The record is not split into fields, so the values of the fields (including `$0`) and the value of `NF` do not change.

4.9.3 Using `getline` from a File

Use '`getline < file`' to read the next record from *file*. Here, *file* is a string-valued expression that specifies the file name. '`< file`' is called a *redirection* because it directs input to come from a different place. For example, the following program reads its input record from the file `secondary.input` when it encounters a first field with a value equal to 10 in the current input file:

```
{
    if ($1 == 10) {
        getline < "secondary.input"
        print
    } else
        print
}
```

Because the main input stream is not used, the values of `NR` and `FNR` are not changed. However, the record it reads is split into fields in the normal manner, so the values of `$0` and the other fields are changed, resulting in a new value of `NF`. `RT` is also set.

According to POSIX, '`getline < expression`' is ambiguous if *expression* contains unparenthesized operators other than '\$'; for example, '`getline < dir "/" file`' is ambiguous because the concatenation operator (not discussed yet; see [Section 6.2.2 \[String Concatenation\], page 115](#)) is not parenthesized. You should write it as '`getline < (dir "/" file)`' if you want your program to be portable to all `awk` implementations.

4.9.4 Using `getline` into a Variable from a File

Use '`getline var < file`' to read input from the file *file*, and put it in the variable *var*. As earlier, *file* is a string-valued expression that specifies the file from which to read.

In this version of `getline`, none of the predefined variables are changed and the record is not split into fields. The only variable changed is *var*.⁸ For example, the following program

⁸ This is not quite true. `RT` could be changed if `RS` is a regular expression.

copies all the input files to the output, except for records that say '@include filename'. Such a record is replaced by the contents of the file *filename*:

```
{
    if (NF == 2 && $1 == "@include") {
        while ((getline line < $2) > 0)
            print line
        close($2)
    } else
        print
}
```

Note here how the name of the extra input file is not built into the program; it is taken directly from the data, specifically from the second field on the @include line.

The `close()` function is called to ensure that if two identical @include lines appear in the input, the entire specified file is included twice. See [Section 5.9 \[Closing Input and Output Redirections\]](#), page 102.

One deficiency of this program is that it does not process nested @include statements (i.e., @include statements in included files) the way a true macro preprocessor would. See [Section 11.3.9 \[An Easy Way to Use Library Functions\]](#), page 287, for a program that does handle nested @include statements.

4.9.5 Using getline from a Pipe

Omniscience has much to recommend it. Failing that, attention to details would be useful.

—Brian Kernighan

The output of a command can also be piped into `getline`, using '*command* | `getline`'. In this case, the string *command* is run as a shell command and its output is piped into `awk` to be used as input. This form of `getline` reads one record at a time from the pipe. For example, the following program copies its input to its output, except for lines that begin with '@execute', which are replaced by the output produced by running the rest of the line as a shell command:

```
{
    if ($1 == "@execute") {
        tmp = substr($0, 10)          # Remove "@execute"
        while ((tmp | getline) > 0)
            print
        close(tmp)
    } else
        print
}
```

The `close()` function is called to ensure that if two identical '@execute' lines appear in the input, the command is run for each one. Given the input:

```
foo
bar
baz
@execute who
```

```
bletch
```

the program might produce:

```
foo
bar
baz
arnold      ttyv0    Jul 13 14:22
miriam      ttyp0    Jul 13 14:23      (murphy:0)
bill        ttyp1    Jul 13 14:23      (murphy:0)
bletch
```

Notice that this program ran the command `who` and printed the result. (If you try this program yourself, you will of course get different results, depending upon who is logged in on your system.)

This variation of `getline` splits the record into fields, sets the value of `NF`, and recomputes the value of `$0`. The values of `NR` and `FNR` are not changed. `RT` is set.

According to POSIX, ‘`expression | getline`’ is ambiguous if *expression* contains unparenthesized operators other than ‘`$`’—for example, ‘`"echo " "date" | getline`’ is ambiguous because the concatenation operator is not parenthesized. You should write it as ‘`("echo " "date") | getline`’ if you want your program to be portable to all `awk` implementations.

NOTE: Unfortunately, `gawk` has not been consistent in its treatment of a construct like ‘`"echo " "date" | getline`’. Most versions, including the current version, treat it as ‘`("echo " "date") | getline`’. (This is also how `BWK awk` behaves.) Some versions instead treat it as ‘`"echo " ("date" | getline)`’. (This is how `mawk` behaves.) In short, *always* use explicit parentheses, and then you won’t have to worry.

4.9.6 Using `getline` into a Variable from a Pipe

When you use ‘`command | getline var`’, the output of *command* is sent through a pipe to `getline` and into the variable *var*. For example, the following program reads the current date and time into the variable `current_time`, using the `date` utility, and then prints it:

```
BEGIN {
    "date" | getline current_time
    close("date")
    print "Report printed on " current_time
}
```

In this version of `getline`, none of the predefined variables are changed and the record is not split into fields. However, `RT` is set.

4.9.7 Using `getline` from a Coprocess

Reading input into `getline` from a pipe is a one-way operation. The command that is started with ‘`command | getline`’ only sends data *to* your `awk` program.

On occasion, you might want to send data to another program for processing and then read the results back. `gawk` allows you to start a *coprocess*, with which two-way communications are possible. This is done with the ‘`|&`’ operator. Typically, you write data to the coprocess first and then read the results back, as shown in the following:

```
print "some query" |& "db_server"
"db_server" |& getline
```

which sends a query to `db_server` and then reads the results.

The values of `NR` and `FNR` are not changed, because the main input stream is not used. However, the record is split into fields in the normal manner, thus changing the values of `$0`, of the other fields, and of `NF` and `RT`.

Coprocesses are an advanced feature. They are discussed here only because this is the section on `getline`. See [Section 12.3 \[Two-Way Communications with Another Process\]](#), [page 308](#), where coprocesses are discussed in more detail.

4.9.8 Using `getline` into a Variable from a Coprocess

When you use `'command |& getline var'`, the output from the coprocess *command* is sent through a two-way pipe to `getline` and into the variable *var*.

In this version of `getline`, none of the predefined variables are changed and the record is not split into fields. The only variable changed is *var*. However, `RT` is set.

4.9.9 Points to Remember About `getline`

Here are some miscellaneous points about `getline` that you should bear in mind:

- When `getline` changes the value of `$0` and `NF`, `awk` does *not* automatically jump to the start of the program and start testing the new record against every pattern. However, the new record is tested against any subsequent rules.
- Some very old `awk` implementations limit the number of pipelines that an `awk` program may have open to just one. In `gawk`, there is no such limit. You can open as many pipelines (and coprocesses) as the underlying operating system permits.
- An interesting side effect occurs if you use `getline` without a redirection inside a `BEGIN` rule. Because an unredirected `getline` reads from the command-line data files, the first `getline` command causes `awk` to set the value of `FILENAME`. Normally, `FILENAME` does not have a value inside `BEGIN` rules, because you have not yet started to process the command-line data files. (See [Section 7.1.4 \[The BEGIN and END Special Patterns\]](#), [page 134](#); also see [Section 7.5.2 \[Built-in Variables That Convey Information\]](#), [page 149](#).)
- Using `FILENAME` with `getline` (`'getline < FILENAME'`) is likely to be a source of confusion. `awk` opens a separate input stream from the current input file. However, by not using a variable, `$0` and `NF` are still updated. If you're doing this, it's probably by accident, and you should reconsider what it is you're trying to accomplish.
- [Section 4.9.10 \[Summary of `getline` Variants\]](#), [page 84](#), presents a table summarizing the `getline` variants and which variables they can affect. It is worth noting that those variants that do not use redirection can cause `FILENAME` to be updated if they cause `awk` to start reading a new input file.
- If the variable being assigned is an expression with side effects, different versions of `awk` behave differently upon encountering end-of-file. Some versions don't evaluate the expression; many versions (including `gawk`) do. Here is an example, courtesy of Duncan Moore:

```
BEGIN {
```



```

        system("echo 1 > f")
        while ((getline a[++c] < "f") > 0) { }
        print c
    }

```

Here, the side effect is the ‘++c’. Is `c` incremented if end-of-file is encountered before the element in `a` is assigned?

`gawk` treats `getline` like a function call, and evaluates the expression ‘`a[++c]`’ before attempting to read from `f`. However, some versions of `awk` only evaluate the expression once they know that there is a string value to be assigned.

4.9.10 Summary of `getline` Variants

[Table 4.1](#) summarizes the eight variants of `getline`, listing which predefined variables are set by each one, and whether the variant is standard or a `gawk` extension. Note: for each variant, `gawk` sets the `RT` predefined variable.

Variant	Effect	awk / gawk
<code>getline</code>	Sets <code>\$0</code> , <code>NF</code> , <code>FNR</code> , <code>NR</code> , and <code>RT</code>	awk
<code>getline var</code>	Sets <code>var</code> , <code>FNR</code> , <code>NR</code> , and <code>RT</code>	awk
<code>getline < file</code>	Sets <code>\$0</code> , <code>NF</code> , and <code>RT</code>	awk
<code>getline var < file</code>	Sets <code>var</code> and <code>RT</code>	awk
<code>command getline</code>	Sets <code>\$0</code> , <code>NF</code> , and <code>RT</code>	awk
<code>command getline var</code>	Sets <code>var</code> and <code>RT</code>	awk
<code>command & getline</code>	Sets <code>\$0</code> , <code>NF</code> , and <code>RT</code>	gawk
<code>command & getline var</code>	Sets <code>var</code> and <code>RT</code>	gawk

Table 4.1: `getline` variants and what they set

4.10 Reading Input with a Timeout

This section describes a feature that is specific to `gawk`.

You may specify a timeout in milliseconds for reading input from the keyboard, a pipe, or two-way communication, including TCP/IP sockets. This can be done on a per-input, per-command, or per-connection basis, by setting a special element in the `PROCINFO` array (see [Section 7.5.2 \[Built-in Variables That Convey Information\]](#), page 149):

```
PROCINFO["input_name", "READ_TIMEOUT"] = timeout in milliseconds
```

When set, this causes `gawk` to time out and return failure if no data is available to read within the specified timeout period. For example, a TCP client can decide to give up on receiving any response from the server after a certain amount of time:

```

Service = "/inet/tcp/0/localhost/daytime"
PROCINFO[Service, "READ_TIMEOUT"] = 100
if ((Service |& getline) > 0)
    print $0
else if (ERRNO != "")
    print ERRNO

```

Here is how to read interactively from the user⁹ without waiting for more than five seconds:

```
PROCINFO["/dev/stdin", "READ_TIMEOUT"] = 5000
while ((getline < "/dev/stdin") > 0)
    print $0
```

gawk terminates the read operation if input does not arrive after waiting for the timeout period, returns failure, and sets **ERRNO** to an appropriate string value. A negative or zero value for the timeout is the same as specifying no timeout at all.

A timeout can also be set for reading from the keyboard in the implicit loop that reads input records and matches them against patterns, like so:

```
$ gawk 'BEGIN { PROCINFO["-", "READ_TIMEOUT"] = 5000 }
> { print "You entered: " $0 }'
gawk
└─ You entered: gawk
```

In this case, failure to respond within five seconds results in the following error message:

```
[error] gawk: cmd. line:2: (FILENAME=- FNR=1) fatal: error reading input file '-
': Connection timed out
```

The timeout can be set or changed at any time, and will take effect on the next attempt to read from the input device. In the following example, we start with a timeout value of one second, and progressively reduce it by one-tenth of a second until we wait indefinitely for the input to arrive:

```
PROCINFO[Service, "READ_TIMEOUT"] = 1000
while ((Service |& getline) > 0) {
    print $0
    PROCINFO[Service, "READ_TIMEOUT"] -= 100
}
```

NOTE: You should not assume that the read operation will block exactly after the tenth record has been printed. It is possible that **gawk** will read and buffer more than one record's worth of data the first time. Because of this, changing the value of timeout like in the preceding example is not very useful.

If the **PROCINFO** element is not present and the **GAWK_READ_TIMEOUT** environment variable exists, **gawk** uses its value to initialize the timeout value. The exclusive use of the environment variable to specify timeout has the disadvantage of not being able to control it on a per-command or per-connection basis.

gawk considers a timeout event to be an error even though the attempt to read from the underlying device may succeed in a later attempt. This is a limitation, and it also means that you cannot use this to multiplex input from two or more sources.

Assigning a timeout value prevents read operations from blocking indefinitely. But bear in mind that there are other ways **gawk** can stall waiting for an input device to be ready. A network client can sometimes take a long time to establish a connection before it can start reading any data, or the attempt to open a FIFO special file for reading can block indefinitely until some other process opens it for writing.

⁹ This assumes that standard input is the keyboard.

4.11 Directories on the Command Line

According to the POSIX standard, files named on the **awk** command line must be text files; it is a fatal error if they are not. Most versions of **awk** treat a directory on the command line as a fatal error.

By default, **gawk** produces a warning for a directory on the command line, but otherwise ignores it. This makes it easier to use shell wildcards with your **awk** program:

```
$ gawk -f whizprog.awk *           Directories could kill this program
```

If either of the `--posix` or `--traditional` options is given, then **gawk** reverts to treating a directory on the command line as a fatal error.

See [Section 16.7.6 \[Reading Directories\]](#), page 406, for a way to treat directories as usable data from an **awk** program.

4.12 Summary

- Input is split into records based on the value of **RS**. The possibilities are as follows:

Value of RS	Records are split on ...	awk / gawk
Any single character	That character	awk
The empty string ("")	Runs of two or more newlines	awk
A regexp	Text that matches the regexp	gawk

- **FNR** indicates how many records have been read from the current input file; **NR** indicates how many records have been read in total.
- **gawk** sets **RT** to the text matched by **RS**.
- After splitting the input into records, **awk** further splits the records into individual fields, named **\$1**, **\$2**, and so on. **\$0** is the whole record, and **NF** indicates how many fields there are. The default way to split fields is between whitespace characters.
- Fields may be referenced using a variable, as in **\$NF**. Fields may also be assigned values, which causes the value of **\$0** to be recomputed when it is later referenced. Assigning to a field with a number greater than **NF** creates the field and rebuilds the record, using **OFS** to separate the fields. Incrementing **NF** does the same thing. Decrementing **NF** throws away fields and rebuilds the record.
- Field splitting is more complicated than record splitting:

Field separator value	Fields are split ...	awk / gawk
FS == " "	On runs of whitespace	awk
FS == <i>any single character</i>	On that character	awk
FS == <i>regexp</i>	On text matching the regexp	awk
FS == ""	Such that each individual character is a separate field	gawk
FIELDWIDTHS == <i>list of columns</i>	Based on character position	gawk
FPAT == <i>regexp</i>	On the text surrounding text matching the regexp	gawk

- Using `'FS = "\n"'` causes the entire record to be a single field (assuming that newlines separate records).

- FS may be set from the command line using the `-F` option. This can also be done using command-line variable assignment.
- Use `PROCINFO["FS"]` to see how fields are being split.
- Use `getline` in its various forms to read additional records from the default input stream, from a file, or from a pipe or coprocess.
- Use `PROCINFO[file, "READ_TIMEOUT"]` to cause reads to time out for *file*.
- Directories on the command line are fatal for standard `awk`; `gawk` ignores them if not in POSIX mode.

4.13 Exercises

1. Using the `FIELDWIDTHS` variable (see [Section 4.6 \[Reading Fixed-Width Data\]](#), page 72), write a program to read election data, where each record represents one voter's votes. Come up with a way to define which columns are associated with each ballot item, and print the total votes, including abstentions, for each item.
2. [Section 4.9.1 \[Using `getline` with No Arguments\]](#), page 78, presented a program to remove C-style comments (`/* ... */`) from the input. That program does not work if one comment ends on one line and another one starts later on the same line. That can be fixed by making one simple change. What is it?

5 Printing Output

One of the most common programming actions is to *print*, or output, some or all of the input. Use the `print` statement for simple output, and the `printf` statement for fancier formatting. The `print` statement is not limited when computing *which* values to print. However, with two exceptions, you cannot specify *how* to print them—how many columns, whether to use exponential notation or not, and so on. (For the exceptions, see [Section 5.3 \[Output Separators\]](#), page 91, and [Section 5.4 \[Controlling Numeric Output with `print`\]](#), page 92.) For printing with specifications, you need the `printf` statement (see [Section 5.5 \[Using `printf` Statements for Fancier Printing\]](#), page 92).

Besides basic and formatted printing, this chapter also covers I/O redirections to files and pipes, introduces the special file names that `gawk` processes internally, and discusses the `close()` built-in function.

5.1 The `print` Statement

Use the `print` statement to produce output with simple, standardized formatting. You specify only the strings or numbers to print, in a list separated by commas. They are output, separated by single spaces, followed by a newline. The statement looks like this:

```
print item1, item2, ...
```

The entire list of items may be optionally enclosed in parentheses. The parentheses are necessary if any of the item expressions uses the ‘>’ relational operator; otherwise it could be confused with an output redirection (see [Section 5.6 \[Redirecting Output of `print` and `printf`\]](#), page 97).

The items to print can be constant strings or numbers, fields of the current record (such as `$1`), variables, or any `awk` expression. Numeric values are converted to strings and then printed.

The simple statement ‘`print`’ with no items is equivalent to ‘`print $0`’: it prints the entire current record. To print a blank line, use ‘`print ""`’. To print a fixed piece of text, use a string constant, such as “Don’t Panic”, as one item. If you forget to use the double-quote characters, your text is taken as an `awk` expression, and you will probably get an error. Keep in mind that a space is printed between any two items.

Note that the `print` statement is a statement and not an expression—you can’t use it in the pattern part of a pattern–action statement, for example.

5.2 `print` Statement Examples

Each `print` statement makes at least one line of output. However, it isn’t limited to only one line. If an item value is a string containing a newline, the newline is output along with the rest of the string. A single `print` statement can make any number of lines this way.

The following is an example of printing a string that contains embedded newlines:

```
$ awk 'BEGIN { print "line one\nline two\nline three" }'
+ line one
+ line two
+ line three
```

The next example, which is run on the `inventory-shipped` file, prints the first two fields of each input record, with a space between them:

```
$ awk '{ print $1, $2 }' inventory-shipped
+ Jan 13
+ Feb 15
+ Mar 15
...
```

A common mistake in using the `print` statement is to omit the comma between two items. This often has the effect of making the items run together in the output, with no space. The reason for this is that juxtaposing two string expressions in `awk` means to concatenate them. Here is the same program, without the comma:

```
$ awk '{ print $1 $2 }' inventory-shipped
+ Jan13
+ Feb15
+ Mar15
...
```

To someone unfamiliar with the `inventory-shipped` file, neither example's output makes much sense. A heading line at the beginning would make it clearer. Let's add some headings to our table of months (`$1`) and green crates shipped (`$2`). We do this using a `BEGIN` rule (see [Section 7.1.4 \[The BEGIN and END Special Patterns\]](#), page 134) so that the headings are only printed once:

```
awk 'BEGIN { print "Month Crates"
              print "-----" }
     { print $1, $2 }' inventory-shipped
```

When run, the program prints the following:

```
Month Crates
-----
Jan 13
Feb 15
Mar 15
...
```

The only problem, however, is that the headings and the table data don't line up! We can fix this by printing some spaces between the two fields:

```
awk 'BEGIN { print "Month Crates"
              print "-----" }
     { print $1, "    ", $2 }' inventory-shipped
```

Lining up columns this way can get pretty complicated when there are many columns to fix. Counting spaces for two or three columns is simple, but any more than this can take up a lot of time. This is why the `printf` statement was created (see [Section 5.5 \[Using printf Statements for Fancier Printing\]](#), page 92); one of its specialties is lining up columns of data.

NOTE: You can continue either a `print` or `printf` statement simply by putting a newline after any comma (see [Section 1.6 \[awk Statements Versus Lines\]](#), page 27).

5.3 Output Separators

As mentioned previously, a `print` statement contains a list of items separated by commas. In the output, the items are normally separated by single spaces. However, this doesn't need to be the case; a single space is simply the default. Any string of characters may be used as the *output field separator* by setting the predefined variable `OFS`. The initial value of this variable is the string " " (i.e., a single space).

The output from an entire `print` statement is called an *output record*. Each `print` statement outputs one output record, and then outputs a string called the *output record separator* (or `ORS`). The initial value of `ORS` is the string `"\\n"` (i.e., a newline character). Thus, each `print` statement normally makes a separate line.

In order to change how output fields and records are separated, assign new values to the variables `OFS` and `ORS`. The usual place to do this is in the `BEGIN` rule (see [Section 7.1.4 \[The BEGIN and END Special Patterns\]](#), page 134), so that it happens before any input is processed. It can also be done with assignments on the command line, before the names of the input files, or using the `-v` command-line option (see [Section 2.2 \[Command-Line Options\]](#), page 31). The following example prints the first and second fields of each input record, separated by a semicolon, with a blank line added after each newline:

```
$ awk 'BEGIN { OFS = ";"; ORS = "\\n\\n" }
>          { print $1, $2 }' mail-list
+ Amelia;555-5553
+
+ Anthony;555-3412
+
+ Becky;555-7685
+
+ Bill;555-1675
+
+ Broderick;555-0542
+
+ Camilla;555-2912
+
+ Fabius;555-1234
+
+ Julie;555-6699
+
+ Martin;555-6480
+
+ Samuel;555-3430
+
+ Jean-Paul;555-2127
+
```

If the value of `ORS` does not contain a newline, the program's output runs together on a single line.

5.4 Controlling Numeric Output with `print`

When printing numeric values with the `print` statement, `awk` internally converts each number to a string of characters and prints that string. `awk` uses the `sprintf()` function to do this conversion (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177). For now, it suffices to say that the `sprintf()` function accepts a *format specification* that tells it how to format numbers (or strings), and that there are a number of different ways in which numbers can be formatted. The different format specifications are discussed more fully in [Section 5.5.2 \[Format-Control Letters\]](#), page 93.

The predefined variable `OFMT` contains the format specification that `print` uses with `sprintf()` when it wants to convert a number to a string for printing. The default value of `OFMT` is `"%.6g"`. The way `print` prints numbers can be changed by supplying a different format specification for the value of `OFMT`, as shown in the following example:

```
$ awk 'BEGIN {
>   OFMT = "%.0f" # print numbers as integers (rounds)
>   print 17.23, 17.54 }'
└─ 17 18
```

According to the POSIX standard, `awk`'s behavior is undefined if `OFMT` contains anything but a floating-point conversion specification.



5.5 Using `printf` Statements for Fancier Printing

For more precise control over the output format than what is provided by `print`, use `printf`. With `printf` you can specify the width to use for each item, as well as various formatting choices for numbers (such as what output base to use, whether to print an exponent, whether to print a sign, and how many digits to print after the decimal point).

5.5.1 Introduction to the `printf` Statement

A simple `printf` statement looks like this:

```
printf format, item1, item2, ...
```

As for `print`, the entire list of arguments may optionally be enclosed in parentheses. Here too, the parentheses are necessary if any of the item expressions uses the `'>'` relational operator; otherwise, it can be confused with an output redirection (see [Section 5.6 \[Redirecting Output of `print` and `printf`\]](#), page 97).

The difference between `printf` and `print` is the *format* argument. This is an expression whose value is taken as a string; it specifies how to output each of the other arguments. It is called the *format string*.

The format string is very similar to that in the ISO C library function `printf()`. Most of *format* is text to output verbatim. Scattered among this text are *format specifiers*—one per item. Each format specifier says to output the next item in the argument list at that place in the format.

The `printf` statement does not automatically append a newline to its output. It outputs only what the format string specifies. So if a newline is needed, you must include one in the format string. The output separator variables `OFS` and `ORS` have no effect on `printf` statements. For example:

```
$ awk 'BEGIN {
```

```

> ORS = "\nOUCH!\n"; OFS = "+"
> msg = "Don\47t Panic!"
> printf "%s\n", msg
> }'
└─ Don't Panic!

```

Here, neither the '+' nor the 'OUCH!' appears in the output message.

5.5.2 Format-Control Letters

A format specifier starts with the character '%' and ends with a *format-control letter*—it tells the `printf` statement how to output one item. The format-control letter specifies what *kind* of value to print. The rest of the format specifier is made up of optional *modifiers* that control *how* to print the value, such as the field width. Here is a list of the format-control letters:

%c Print a number as a character; thus, '`printf "%c", 65`' outputs the letter 'A'. The output for a string value is the first character of the string.

NOTE: The POSIX standard says the first character of a string is printed. In locales with multibyte characters, **gawk** attempts to convert the leading bytes of the string into a valid wide character and then to print the multibyte encoding of that character. Similarly, when printing a numeric value, **gawk** allows the value to be within the numeric range of values that can be held in a wide character. If the conversion to multibyte encoding fails, **gawk** uses the low eight bits of the value as the character to print.

Other **awk** versions generally restrict themselves to printing the first byte of a string or to numeric values within the range of a single byte (0–255).

%d, %i Print a decimal integer. The two control letters are equivalent. (The '%i' specification is for compatibility with ISO C.)

%e, %E Print a number in scientific (exponential) notation. For example:

```
printf "%4.3e\n", 1950
```

prints '1.950e+03', with a total of four significant figures, three of which follow the decimal point. (The '4.3' represents two modifiers, discussed in the next subsection.) '%E' uses 'E' instead of 'e' in the output.

%f Print a number in floating-point notation. For example:

```
printf "%4.3f", 1950
```

prints '1950.000', with a total of four significant figures, three of which follow the decimal point. (The '4.3' represents two modifiers, discussed in the next subsection.)

On systems supporting IEEE 754 floating-point format, values representing negative infinity are formatted as '-inf' or '-infinity', and positive infinity as 'inf' or 'infinity'. The special "not a number" value formats as '-nan' or 'nan' (see [Section 15.2 \[Other Stuff to Know\]](#), page 344).

<code>%F</code>	Like <code>%f</code> , but the infinity and “not a number” values are spelled using uppercase letters. The <code>%F</code> format is a POSIX extension to ISO C; not all systems support it. On those that don’t, <code>gawk</code> uses <code>%f</code> instead.
<code>%g, %G</code>	Print a number in either scientific notation or in floating-point notation, whichever uses fewer characters; if the result is printed in scientific notation, <code>%G</code> uses <code>‘E’</code> instead of <code>‘e’</code> .
<code>%o</code>	Print an unsigned octal integer (see Section 6.1.1.2 [Octal and Hexadecimal Numbers] , page 107).
<code>%s</code>	Print a string.
<code>%u</code>	Print an unsigned decimal integer. (This format is of marginal use, because all numbers in <code>awk</code> are floating point; it is provided primarily for compatibility with C.)
<code>%x, %X</code>	Print an unsigned hexadecimal integer; <code>%X</code> uses the letters <code>‘A’</code> through <code>‘F’</code> instead of <code>‘a’</code> through <code>‘f’</code> (see Section 6.1.1.2 [Octal and Hexadecimal Numbers] , page 107).
<code>%%</code>	Print a single <code>‘%’</code> . This does not consume an argument and it ignores any modifiers.

NOTE: When using the integer format-control letters for values that are outside the range of the widest C integer type, `gawk` switches to the `‘%g’` format specifier. If `--lint` is provided on the command line (see [Section 2.2 \[Command-Line Options\]](#), page 31), `gawk` warns about this. Other versions of `awk` may print invalid values or do something else entirely.



5.5.3 Modifiers for printf Formats

A format specification can also include *modifiers* that can control how much of the item’s value is printed, as well as how much space it gets. The modifiers come between the `‘%’` and the format-control letter. We use the bullet symbol “•” in the following examples to represent spaces in the output. Here are the possible modifiers, in the order in which they may appear:

N\$ An integer constant followed by a `‘$’` is a *positional specifier*. Normally, format specifications are applied to arguments in the order given in the format string. With a positional specifier, the format specification is applied to a specific argument, instead of what would be the next argument in the list. Positional specifiers begin counting with one. Thus:

```
printf "%s %s\n", "don't", "panic"
printf "%2$s %1$s\n", "panic", "don't"
```

prints the famous friendly message twice.

At first glance, this feature doesn’t seem to be of much use. It is in fact a `gawk` extension, intended for use in translating messages at runtime. See [Section 13.4.2 \[Rearranging printf Arguments\]](#), page 322, which describes how and why to use positional specifiers. For now, we ignore them.

- (Minus) The minus sign, used before the width modifier (see later on in this list), says to left-justify the argument within its specified width. Normally, the argument is printed right-justified in the specified width. Thus:

```
printf "%-4s", "foo"
prints 'foo•'.
```

space For numeric conversions, prefix positive values with a space and negative values with a minus sign.

- +
- The plus sign, used before the width modifier (see later on in this list), says to always supply a sign for numeric conversions, even if the data to format is positive. The '+' overrides the space modifier.

Use an “alternative form” for certain control letters. For '%o', supply a leading zero. For '%x' and '%X', supply a leading '0x' or '0X' for a nonzero result. For '%e', '%E', '%f', and '%F', the result always contains a decimal point. For '%g' and '%G', trailing zeros are not removed from the result.

0 A leading '0' (zero) acts as a flag indicating that output should be padded with zeros instead of spaces. This applies only to the numeric output formats. This flag only has an effect when the field width is wider than the value to print.

' A single quote or apostrophe character is a POSIX extension to ISO C. It indicates that the integer part of a floating-point value, or the entire part of an integer decimal value, should have a thousands-separator character in it. This only works in locales that support such characters. For example:

```
$ cat thousands.awk          Show source program
+ BEGIN { printf "%'d\n", 1234567 }
$ LC_ALL=C gawk -f thousands.awk
+ 1234567                    Results in "C" locale
$ LC_ALL=en_US.UTF-8 gawk -f thousands.awk
+ 1,234,567                  Results in US English UTF locale
```

For more information about locales and internationalization issues, see [Section 6.6 \[Where You Are Makes a Difference\]](#), page 129.

NOTE: The '' flag is a nice feature, but its use complicates things: it becomes difficult to use it in command-line programs. For information on appropriate quoting tricks, see [Section 1.1.6 \[Shell Quoting Issues\]](#), page 21.

width This is a number specifying the desired minimum width of a field. Inserting any number between the '%' sign and the format-control character forces the field to expand to this width. The default way to do this is to pad with spaces on the left. For example:

```
printf "%4s", "foo"
prints '•foo'.
```

The value of *width* is a minimum width, not a maximum. If the item value requires more than *width* characters, it can be as wide as necessary. Thus, the following:

```
printf "%4s", "foobar"
```

prints 'foobar'.

Preceding the *width* with a minus sign causes the output to be padded with spaces on the right, instead of on the left.

.prec A period followed by an integer constant specifies the precision to use when printing. The meaning of the precision varies by control letter:

%d, %i, %o, %u, %x, %X

Minimum number of digits to print.

%e, %E, %f, %F

Number of digits to the right of the decimal point.

%g, %G Maximum number of significant digits.

%s Maximum number of characters from the string that should print.

Thus, the following:

```
printf "%.4s", "foobar"
```

prints 'foob'.

The C library `printf`'s dynamic *width* and *prec* capability (e.g., "%*.s") is supported. Instead of supplying explicit *width* and/or *prec* values in the format string, they are passed in the argument list. For example:

```
w = 5
p = 3
s = "abcdefg"
printf "%*.s\n", w, p, s
```

is exactly equivalent to:

```
s = "abcdefg"
printf "%5.3s\n", s
```

Both programs output '••abc'. Earlier versions of `awk` did not support this capability. If you must use such a version, you may simulate this feature by using concatenation to build up the format string, like so:

```
w = 5
p = 3
s = "abcdefg"
printf "%" w "." p "s\n", s
```

This is not particularly easy to read, but it does work.

C programmers may be used to supplying additional modifiers ('h', 'j', 'l', 'L', 't', and 'z') in `printf` format strings. These are not valid in `awk`. Most `awk` implementations silently ignore them. If `--lint` is provided on the command line (see [Section 2.2 \[Command-Line Options\]](#), page 31), `gawk` warns about their use. If `--posix` is supplied, their use is a fatal error.

5.5.4 Examples Using printf

The following simple example shows how to use `printf` to make an aligned table:

```
awk '{ printf "%-10s %s\n", $1, $2 }' mail-list
```

This command prints the names of the people (\$1) in the file `mail-list` as a string of 10 characters that are left-justified. It also prints the phone numbers (\$2) next on the line. This produces an aligned two-column table of names and phone numbers, as shown here:

```
$ awk '{ printf "%-10s %s\n", $1, $2 }' mail-list
+ Amelia      555-5553
+ Anthony     555-3412
+ Becky       555-7685
+ Bill        555-1675
+ Broderick   555-0542
+ Camilla     555-2912
+ Fabius      555-1234
+ Julie       555-6699
+ Martin      555-6480
+ Samuel      555-3430
+ Jean-Paul   555-2127
```

In this case, the phone numbers had to be printed as strings because the numbers are separated by dashes. Printing the phone numbers as numbers would have produced just the first three digits: '555'. This would have been pretty confusing.

It wasn't necessary to specify a width for the phone numbers because they are last on their lines. They don't need to have spaces after them.

The table could be made to look even nicer by adding headings to the tops of the columns. This is done using a `BEGIN` rule (see [Section 7.1.4 \[The BEGIN and END Special Patterns\]](#), [page 134](#)) so that the headers are only printed once, at the beginning of the `awk` program:

```
awk 'BEGIN { print "Name      Number"
              print "----      -" }
     { printf "%-10s %s\n", $1, $2 }' mail-list
```

The preceding example mixes `print` and `printf` statements in the same program. Using just `printf` statements can produce the same results:

```
awk 'BEGIN { printf "%-10s %s\n", "Name", "Number"
              printf "%-10s %s\n", "----", "-" }
     { printf "%-10s %s\n", $1, $2 }' mail-list
```

Printing each column heading with the same format specification used for the column elements ensures that the headings are aligned just like the columns.

The fact that the same format specification is used three times can be emphasized by storing it in a variable, like this:

```
awk 'BEGIN { format = "%-10s %s\n"
              printf format, "Name", "Number"
              printf format, "----", "-" }
     { printf format, $1, $2 }' mail-list
```

5.6 Redirecting Output of `print` and `printf`

So far, the output from `print` and `printf` has gone to the standard output, usually the screen. Both `print` and `printf` can also send their output to other places. This is called *redirection*.

NOTE: When `--sandbox` is specified (see [Section 2.2 \[Command-Line Options\]](#), [page 31](#)), redirecting output to files, pipes, and coprocesses is disabled.

A redirection appears after the `print` or `printf` statement. Redirections in `awk` are written just like redirections in shell commands, except that they are written inside the `awk` program.

There are four forms of output redirection: output to a file, output appended to a file, output through a pipe to another command, and output to a coprocess. We show them all for the `print` statement, but they work identically for `printf`:

`print items > output-file`

This redirection prints the items into the output file named *output-file*. The file name *output-file* can be any expression. Its value is changed to a string and then used as a file name (see [Chapter 6 \[Expressions\]](#), [page 107](#)).

When this type of redirection is used, the *output-file* is erased before the first output is written to it. Subsequent writes to the same *output-file* do not erase *output-file*, but append to it. (This is different from how you use redirections in shell scripts.) If *output-file* does not exist, it is created. For example, here is how an `awk` program can write a list of peoples' names to one file named *name-list*, and a list of phone numbers to another file named *phone-list*:

```
$ awk '{ print $2 > "phone-list"
>      print $1 > "name-list" }' mail-list
$ cat phone-list
+ 555-5553
+ 555-3412
...
$ cat name-list
+ Amelia
+ Anthony
...
```

Each output file contains one name or number per line.

`print items >> output-file`

This redirection prints the items into the preexisting output file named *output-file*. The difference between this and the single-`>` redirection is that the old contents (if any) of *output-file* are not erased. Instead, the `awk` output is appended to the file. If *output-file* does not exist, then it is created.

`print items | command`

It is possible to send output to another program through a pipe instead of into a file. This redirection opens a pipe to *command*, and writes the values of *items* through this pipe to another process created to execute *command*.

The redirection argument *command* is actually an `awk` expression. Its value is converted to a string whose contents give the shell command to be run. For example, the following produces two files, one unsorted list of peoples' names, and one list sorted in reverse alphabetical order:

```
awk '{ print $1 > "names.unsorted"
      command = "sort -r > names.sorted"
```

```
print $1 | command }' mail-list
```

The unsorted list is written with an ordinary redirection, while the sorted list is written by piping through the `sort` utility.

The next example uses redirection to mail a message to the mailing list `bug-system`. This might be useful when trouble is encountered in an `awk` script run periodically for system maintenance:

```
report = "mail bug-system"
print("Awk script failed:", $0) | report
print("at record number", FNR, "of", FILENAME) | report
close(report)
```

The `close()` function is called here because it's a good idea to close the pipe as soon as all the intended output has been sent to it. See [Section 5.9 \[Closing Input and Output Redirections\]](#), page 102, for more information.

This example also illustrates the use of a variable to represent a *file* or *command*—it is not necessary to always use a string constant. Using a variable is generally a good idea, because (if you mean to refer to that same file or command) `awk` requires that the string value be written identically every time.

```
print items |& command
```

This redirection prints the items to the input of *command*. The difference between this and the single-`|` redirection is that the output from *command* can be read with `getline`. Thus, *command* is a *coprocess*, which works together with but is subsidiary to the `awk` program.

This feature is a `gawk` extension, and is not available in POSIX `awk`. See [Section 4.9.7 \[Using `getline` from a Coprocess\]](#), page 82, for a brief discussion. See [Section 12.3 \[Two-Way Communications with Another Process\]](#), page 308, for a more complete discussion.

Redirecting output using `>`, `>>`, `|`, or `|&` asks the system to open a file, pipe, or coprocess only if the particular *file* or *command* you specify has not already been written to by your program or if it has been closed since it was last written to.

It is a common error to use `>` redirection for the first `print` to a file, and then to use `>>` for subsequent output:

```
# clear the file
print "Don't panic" > "guide.txt"
...
# append
print "Avoid improbability generators" >> "guide.txt"
```

This is indeed how redirections must be used from the shell. But in `awk`, it isn't necessary. In this kind of case, a program should use `>` for all the `print` statements, because the output file is only opened once. (It happens that if you mix `>` and `>>` output is produced in the expected order. However, mixing the operators for the same file is definitely poor style, and is confusing to readers of your program.)

As mentioned earlier (see [Section 4.9.9 \[Points to Remember About `getline`\]](#), page 83), many older `awk` implementations limit the number of pipelines that an `awk` program may

have open to just one! In **gawk**, there is no such limit. **gawk** allows a program to open as many pipelines as the underlying operating system permits.

Piping into sh

A particularly powerful way to use redirection is to build command lines and pipe them into the shell, **sh**. For example, suppose you have a list of files brought over from a system where all the file names are stored in uppercase, and you wish to rename them to have names in all lowercase. The following program is both simple and efficient:

```
{ printf("mv %s %s\n", $0, tolower($0)) | "sh" }

END { close("sh") }
```

The **tolower()** function returns its argument string with all uppercase characters converted to lowercase (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177). The program builds up a list of command lines, using the **mv** utility to rename the files. It then sends the list to the shell for execution.

See [Section 10.2.9 \[Quoting Strings to Pass to the Shell\]](#), page 230, for a function that can help in generating command lines to be fed to the shell.

5.7 Special Files for Standard Preopened Data Streams

Running programs conventionally have three input and output streams already available to them for reading and writing. These are known as the *standard input*, *standard output*, and *standard error output*. These open streams (and any other open files or pipes) are often referred to by the technical term *file descriptors*.

These streams are, by default, connected to your keyboard and screen, but they are often redirected with the shell, via the '<', '<<', '>', '>>', '>&', and '|' operators. Standard error is typically used for writing error messages; the reason there are two separate streams, standard output and standard error, is so that they can be redirected separately.

In traditional implementations of **awk**, the only way to write an error message to standard error in an **awk** program is as follows:

```
print "Serious error detected!" | "cat 1>&2"
```

This works by opening a pipeline to a shell command that can access the standard error stream that it inherits from the **awk** process. This is far from elegant, and it also requires a separate process. So people writing **awk** programs often don't do this. Instead, they send the error messages to the screen, like this:

```
print "Serious error detected!" > "/dev/tty"
```

(**/dev/tty** is a special file supplied by the operating system that is connected to your keyboard and screen. It represents the “terminal,”¹ which on modern systems is a keyboard and screen, not a serial console.) This generally has the same effect, but not always: although the standard error stream is usually the screen, it can be redirected; when that happens, writing to the screen is not correct. In fact, if **awk** is run from a background job, it may not have a terminal at all. Then opening **/dev/tty** fails.

¹ The “tty” in **/dev/tty** stands for “Teletype,” a serial terminal.

gawk, **BWK awk**, and **mawk** provide special file names for accessing the three standard streams. If the file name matches one of these special names when **gawk** (or one of the others) redirects input or output, then it directly uses the descriptor that the file name stands for. These special file names work for all operating systems that **gawk** has been ported to, not just those that are POSIX-compliant:

/dev/stdin

The standard input (file descriptor 0).

/dev/stdout

The standard output (file descriptor 1).

/dev/stderr

The standard error output (file descriptor 2).

With these facilities, the proper way to write an error message then becomes:

```
print "Serious error detected!" > "/dev/stderr"
```

Note the use of quotes around the file name. Like with any other redirection, the value must be a string. It is a common error to omit the quotes, which leads to confusing results.

gawk does not treat these file names as special when in POSIX-compatibility mode. However, because **BWK awk** supports them, **gawk** does support them even when invoked with the `--traditional` option (see [Section 2.2 \[Command-Line Options\]](#), page 31).

5.8 Special File names in gawk

Besides access to standard input, standard output, and standard error, **gawk** provides access to any open file descriptor. Additionally, there are special file names reserved for TCP/IP networking.

5.8.1 Accessing Other Open Files with gawk

Besides the **/dev/stdin**, **/dev/stdout**, and **/dev/stderr** special file names mentioned earlier, **gawk** provides syntax for accessing any other inherited open file:

/dev/fd/*N*

The file associated with file descriptor *N*. Such a file must be opened by the program initiating the **awk** execution (typically the shell). Unless special pains are taken in the shell from which **gawk** is invoked, only descriptors 0, 1, and 2 are available.

The file names **/dev/stdin**, **/dev/stdout**, and **/dev/stderr** are essentially aliases for **/dev/fd/0**, **/dev/fd/1**, and **/dev/fd/2**, respectively. However, those names are more self-explanatory.

Note that using `close()` on a file name of the form **/dev/fd/*N***, for file descriptor numbers above two, does actually close the given file descriptor.

5.8.2 Special Files for Network Communications

gawk programs can open a two-way TCP/IP connection, acting as either a client or a server. This is done using a special file name of the form:

```
/net-type/protocol/local-port/remote-host/remote-port
```

The *net-type* is one of ‘inet’, ‘inet4’, or ‘inet6’. The *protocol* is one of ‘tcp’ or ‘udp’, and the other fields represent the other essential pieces of information for making a networking connection. These file names are used with the ‘|&’ operator for communicating with a coprocess (see [Section 12.3 \[Two-Way Communications with Another Process\]](#), page 308). This is an advanced feature, mentioned here only for completeness. Full discussion is delayed until [Section 12.4 \[Using gawk for Network Programming\]](#), page 311.

5.8.3 Special File name Caveats

Here are some things to bear in mind when using the special file names that **gawk** provides:

- Recognition of the file names for the three standard preopened files is disabled only in POSIX mode.
- Recognition of the other special file names is disabled if **gawk** is in compatibility mode (either `--traditional` or `--posix`; see [Section 2.2 \[Command-Line Options\]](#), page 31).
- **gawk** *always* interprets these special file names. For example, using ‘/dev/fd/4’ for output actually writes on file descriptor 4, and not on a new file descriptor that is `dup()`ed from file descriptor 4. Most of the time this does not matter; however, it is important to *not* close any of the files related to file descriptors 0, 1, and 2. Doing so results in unpredictable behavior.

5.9 Closing Input and Output Redirections

If the same file name or the same shell command is used with **getline** more than once during the execution of an **awk** program (see [Section 4.9 \[Explicit Input with getline\]](#), page 78), the file is opened (or the command is executed) the first time only. At that time, the first record of input is read from that file or command. The next time the same file or command is used with **getline**, another record is read from it, and so on.

Similarly, when a file or pipe is opened for output, **awk** remembers the file name or command associated with it, and subsequent writes to the same file or command are appended to the previous writes. The file or pipe stays open until **awk** exits.

This implies that special steps are necessary in order to read the same file again from the beginning, or to rerun a shell command (rather than reading more output from the same command). The `close()` function makes these things possible:

```
close(filename)
```

or:

```
close(command)
```

The argument *filename* or *command* can be any expression. Its value must *exactly* match the string that was used to open the file or start the command (spaces and other “irrelevant” characters included). For example, if you open a pipe with this:

```
"sort -r names" | getline foo
```

then you must close it with this:

```
close("sort -r names")
```

Once this function call is executed, the next **getline** from that file or command, or the next **print** or **printf** to that file or command, reopens the file or reruns the command. Because the expression that you use to close a file or pipeline must exactly match the

expression used to open the file or run the command, it is good practice to use a variable to store the file name or command. The previous example becomes the following:

```
sortcom = "sort -r names"
sortcom | getline foo
...
close(sortcom)
```

This helps avoid hard-to-find typographical errors in your `awk` programs. Here are some of the reasons for closing an output file:

- To write a file and read it back later on in the same `awk` program. Close the file after writing it, then begin reading it with `getline`.
- To write numerous files, successively, in the same `awk` program. If the files aren't closed, eventually `awk` may exceed a system limit on the number of open files in one process. It is best to close each one when the program has finished writing it.
- To make a command finish. When output is redirected through a pipe, the command reading the pipe normally continues to try to read input as long as the pipe is open. Often this means the command cannot really do its work until the pipe is closed. For example, if output is redirected to the `mail` program, the message is not actually sent until the pipe is closed.
- To run the same program a second time, with the same arguments. This is not the same thing as giving more input to the first run!

For example, suppose a program pipes output to the `mail` program. If it outputs several lines redirected to this pipe without closing it, they make a single message of several lines. By contrast, if the program closes the pipe after each line of output, then each line makes a separate message.

If you use more files than the system allows you to have open, `gawk` attempts to multiplex the available open files among your data files. `gawk`'s ability to do this depends upon the facilities of your operating system, so it may not always work. It is therefore both good practice and good portability advice to always use `close()` on your files when you are done with them. In fact, if you are using a lot of pipes, it is essential that you close commands when done. For example, consider something like this:

```
{
    ...
    command = ("grep " $1 " /some/file | my_prog -q " $3)
    while ((command | getline) > 0) {
        process output of command
    }
    # need close(command) here
}
```

This example creates a new pipeline based on data in *each* record. Without the call to `close()` indicated in the comment, `awk` creates child processes to run the commands, until it eventually runs out of file descriptors for more pipelines.

Even though each command has finished (as indicated by the end-of-file return status from `getline`), the child process is not terminated;² more importantly, the file descriptor for the pipe is not closed and released until `close()` is called or `awk` exits.

`close()` silently does nothing if given an argument that does not represent a file, pipe, or coprocess that was opened with a redirection. In such a case, it returns a negative value, indicating an error. In addition, `gawk` sets `ERRNO` to a string indicating the error.

Note also that '`close(FILENAME)`' has no "magic" effects on the implicit loop that reads through the files named on the command line. It is, more likely, a close of a file that was never opened with a redirection, so `awk` silently does nothing, except return a negative value.

When using the '|&' operator to communicate with a coprocess, it is occasionally useful to be able to close one end of the two-way pipe without closing the other. This is done by supplying a second argument to `close()`. As in any other call to `close()`, the first argument is the name of the command or special file used to start the coprocess. The second argument should be a string, with either of the values "to" or "from". Case does not matter. As this is an advanced feature, discussion is delayed until [Section 12.3 \[Two-Way Communications with Another Process\]](#), page 308, which describes it in more detail and gives an example.

Using `close()`'s Return Value

In many older versions of Unix `awk`, the `close()` function is actually a statement. It is a syntax error to try and use the return value from `close()`:

```
command = "..."  
command | getline info  
retval = close(command) # syntax error in many Unix awks
```

`gawk` treats `close()` as a function. The return value is `-1` if the argument names something that was never opened with a redirection, or if there is a system problem closing the file or process. In these cases, `gawk` sets the predefined variable `ERRNO` to a string describing the problem.

In `gawk`, when closing a pipe or coprocess (input or output), the return value is the exit status of the command.³ Otherwise, it is the return value from the system's `close()` or `fclose()` C functions when closing input or output files, respectively. This value is zero if the close succeeds, or `-1` if it fails.

The POSIX standard is very vague; it says that `close()` returns zero on success and a nonzero value otherwise. In general, different implementations vary in what they report when closing pipes; thus, the return value cannot be used portably. In POSIX mode (see [Section 2.2 \[Command-Line Options\]](#), page 31), `gawk` just returns zero when closing a pipe.

5.10 Summary

- The `print` statement prints comma-separated expressions. Each expression is sepa-

² The technical terminology is rather morbid. The finished child is called a "zombie," and cleaning up after it is referred to as "reaping."

³ This is a full 16-bit value as returned by the `wait()` system call. See the system manual pages for information on how to decode this value.

rated by the value of `OFS` and terminated by the value of `ORS`. `OFMT` provides the conversion format for numeric values for the `print` statement.

- The `printf` statement provides finer-grained control over output, with format-control letters for different data types and various flags that modify the behavior of the format-control letters.
- Output from both `print` and `printf` may be redirected to files, pipes, and coprocesses.
- `gawk` provides special file names for access to standard input, output, and error, and for network communications.
- Use `close()` to close open file, pipe, and coprocess redirections. For coprocesses, it is possible to close only one direction of the communications.

5.11 Exercises

1. Rewrite the program:

```
awk 'BEGIN { print "Month Crates"
            print "-----" }
     { print $1, "    ", $2 }' inventory-shipped
```

from [Section 5.3 \[Output Separators\]](#), page 91, by using a new value of `OFS`.

2. Use the `printf` statement to line up the headings and table data for the `inventory-shipped` example that was covered in [Section 5.1 \[The `print` Statement\]](#), page 89.
3. What happens if you forget the double quotes when redirecting output, as follows:

```
BEGIN { print "Serious error detected!" > /dev/stderr }
```


6 Expressions

Expressions are the basic building blocks of **awk** patterns and actions. An expression evaluates to a value that you can print, test, or pass to a function. Additionally, an expression can assign a new value to a variable or a field by using an assignment operator.

An expression can serve as a pattern or action statement on its own. Most other kinds of statements contain one or more expressions that specify the data on which to operate. As in other languages, expressions in **awk** can include variables, array references, constants, and function calls, as well as combinations of these with various operators.

6.1 Constants, Variables, and Conversions

Expressions are built up from values and the operations performed upon them. This section describes the elementary objects that provide the values used in expressions.

6.1.1 Constant Expressions

The simplest type of expression is the *constant*, which always has the same value. There are three types of constants: numeric, string, and regular expression.

Each is used in the appropriate context when you need a data value that isn't going to change. Numeric constants can have different forms, but are internally stored in an identical manner.

6.1.1.1 Numeric and String Constants

A *numeric constant* stands for a number. This number can be an integer, a decimal fraction, or a number in scientific (exponential) notation.¹ Here are some examples of numeric constants that all have the same value:

```
105
1.05e+2
1050e-1
```

A *string constant* consists of a sequence of characters enclosed in double quotation marks. For example:

```
"parrot"
```

represents the string whose contents are 'parrot'. Strings in **gawk** can be of any length, and they can contain any of the possible eight-bit ASCII characters, including ASCII NUL (character code zero). Other **awk** implementations may have difficulty with some character codes.

6.1.1.2 Octal and Hexadecimal Numbers

In **awk**, all numbers are in decimal (i.e., base 10). Many other programming languages allow you to specify numbers in other bases, often octal (base 8) and hexadecimal (base 16). In octal, the numbers go 0, 1, 2, 3, 4, 5, 6, 7, 10, 11, 12, and so on. Just as '11' in decimal is 1 times 10 plus 1, so '11' in octal is 1 times 8 plus 1. This equals 9 in decimal. In

¹ The internal representation of all numbers, including integers, uses double-precision floating-point numbers. On most modern systems, these are in IEEE 754 standard format. See [Chapter 15 \[Arithmetic and Arbitrary-Precision Arithmetic with **gawk**\]](#), page 343, for much more information.

hexadecimal, there are 16 digits. Because the everyday decimal number system only has ten digits ('0'–'9'), the letters 'a' through 'f' are used to represent the rest. (Case in the letters is usually irrelevant; hexadecimal 'a' and 'A' have the same value.) Thus, '11' in hexadecimal is 1 times 16 plus 1, which equals 17 in decimal.

Just by looking at plain '11', you can't tell what base it's in. So, in C, C++, and other languages derived from C, there is a special notation to signify the base. Octal numbers start with a leading '0', and hexadecimal numbers start with a leading '0x' or '0X':

```
11          Decimal value 11
011         Octal 11, decimal value 9
0x11       Hexadecimal 11, decimal value 17
```

This example shows the difference:

```
$ gawk 'BEGIN { printf "%d, %d, %d\n", 011, 11, 0x11 }'
+ 9, 11, 17
```

Being able to use octal and hexadecimal constants in your programs is most useful when working with data that cannot be represented conveniently as characters or as regular numbers, such as binary data of various sorts.

gawk allows the use of octal and hexadecimal constants in your program text. However, such numbers in the input data are not treated differently; doing so by default would break old programs. (If you really need to do this, use the `--non-decimal-data` command-line option; see [Section 12.1 \[Allowing Nondecimal Input Data\]](#), page 301.) If you have octal or hexadecimal data, you can use the `strtonum()` function (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177) to convert the data into a number. Most of the time, you will want to use octal or hexadecimal constants when working with the built-in bit-manipulation functions; see [Section 9.1.6 \[Bit-Manipulation Functions\]](#), page 197, for more information.

Unlike in some early C implementations, '8' and '9' are not valid in octal constants. For example, **gawk** treats '018' as decimal 18:

```
$ gawk 'BEGIN { print "021 is", 021 ; print 018 }'
+ 021 is 17
+ 18
```

Octal and hexadecimal source code constants are a **gawk** extension. If **gawk** is in compatibility mode (see [Section 2.2 \[Command-Line Options\]](#), page 31), they are not available.

A Constant's Base Does Not Affect Its Value

Once a numeric constant has been converted internally into a number, **gawk** no longer remembers what the original form of the constant was; the internal value is always used. This has particular consequences for conversion of numbers to strings:

```
$ gawk 'BEGIN { printf "0x11 is <%s>\n", 0x11 }'
+ 0x11 is <17>
```

6.1.1.3 Regular Expression Constants

A *regexp constant* is a regular expression description enclosed in slashes, such as `/~beginning and end$/`. Most regexps used in **awk** programs are constant, but the '~' and

‘!~’ matching operators can also match computed or dynamic regexps (which are typically just ordinary strings or variables that contain a regexp, but could be more complex expressions).

6.1.2 Using Regular Expression Constants

When used on the righthand side of the ‘~’ or ‘!~’ operators, a regexp constant merely stands for the regexp that is to be matched. However, regexp constants (such as `/foo/`) may be used like simple expressions. When a regexp constant appears by itself, it has the same meaning as if it appeared in a pattern (i.e., ‘`($0 ~ /foo/)`’). See [Section 7.1.2 \[Expressions as Patterns\]](#), page 131. This means that the following two code segments:

```
if ($0 ~ /barfly/ || $0 ~ /camelot/)
    print "found"
```

and:

```
if (/barfly/ || /camelot/)
    print "found"
```

are exactly equivalent. One rather bizarre consequence of this rule is that the following Boolean expression is valid, but does not do what its author probably intended:

```
# Note that /foo/ is on the left of the ~
if (/foo/ ~ $1) print "found foo"
```

This code is “obviously” testing `$1` for a match against the regexp `/foo/`. But in fact, the expression ‘`/foo/ ~ $1`’ really means ‘`($0 ~ /foo/) ~ $1`’. In other words, first match the input record against the regexp `/foo/`. The result is either zero or one, depending upon the success or failure of the match. That result is then matched against the first field in the record. Because it is unlikely that you would ever really want to make this kind of test, **gawk** issues a warning when it sees this construct in a program. Another consequence of this rule is that the assignment statement:

```
matches = /foo/
```

assigns either zero or one to the variable `matches`, depending upon the contents of the current input record.

Constant regular expressions are also used as the first argument for the `gensub()`, `sub()`, and `gsub()` functions, as the second argument of the `match()` function, and as the third argument of the `split()` and `patsplit()` functions (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177). Modern implementations of **awk**, including **gawk**, allow the third argument of `split()` to be a regexp constant, but some older implementations do not.

Because some built-in functions accept regexp constants as arguments, confusion can arise when attempting to use regexp constants as arguments to user-defined functions (see [Section 9.2 \[User-Defined Functions\]](#), page 200). For example:

```
function mysub(pat, repl, str, global)
{
    if (global)
        gsub(pat, repl, str)
    else
        sub(pat, repl, str)
    return str
}
```



```

    }

    {
        ...
        text = "hi! hi yourself!"
        mysub(/hi/, "howdy", text, 1)
        ...
    }

```

In this example, the programmer wants to pass a regexp constant to the user-defined function `mysub()`, which in turn passes it on to either `sub()` or `gsub()`. However, what really happens is that the `pat` parameter is assigned a value of either one or zero, depending upon whether or not `$0` matches `/hi/`. `gawk` issues a warning when it sees a regexp constant used as a parameter to a user-defined function, because passing a truth value in this way is probably not what was intended.

6.1.3 Variables

Variables are ways of storing values at one point in your program for use later in another part of your program. They can be manipulated entirely within the program text, and they can also be assigned values on the `awk` command line.

6.1.3.1 Using Variables in a Program

Variables let you give names to values and refer to them later. Variables have already been used in many of the examples. The name of a variable must be a sequence of letters, digits, or underscores, and it may not begin with a digit. Here, a *letter* is any one of the 52 upper- and lowercase English letters. Other characters that may be defined as letters in non-English locales are not valid in variable names. Case is significant in variable names; `a` and `A` are distinct variables.

A variable name is a valid expression by itself; it represents the variable's current value. Variables are given new values with *assignment operators*, *increment operators*, and *decrement operators* (see [Section 6.2.3 \[Assignment Expressions\]](#), page 116). In addition, the `sub()` and `gsub()` functions can change a variable's value, and the `match()`, `split()`, and `patsplit()` functions can change the contents of their array parameters (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177).

A few variables have special built-in meanings, such as `FS` (the field separator) and `NF` (the number of fields in the current input record). See [Section 7.5 \[Predefined Variables\]](#), page 147, for a list of the predefined variables. These predefined variables can be used and assigned just like all other variables, but their values are also used or changed automatically by `awk`. All predefined variables' names are entirely uppercase.

Variables in `awk` can be assigned either numeric or string values. The kind of value a variable holds can change over the life of a program. By default, variables are initialized to the empty string, which is zero if converted to a number. There is no need to explicitly initialize a variable in `awk`, which is what you would do in C and in most other traditional languages.

6.1.3.2 Assigning Variables on the Command Line

Any `awk` variable can be set by including a *variable assignment* among the arguments on the command line when `awk` is invoked (see [Section 2.3 \[Other Command-Line Arguments\]](#), [page 37](#)). Such an assignment has the following form:

```
variable=text
```

With it, a variable is set either at the beginning of the `awk` run or in between input files. When the assignment is preceded with the `-v` option, as in the following:

```
-v variable=text
```

the variable is set at the very beginning, even before the `BEGIN` rules execute. The `-v` option and its assignment must precede all the file name arguments, as well as the program text. (See [Section 2.2 \[Command-Line Options\]](#), [page 31](#), for more information about the `-v` option.) Otherwise, the variable assignment is performed at a time determined by its position among the input file arguments—after the processing of the preceding input file argument. For example:

```
awk '{ print $n }' n=4 inventory-shipped n=2 mail-list
```

prints the value of field number `n` for all input records. Before the first file is read, the command line sets the variable `n` equal to four. This causes the fourth field to be printed in lines from `inventory-shipped`. After the first file has finished, but before the second file is started, `n` is set to two, so that the second field is printed in lines from `mail-list`:

```
$ awk '{ print $n }' n=4 inventory-shipped n=2 mail-list
+ 15
+ 24
...
+ 555-5553
+ 555-3412
...
```

Command-line arguments are made available for explicit examination by the `awk` program in the `ARGV` array (see [Section 7.5.3 \[Using ARGV\]](#), [page 155](#)). `awk` processes the values of command-line assignments for escape sequences (see [Section 3.2 \[Escape Sequences\]](#), [page 46](#)).



6.1.4 Conversion of Strings and Numbers

Number-to-string and string-to-number conversion are generally straightforward. There can be subtleties to be aware of; this section discusses this important facet of `awk`.

6.1.4.1 How `awk` Converts Between Strings and Numbers

Strings are converted to numbers and numbers are converted to strings, if the context of the `awk` program demands it. For example, if the value of either `foo` or `bar` in the expression `'foo + bar'` happens to be a string, it is converted to a number before the addition is performed. If numeric values appear in string concatenation, they are converted to strings. Consider the following:

```
two = 2; three = 3
print (two three) + 4
```

This prints the (numeric) value 27. The numeric values of the variables `two` and `three` are converted to strings and concatenated together. The resulting string is converted back to the number 23, to which 4 is then added.

If, for some reason, you need to force a number to be converted to a string, concatenate that number with the empty string, `""`. To force a string to be converted to a number, add zero to that string. A string is converted to a number by interpreting any numeric prefix of the string as numerals: `"2.5"` converts to 2.5, `"1e3"` converts to 1,000, and `"25fix"` has a numeric value of 25. Strings that can't be interpreted as valid numbers convert to zero.

The exact manner in which numbers are converted into strings is controlled by the `awk` predefined variable `CONVFMT` (see [Section 7.5 \[Predefined Variables\]](#), page 147). Numbers are converted using the `sprintf()` function with `CONVFMT` as the format specifier (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177).

`CONVFMT`'s default value is `"%.6g"`, which creates a value with at most six significant digits. For some applications, you might want to change it to specify more precision. On most modern machines, 17 digits is usually enough to capture a floating-point number's value exactly.²

Strange results can occur if you set `CONVFMT` to a string that doesn't tell `sprintf()` how to format floating-point numbers in a useful way. For example, if you forget the `'%'` in the format, `awk` converts all numbers to the same constant string.

As a special case, if a number is an integer, then the result of converting it to a string is *always* an integer, no matter what the value of `CONVFMT` may be. Given the following code fragment:

```
CONVFMT = "%2.2f"
a = 12
b = a ""
```

`b` has the value `"12"`, not `"12.00"`.



Pre-POSIX `awk` Used `OFMT` for String Conversion

Prior to the POSIX standard, `awk` used the value of `OFMT` for converting numbers to strings. `OFMT` specifies the output format to use when printing numbers with `print`. `CONVFMT` was introduced in order to separate the semantics of conversion from the semantics of printing. Both `CONVFMT` and `OFMT` have the same default value: `"%.6g"`. In the vast majority of cases, old `awk` programs do not change their behavior. See [Section 5.1 \[The `print` Statement\]](#), page 89, for more information on the `print` statement.

6.1.4.2 Locales Can Influence Conversion

Where you are can matter when it comes to converting between numbers and strings. The local character set and language—the *locale*—can affect numeric formats. In particular, for `awk` programs, it affects the decimal point character and the thousands-separator character. The `"C"` locale, and most English-language locales, use the period character (`'.'`) as the decimal point and don't have a thousands separator. However, many (if not most) European and non-English locales use the comma (`'.'`) as the decimal point character. European locales often use either a space or a period as the thousands separator, if they have one.

² Pathological cases can require up to 752 digits (!), but we doubt that you need to worry about this.



The POSIX standard says that **awk** always uses the period as the decimal point when reading the **awk** program source code, and for command-line variable assignments (see [Section 2.3 \[Other Command-Line Arguments\]](#), page 37). However, when interpreting input data, for **print** and **printf** output, and for number-to-string conversion, the local decimal point character is used. In all cases, numbers in source code and in input data cannot have a thousands separator. Here are some examples indicating the difference in behavior, on a GNU/Linux system:

```
$ export POSIXLY_CORRECT=1                                Force POSIX behavior
$ gawk 'BEGIN { printf "%g\n", 3.1415927 }'
+ 3.14159
$ LC_ALL=en_DK.utf-8 gawk 'BEGIN { printf "%g\n", 3.1415927 }'
+ 3,14159
$ echo 4,321 | gawk '{ print $1 + 1 }'
+ 5
$ echo 4,321 | LC_ALL=en_DK.utf-8 gawk '{ print $1 + 1 }'
+ 5,321
```

The **en_DK.utf-8** locale is for English in Denmark, where the comma acts as the decimal point separator. In the normal "C" locale, **gawk** treats '4,321' as 4, while in the Danish locale, it's treated as the full number including the fractional part, 4.321.

Some earlier versions of **gawk** fully complied with this aspect of the standard. However, many users in non-English locales complained about this behavior, because their data used a period as the decimal point, so the default behavior was restored to use a period as the decimal point character. You can use the **--use-lc-numeric** option (see [Section 2.2 \[Command-Line Options\]](#), page 31) to force **gawk** to use the locale's decimal point character. (**gawk** also uses the locale's decimal point character when in POSIX mode, either via **--posix** or the **POSIXLY_CORRECT** environment variable, as shown previously.)

[Table 6.1](#) describes the cases in which the locale's decimal point character is used and when a period is used. Some of these features have not been described yet.

Feature	Default	--posix or --use-lc-numeric
%g	Use locale	Use locale
%G	Use period	Use locale
Input	Use period	Use locale
strtonum()	Use period	Use locale

Table 6.1: Locale decimal point versus a period

Finally, modern-day formal standards and the IEEE standard floating-point representation can have an unusual but important effect on the way **gawk** converts some special string values to numbers. The details are presented in [Section 15.6 \[Standards Versus Existing Practice\]](#), page 353.

6.2 Operators: Doing Something with Values

This section introduces the *operators* that make use of the values provided by constants and variables.

6.2.1 Arithmetic Operators

The `awk` language uses the common arithmetic operators when evaluating expressions. All of these arithmetic operators follow normal precedence rules and work as you would expect them to.

The following example uses a file named `grades`, which contains a list of student names as well as three test scores per student (it's a small class):

```
Pat    100 97 58
Sandy  84 72 93
Chris  72 92 89
```

This program takes the file `grades` and prints the average of the scores:

```
$ awk '{ sum = $2 + $3 + $4 ; avg = sum / 3
>      print $1, avg }' grades
+ Pat 85
+ Sandy 83
+ Chris 84.3333
```

The following list provides the arithmetic operators in `awk`, in order from the highest precedence to the lowest:

$x \wedge y$	
$x ** y$	Exponentiation; x raised to the y power. ' $2 \wedge 3$ ' has the value eight; the character sequence ' $**$ ' is equivalent to ' \wedge '. (c.e.)
$- x$	Negation.
$+ x$	Unary plus; the expression is converted to a number.
$x * y$	Multiplication.
x / y	Division; because all numbers in <code>awk</code> are floating-point numbers, the result is <i>not</i> rounded to an integer—' $3 / 4$ ' has the value 0.75. (It is a common mistake, especially for C programmers, to forget that <i>all</i> numbers in <code>awk</code> are floating point, and that division of integer-looking constants produces a real number, not an integer.)
$x \% y$	Remainder; further discussion is provided in the text, just after this list.
$x + y$	Addition.
$x - y$	Subtraction.

Unary plus and minus have the same precedence, the multiplication operators all have the same precedence, and addition and subtraction have the same precedence.

When computing the remainder of ' $x \% y$ ', the quotient is rounded toward zero to an integer and multiplied by y . This result is subtracted from x ; this operation is sometimes known as "trunc-mod." The following relation always holds:

$$b * \text{int}(a / b) + (a \% b) == a$$

One possibly undesirable effect of this definition of remainder is that ' $x \% y$ ' is negative if x is negative. Thus:

$$-17 \% 8 = -1$$

In other `awk` implementations, the signedness of the remainder may be machine-dependent.

NOTE: The POSIX standard only specifies the use of ‘^’ for exponentiation. For maximum portability, do not use the ‘**’ operator.

6.2.2 String Concatenation

It seemed like a good idea at the time.
—Brian Kernighan

There is only one string operation: concatenation. It does not have a specific operator to represent it. Instead, concatenation is performed by writing expressions next to one another, with no operator. For example:

```
$ awk '{ print "Field number one: " $1 }' mail-list
+ Field number one: Amelia
+ Field number one: Anthony
...
```

Without the space in the string constant after the ‘:’, the line runs together. For example:

```
$ awk '{ print "Field number one:" $1 }' mail-list
+ Field number one:Amelia
+ Field number one:Anthony
...
```

Because string concatenation does not have an explicit operator, it is often necessary to ensure that it happens at the right time by using parentheses to enclose the items to concatenate. For example, you might expect that the following code fragment concatenates file and name:

```
file = "file"
name = "name"
print "something meaningful" > file name
```

This produces a syntax error with some versions of Unix `awk`.³ It is necessary to use the following:

```
print "something meaningful" > (file name)
```

Parentheses should be used around concatenation in all but the most common contexts, such as on the righthand side of ‘=’. Be careful about the kinds of expressions used in string concatenation. In particular, the order of evaluation of expressions used for concatenation is undefined in the `awk` language. Consider this example:

```
BEGIN {
    a = "don't"
    print (a " " (a = "panic"))
}
```

It is not defined whether the second assignment to `a` happens before or after the value of `a` is retrieved for producing the concatenated value. The result could be either ‘don’t panic’, or ‘panic panic’.

³ It happens that BWK `awk`, `gawk`, and `mawk` all “get it right,” but you should not rely on this.

The precedence of concatenation, when mixed with other operators, is often counter-intuitive. Consider this example:

```
$ awk 'BEGIN { print -12 " " -24 }'
-12-24
```

This “obviously” is concatenating `-12`, a space, and `-24`. But where did the space disappear to? The answer lies in the combination of operator precedences and `awk`’s automatic conversion rules. To get the desired result, write the program this way:

```
$ awk 'BEGIN { print -12 " " (-24) }'
-12 -24
```

This forces `awk` to treat the `-` on the `-24` as unary. Otherwise, it’s parsed as follows:

```
-12 ( " " - 24)
⇒ -12 (0 - 24)
⇒ -12 (-24)
⇒ -12-24
```

As mentioned earlier, when mixing concatenation with other operators, *parenthesize*. Otherwise, you’re never quite sure what you’ll get.

6.2.3 Assignment Expressions

An *assignment* is an expression that stores a (usually different) value into a variable. For example, let’s assign the value one to the variable `z`:

```
z = 1
```

After this expression is executed, the variable `z` has the value one. Whatever old value `z` had before the assignment is forgotten.

Assignments can also store string values. For example, the following stores the value `"this food is good"` in the variable `message`:

```
thing = "food"
predicate = "good"
message = "this " thing " is " predicate
```

This also illustrates string concatenation. The `=` sign is called an *assignment operator*. It is the simplest assignment operator because the value of the righthand operand is stored unchanged. Most operators (addition, concatenation, and so on) have no effect except to compute a value. If the value isn’t used, there’s no reason to use the operator. An assignment operator is different; it does produce a value, but even if you ignore it, the assignment still makes itself felt through the alteration of the variable. We call this a *side effect*.

The lefthand operand of an assignment need not be a variable (see [Section 6.1.3 \[Variables\]](#), page 110); it can also be a field (see [Section 4.4 \[Changing the Contents of a Field\]](#), page 65) or an array element (see [Chapter 8 \[Arrays in awk\]](#), page 159). These are all called *lvalues*, which means they can appear on the lefthand side of an assignment operator. The righthand operand may be any expression; it produces the new value that the assignment stores in the specified variable, field, or array element. (Such values are called *rvalues*.)

It is important to note that variables do *not* have permanent types. A variable’s type is simply the type of whatever value was last assigned to it. In the following program fragment, the variable `foo` has a numeric value at first, and a string value later on:

```
foo = 1
print foo
foo = "bar"
print foo
```

When the second assignment gives `foo` a string value, the fact that it previously had a numeric value is forgotten.

String values that do not begin with a digit have a numeric value of zero. After executing the following code, the value of `foo` is five:

```
foo = "a string"
foo = foo + 5
```

NOTE: Using a variable as a number and then later as a string can be confusing and is poor programming style. The previous two examples illustrate how `awk` works, *not* how you should write your programs!

An assignment is an expression, so it has a value—the same value that is assigned. Thus, `'z = 1'` is an expression with the value one. One consequence of this is that you can write multiple assignments together, such as:

```
x = y = z = 5
```

This example stores the value five in all three variables (`x`, `y`, and `z`). It does so because the value of `'z = 5'`, which is five, is stored into `y` and then the value of `'y = z = 5'`, which is five, is stored into `x`.

Assignments may be used anywhere an expression is called for. For example, it is valid to write `'x != (y = 1)'` to set `y` to one, and then test whether `x` equals one. But this style tends to make programs hard to read; such nesting of assignments should be avoided, except perhaps in a one-shot program.

Aside from `'='`, there are several other assignment operators that do arithmetic with the old value of the variable. For example, the operator `'+='` computes a new value by adding the righthand value to the old value of the variable. Thus, the following assignment adds five to the value of `foo`:

```
foo += 5
```

This is equivalent to the following:

```
foo = foo + 5
```

Use whichever makes the meaning of your program clearer.

There are situations where using `'+='` (or any assignment operator) is *not* the same as simply repeating the lefthand operand in the righthand expression. For example:

```
# Thanks to Pat Rankin for this example
BEGIN {
    foo[rand()] += 5
    for (x in foo)
        print x, foo[x]

    bar[rand()] = bar[rand()] + 5
    for (x in bar)
        print x, bar[x]
```

```
}

```

The indices of `bar` are practically guaranteed to be different, because `rand()` returns different values each time it is called. (Arrays and the `rand()` function haven't been covered yet. See [Chapter 8 \[Arrays in awk\]](#), page 159, and see [Section 9.1.2 \[Numeric Functions\]](#), page 176, for more information.) This example illustrates an important fact about assignment operators: the lefthand expression is only evaluated *once*.

It is up to the implementation as to which expression is evaluated first, the lefthand or the righthand. Consider this example:

```
i = 1
a[i += 2] = i + 1
```

The value of `a[3]` could be either two or four.

[Table 6.2](#) lists the arithmetic assignment operators. In each case, the righthand operand is an expression whose value is converted to a number.

Operator	Effect
<code>lvalue += increment</code>	Add <i>increment</i> to the value of <i>lvalue</i> .
<code>lvalue -= decrement</code>	Subtract <i>decrement</i> from the value of <i>lvalue</i> .
<code>lvalue *= coefficient</code>	Multiply the value of <i>lvalue</i> by <i>coefficient</i> .
<code>lvalue /= divisor</code>	Divide the value of <i>lvalue</i> by <i>divisor</i> .
<code>lvalue %= modulus</code>	Set <i>lvalue</i> to its remainder by <i>modulus</i> .
<code>lvalue ^= power</code>	Raise <i>lvalue</i> to the power <i>power</i> .
<code>lvalue **= power</code>	Raise <i>lvalue</i> to the power <i>power</i> . (c.e.)

Table 6.2: Arithmetic assignment operators

NOTE: Only the ‘`^=`’ operator is specified by POSIX. For maximum portability, do not use the ‘`**=`’ operator.

Syntactic Ambiguities Between ‘`/=`’ and Regular Expressions

There is a syntactic ambiguity between the `/=` assignment operator and regexp constants whose first character is an ‘`=`’. This is most notable in some commercial `awk` versions. For example:

```
$ awk /=/ /dev/null
error awk: syntax error at source line 1
error context is
error >>> /= <<<
error awk: bailing out at source line 1
```

A workaround is:

```
awk '/[=]/' /dev/null
```

`gawk` does not have this problem; `BWK awk` and `mawk` also do not.



6.2.4 Increment and Decrement Operators

Increment and *decrement operators* increase or decrease the value of a variable by one. An assignment operator can do the same thing, so the increment operators add no power to the **awk** language; however, they are convenient abbreviations for very common operations.

The operator used for adding one is written ‘++’. It can be used to increment a variable either before or after taking its value. To *pre-increment* a variable *v*, write ‘++*v*’. This adds one to the value of *v*—that new value is also the value of the expression. (The assignment expression ‘*v* += 1’ is completely equivalent.) Writing the ‘++’ after the variable specifies *post-increment*. This increments the variable value just the same; the difference is that the value of the increment expression itself is the variable’s *old* value. Thus, if **foo** has the value four, then the expression ‘**foo++**’ has the value four, but it changes the value of **foo** to five. In other words, the operator returns the old value of the variable, but with the side effect of incrementing it.

The post-increment ‘**foo++**’ is nearly the same as writing ‘(**foo** += 1) - 1’. It is not perfectly equivalent because all numbers in **awk** are floating point—in floating point, ‘**foo** + 1 - 1’ does not necessarily equal **foo**. But the difference is minute as long as you stick to numbers that are fairly small (less than 10^{12}).

Fields and array elements are incremented just like variables. (Use ‘\$(**i**++)’ when you want to do a field reference and a variable increment at the same time. The parentheses are necessary because of the precedence of the field reference operator ‘\$’.)

The decrement operator ‘--’ works just like ‘++’, except that it subtracts one instead of adding it. As with ‘++’, it can be used before the *lvalue* to pre-decrement or after it to post-decrement. Following is a summary of increment and decrement expressions:

- ++*lvalue*** Increment *lvalue*, returning the new value as the value of the expression.
- lvalue*++** Increment *lvalue*, returning the *old* value of *lvalue* as the value of the expression.
- lvalue*** Decrement *lvalue*, returning the new value as the value of the expression. (This expression is like ‘++*lvalue*’, but instead of adding, it subtracts.)
- lvalue*--** Decrement *lvalue*, returning the *old* value of *lvalue* as the value of the expression. (This expression is like ‘*lvalue*++’, but instead of adding, it subtracts.)

Operator Evaluation Order*Doctor, it hurts when I do this!**Then don't do that!*

—Groucho Marx

What happens for something like the following?

```

b = 6
print b += b++

```

Or something even stranger?

```

b = 6
b += ++b + b++
print b

```

In other words, when do the various side effects prescribed by the postfix operators (`b++`) take effect? When side effects happen is *implementation-defined*. In other words, it is up to the particular version of **awk**. The result for the first example may be 12 or 13, and for the second, it may be 22 or 23.

In short, doing things like this is not recommended and definitely not anything that you can rely upon for portability. You should avoid such things in your own programs.

6.3 Truth Values and Conditions

In certain contexts, expression values also serve as “truth values”; i.e., they determine what should happen next as the program runs. This section describes how **awk** defines “true” and “false” and how values are compared.

6.3.1 True and False in awk

Many programming languages have a special representation for the concepts of “true” and “false.” Such languages usually use the special constants **true** and **false**, or perhaps their uppercase equivalents. However, **awk** is different. It borrows a very simple concept of true and false from C. In **awk**, any nonzero numeric value *or* any nonempty string value is true. Any other value (zero or the null string, `""`) is false. The following program prints ‘A strange truth value’ three times:

```

BEGIN {
    if (3.1415927)
        print "A strange truth value"
    if ("Four Score And Seven Years Ago")
        print "A strange truth value"
    if (j = 57)
        print "A strange truth value"
}

```

There is a surprising consequence of the “nonzero or non-null” rule: the string constant `"0"` is actually true, because it is non-null.



6.3.2 Variable Typing and Comparison Expressions

The Guide is definitive. Reality is frequently inaccurate.—Douglas Adams, *The Hitchhiker’s Guide to the Galaxy*

Unlike in other programming languages, in `awk` variables do not have a fixed type. Instead, they can be either a number or a string, depending upon the value that is assigned to them. We look now at how variables are typed, and how `awk` compares variables.

6.3.2.1 String Type versus Numeric Type

The POSIX standard introduced the concept of a *numeric string*, which is simply a string that looks like a number—for example, `" +2"`. This concept is used for determining the type of a variable. The type of the variable is important because the types of two variables determine how they are compared. Variable typing follows these rules:

- A numeric constant or the result of a numeric operation has the *numeric* attribute.
- A string constant or the result of a string operation has the *string* attribute.
- Fields, `getline` input, `FILENAME`, `ARGV` elements, `ENVIRON` elements, and the elements of an array created by `match()`, `split()`, and `patsplit()` that are numeric strings have the *strnum* attribute. Otherwise, they have the *string* attribute. Uninitialized variables also have the *strnum* attribute.
- Attributes propagate across assignments but are not changed by any use.

The last rule is particularly important. In the following program, `a` has numeric type, even though it is later used in a string operation:

```
BEGIN {
    a = 12.345
    b = a " is a cute number"
    print b
}
```

When two operands are compared, either string comparison or numeric comparison may be used. This depends upon the attributes of the operands, according to the following symmetric matrix:

	STRING	NUMERIC	STRNUM
STRING	string	string	string
NUMERIC	string	numeric	numeric
STRNUM	string	numeric	numeric

The basic idea is that user input that looks numeric—and *only* user input—should be treated as numeric, even though it is actually made of characters and is therefore also a string. Thus, for example, the string constant `" +3.14"`, when it appears in program source code, is a string—even though it looks numeric—and is *never* treated as a number for comparison purposes.

In short, when one operand is a “pure” string, such as a string constant, then a string comparison is performed. Otherwise, a numeric comparison is performed.

This point bears additional emphasis: All user input is made of characters, and so is first and foremost of string type; input strings that look numeric are additionally given the *strnum* attribute. Thus, the six-character input string `' +3.14'` receives the *strnum* attribute. In contrast, the eight characters `" +3.14"` appearing in program text comprise a string constant. The following examples print `'1'` when the comparison between the two different constants is true, and `'0'` otherwise:

```

$ echo ' +3.14' | awk '{ print($0 == " +3.14") }'      True
└ 1
$ echo ' +3.14' | awk '{ print($0 == "+3.14") }'      False
└ 0
$ echo ' +3.14' | awk '{ print($0 == "3.14") }'      False
└ 0
$ echo ' +3.14' | awk '{ print($0 == 3.14) }'        True
└ 1
$ echo ' +3.14' | awk '{ print($1 == " +3.14") }'    False
└ 0
$ echo ' +3.14' | awk '{ print($1 == "+3.14") }'    True
└ 1
$ echo ' +3.14' | awk '{ print($1 == "3.14") }'    False
└ 0
$ echo ' +3.14' | awk '{ print($1 == 3.14) }'        True
└ 1

```

6.3.2.2 Comparison Operators

Comparison expressions compare strings or numbers for relationships such as equality. They are written using *relational operators*, which are a superset of those in C. [Table 6.3](#) describes them.

Expression	Result
$x < y$	True if x is less than y
$x \leq y$	True if x is less than or equal to y
$x > y$	True if x is greater than y
$x \geq y$	True if x is greater than or equal to y
$x == y$	True if x is equal to y
$x != y$	True if x is not equal to y
$x \sim y$	True if the string x matches the regexp denoted by y
$x !\sim y$	True if the string x does not match the regexp denoted by y
$subscript$ in $array$	True if the array $array$ has an element with the subscript $subscript$

Table 6.3: Relational operators

Comparison expressions have the value one if true and zero if false. When comparing operands of mixed types, numeric operands are converted to strings using the value of `CONVFMT` (see [Section 6.1.4 \[Conversion of Strings and Numbers\]](#), page 111).

Strings are compared by comparing the first character of each, then the second character of each, and so on. Thus, "10" is less than "9". If there are two strings where one is a prefix of the other, the shorter string is less than the longer one. Thus, "abc" is less than "abcd".

It is very easy to accidentally mistype the '==' operator and leave off one of the '=' characters. The result is still valid `awk` code, but the program does not do what is intended:

```

if (a = b)    # oops! should be a == b
    ...

```

```
else
    ...
```

Unless `b` happens to be zero or the null string, the `if` part of the test always succeeds. Because the operators are so similar, this kind of error is very difficult to spot when scanning the source code.

The following list of expressions illustrates the kinds of comparisons `awk` performs, as well as what the result of each comparison is:

```
1.5 <= 2.0
    Numeric comparison (true)

"abc" >= "xyz"
    String comparison (false)

1.5 != " +2"
    String comparison (true)

"1e2" < "3"
    String comparison (true)

a = 2; b = "2"
a == b      String comparison (true)

a = 2; b = " +2"
a == b      String comparison (false)
```

In this example:

```
$ echo 1e2 3 | awk '{ print ($1 < $2) ? "true" : "false" }'
+ false
```

the result is `false` because both `$1` and `$2` are user input. They are numeric strings—therefore both have the `strnum` attribute, dictating a numeric comparison. The purpose of the comparison rules and the use of numeric strings is to attempt to produce the behavior that is “least surprising,” while still “doing the right thing.”

String comparisons and regular expression comparisons are very different. For example:

```
x == "foo"
```

has the value one, or is true if the variable `x` is precisely `foo`. By contrast:

```
x ~ /foo/
```

has the value one if `x` contains `foo`, such as `"Oh, what a fool am I!"`.

The righthand operand of the `~` and `!~` operators may be either a regexp constant (`/.../`) or an ordinary expression. In the latter case, the value of the expression as a string is used as a dynamic regexp (see [Section 3.1 \[How to Use Regular Expressions\]](#), page 45; also see [Section 3.6 \[Using Dynamic Regexp\]](#), page 53).

A constant regular expression in slashes by itself is also an expression. `/regexp/` is an abbreviation for the following comparison expression:

```
$0 ~ /regexp/
```

One special place where `/foo/` is *not* an abbreviation for `$0 ~ /foo/` is when it is the righthand operand of `~` or `!~`. See [Section 6.1.2 \[Using Regular Expression Constants\]](#), page 109, where this is discussed in more detail.

6.3.2.3 String Comparison with POSIX Rules

The POSIX standard says that string comparison is performed based on the locale's *collating order*. This is the order in which characters sort, as defined by the locale (for more discussion, see [Section 6.6 \[Where You Are Makes a Difference\]](#), page 129). This order is usually very different from the results obtained when doing straight character-by-character comparison.⁴

Because this behavior differs considerably from existing practice, **gawk** only implements it when in POSIX mode (see [Section 2.2 \[Command-Line Options\]](#), page 31). Here is an example to illustrate the difference, in an `en_US.UTF-8` locale:

```
$ gawk 'BEGIN { printf("ABC < abc = %s\n",
>                  ("ABC" < "abc" ? "TRUE" : "FALSE")) }'
+ ABC < abc = TRUE
$ gawk --posix 'BEGIN { printf("ABC < abc = %s\n",
>                  ("ABC" < "abc" ? "TRUE" : "FALSE")) }'
+ ABC < abc = FALSE
```

6.3.3 Boolean Expressions

A *Boolean expression* is a combination of comparison expressions or matching expressions, using the Boolean operators “or” (`||`), “and” (`&&`), and “not” (`!`), along with parentheses to control nesting. The truth value of the Boolean expression is computed by combining the truth values of the component expressions. Boolean expressions are also referred to as *logical expressions*. The terms are equivalent.

Boolean expressions can be used wherever comparison and matching expressions can be used. They can be used in `if`, `while`, `do`, and `for` statements (see [Section 7.4 \[Control Statements in Actions\]](#), page 138). They have numeric values (one if true, zero if false) that come into play if the result of the Boolean expression is stored in a variable or used in arithmetic.

In addition, every Boolean expression is also a valid pattern, so you can use one as a pattern to control the execution of rules. The Boolean operators are:

`boolean1 && boolean2`

True if both *boolean1* and *boolean2* are true. For example, the following statement prints the current input record if it contains both ‘edu’ and ‘li’:

```
if ($0 ~ /edu/ && $0 ~ /li/) print
```

The subexpression *boolean2* is evaluated only if *boolean1* is true. This can make a difference when *boolean2* contains expressions that have side effects. In the case of `'$0 ~ /foo/ && ($2 == bar++)'`, the variable `bar` is not incremented if there is no substring ‘foo’ in the record.

`boolean1 || boolean2`

True if at least one of *boolean1* or *boolean2* is true. For example, the following statement prints all records in the input that contain *either* ‘edu’ or ‘li’:

```
if ($0 ~ /edu/ || $0 ~ /li/) print
```

⁴ Technically, string comparison is supposed to behave the same way as if the strings were compared with the C `strcoll()` function.

The subexpression *boolean2* is evaluated only if *boolean1* is false. This can make a difference when *boolean2* contains expressions that have side effects. (Thus, this test never really distinguishes records that contain both ‘edu’ and ‘li’—as soon as ‘edu’ is matched, the full test succeeds.)

! *boolean* True if *boolean* is false. For example, the following program prints ‘no home!’ in the unusual event that the HOME environment variable is not defined:

```
BEGIN { if (! ("HOME" in ENVIRON))
        print "no home!" }
```

(The **in** operator is described in [Section 8.1.2 \[Referring to an Array Element\]](#), page 161.)

The ‘&&’ and ‘||’ operators are called *short-circuit* operators because of the way they work. Evaluation of the full expression is “short-circuited” if the result can be determined partway through its evaluation.

Statements that end with ‘&&’ or ‘||’ can be continued simply by putting a newline after them. But you cannot put a newline in front of either of these operators without using backslash continuation (see [Section 1.6 \[awk Statements Versus Lines\]](#), page 27).

The actual value of an expression using the ‘!’ operator is either one or zero, depending upon the truth value of the expression it is applied to. The ‘!’ operator is often useful for changing the sense of a flag variable from false to true and back again. For example, the following program is one way to print lines in between special bracketing lines:

```
$1 == "START"   { interested = ! interested; next }
interested      { print }
$1 == "END"     { interested = ! interested; next }
```

The variable *interested*, as with all **awk** variables, starts out initialized to zero, which is also false. When a line is seen whose first field is ‘START’, the value of *interested* is toggled to true, using ‘!’. The next rule prints lines as long as *interested* is true. When a line is seen whose first field is ‘END’, *interested* is toggled back to false.⁵

Most commonly, the ‘!’ operator is used in the conditions of **if** and **while** statements, where it often makes more sense to phrase the logic in the negative:

```
if (! some condition || some other condition) {
    ... do whatever processing ...
}
```

NOTE: The **next** statement is discussed in [Section 7.4.8 \[The next Statement\]](#), page 144. **next** tells **awk** to skip the rest of the rules, get the next record, and start processing the rules over again at the top. The reason it’s there is to avoid printing the bracketing ‘START’ and ‘END’ lines.

6.3.4 Conditional Expressions

A *conditional expression* is a special kind of expression that has three operands. It allows you to use one expression’s value to select one of two other expressions. The conditional expression in **awk** is the same as in the C language, as shown here:

```
selector ? if-true-exp : if-false-exp
```

⁵ This program has a bug; it prints lines starting with ‘END’. How would you fix it?

There are three subexpressions. The first, *selector*, is always computed first. If it is “true” (not zero or not null), then *if-true-exp* is computed next, and its value becomes the value of the whole expression. Otherwise, *if-false-exp* is computed next, and its value becomes the value of the whole expression. For example, the following expression produces the absolute value of *x*:

```
x >= 0 ? x : -x
```

Each time the conditional expression is computed, only one of *if-true-exp* and *if-false-exp* is used; the other is ignored. This is important when the expressions have side effects. For example, this conditional expression examines element *i* of either array *a* or array *b*, and increments *i*:

```
x == y ? a[i++] : b[i++]
```

This is guaranteed to increment *i* exactly once, because each time only one of the two increment expressions is executed and the other is not. See [Chapter 8 \[Arrays in awk\]](#), [page 159](#), for more information about arrays.

As a minor **gawk** extension, a statement that uses ‘?:’ can be continued simply by putting a newline after either character. However, putting a newline in front of either character does not work without using backslash continuation (see [Section 1.6 \[awk Statements Versus Lines\]](#), [page 27](#)). If `--posix` is specified (see [Section 2.2 \[Command-Line Options\]](#), [page 31](#)), this extension is disabled.

6.4 Function Calls

A *function* is a name for a particular calculation. This enables you to ask for it by name at any point in the program. For example, the function `sqrt()` computes the square root of a number.

A fixed set of functions are *built in*, which means they are available in every **awk** program. The `sqrt()` function is one of these. See [Section 9.1 \[Built-in Functions\]](#), [page 175](#), for a list of built-in functions and their descriptions. In addition, you can define functions for use in your program. See [Section 9.2 \[User-Defined Functions\]](#), [page 200](#), for instructions on how to do this. Finally, **gawk** lets you write functions in C or C++ that may be called from your program (see [Chapter 16 \[Writing Extensions for gawk\]](#), [page 357](#)).

The way to use a function is with a *function call* expression, which consists of the function name followed immediately by a list of *arguments* in parentheses. The arguments are expressions that provide the raw materials for the function’s calculations. When there is more than one argument, they are separated by commas. If there are no arguments, just write ‘()’ after the function name. The following examples show function calls with and without arguments:

<code>sqrt(x^2 + y^2)</code>	<i>one argument</i>
<code>atan2(y, x)</code>	<i>two arguments</i>
<code>rand()</code>	<i>no arguments</i>

CAUTION: Do not put any space between the function name and the opening parenthesis! A user-defined function name looks just like the name of a variable—a space would make the expression look like concatenation of a variable with an expression inside parentheses. With built-in functions, space before

the parenthesis is harmless, but it is best not to get into the habit of using space to avoid mistakes with user-defined functions.

Each function expects a particular number of arguments. For example, the `sqrt()` function must be called with a single argument, the number of which to take the square root:

```
sqrt(argument)
```

Some of the built-in functions have one or more optional arguments. If those arguments are not supplied, the functions use a reasonable default value. See [Section 9.1 \[Built-in Functions\]](#), page 175, for full details. If arguments are omitted in calls to user-defined functions, then those arguments are treated as local variables. Such local variables act like the empty string if referenced where a string value is required, and like zero if referenced where a numeric value is required (see [Section 9.2 \[User-Defined Functions\]](#), page 200).

As an advanced feature, `gawk` provides indirect function calls, which is a way to choose the function to call at runtime, instead of when you write the source code to your program. We defer discussion of this feature until later; see [Section 9.3 \[Indirect Function Calls\]](#), page 209.

Like every other expression, the function call has a value, often called the *return value*, which is computed by the function based on the arguments you give it. In this example, the return value of `'sqrt(argument)'` is the square root of *argument*. The following program reads numbers, one number per line, and prints the square root of each one:

```
$ awk '{ print "The square root of", $1, "is", sqrt($1) }'
1
+ The square root of 1 is 1
3
+ The square root of 3 is 1.73205
5
+ The square root of 5 is 2.23607
Ctrl-d
```

A function can also have side effects, such as assigning values to certain variables or doing I/O. This program shows how the `match()` function (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177) changes the variables `RSTART` and `RLENGTH`:

```
{
    if (match($1, $2))
        print RSTART, RLENGTH
    else
        print "no match"
}
```

Here is a sample run:

```
$ awk -f matchit.awk
aacdd c+
+ 3 2
foo bar
+ no match
abcdefg e
+ 5 1
```

6.5 Operator Precedence (How Operators Nest)

Operator precedence determines how operators are grouped when different operators appear close by in one expression. For example, ‘*’ has higher precedence than ‘+’; thus, ‘a + b * c’ means to multiply b and c, and then add a to the product (i.e., ‘a + (b * c)’).

The normal precedence of the operators can be overruled by using parentheses. Think of the precedence rules as saying where the parentheses are assumed to be. In fact, it is wise to always use parentheses whenever there is an unusual combination of operators, because other people who read the program may not remember what the precedence is in this case. Even experienced programmers occasionally forget the exact rules, which leads to mistakes. Explicit parentheses help prevent any such mistakes.

When operators of equal precedence are used together, the leftmost operator groups first, except for the assignment, conditional, and exponentiation operators, which group in the opposite order. Thus, ‘a - b + c’ groups as ‘(a - b) + c’ and ‘a = b = c’ groups as ‘a = (b = c)’.

Normally the precedence of prefix unary operators does not matter, because there is only one way to interpret them: innermost first. Thus, ‘\$++i’ means ‘\$(++i)’ and ‘++\$x’ means ‘++(\$x)’. However, when another operator follows the operand, then the precedence of the unary operators can matter. ‘\$x^2’ means ‘(\$x)^2’, but ‘-x^2’ means ‘-(x^2)’, because ‘-’ has lower precedence than ‘^’, whereas ‘\$’ has higher precedence. Also, operators cannot be combined in a way that violates the precedence rules; for example, ‘\$\$0+--’ is not a valid expression because the first ‘\$’ has higher precedence than the ‘++’; to avoid the problem the expression can be rewritten as ‘\$(\$0+)--’.

This list presents **awk**’s operators, in order of highest to lowest precedence:

(. . .)	Grouping.
\$	Field reference.
++ --	Increment, decrement.
^ **	Exponentiation. These operators group right to left.
+ - !	Unary plus, minus, logical “not.”
* / %	Multiplication, division, remainder.
+ -	Addition, subtraction.

String concatenation

There is no special symbol for concatenation. The operands are simply written side by side (see [Section 6.2.2 \[String Concatenation\]](#), page 115).

< <= == != > >= >> | |&

Relational and redirection. The relational operators and the redirections have the same precedence level. Characters such as ‘>’ serve both as relationals and as redirections; the context distinguishes between the two meanings.

Note that the I/O redirection operators in **print** and **printf** statements belong to the statement level, not to expressions. The redirection does not produce an expression that could be the operand of another operator. As a result, it does not make sense to use a redirection operator near another operator of lower

precedence without parentheses. Such combinations (e.g., ‘`print foo > a ? b : c`’) result in syntax errors. The correct way to write this statement is ‘`print foo > (a ? b : c)`’.

<code>~ ! ~</code>	Matching, nonmatching.
<code>in</code>	Array membership.
<code>&&</code>	Logical “and.”
<code> </code>	Logical “or.”
<code>?:</code>	Conditional. This operator groups right to left.
<code>= += -= *= /= %= ^= **=</code>	Assignment. These operators group right to left.

NOTE: The ‘`&`’, ‘`**`’, and ‘`**=`’ operators are not specified by POSIX. For maximum portability, do not use them.

6.6 Where You Are Makes a Difference

Modern systems support the notion of *locales*: a way to tell the system about the local character set and language. The ISO C standard defines a default “C” locale, which is an environment that is typical of what many C programmers are used to.

Once upon a time, the locale setting used to affect regexp matching, but this is no longer true (see [Section A.8 \[Regexp Ranges and Locales: A Long Sad Story\]](#), page 426).

Locales can affect record splitting. For the normal case of ‘`RS = "\n"`’, the locale is largely irrelevant. For other single-character record separators, setting ‘`LC_ALL=C`’ in the environment will give you much better performance when reading records. Otherwise, `gawk` has to make several function calls, *per input character*, to find the record terminator.

Locales can affect how dates and times are formatted (see [Section 9.1.5 \[Time Functions\]](#), page 192). For example, a common way to abbreviate the date September 4, 2015, in the United States is “9/4/15.” In many countries in Europe, however, it is abbreviated “4.9.15.” Thus, the ‘`%x`’ specification in a “US” locale might produce ‘9/4/15’, while in a “EUROPE” locale, it might produce ‘4.9.15’.

According to POSIX, string comparison is also affected by locales (similar to regular expressions). The details are presented in [Section 6.3.2.3 \[String Comparison with POSIX Rules\]](#), page 124.

Finally, the locale affects the value of the decimal point character used when `gawk` parses input data. This is discussed in detail in [Section 6.1.4 \[Conversion of Strings and Numbers\]](#), page 111.

6.7 Summary

- Expressions are the basic elements of computation in programs. They are built from constants, variables, function calls, and combinations of the various kinds of values with operators.
- `awk` supplies three kinds of constants: numeric, string, and regexp. `gawk` lets you specify numeric constants in octal and hexadecimal (bases 8 and 16) as well as decimal

(base 10). In certain contexts, a standalone regexp constant such as `/foo/` has the same meaning as `'$0 ~ /foo/'`.

- Variables hold values between uses in computations. A number of built-in variables provide information to your `awk` program, and a number of others let you control how `awk` behaves.
- Numbers are automatically converted to strings, and strings to numbers, as needed by `awk`. Numeric values are converted as if they were formatted with `sprintf()` using the format in `CONVFMT`. Locales can influence the conversions.
- `awk` provides the usual arithmetic operators (addition, subtraction, multiplication, division, modulus), and unary plus and minus. It also provides comparison operators, Boolean operators, an array membership testing operator, and regexp matching operators. String concatenation is accomplished by placing two expressions next to each other; there is no explicit operator. The three-operand `'?:'` operator provides an “if-else” test within expressions.
- Assignment operators provide convenient shorthands for common arithmetic operations.
- In `awk`, a value is considered to be true if it is nonzero *or* non-null. Otherwise, the value is false.
- A variable’s type is set upon each assignment and may change over its lifetime. The type determines how it behaves in comparisons (string or numeric).
- Function calls return a value that may be used as part of a larger expression. Expressions used to pass parameter values are fully evaluated before the function is called. `awk` provides built-in and user-defined functions; this is described in [Chapter 9 \[Functions\]](#), [page 175](#).
- Operator precedence specifies the order in which operations are performed, unless explicitly overridden by parentheses. `awk`’s operator precedence is compatible with that of C.
- Locales can affect the format of data as output by an `awk` program, and occasionally the format for data read as input.

7 Patterns, Actions, and Variables

As you have already seen, each **awk** statement consists of a pattern with an associated action. This chapter describes how you build patterns and actions, what kinds of things you can do within actions, and **awk**'s predefined variables.

The pattern–action rules and the statements available for use within actions form the core of **awk** programming. In a sense, everything covered up to here has been the foundation that programs are built on top of. Now it's time to start building something useful.

7.1 Pattern Elements

Patterns in **awk** control the execution of rules—a rule is executed when its pattern matches the current input record. The following is a summary of the types of **awk** patterns:

/regular expression/

A regular expression. It matches when the text of the input record fits the regular expression. (See [Chapter 3 \[Regular Expressions\]](#), page 45.)

expression

A single expression. It matches when its value is nonzero (if a number) or non-null (if a string). (See [Section 7.1.2 \[Expressions as Patterns\]](#), page 131.)

begpat, endpat

A pair of patterns separated by a comma, specifying a *range* of records. The range includes both the initial record that matches *begpat* and the final record that matches *endpat*. (See [Section 7.1.3 \[Specifying Record Ranges with Patterns\]](#), page 133.)

BEGIN

END Special patterns for you to supply startup or cleanup actions for your **awk** program. (See [Section 7.1.4 \[The BEGIN and END Special Patterns\]](#), page 134.)

BEGINFILE

ENDFILE Special patterns for you to supply startup or cleanup actions to be done on a per-file basis. (See [Section 7.1.5 \[The BEGINFILE and ENDFILE Special Patterns\]](#), page 135.)

empty

The empty pattern matches every input record. (See [Section 7.1.6 \[The Empty Pattern\]](#), page 136.)

7.1.1 Regular Expressions as Patterns

Regular expressions are one of the first kinds of patterns presented in this book. This kind of pattern is simply a regexp constant in the pattern part of a rule. Its meaning is '\$0 ~ /pattern/'. The pattern matches when the input record matches the regexp. For example:

```
/foo|bar|baz/ { buzzwords++ }
END           { print buzzwords, "buzzwords seen" }
```

7.1.2 Expressions as Patterns

Any **awk** expression is valid as an **awk** pattern. The pattern matches if the expression's value is nonzero (if a number) or non-null (if a string). The expression is reevaluated each

time the rule is tested against a new input record. If the expression uses fields such as `$1`, the value depends directly on the new input record's text; otherwise, it depends on only what has happened so far in the execution of the `awk` program.

Comparison expressions, using the comparison operators described in [Section 6.3.2 \[Variable Typing and Comparison Expressions\]](#), page 120, are a very common kind of pattern. Regexp matching and nonmatching are also very common expressions. The left operand of the `~` and `!~` operators is a string. The right operand is either a constant regular expression enclosed in slashes (`/regexp/`), or any expression whose string value is used as a dynamic regular expression (see [Section 3.6 \[Using Dynamic Regexp\]](#), page 53). The following example prints the second field of each input record whose first field is precisely `'li'`:

```
$ awk '$1 == "li" { print $2 }' mail-list
```

(There is no output, because there is no person with the exact name `'li'`.) Contrast this with the following regular expression match, which accepts any record with a first field that contains `'li'`:

```
$ awk '$1 ~ /li/ { print $2 }' mail-list
+ 555-5553
+ 555-6699
```

A regexp constant as a pattern is also a special case of an expression pattern. The expression `/li/` has the value one if `'li'` appears in the current input record. Thus, as a pattern, `/li/` matches any record containing `'li'`.

Boolean expressions are also commonly used as patterns. Whether the pattern matches an input record depends on whether its subexpressions match. For example, the following command prints all the records in `mail-list` that contain both `'edu'` and `'li'`:

```
$ awk '/edu/ && /li/' mail-list
+ Samuel      555-3430      samuel.lanceolis@shu.edu      A
```

The following command prints all records in `mail-list` that contain *either* `'edu'` or `'li'` (or both, of course):

```
$ awk '/edu/ || /li/' mail-list
+ Amelia      555-5553      amelia.zodiacusque@gmail.com  F
+ Broderick   555-0542      broderick.aliquotiens@yahoo.com R
+ Fabius      555-1234      fabius.undevicesimus@ucb.edu  F
+ Julie       555-6699      julie.perscrutabor@skeeve.com F
+ Samuel      555-3430      samuel.lanceolis@shu.edu      A
+ Jean-Paul   555-2127      jeanpaul.campanorum@nyu.edu   R
```

The following command prints all records in `mail-list` that do *not* contain the string `'li'`:

```
$ awk '! /li/' mail-list
+ Anthony      555-3412      anthony.asserturo@hotmail.com A
+ Becky        555-7685      becky.algebrarum@gmail.com   A
+ Bill         555-1675      bill.drowning@hotmail.com    A
+ Camilla      555-2912      camilla.infusarum@skynet.be   R
+ Fabius       555-1234      fabius.undevicesimus@ucb.edu  F
+ Martin       555-6480      martin.codicibus@hotmail.com  A
```

✦ Jean-Paul 555-2127 jeanpaul.campanorum@nyu.edu R

The subexpressions of a Boolean operator in a pattern can be constant regular expressions, comparisons, or any other `awk` expressions. Range patterns are not expressions, so they cannot appear inside Boolean patterns. Likewise, the special patterns `BEGIN`, `END`, `BEGINFILE`, and `ENDFILE`, which never match any input record, are not expressions and cannot appear inside Boolean patterns.

The precedence of the different operators that can appear in patterns is described in [Section 6.5 \[Operator Precedence \(How Operators Nest\)\]](#), page 128.

7.1.3 Specifying Record Ranges with Patterns

A *range pattern* is made of two patterns separated by a comma, in the form '`begpat, endpat`'. It is used to match ranges of consecutive input records. The first pattern, *begpat*, controls where the range begins, while *endpat* controls where the pattern ends. For example, the following:

```
awk '$1 == "on", $1 == "off"' myfile
```

prints every record in `myfile` between 'on'/'off' pairs, inclusive.

A range pattern starts out by matching *begpat* against every input record. When a record matches *begpat*, the range pattern is *turned on*, and the range pattern matches this record as well. As long as the range pattern stays turned on, it automatically matches every input record read. The range pattern also matches *endpat* against every input record; when this succeeds, the range pattern is *turned off* again for the following record. Then the range pattern goes back to checking *begpat* against each record.

The record that turns on the range pattern and the one that turns it off both match the range pattern. If you don't want to operate on these records, you can write `if` statements in the rule's action to distinguish them from the records you are interested in.

It is possible for a pattern to be turned on and off by the same record. If the record satisfies both conditions, then the action is executed for just that record. For example, suppose there is text between two identical markers (e.g., the '%' symbol), each on its own line, that should be ignored. A first attempt would be to combine a range pattern that describes the delimited text with the `next` statement (not discussed yet, see [Section 7.4.8 \[The next Statement\]](#), page 144). This causes `awk` to skip any further processing of the current record and start over again with the next input record. Such a program looks like this:

```
/%$/,/%$/ { next }
           { print }
```

This program fails because the range pattern is both turned on and turned off by the first line, which just has a '%' on it. To accomplish this task, write the program in the following manner, using a flag:

```
/%$/ { skip = ! skip; next }
skip == 1 { next } # skip lines with 'skip' set
```

In a range pattern, the comma (',') has the lowest precedence of all the operators (i.e., it is evaluated last). Thus, the following program attempts to combine a range pattern with another, simpler test:

```
echo Yes | awk '/1/,/2/ || /Yes/'
```

The intent of this program is `'(/1/,/2/) || /Yes/'`. However, `awk` interprets this as `'/1/, (/2/ || /Yes/)'`. This cannot be changed or worked around; range patterns do not combine with other patterns:

```
$ echo Yes | gawk '/(1/,/2/) || /Yes/'
error gawk: cmd. line:1: (/1/,/2/) || /Yes/
error gawk: cmd. line:1:             ^ syntax error
```

As a minor point of interest, although it is poor style, POSIX allows you to put a newline after the comma in a range pattern.



7.1.4 The BEGIN and END Special Patterns

All the patterns described so far are for matching input records. The `BEGIN` and `END` special patterns are different. They supply startup and cleanup actions for `awk` programs. `BEGIN` and `END` rules must have actions; there is no default action for these rules because there is no current record when they run. `BEGIN` and `END` rules are often referred to as “`BEGIN` and `END` blocks” by longtime `awk` programmers.

7.1.4.1 Startup and Cleanup Actions

A `BEGIN` rule is executed once only, before the first input record is read. Likewise, an `END` rule is executed once only, after all the input is read. For example:

```
$ awk '
> BEGIN { print "Analysis of \"li\"" }
> /li/ { ++n }
> END   { print "\"li\" appears in", n, "records." }' mail-list
+ Analysis of "li"
+ "li" appears in 4 records.
```

This program finds the number of records in the input file `mail-list` that contain the string `'li'`. The `BEGIN` rule prints a title for the report. There is no need to use the `BEGIN` rule to initialize the counter `n` to zero, as `awk` does this automatically (see [Section 6.1.3 \[Variables\]](#), page 110). The second rule increments the variable `n` every time a record containing the pattern `'li'` is read. The `END` rule prints the value of `n` at the end of the run.

The special patterns `BEGIN` and `END` cannot be used in ranges or with Boolean operators (indeed, they cannot be used with any operators). An `awk` program may have multiple `BEGIN` and/or `END` rules. They are executed in the order in which they appear: all the `BEGIN` rules at startup and all the `END` rules at termination. `BEGIN` and `END` rules may be intermixed with other rules. This feature was added in the 1987 version of `awk` and is included in the POSIX standard. The original (1978) version of `awk` required the `BEGIN` rule to be placed at the beginning of the program, the `END` rule to be placed at the end, and only allowed one of each. This is no longer required, but it is a good idea to follow this template in terms of program organization and readability.

Multiple `BEGIN` and `END` rules are useful for writing library functions, because each library file can have its own `BEGIN` and/or `END` rule to do its own initialization and/or cleanup. The order in which library functions are named on the command line controls the order in which their `BEGIN` and `END` rules are executed. Therefore, you have to be careful when writing such rules in library files so that the order in which they are executed doesn't matter. See [Section 2.2 \[Command-Line Options\]](#), page 31, for more information on using library

functions. See [Chapter 10 \[A Library of `awk` Functions\]](#), page 219, for a number of useful library functions.

If an `awk` program has only `BEGIN` rules and no other rules, then the program exits after the `BEGIN` rules are run.¹ However, if an `END` rule exists, then the input is read, even if there are no other rules in the program. This is necessary in case the `END` rule checks the `FNR` and `NR` variables.

7.1.4.2 Input/Output from `BEGIN` and `END` Rules

There are several (sometimes subtle) points to be aware of when doing I/O from a `BEGIN` or `END` rule. The first has to do with the value of `$0` in a `BEGIN` rule. Because `BEGIN` rules are executed before any input is read, there simply is no input record, and therefore no fields, when executing `BEGIN` rules. References to `$0` and the fields yield a null string or zero, depending upon the context. One way to give `$0` a real value is to execute a `getline` command without a variable (see [Section 4.9 \[Explicit Input with `getline`\]](#), page 78). Another way is simply to assign a value to `$0`.

The second point is similar to the first, but from the other direction. Traditionally, due largely to implementation issues, `$0` and `NF` were *undefined* inside an `END` rule. The POSIX standard specifies that `NF` is available in an `END` rule. It contains the number of fields from the last input record. Most probably due to an oversight, the standard does not say that `$0` is also preserved, although logically one would think that it should be. In fact, all of `BWK awk`, `mawk`, and `gawk` preserve the value of `$0` for use in `END` rules. Be aware, however, that some other implementations and many older versions of Unix `awk` do not.

The third point follows from the first two. The meaning of ‘`print`’ inside a `BEGIN` or `END` rule is the same as always: ‘`print $0`’. If `$0` is the null string, then this prints an empty record. Many longtime `awk` programmers use an unadorned ‘`print`’ in `BEGIN` and `END` rules, to mean ‘`print ""`’, relying on `$0` being null. Although one might generally get away with this in `BEGIN` rules, it is a very bad idea in `END` rules, at least in `gawk`. It is also poor style, because if an empty line is needed in the output, the program should print one explicitly.

Finally, the `next` and `nextfile` statements are not allowed in a `BEGIN` rule, because the implicit read-a-record-and-match-against-the-rules loop has not started yet. Similarly, those statements are not valid in an `END` rule, because all the input has been read. (See [Section 7.4.8 \[The `next` Statement\]](#), page 144, and see [Section 7.4.9 \[The `nextfile` Statement\]](#), page 145.)

7.1.5 The `BEGINFILE` and `ENDFILE` Special Patterns

This section describes a `gawk`-specific feature.

Two special kinds of rule, `BEGINFILE` and `ENDFILE`, give you “hooks” into `gawk`’s command-line file processing loop. As with the `BEGIN` and `END` rules (see the previous section), all `BEGINFILE` rules in a program are merged, in the order they are read by `gawk`, and all `ENDFILE` rules are merged as well.

The body of the `BEGINFILE` rules is executed just before `gawk` reads the first record from a file. `FILENAME` is set to the name of the current file, and `FNR` is set to zero.

¹ The original version of `awk` kept reading and ignoring input until the end of the file was seen.

The **BEGINFILE** rule provides you the opportunity to accomplish two tasks that would otherwise be difficult or impossible to perform:

- You can test if the file is readable. Normally, it is a fatal error if a file named on the command line cannot be opened for reading. However, you can bypass the fatal error and move on to the next file on the command line.

You do this by checking if the **ERRNO** variable is not the empty string; if so, then **gawk** was not able to open the file. In this case, your program can execute the **nextfile** statement (see [Section 7.4.9 \[The **nextfile** Statement\]](#), page 145). This causes **gawk** to skip the file entirely. Otherwise, **gawk** exits with the usual fatal error.

- If you have written extensions that modify the record handling (by inserting an “input parser”; see [Section 16.4.5.4 \[Customized Input Parsers\]](#), page 367), you can invoke them at this point, before **gawk** has started processing the file. (This is a *very* advanced feature, currently used only by the [gawkextlib](#) project.)

The **ENDFILE** rule is called when **gawk** has finished processing the last record in an input file. For the last input file, it will be called before any **END** rules. The **ENDFILE** rule is executed even for empty input files.

Normally, when an error occurs when reading input in the normal input-processing loop, the error is fatal. However, if an **ENDFILE** rule is present, the error becomes non-fatal, and instead **ERRNO** is set. This makes it possible to catch and process I/O errors at the level of the **awk** program.

The **next** statement (see [Section 7.4.8 \[The **next** Statement\]](#), page 144) is not allowed inside either a **BEGINFILE** or an **ENDFILE** rule. The **nextfile** statement is allowed only inside a **BEGINFILE** rule, not inside an **ENDFILE** rule.

The **getline** statement (see [Section 4.9 \[Explicit Input with **getline**\]](#), page 78) is restricted inside both **BEGINFILE** and **ENDFILE**: only redirected forms of **getline** are allowed.

BEGINFILE and **ENDFILE** are **gawk** extensions. In most other **awk** implementations, or if **gawk** is in compatibility mode (see [Section 2.2 \[Command-Line Options\]](#), page 31), they are not special.

7.1.6 The Empty Pattern

An empty (i.e., nonexistent) pattern is considered to match *every* input record. For example, the program:

```
awk '{ print $1 }' mail-list
```

prints the first field of every record.

7.2 Using Shell Variables in Programs

awk programs are often used as components in larger programs written in shell. For example, it is very common to use a shell variable to hold a pattern that the **awk** program searches for. There are two ways to get the value of the shell variable into the body of the **awk** program.

A common method is to use shell quoting to substitute the variable’s value into the program inside the script. For example, consider the following program:

```
printf "Enter search pattern: "
```

```

read pattern
awk "/$pattern/ '{ nmatches++ }
    END { print nmatches, "found" }' /path/to/data

```

The `awk` program consists of two pieces of quoted text that are concatenated together to form the program. The first part is double-quoted, which allows substitution of the `pattern` shell variable inside the quotes. The second part is single-quoted.

Variable substitution via quoting works, but can potentially be messy. It requires a good understanding of the shell's quoting rules (see [Section 1.1.6 \[Shell Quoting Issues\]](#), page 21), and it's often difficult to correctly match up the quotes when reading the program.

A better method is to use `awk`'s variable assignment feature (see [Section 6.1.3.2 \[Assigning Variables on the Command Line\]](#), page 111) to assign the shell variable's value to an `awk` variable. Then use dynamic regexps to match the pattern (see [Section 3.6 \[Using Dynamic Regexps\]](#), page 53). The following shows how to redo the previous example using this technique:

```

printf "Enter search pattern: "
read pattern
awk -v pat="$pattern" '$0 ~ pat { nmatches++ }
    END { print nmatches, "found" }' /path/to/data

```

Now, the `awk` program is just one single-quoted string. The assignment `-v pat="$pattern"` still requires double quotes, in case there is whitespace in the value of `$pattern`. The `awk` variable `pat` could be named `pattern` too, but that would be more confusing. Using a variable also provides more flexibility, as the variable can be used anywhere inside the program—for printing, as an array subscript, or for any other use—without requiring the quoting tricks at every point in the program.

7.3 Actions

An `awk` program or script consists of a series of rules and function definitions interspersed. (Functions are described later. See [Section 9.2 \[User-Defined Functions\]](#), page 200.) A rule contains a pattern and an action, either of which (but not both) may be omitted. The purpose of the *action* is to tell `awk` what to do once a match for the pattern is found. Thus, in outline, an `awk` program generally looks like this:

```

[pattern] { action }
pattern [{ action }]
...
function name(args) { ... }
...

```

An action consists of one or more *awk statements*, enclosed in braces (`{...}`). Each statement specifies one thing to do. The statements are separated by newlines or semicolons. The braces around an action must be used even if the action contains only one statement, or if it contains no statements at all. However, if you omit the action entirely, omit the braces as well. An omitted action is equivalent to `{ print $0 }`:

```

/foo/ { }      match foo, do nothing — empty action
/foo/         match foo, print the record — omitted action

```

The following types of statements are supported in `awk`:

Expressions

Call functions or assign values to variables (see [Chapter 6 \[Expressions\]](#), [page 107](#)). Executing this kind of statement simply computes the value of the expression. This is useful when the expression has side effects (see [Section 6.2.3 \[Assignment Expressions\]](#), [page 116](#)).

Control statements

Specify the control flow of `awk` programs. The `awk` language gives you C-like constructs (`if`, `for`, `while`, and `do`) as well as a few special ones (see [Section 7.4 \[Control Statements in Actions\]](#), [page 138](#)).

Compound statements

Enclose one or more statements in braces. A compound statement is used in order to put several statements together in the body of an `if`, `while`, `do`, or `for` statement.

Input statements

Use the `getline` command (see [Section 4.9 \[Explicit Input with getline\]](#), [page 78](#)). Also supplied in `awk` are the `next` statement (see [Section 7.4.8 \[The next Statement\]](#), [page 144](#)) and the `nextfile` statement (see [Section 7.4.9 \[The nextfile Statement\]](#), [page 145](#)).

Output statements

Such as `print` and `printf`. See [Chapter 5 \[Printing Output\]](#), [page 89](#).

Deletion statements

For deleting array elements. See [Section 8.4 \[The delete Statement\]](#), [page 168](#).

7.4 Control Statements in Actions

Control statements, such as `if`, `while`, and so on, control the flow of execution in `awk` programs. Most of `awk`'s control statements are patterned after similar statements in C.

All the control statements start with special keywords, such as `if` and `while`, to distinguish them from simple expressions. Many control statements contain other statements. For example, the `if` statement contains another statement that may or may not be executed. The contained statement is called the *body*. To include more than one statement in the body, group them into a single *compound statement* with braces, separating them with newlines or semicolons.

7.4.1 The if-else Statement

The `if-else` statement is `awk`'s decision-making statement. It looks like this:

```
if (condition) then-body [else else-body]
```

The *condition* is an expression that controls what the rest of the statement does. If the *condition* is true, *then-body* is executed; otherwise, *else-body* is executed. The `else` part of the statement is optional. The condition is considered false if its value is zero or the null string; otherwise, the condition is true. Refer to the following:

```
if (x % 2 == 0)
    print "x is even"
else
```

```
print "x is odd"
```

In this example, if the expression `'x % 2 == 0'` is true (i.e., if the value of `x` is evenly divisible by two), then the first `print` statement is executed; otherwise, the second `print` statement is executed. If the `else` keyword appears on the same line as *then-body* and *then-body* is not a compound statement (i.e., not surrounded by braces), then a semicolon must separate *then-body* from the `else`. To illustrate this, the previous example can be rewritten as:

```
if (x % 2 == 0) print "x is even"; else
    print "x is odd"
```

If the `';`' is left out, `awk` can't interpret the statement and it produces a syntax error. Don't actually write programs this way, because a human reader might fail to see the `else` if it is not the first thing on its line.

7.4.2 The while Statement

In programming, a *loop* is a part of a program that can be executed two or more times in succession. The `while` statement is the simplest looping statement in `awk`. It repeatedly executes a statement as long as a condition is true. For example:

```
while (condition)
    body
```

body is a statement called the *body* of the loop, and *condition* is an expression that controls how long the loop keeps running. The first thing the `while` statement does is test the *condition*. If the *condition* is true, it executes the statement *body*. After *body* has been executed, *condition* is tested again, and if it is still true, *body* executes again. This process repeats until the *condition* is no longer true. If the *condition* is initially false, the body of the loop never executes and `awk` continues with the statement following the loop. This example prints the first three fields of each record, one per line:

```
awk '
{
    i = 1
    while (i <= 3) {
        print $i
        i++
    }
}' inventory-shipped
```

The body of this loop is a compound statement enclosed in braces, containing two statements. The loop works in the following manner: first, the value of `i` is set to one. Then, the `while` statement tests whether `i` is less than or equal to three. This is true when `i` equals one, so the `i`th field is printed. Then the `'i++'` increments the value of `i` and the loop repeats. The loop terminates when `i` reaches four.

A newline is not required between the condition and the body; however, using one makes the program clearer unless the body is a compound statement or else is very simple. The newline after the open brace that begins the compound statement is not required either, but the program is harder to read without it.

7.4.3 The do-while Statement

The `do` loop is a variation of the `while` looping statement. The `do` loop executes the *body* once and then repeats the *body* as long as the *condition* is true. It looks like this:

```
do
    body
while (condition)
```

Even if the *condition* is false at the start, the *body* executes at least once (and only once, unless executing *body* makes *condition* true). Contrast this with the corresponding `while` statement:

```
while (condition)
    body
```

This statement does not execute the *body* even once if the *condition* is false to begin with. The following is an example of a `do` statement:

```
{
    i = 1
    do {
        print $0
        i++
    } while (i <= 10)
}
```

This program prints each input record 10 times. However, it isn't a very realistic example, because in this case an ordinary `while` would do just as well. This situation reflects actual experience; only occasionally is there a real use for a `do` statement.

7.4.4 The for Statement

The `for` statement makes it more convenient to count iterations of a loop. The general form of the `for` statement looks like this:

```
for (initialization; condition; increment)
    body
```

The *initialization*, *condition*, and *increment* parts are arbitrary `awk` expressions, and *body* stands for any `awk` statement.

The `for` statement starts by executing *initialization*. Then, as long as the *condition* is true, it repeatedly executes *body* and then *increment*. Typically, *initialization* sets a variable to either zero or one, *increment* adds one to it, and *condition* compares it against the desired number of iterations. For example:

```
awk '
{
    for (i = 1; i <= 3; i++)
        print $i
}' inventory-shipped
```

This prints the first three fields of each input record, with one field per line.

It isn't possible to set more than one variable in the *initialization* part without using a multiple assignment statement such as '`x = y = 0`'. This makes sense only if all the ini-

tial values are equal. (But it is possible to initialize additional variables by writing their assignments as separate statements preceding the `for` loop.)

The same is true of the *increment* part. Incrementing additional variables requires separate statements at the end of the loop. The C compound expression, using C's comma operator, is useful in this context, but it is not supported in `awk`.

Most often, *increment* is an increment expression, as in the previous example. But this is not required; it can be any expression whatsoever. For example, the following statement prints all the powers of two between 1 and 100:

```
for (i = 1; i <= 100; i *= 2)
    print i
```

If there is nothing to be done, any of the three expressions in the parentheses following the `for` keyword may be omitted. Thus, '`for (; x > 0;)`' is equivalent to '`while (x > 0)`'. If the *condition* is omitted, it is treated as true, effectively yielding an *infinite loop* (i.e., a loop that never terminates).

In most cases, a `for` loop is an abbreviation for a `while` loop, as shown here:

```
initialization
while (condition) {
    body
    increment
}
```

The only exception is when the `continue` statement (see [Section 7.4.7 \[The `continue` Statement\]](#), [page 143](#)) is used inside the loop. Changing a `for` statement to a `while` statement in this way can change the effect of the `continue` statement inside the loop.

The `awk` language has a `for` statement in addition to a `while` statement because a `for` loop is often both less work to type and more natural to think of. Counting the number of iterations is very common in loops. It can be easier to think of this counting as part of looping rather than as something to do inside the loop.

There is an alternative version of the `for` loop, for iterating over all the indices of an array:

```
for (i in array)
    do something with array[i]
```

See [Section 8.1.5 \[Scanning All Elements of an Array\]](#), [page 163](#), for more information on this version of the `for` loop.

7.4.5 The `switch` Statement

This section describes a `gawk`-specific feature. If `gawk` is in compatibility mode (see [Section 2.2 \[Command-Line Options\]](#), [page 31](#)), it is not available.

The `switch` statement allows the evaluation of an expression and the execution of statements based on a `case` match. Case statements are checked for a match in the order they are defined. If no suitable `case` is found, the `default` section is executed, if supplied.

Each `case` contains a single constant, be it numeric, string, or regexp. The `switch` expression is evaluated, and then each `case`'s constant is compared against the result in turn. The type of constant determines the comparison: numeric or string do the usual

comparisons. A regexp constant does a regular expression match against the string value of the original expression. The general form of the **switch** statement looks like this:

```
switch (expression) {
  case value or regular expression:
    case-body
  default:
    default-body
}
```

Control flow in the **switch** statement works as it does in C. Once a match to a given case is made, the case statement bodies execute until a **break**, **continue**, **next**, **nextfile**, or **exit** is encountered, or the end of the **switch** statement itself. For example:

```
while ((c = getopt(ARGC, ARGV, "aksx")) != -1) {
  switch (c) {
    case "a":
      # report size of all files
      all_files = TRUE;
      break
    case "k":
      BLOCK_SIZE = 1024      # 1K block size
      break
    case "s":
      # do sums only
      sum_only = TRUE
      break
    case "x":
      # don't cross filesystems
      fts_flags = or(fts_flags, FTS_XDEV)
      break
    case "?":
    default:
      usage()
      break
  }
}
```

Note that if none of the statements specified here halt execution of a matched **case** statement, execution falls through to the next **case** until execution halts. In this example, the **case** for "?" falls through to the **default** case, which is to call a function named **usage()**. (The **getopt()** function being called here is described in [Section 10.4 \[Processing Command-Line Options\]](#), page 236.)

7.4.6 The **break** Statement

The **break** statement jumps out of the innermost **for**, **while**, or **do** loop that encloses it. The following example finds the smallest divisor of any integer, and also identifies prime numbers:

```
# find smallest divisor of num
{
```



```

num = $1
for (divisor = 2; divisor * divisor <= num; divisor++) {
    if (num % divisor == 0)
        break
}
if (num % divisor == 0)
    printf "Smallest divisor of %d is %d\n", num, divisor
else
    printf "%d is prime\n", num
}

```

When the remainder is zero in the first `if` statement, `awk` immediately *breaks out* of the containing `for` loop. This means that `awk` proceeds immediately to the statement following the loop and continues processing. (This is very different from the `exit` statement, which stops the entire `awk` program. See [Section 7.4.10 \[The `exit` Statement\]](#), page 146.)

The following program illustrates how the *condition* of a `for` or `while` statement could be replaced with a `break` inside an `if`:

```

# find smallest divisor of num
{
    num = $1
    for (divisor = 2; ; divisor++) {
        if (num % divisor == 0) {
            printf "Smallest divisor of %d is %d\n", num, divisor
            break
        }
        if (divisor * divisor > num) {
            printf "%d is prime\n", num
            break
        }
    }
}

```

The `break` statement is also used to break out of the `switch` statement. This is discussed in [Section 7.4.5 \[The `switch` Statement\]](#), page 141.

The `break` statement has no meaning when used outside the body of a loop or `switch`. However, although it was never documented, historical implementations of `awk` treated the `break` statement outside of a loop as if it were a `next` statement (see [Section 7.4.8 \[The `next` Statement\]](#), page 144). Recent versions of BWK `awk` no longer allow this usage, nor does `gawk`.



7.4.7 The `continue` Statement

Similar to `break`, the `continue` statement is used only inside `for`, `while`, and `do` loops. It skips over the rest of the loop body, causing the next cycle around the loop to begin immediately. Contrast this with `break`, which jumps out of the loop altogether.

The `continue` statement in a `for` loop directs `awk` to skip the rest of the body of the loop and resume execution with the increment-expression of the `for` statement. The following program illustrates this fact:

```

BEGIN {
    for (x = 0; x <= 20; x++) {
        if (x == 5)
            continue
        printf "%d ", x
    }
    print ""
}

```

This program prints all the numbers from 0 to 20—except for 5, for which the `printf` is skipped. Because the increment ‘`x++`’ is not skipped, `x` does not remain stuck at 5. Contrast the `for` loop from the previous example with the following `while` loop:

```

BEGIN {
    x = 0
    while (x <= 20) {
        if (x == 5)
            continue
        printf "%d ", x
        x++
    }
    print ""
}

```

This program loops forever once `x` reaches 5, because the increment (‘`x++`’) is never reached.

The `continue` statement has no special meaning with respect to the `switch` statement, nor does it have any meaning when used outside the body of a loop. Historical versions of `awk` treated a `continue` statement outside a loop the same way they treated a `break` statement outside a loop: as if it were a `next` statement (see [Section 7.4.8 \[The next Statement\]](#), page 144). Recent versions of BWK `awk` no longer work this way, nor does `gawk`.



7.4.8 The next Statement

The `next` statement forces `awk` to immediately stop processing the current record and go on to the next record. This means that no further rules are executed for the current record, and the rest of the current rule’s action isn’t executed.

Contrast this with the effect of the `getline` function (see [Section 4.9 \[Explicit Input with getline\]](#), page 78). That also causes `awk` to read the next record immediately, but it does not alter the flow of control in any way (i.e., the rest of the current action executes with a new input record).

At the highest level, `awk` program execution is a loop that reads an input record and then tests each rule’s pattern against it. If you think of this loop as a `for` statement whose body contains the rules, then the `next` statement is analogous to a `continue` statement. It skips to the end of the body of this implicit loop and executes the increment (which reads another record).

For example, suppose an `awk` program works only on records with four fields, and it shouldn’t fail when given bad input. To avoid complicating the rest of the program, write a “weed out” rule near the beginning, in the following manner:

```

NF != 4 {
    printf("%s:%d: skipped: NF != 4\n", FILENAME, FNR) > "/dev/stderr"
    next
}

```

Because of the `next` statement, the program's subsequent rules won't see the bad record. The error message is redirected to the standard error output stream, as error messages should be. For more detail, see [Section 5.8 \[Special File names in gawk\]](#), page 101.

If the `next` statement causes the end of the input to be reached, then the code in any `END` rules is executed. See [Section 7.1.4 \[The BEGIN and END Special Patterns\]](#), page 134.

The `next` statement is not allowed inside `BEGINFILE` and `ENDFILE` rules. See [Section 7.1.5 \[The BEGINFILE and ENDFILE Special Patterns\]](#), page 135.

According to the POSIX standard, the behavior is undefined if the `next` statement is used in a `BEGIN` or `END` rule. `gawk` treats it as a syntax error. Although POSIX does not disallow it, most other `awk` implementations don't allow the `next` statement inside function bodies (see [Section 9.2 \[User-Defined Functions\]](#), page 200). Just as with any other `next` statement, a `next` statement inside a function body reads the next record and starts processing it with the first rule in the program.

7.4.9 The nextfile Statement

The `nextfile` statement is similar to the `next` statement. However, instead of abandoning processing of the current record, the `nextfile` statement instructs `awk` to stop processing the current data file.

Upon execution of the `nextfile` statement, `FILENAME` is updated to the name of the next data file listed on the command line, `FNR` is reset to one, and processing starts over with the first rule in the program. If the `nextfile` statement causes the end of the input to be reached, then the code in any `END` rules is executed. An exception to this is when `nextfile` is invoked during execution of any statement in an `END` rule; in this case, it causes the program to stop immediately. See [Section 7.1.4 \[The BEGIN and END Special Patterns\]](#), page 134.

The `nextfile` statement is useful when there are many data files to process but it isn't necessary to process every record in every file. Without `nextfile`, in order to move on to the next data file, a program would have to continue scanning the unwanted records. The `nextfile` statement accomplishes this much more efficiently.

In `gawk`, execution of `nextfile` causes additional things to happen: any `ENDFILE` rules are executed if `gawk` is not currently in an `END` or `BEGINFILE` rule, `ARGIND` is incremented, and any `BEGINFILE` rules are executed. (`ARGIND` hasn't been introduced yet. See [Section 7.5 \[Predefined Variables\]](#), page 147.)

With `gawk`, `nextfile` is useful inside a `BEGINFILE` rule to skip over a file that would otherwise cause `gawk` to exit with a fatal error. In this case, `ENDFILE` rules are not executed. See [Section 7.1.5 \[The BEGINFILE and ENDFILE Special Patterns\]](#), page 135.

Although it might seem that `'close(FILENAME)'` would accomplish the same as `nextfile`, this isn't true. `close()` is reserved for closing files, pipes, and coprocesses that are opened with redirections. It is not related to the main processing that `awk` does with the files listed in `ARGV`.

NOTE: For many years, `nextfile` was a common extension. In September 2012, it was accepted for inclusion into the POSIX standard. See [the Austin Group website](#).

The current version of BWK `awk` and `mawk` also support `nextfile`. However, they don't allow the `nextfile` statement inside function bodies (see [Section 9.2 \[User-Defined Functions\]](#), page 200). `gawk` does; a `nextfile` inside a function body reads the first record from the next file and starts processing it with the first rule in the program, just as any other `nextfile` statement.

7.4.10 The `exit` Statement

The `exit` statement causes `awk` to immediately stop executing the current rule and to stop processing input; any remaining input is ignored. The `exit` statement is written as follows:

```
exit [return code]
```

When an `exit` statement is executed from a `BEGIN` rule, the program stops processing everything immediately. No input records are read. However, if an `END` rule is present, as part of executing the `exit` statement, the `END` rule is executed (see [Section 7.1.4 \[The BEGIN and END Special Patterns\]](#), page 134). If `exit` is used in the body of an `END` rule, it causes the program to stop immediately.

An `exit` statement that is not part of a `BEGIN` or `END` rule stops the execution of any further automatic rules for the current record, skips reading any remaining input records, and executes the `END` rule if there is one. `gawk` also skips any `ENDFILE` rules; they do not execute.

In such a case, if you don't want the `END` rule to do its job, set a variable to a nonzero value before the `exit` statement and check that variable in the `END` rule. See [Section 10.2.2 \[Assertions\]](#), page 222, for an example that does this.

If an argument is supplied to `exit`, its value is used as the exit status code for the `awk` process. If no argument is supplied, `exit` causes `awk` to return a “success” status. In the case where an argument is supplied to a first `exit` statement, and then `exit` is called a second time from an `END` rule with no argument, `awk` uses the previously supplied exit value.

See [Section 2.6 \[gawk's Exit Status\]](#), page 41, for more information.

For example, suppose an error condition occurs that is difficult or impossible to handle. Conventionally, programs report this by exiting with a nonzero status. An `awk` program can do this using an `exit` statement with a nonzero argument, as shown in the following example:

```
BEGIN {
    if (("date" | getline date_now) <= 0) {
        print "Can't get system date" > "/dev/stderr"
        exit 1
    }
    print "current date is", date_now
    close("date")
}
```

NOTE: For full portability, exit values should be between zero and 126, inclusive. Negative values, and values of 127 or greater, may not produce consistent results across different operating systems.



7.5 Predefined Variables

Most **awk** variables are available to use for your own purposes; they never change unless your program assigns values to them, and they never affect anything unless your program examines them. However, a few variables in **awk** have special built-in meanings. **awk** examines some of these automatically, so that they enable you to tell **awk** how to do certain things. Others are set automatically by **awk**, so that they carry information from the internal workings of **awk** to your program.

This section documents all of **gawk**'s predefined variables, most of which are also documented in the chapters describing their areas of activity.

7.5.1 Built-in Variables That Control **awk**

The following is an alphabetical list of variables that you can change to control how **awk** does certain things.

The variables that are specific to **gawk** are marked with a pound sign ('#'). These variables are **gawk** extensions. In other **awk** implementations or if **gawk** is in compatibility mode (see [Section 2.2 \[Command-Line Options\]](#), page 31), they are not special. (Any exceptions are noted in the description of each variable.)

- BINMODE #** On non-POSIX systems, this variable specifies use of binary mode for all I/O. Numeric values of one, two, or three specify that input files, output files, or all files, respectively, should use binary I/O. A numeric value less than zero is treated as zero, and a numeric value greater than three is treated as three. Alternatively, string values of "r" or "w" specify that input files and output files, respectively, should use binary I/O. A string value of "rw" or "wr" indicates that all files should use binary I/O. Any other string value is treated the same as "rw", but causes **gawk** to generate a warning message. **BINMODE** is described in more detail in [Section B.3.1.4 \[Using **gawk** on PC Operating Systems\]](#), page 439. **mawk** (see [Section B.5 \[Other Freely Available **awk** Implementations\]](#), page 446) also supports this variable, but only using numeric values.
- CONVFMT** A string that controls the conversion of numbers to strings (see [Section 6.1.4 \[Conversion of Strings and Numbers\]](#), page 111). It works by being passed, in effect, as the first argument to the **sprintf()** function (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177). Its default value is "%.6g". **CONVFMT** was introduced by the POSIX standard.
- FIELDWIDTHS #**
A space-separated list of columns that tells **gawk** how to split input with fixed columnar boundaries. Assigning a value to **FIELDWIDTHS** overrides the use of **FS** and **FPAT** for field splitting. See [Section 4.6 \[Reading Fixed-Width Data\]](#), page 72, for more information.
- FPAT #** A regular expression (as a string) that tells **gawk** to create the fields based on text that matches the regular expression. Assigning a value to **FPAT** overrides the use of **FS** and **FIELDWIDTHS** for field splitting. See [Section 4.7 \[Defining Fields by Content\]](#), page 74, for more information.
- FS** The input field separator (see [Section 4.5 \[Specifying How Fields Are Separated\]](#), page 67). The value is a single-character string or a multicharacter regular

expression that matches the separations between fields in an input record. If the value is the null string (""), then each character in the record becomes a separate field. (This behavior is a **gawk** extension. POSIX **awk** does not specify the behavior when **FS** is the null string. Nonetheless, some other versions of **awk** also treat "" specially.)

The default value is " ", a string consisting of a single space. As a special exception, this value means that any sequence of spaces, TABs, and/or newlines is a single separator.² It also causes spaces, TABs, and newlines at the beginning and end of a record to be ignored.

You can set the value of **FS** on the command line using the **-F** option:

```
awk -F, 'program' input-files
```

If **gawk** is using **FIELDWIDTHS** or **FPAT** for field splitting, assigning a value to **FS** causes **gawk** to return to the normal, **FS**-based field splitting. An easy way to do this is to simply say '**FS = FS**', perhaps with an explanatory comment.

IGNORECASE

If **IGNORECASE** is nonzero or non-null, then all string comparisons and all regular expression matching are case-independent. This applies to regexp matching with **~** and **!~**, the **gensub()**, **gsub()**, **index()**, **match()**, **patsplit()**, **split()**, and **sub()** functions, record termination with **RS**, and field splitting with **FS** and **FPAT**. However, the value of **IGNORECASE** does *not* affect array subscripting and it does not affect field splitting when using a single-character field separator. See [Section 3.8 \[Case Sensitivity in Matching\]](#), page 55.

LINT

When this variable is true (nonzero or non-null), **gawk** behaves as if the **--lint** command-line option is in effect (see [Section 2.2 \[Command-Line Options\]](#), page 31). With a value of **"fatal"**, lint warnings become fatal errors. With a value of **"invalid"**, only warnings about things that are actually invalid are issued. (This is not fully implemented yet.) Any other true value prints nonfatal warnings. Assigning a false value to **LINT** turns off the lint warnings.

This variable is a **gawk** extension. It is not special in other **awk** implementations. Unlike with the other special variables, changing **LINT** does affect the production of lint warnings, even if **gawk** is in compatibility mode. Much as the **--lint** and **--traditional** options independently control different aspects of **gawk**'s behavior, the control of lint warnings during program execution is independent of the flavor of **awk** being executed.

OFMT

A string that controls conversion of numbers to strings (see [Section 6.1.4 \[Conversion of Strings and Numbers\]](#), page 111) for printing with the **print** statement. It works by being passed as the first argument to the **sprintf()** function (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177). Its default value is **"%.6g"**. Earlier versions of **awk** used **OFMT** to specify the format for converting numbers to strings in general expressions; this is now done by **CONVFMT**.

OFS

The output field separator (see [Section 5.3 \[Output Separators\]](#), page 91). It is output between the fields printed by a **print** statement. Its default value is " ", a string consisting of a single space.

² In POSIX **awk**, newline does not count as whitespace.

ORS	The output record separator. It is output at the end of every <code>print</code> statement. Its default value is <code>"\n"</code> , the newline character. (See Section 5.3 [Output Separators] , page 91.)
PREC #	The working precision of arbitrary-precision floating-point numbers, 53 bits by default (see Section 15.4.4 [Setting the Precision] , page 350).
ROUNDMODE #	The rounding mode to use for arbitrary-precision arithmetic on numbers, by default <code>"N"</code> (<code>roundTiesToEven</code> in the IEEE 754 standard; see Section 15.4.5 [Setting the Rounding Mode] , page 351).
RS	The input record separator. Its default value is a string containing a single newline character, which means that an input record consists of a single line of text. It can also be the null string, in which case records are separated by runs of blank lines. If it is a regexp, records are separated by matches of the regexp in the input text. (See Section 4.1 [How Input Is Split into Records] , page 59.) The ability for RS to be a regular expression is a <code>gawk</code> extension. In most other <code>awk</code> implementations, or if <code>gawk</code> is in compatibility mode (see Section 2.2 [Command-Line Options] , page 31), just the first character of RS's value is used.
SUBSEP	The subscript separator. It has the default value of <code>"\034"</code> and is used to separate the parts of the indices of a multidimensional array. Thus, the expression <code>'foo["A", "B"]'</code> really accesses <code>foo["A\034B"]</code> (see Section 8.5 [Multidimensional Arrays] , page 169).
TEXTDOMAIN #	Used for internationalization of programs at the <code>awk</code> level. It sets the default text domain for specially marked string constants in the source text, as well as for the <code>dcgettext()</code> , <code>dcngettext()</code> , and <code>bindtextdomain()</code> functions (see Chapter 13 [Internationalization with gawk] , page 317). The default value of TEXTDOMAIN is <code>"messages"</code> .

7.5.2 Built-in Variables That Convey Information

The following is an alphabetical list of variables that `awk` sets automatically on certain occasions in order to provide information to your program.

The variables that are specific to `gawk` are marked with a pound sign (`#`). These variables are `gawk` extensions. In other `awk` implementations or if `gawk` is in compatibility mode (see [Section 2.2 \[Command-Line Options\]](#), page 31), they are not special:

ARGC, ARGV

The command-line arguments available to `awk` programs are stored in an array called ARGV. ARGC is the number of command-line arguments present. See [Section 2.3 \[Other Command-Line Arguments\]](#), page 37. Unlike most `awk` arrays, ARGV is indexed from 0 to ARGC - 1. In the following example:

```
$ awk 'BEGIN {
>     for (i = 0; i < ARGC; i++)
>         print ARGV[i]
>     }' inventory-shipped mail-list
```



```

+ awk
+ inventory-shipped
+ mail-list

```

ARGV[0] contains 'awk', ARGV[1] contains 'inventory-shipped', and ARGV[2] contains 'mail-list'. The value of ARGV is three, one more than the index of the last element in ARGV, because the elements are numbered from zero.

The names ARGV and ARGV, as well as the convention of indexing the array from 0 to ARGV - 1, are derived from the C language's method of accessing command-line arguments.

The value of ARGV[0] can vary from system to system. Also, you should note that the program text is *not* included in ARGV, nor are any of **awk**'s command-line options. See [Section 7.5.3 \[Using ARGV and ARGV\]](#), page 155, for information about how **awk** uses these variables.



ARGIND # The index in ARGV of the current file being processed. Every time **gawk** opens a new data file for processing, it sets ARGIND to the index in ARGV of the file name. When **gawk** is processing the input files, 'FILENAME == ARGV[ARGIND]' is always true.

This variable is useful in file processing; it allows you to tell how far along you are in the list of data files as well as to distinguish between successive instances of the same file name on the command line.

While you can change the value of ARGIND within your **awk** program, **gawk** automatically sets it to a new value when it opens the next file.

ENVIRON An associative array containing the values of the environment. The array indices are the environment variable names; the elements are the values of the particular environment variables. For example, ENVIRON["HOME"] might be "/home/arnold". Changing this array does not affect the environment passed on to any programs that **awk** may spawn via redirection or the **system()** function. (In a future version of **gawk**, it may do so.)

Some operating systems may not have environment variables. On such systems, the ENVIRON array is empty (except for ENVIRON["AWKPATH"] and ENVIRON["AWKLIBPATH"]; see [Section 2.5.1 \[The AWKPATH Environment Variable\]](#), page 39, and see [Section 2.5.2 \[The AWKLIBPATH Environment Variable\]](#), page 40).

ERRNO # If a system error occurs during a redirection for **getline**, during a read for **getline**, or during a **close()** operation, then ERRNO contains a string describing the error.

In addition, **gawk** clears ERRNO before opening each command-line input file. This enables checking if the file is readable inside a **BEGINFILE** pattern (see [Section 7.1.5 \[The BEGINFILE and ENDFILE Special Patterns\]](#), page 135).

Otherwise, ERRNO works similarly to the C variable **errno**. Except for the case just mentioned, **gawk** *never* clears it (sets it to zero or ""). Thus, you should only expect its value to be meaningful when an I/O operation returns a failure value, such as **getline** returning -1. You are, of course, free to clear it yourself before doing an I/O operation.



FILENAME The name of the current input file. When no data files are listed on the command line, `awk` reads from the standard input and `FILENAME` is set to `"-"`. `FILENAME` changes each time a new file is read (see [Chapter 4 \[Reading Input Files\]](#), page 59). Inside a `BEGIN` rule, the value of `FILENAME` is `"`, because there are no input files being processed yet.³ Note, though, that using `getline` (see [Section 4.9 \[Explicit Input with getline\]](#), page 78) inside a `BEGIN` rule can give `FILENAME` a value.

FNR The current record number in the current file. `awk` increments `FNR` each time it reads a new record (see [Section 4.1 \[How Input Is Split into Records\]](#), page 59). `awk` resets `FNR` to zero each time it starts a new input file.

NF The number of fields in the current input record. `NF` is set each time a new record is read, when a new field is created, or when `$0` changes (see [Section 4.2 \[Examining Fields\]](#), page 63).

Unlike most of the variables described in this subsection, assigning a value to `NF` has the potential to affect `awk`'s internal workings. In particular, assignments to `NF` can be used to create fields in or remove fields from the current record. See [Section 4.4 \[Changing the Contents of a Field\]](#), page 65.

FUNCTAB # An array whose indices and corresponding values are the names of all the built-in, user-defined, and extension functions in the program.

NOTE: Attempting to use the `delete` statement with the `FUNCTAB` array causes a fatal error. Any attempt to assign to an element of `FUNCTAB` also causes a fatal error.

NR The number of input records `awk` has processed since the beginning of the program's execution (see [Section 4.1 \[How Input Is Split into Records\]](#), page 59). `awk` increments `NR` each time it reads a new record.

PROCINFO #

The elements of this array provide access to information about the running `awk` program. The following elements (listed alphabetically) are guaranteed to be available:

`PROCINFO["egid"]`

The value of the `getegid()` system call.

`PROCINFO["euid"]`

The value of the `geteuid()` system call.

`PROCINFO["FS"]`

This is `"FS"` if field splitting with `FS` is in effect, `"FIELDWIDTHS"` if field splitting with `FIELDWIDTHS` is in effect, or `"FPAT"` if field matching with `FPAT` is in effect.

`PROCINFO["gid"]`

The value of the `getgid()` system call.

³ Some early implementations of Unix `awk` initialized `FILENAME` to `"-"`, even if there were data files to be processed. This behavior was incorrect and should not be relied upon in your programs.

PROCINFO["identifiers"]

A subarray, indexed by the names of all identifiers used in the text of the **awk** program. An *identifier* is simply the name of a variable (be it scalar or array), built-in function, user-defined function, or extension function. For each identifier, the value of the element is one of the following:

"array" The identifier is an array.

"builtin" The identifier is a built-in function.

"extension" The identifier is an extension function loaded via `@load` or `-l`.

"scalar" The identifier is a scalar.

"untyped" The identifier is untyped (could be used as a scalar or an array; **gawk** doesn't know yet).

"user" The identifier is a user-defined function.

The values indicate what **gawk** knows about the identifiers after it has finished parsing the program; they are *not* updated while the program runs.

PROCINFO["pgrp"]

The process group ID of the current process.

PROCINFO["pid"]

The process ID of the current process.

PROCINFO["ppid"]

The parent process ID of the current process.

PROCINFO["strftime"]

The default time format string for `strftime()`. Assigning a new value to this element changes the default. See [Section 9.1.5 \[Time Functions\]](#), page 192.

PROCINFO["uid"]

The value of the `getuid()` system call.

PROCINFO["version"]

The version of **gawk**.

The following additional elements in the array are available to provide information about the MPFR and GMP libraries if your version of **gawk** supports arbitrary-precision arithmetic (see [Chapter 15 \[Arithmetic and Arbitrary-Precision Arithmetic with gawk\]](#), page 343):

PROCINFO["gmp_version"]

The version of the GNU MP library.

`PROCINFO["mpfr_version"]`
The version of the GNU MPFR library.

`PROCINFO["prec_max"]`
The maximum precision supported by MPFR.

`PROCINFO["prec_min"]`
The minimum precision required by MPFR.

The following additional elements in the array are available to provide information about the version of the extension API, if your version of `gawk` supports dynamic loading of extension functions (see [Chapter 16 \[Writing Extensions for gawk\]](#), page 357):

`PROCINFO["api_major"]`
The major version of the extension API.

`PROCINFO["api_minor"]`
The minor version of the extension API.

On some systems, there may be elements in the array, `"group1"` through `"groupN"` for some *N*. *N* is the number of supplementary groups that the process has. Use the `in` operator to test for these elements (see [Section 8.1.2 \[Referring to an Array Element\]](#), page 161).

The following elements allow you to change `gawk`'s behavior:

`PROCINFO["command", "pty"]`
For two-way communication to *command*, use a pseudo-tty instead of setting up a two-way pipe. See [Section 12.3 \[Two-Way Communications with Another Process\]](#), page 308, for more information.

`PROCINFO["input_name", "READ_TIMEOUT"]`
Set a timeout for reading from input redirection *input_name*. See [Section 4.10 \[Reading Input with a Timeout\]](#), page 84, for more information.

`PROCINFO["sorted_in"]`
If this element exists in `PROCINFO`, its value controls the order in which array indices will be processed by `'for (indx in array)'` loops. This is an advanced feature, so we defer the full description until later; see [Section 8.1.5 \[Scanning All Elements of an Array\]](#), page 163.

RLENGTH The length of the substring matched by the `match()` function (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177). **RLENGTH** is set by invoking the `match()` function. Its value is the length of the matched string, or `-1` if no match is found.

RSTART The start index in characters of the substring that is matched by the `match()` function (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177). **RSTART** is set by invoking the `match()` function. Its value is the position of the string where the matched substring starts, or zero if no match was found.

RT # The input text that matched the text denoted by **RS**, the record separator. It is set every time a record is read.

SYMTAB # An array whose indices are the names of all defined global variables and arrays in the program. **SYMTAB** makes **gawk**'s symbol table visible to the **awk** programmer. It is built as **gawk** parses the program and is complete before the program starts to run.

The array may be used for indirect access to read or write the value of a variable:

```
foo = 5
SYMTAB["foo"] = 4
print foo      # prints 4
```

The **isarray()** function (see [Section 9.1.7 \[Getting Type Information\]](#), [page 199](#)) may be used to test if an element in **SYMTAB** is an array. Also, you may not use the **delete** statement with the **SYMTAB** array.

You may use an index for **SYMTAB** that is not a predefined identifier:

```
SYMTAB["xxx"] = 5
print SYMTAB["xxx"]
```

This works as expected: in this case **SYMTAB** acts just like a regular array. The only difference is that you can't then delete **SYMTAB["xxx"]**.

The **SYMTAB** array is more interesting than it looks. Andrew Schorr points out that it effectively gives **awk** data pointers. Consider his example:

```
# Indirect multiply of any variable by amount, return result

function multiply(variable, amount)
{
    return SYMTAB[variable] *= amount
}
```

You would use it like this:

```
BEGIN {
    answer = 10.5
    multiply("answer", 4)
    print "The answer is", answer
}
```

When run, this produces:

```
$ gawk -f answer.awk
→ The answer is 42
```

NOTE: In order to avoid severe time-travel paradoxes,⁴ neither **FUNCTAB** nor **SYMTAB** is available as an element within the **SYMTAB** array.

⁴ Not to mention difficult implementation issues.



Changing NR and FNR

`awk` increments `NR` and `FNR` each time it reads a record, instead of setting them to the absolute value of the number of records read. This means that a program can change these variables and their new values are incremented for each record. The following example shows this:

```
$ echo '1
> 2
> 3
> 4' | awk 'NR == 2 { NR = 17 }
> { print NR }'
+ 1
+ 17
+ 18
+ 19
```

Before `FNR` was added to the `awk` language (see [Section A.1 \[Major Changes Between V7 and SVR3.1\]](#), page 415), many `awk` programs used this feature to track the number of records in a file by resetting `NR` to zero when `FILENAME` changed.

7.5.3 Using ARGV and ARGV

[Section 7.5.2 \[Built-in Variables That Convey Information\]](#), page 149, presented the following program describing the information contained in `ARGC` and `ARGV`:

```
$ awk 'BEGIN {
>     for (i = 0; i < ARGC; i++)
>         print ARGV[i]
>     }' inventory-shipped mail-list
+ awk
+ inventory-shipped
+ mail-list
```

In this example, `ARGV[0]` contains `'awk'`, `ARGV[1]` contains `'inventory-shipped'`, and `ARGV[2]` contains `'mail-list'`. Notice that the `awk` program is not entered in `ARGV`. The other command-line options, with their arguments, are also not entered. This includes variable assignments done with the `-v` option (see [Section 2.2 \[Command-Line Options\]](#), page 31). Normal variable assignments on the command line *are* treated as arguments and do show up in the `ARGV` array. Given the following program in a file named `showargs.awk`:

```
BEGIN {
    printf "A=%d, B=%d\n", A, B
    for (i = 0; i < ARGC; i++)
        printf "\tARGV[%d] = %s\n", i, ARGV[i]
}
END { printf "A=%d, B=%d\n", A, B }
```

Running it produces the following:

```
$ awk -v A=1 -f showargs.awk B=2 /dev/null
+ A=1, B=0
+ ARGV[0] = awk
+ ARGV[1] = B=2
```

```

+      ARGV[2] = /dev/null
+ A=1, B=2

```

A program can alter `ARGC` and the elements of `ARGV`. Each time `awk` reaches the end of an input file, it uses the next element of `ARGV` as the name of the next input file. By storing a different string there, a program can change which files are read. Use `"-"` to represent the standard input. Storing additional elements and incrementing `ARGC` causes additional files to be read.

If the value of `ARGC` is decreased, that eliminates input files from the end of the list. By recording the old value of `ARGC` elsewhere, a program can treat the eliminated arguments as something other than file names.

To eliminate a file from the middle of the list, store the null string (`"`) into `ARGV` in place of the file's name. As a special feature, `awk` ignores file names that have been replaced with the null string. Another option is to use the `delete` statement to remove elements from `ARGV` (see [Section 8.4 \[The delete Statement\]](#), page 168).

All of these actions are typically done in the `BEGIN` rule, before actual processing of the input begins. See [Section 11.2.4 \[Splitting a Large File into Pieces\]](#), page 264, and see [Section 11.2.5 \[Duplicating Output into Multiple Files\]](#), page 265, for examples of each way of removing elements from `ARGV`.

To actually get options into an `awk` program, end the `awk` options with `--` and then supply the `awk` program's options, in the following manner:

```
awk -f myprog.awk -- -v -q file1 file2 ...
```

The following fragment processes `ARGV` in order to examine, and then remove, the previously mentioned command-line options:

```

BEGIN {
    for (i = 1; i < ARGC; i++) {
        if (ARGV[i] == "-v")
            verbose = 1
        else if (ARGV[i] == "-q")
            debug = 1
        else if (ARGV[i] ~ /^-./) {
            e = sprintf("%s: unrecognized option -- %c",
                        ARGV[0], substr(ARGV[i], 2, 1))
            print e > "/dev/stderr"
        } else
            break
        delete ARGV[i]
    }
}

```

Ending the `awk` options with `--` isn't necessary in `gawk`. Unless `--posix` has been specified, `gawk` silently puts any unrecognized options into `ARGV` for the `awk` program to deal with. As soon as it sees an unknown option, `gawk` stops looking for other options that it might otherwise recognize. The previous command line with `gawk` would be:

```
gawk -f myprog.awk -q -v file1 file2 ...
```

Because `-q` is not a valid `gawk` option, it and the following `-v` are passed on to the `awk` program. (See [Section 10.4 \[Processing Command-Line Options\]](#), page 236, for an `awk` library function that parses command-line options.)

When designing your program, you should choose options that don't conflict with `gawk`'s, because it will process any options that it accepts before passing the rest of the command line on to your program. Using `#!` with the `-E` option may help (see [Section 1.1.4 \[Executable awk Programs\]](#), page 19, and see [Section 2.2 \[Command-Line Options\]](#), page 31).

7.6 Summary

- Pattern-action pairs make up the basic elements of an `awk` program. Patterns are either normal expressions, range expressions, or regexp constants; one of the special keywords `BEGIN`, `END`, `BEGINFILE`, or `ENDFILE`; or empty. The action executes if the current record matches the pattern. Empty (missing) patterns match all records.
- I/O from `BEGIN` and `END` rules has certain constraints. This is also true, only more so, for `BEGINFILE` and `ENDFILE` rules. The latter two give you “hooks” into `gawk`'s file processing, allowing you to recover from a file that otherwise would cause a fatal error (such as a file that cannot be opened).
- Shell variables can be used in `awk` programs by careful use of shell quoting. It is easier to pass a shell variable into `awk` by using the `-v` option and an `awk` variable.
- Actions consist of statements enclosed in curly braces. Statements are built up from expressions, control statements, compound statements, input and output statements, and deletion statements.
- The control statements in `awk` are `if-else`, `while`, `for`, and `do-while`. `gawk` adds the `switch` statement. There are two flavors of `for` statement: one for performing general looping, and the other for iterating through an array.
- `break` and `continue` let you exit early or start the next iteration of a loop (or get out of a `switch`).
- `next` and `nextfile` let you read the next record and start over at the top of your program or skip to the next input file and start over, respectively.
- The `exit` statement terminates your program. When executed from an action (or function body), it transfers control to the `END` statements. From an `END` statement body, it exits immediately. You may pass an optional numeric value to be used as `awk`'s exit status.
- Some predefined variables provide control over `awk`, mainly for I/O. Other variables convey information from `awk` to your program.
- `ARGC` and `ARGV` make the command-line arguments available to your program. Manipulating them from a `BEGIN` rule lets you control how `awk` will process the provided data files.

8 Arrays in `awk`

An *array* is a table of values called *elements*. The elements of an array are distinguished by their *indices*. Indices may be either numbers or strings.

This chapter describes how arrays work in `awk`, how to use array elements, how to scan through every element in an array, and how to remove array elements. It also describes how `awk` simulates multidimensional arrays, as well as some of the less obvious points about array usage. The chapter moves on to discuss `gawk`'s facility for sorting arrays, and ends with a brief description of `gawk`'s ability to support true arrays of arrays.

8.1 The Basics of Arrays

This section presents the basics: working with elements in arrays one at a time, and traversing all of the elements in an array.

8.1.1 Introduction to Arrays

Doing linear scans over an associative array is like trying to club someone to death with a loaded Uzi.

—Larry Wall

The `awk` language provides one-dimensional arrays for storing groups of related strings or numbers. Every `awk` array must have a name. Array names have the same syntax as variable names; any valid variable name would also be a valid array name. But one name cannot be used in both ways (as an array and as a variable) in the same `awk` program.

Arrays in `awk` superficially resemble arrays in other programming languages, but there are fundamental differences. In `awk`, it isn't necessary to specify the size of an array before starting to use it. Additionally, any number or string, not just consecutive integers, may be used as an array index.

In most other languages, arrays must be *declared* before use, including a specification of how many elements or components they contain. In such languages, the declaration causes a contiguous block of memory to be allocated for that many elements. Usually, an index in the array must be a nonnegative integer. For example, the index zero specifies the first element in the array, which is actually stored at the beginning of the block of memory. Index one specifies the second element, which is stored in memory right after the first element, and so on. It is impossible to add more elements to the array, because it has room only for as many elements as given in the declaration. (Some languages allow arbitrary starting and ending indices—e.g., '15 .. 27'—but the size of the array is still fixed when the array is declared.)

A contiguous array of four elements might look like [Figure 8.1](#), conceptually, if the element values are eight, "foo", "", and 30.

8	"foo"	" "	30	Value
0	1	2	3	Index

Figure 8.1: A contiguous array

Only the values are stored; the indices are implicit from the order of the values. Here, eight is the value at index zero, because eight appears in the position with zero elements before it.

Arrays in **awk** are different—they are *associative*. This means that each array is a collection of pairs—an index and its corresponding array element value:

Index	Value
3	30
1	"foo"
0	8
2	" "

The pairs are shown in jumbled order because their order is irrelevant.¹

One advantage of associative arrays is that new pairs can be added at any time. For example, suppose a tenth element is added to the array whose value is **"number ten"**. The result is:

Index	Value
10	"number ten"
3	30
1	"foo"
0	8
2	" "

Now the array is *sparse*, which just means some indices are missing. It has elements 0–3 and 10, but doesn't have elements 4, 5, 6, 7, 8, or 9.

Another consequence of associative arrays is that the indices don't have to be nonnegative integers. Any number, or even a string, can be an index. For example, the following is an array that translates words from English to French:

Index	Value
"dog"	"chien"
"cat"	"chat"
"one"	"un"
1	"un"

¹ The ordering will vary among **awk** implementations, which typically use hash tables to store array elements and values.

Here we decided to translate the number one in both spelled-out and numeric form—thus illustrating that a single array can have both numbers and strings as indices. (In fact, array subscripts are always strings. There are some subtleties to how numbers work when used as array subscripts; this is discussed in more detail in [Section 8.2 \[Using Numbers to Subscript Arrays\]](#), page 167.) Here, the number 1 isn't double-quoted, because `awk` automatically converts it to a string.

The value of `IGNORECASE` has no effect upon array subscripting. The identical string value used to store an array element must be used to retrieve it. When `awk` creates an array (e.g., with the `split()` built-in function), that array's indices are consecutive integers starting at one. (See [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177.)

`awk`'s arrays are efficient—the time to access an element is independent of the number of elements in the array.

8.1.2 Referring to an Array Element

The principal way to use an array is to refer to one of its elements. An *array reference* is an expression as follows:

```
array[index-expression]
```

Here, *array* is the name of an array. The expression *index-expression* is the index of the desired element of the array.

The value of the array reference is the current value of that array element. For example, `foo[4.3]` is an expression referencing the element of array `foo` at index '4.3'.

A reference to an array element that has no recorded value yields a value of "", the null string. This includes elements that have not been assigned any value as well as elements that have been deleted (see [Section 8.4 \[The delete Statement\]](#), page 168).

NOTE: A reference to an element that does not exist *automatically* creates that array element, with the null string as its value. (In some cases, this is unfortunate, because it might waste memory inside `awk`.)

Novice `awk` programmers often make the mistake of checking if an element exists by checking if the value is empty:

```
# Check if "foo" exists in a:          Incorrect!
if (a["foo"] != "") ...
```

This is incorrect for two reasons. First, it *creates* `a["foo"]` if it didn't exist before! Second, it is valid (if a bit unusual) to set an array element equal to the empty string.

To determine whether an element exists in an array at a certain index, use the following expression:

```
indx in array
```

This expression tests whether the particular index *indx* exists, without the side effect of creating that element if it is not present. The expression has the value one (true) if `array[indx]` exists and zero (false) if it does not exist. (We use *indx* here, because 'index' is the name of a built-in function.) For example, this statement tests whether the array `frequencies` contains the index '2':

```
if (2 in frequencies)
    print "Subscript 2 is present."
```

Note that this is *not* a test of whether the array `frequencies` contains an element whose *value* is two. There is no way to do that except to scan all the elements. Also, this *does not* create `frequencies[2]`, while the following (incorrect) alternative does:

```
if (frequencies[2] != "")
    print "Subscript 2 is present."
```

8.1.3 Assigning Array Elements

Array elements can be assigned values just like `awk` variables:

```
array[index-expression] = value
```

`array` is the name of an array. The expression `index-expression` is the index of the element of the array that is assigned a value. The expression `value` is the value to assign to that element of the array.

8.1.4 Basic Array Example

The following program takes a list of lines, each beginning with a line number, and prints them out in order of line number. The line numbers are not in order when they are first read—instead, they are scrambled. This program sorts the lines by making an array using the line numbers as subscripts. The program then prints out the lines in sorted order of their numbers. It is a very simple program and gets confused upon encountering repeated numbers, gaps, or lines that don't begin with a number:

```
{
    if ($1 > max)
        max = $1
    arr[$1] = $0
}

END {
    for (x = 1; x <= max; x++)
        print arr[x]
}
```

The first rule keeps track of the largest line number seen so far; it also stores each line into the array `arr`, at an index that is the line's number. The second rule runs after all the input has been read, to print out all the lines. When this program is run with the following input:

```
5 I am the Five man
2 Who are you? The new number two!
4 . . . And four on the floor
1 Who is number one?
3 I three you.
```

Its output is:

```
1 Who is number one?
2 Who are you? The new number two!
3 I three you.
4 . . . And four on the floor
5 I am the Five man
```

If a line number is repeated, the last line with a given number overrides the others. Gaps in the line numbers can be handled with an easy improvement to the program's `END` rule, as follows:

```
END {
    for (x = 1; x <= max; x++)
        if (x in arr)
            print arr[x]
}
```

8.1.5 Scanning All Elements of an Array

In programs that use arrays, it is often necessary to use a loop that executes once for each element of an array. In other languages, where arrays are contiguous and indices are limited to nonnegative integers, this is easy: all the valid indices can be found by counting from the lowest index up to the highest. This technique won't do the job in `awk`, because any number or string can be an array index. So `awk` has a special kind of `for` statement for scanning an array:

```
for (var in array)
    body
```

This loop executes *body* once for each index in *array* that the program has previously used, with the variable *var* set to that index.

The following program uses this form of the `for` statement. The first rule scans the input records and notes which words appear (at least once) in the input, by storing a one into the array `used` with the word as the index. The second rule scans the elements of `used` to find all the distinct words that appear in the input. It prints each word that is more than 10 characters long and also prints the number of such words. See [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177, for more information on the built-in function `length()`.

```
# Record a 1 for each word that is used at least once
{
    for (i = 1; i <= NF; i++)
        used[$i] = 1
}

# Find number of distinct words more than 10 characters long
END {
    for (x in used) {
        if (length(x) > 10) {
            ++num_long_words
            print x
        }
    }
    print num_long_words, "words longer than 10 characters"
}
```

See [Section 11.3.5 \[Generating Word-Usage Counts\]](#), page 280, for a more detailed example of this type.

The order in which elements of the array are accessed by this statement is determined by the internal arrangement of the array elements within **awk** and in standard **awk** cannot be controlled or changed. This can lead to problems if new elements are added to *array* by statements in the loop body; it is not predictable whether the **for** loop will reach them. Similarly, changing *var* inside the loop may produce strange results. It is best to avoid such things.

As a point of information, **gawk** sets up the list of elements to be iterated over before the loop starts, and does not change it. But not all **awk** versions do so. Consider this program, named `loopcheck.awk`:

```
BEGIN {
    a["here"] = "here"
    a["is"] = "is"
    a["a"] = "a"
    a["loop"] = "loop"
    for (i in a) {
        j++
        a[j] = i
        print i
    }
}
```

Here is what happens when run with **gawk** (and **mawk**):

```
$ gawk -f loopcheck.awk
+ here
+ loop
+ a
+ is
```

Contrast this to **BWK awk**:

```
$ nawk -f loopcheck.awk
+ loop
+ here
+ is
+ a
+ 1
```

8.1.6 Using Predefined Array Scanning Orders with **gawk**

This subsection describes a feature that is specific to **gawk**.

By default, when a **for** loop traverses an array, the order is undefined, meaning that the **awk** implementation determines the order in which the array is traversed. This order is usually based on the internal implementation of arrays and will vary from one version of **awk** to the next.

Often, though, you may wish to do something simple, such as “traverse the array by comparing the indices in ascending order,” or “traverse the array by comparing the values in descending order.” **gawk** provides two mechanisms that give you this control:

- Set `PROCINFO["sorted_in"]` to one of a set of predefined values. We describe this now.

- Set `PROCINFO["sorted_in"]` to the name of a user-defined function to use for comparison of array elements. This advanced feature is described later in [Section 12.2 \[Controlling Array Traversal and Array Sorting\]](#), page 302.

The following special values for `PROCINFO["sorted_in"]` are available:

`"@unsorted"`

Array elements are processed in arbitrary order, which is the default `awk` behavior.

`"@ind_str_asc"`

Order by indices in ascending order compared as strings; this is the most basic sort. (Internally, array indices are always strings, so with `'a[2*5] = 1'` the index is `"10"` rather than numeric 10.)

`"@ind_num_asc"`

Order by indices in ascending order but force them to be treated as numbers in the process. Any index with a non-numeric value will end up positioned as if it were zero.

`"@val_type_asc"`

Order by element values in ascending order (rather than by indices). Ordering is by the type assigned to the element (see [Section 6.3.2 \[Variable Typing and Comparison Expressions\]](#), page 120). All numeric values come before all string values, which in turn come before all subarrays. (Subarrays have not been described yet; see [Section 8.6 \[Arrays of Arrays\]](#), page 171.)

`"@val_str_asc"`

Order by element values in ascending order (rather than by indices). Scalar values are compared as strings. Subarrays, if present, come out last.

`"@val_num_asc"`

Order by element values in ascending order (rather than by indices). Scalar values are compared as numbers. Subarrays, if present, come out last. When numeric values are equal, the string values are used to provide an ordering: this guarantees consistent results across different versions of the C `qsort()` function,² which `gawk` uses internally to perform the sorting.

`"@ind_str_desc"`

Like `"@ind_str_asc"`, but the string indices are ordered from high to low.

`"@ind_num_desc"`

Like `"@ind_num_asc"`, but the numeric indices are ordered from high to low.

`"@val_type_desc"`

Like `"@val_type_asc"`, but the element values, based on type, are ordered from high to low. Subarrays, if present, come out first.

`"@val_str_desc"`

Like `"@val_str_asc"`, but the element values, treated as strings, are ordered from high to low. Subarrays, if present, come out first.

² When two elements compare as equal, the C `qsort()` function does not guarantee that they will maintain their original relative order after sorting. Using the string value to provide a unique ordering when the numeric values are equal ensures that `gawk` behaves consistently across different environments.

"@val_num_desc"

Like "@val_num_asc", but the element values, treated as numbers, are ordered from high to low. Subarrays, if present, come out first.

The array traversal order is determined before the `for` loop starts to run. Changing `PROCINFO["sorted_in"]` in the loop body does not affect the loop. For example:

```
$ gawk '
> BEGIN {
>   a[4] = 4
>   a[3] = 3
>   for (i in a)
>     print i, a[i]
> }'
+ 4 4
+ 3 3
$ gawk '
> BEGIN {
>   PROCINFO["sorted_in"] = "@ind_str_asc"
>   a[4] = 4
>   a[3] = 3
>   for (i in a)
>     print i, a[i]
> }'
+ 3 3
+ 4 4
```

When sorting an array by element values, if a value happens to be a subarray then it is considered to be greater than any string or numeric value, regardless of what the subarray itself contains, and all subarrays are treated as being equal to each other. Their order relative to each other is determined by their index strings.

Here are some additional things to bear in mind about sorted array traversal:

- The value of `PROCINFO["sorted_in"]` is global. That is, it affects all array traversal `for` loops. If you need to change it within your own code, you should see if it's defined and save and restore the value:

```
...
if ("sorted_in" in PROCINFO) {
    save_sorted = PROCINFO["sorted_in"]
    PROCINFO["sorted_in"] = "@val_str_desc" # or whatever
}
...
if (save_sorted)
    PROCINFO["sorted_in"] = save_sorted
```

- As already mentioned, the default array traversal order is represented by "@unsorted". You can also get the default behavior by assigning the null string to `PROCINFO["sorted_in"]` or by just deleting the "sorted_in" element from the `PROCINFO` array with the `delete` statement. (The `delete` statement hasn't been described yet; see [Section 8.4 \[The delete Statement\]](#), page 168.)

In addition, **gawk** provides built-in functions for sorting arrays; see [Section 12.2.2 \[Sorting Array Values and Indices with gawk\]](#), page 306.

8.2 Using Numbers to Subscript Arrays

An important aspect to remember about arrays is that *array subscripts are always strings*. When a numeric value is used as a subscript, it is converted to a string value before being used for subscripting (see [Section 6.1.4 \[Conversion of Strings and Numbers\]](#), page 111). This means that the value of the predefined variable `CONVFMT` can affect how your program accesses elements of an array. For example:

```
xyz = 12.153
data[xyz] = 1
CONVFMT = "%2.2f"
if (xyz in data)
    printf "%s is in data\n", xyz
else
    printf "%s is not in data\n", xyz
```

This prints ‘12.15 is not in data’. The first statement gives `xyz` a numeric value. Assigning to `data[xyz]` subscripts `data` with the string value “12.153” (using the default conversion value of `CONVFMT`, “%.6g”). Thus, the array element `data["12.153"]` is assigned the value one. The program then changes the value of `CONVFMT`. The test ‘(xyz in data)’ generates a new string value from `xyz`—this time “12.15”—because the value of `CONVFMT` only allows two significant digits. This test fails, because “12.15” is different from “12.153”.

According to the rules for conversions (see [Section 6.1.4 \[Conversion of Strings and Numbers\]](#), page 111), integer values always convert to strings as integers, no matter what the value of `CONVFMT` may happen to be. So the usual case of the following works:

```
for (i = 1; i <= maxsub; i++)
    do something with array[i]
```

The “integer values always convert to strings as integers” rule has an additional consequence for array indexing. Octal and hexadecimal constants (see [Section 6.1.1.2 \[Octal and Hexadecimal Numbers\]](#), page 107) are converted internally into numbers, and their original form is forgotten. This means, for example, that `array[17]`, `array[021]`, and `array[0x11]` all refer to the same element!

As with many things in **awk**, the majority of the time things work as you would expect them to. But it is useful to have a precise knowledge of the actual rules, as they can sometimes have a subtle effect on your programs.

8.3 Using Uninitialized Variables as Subscripts

Suppose it’s necessary to write a program to print the input data in reverse order. A reasonable attempt to do so (with some test data) might look like this:

```
$ echo 'line 1
> line 2
> line 3' | awk '{ l[lines] = $0; ++lines }
> END {
```

```

>     for (i = lines - 1; i >= 0; i--)
>         print l[i]
> }'
+ line 3
+ line 2

```

Unfortunately, the very first line of input data did not appear in the output!

Upon first glance, we would think that this program should have worked. The variable `lines` is uninitialized, and uninitialized variables have the numeric value zero. So, `awk` should have printed the value of `l[0]`.

The issue here is that subscripts for `awk` arrays are *always* strings. Uninitialized variables, when used as strings, have the value `""`, not zero. Thus, ‘line 1’ ends up stored in `l[""]`. The following version of the program works correctly:

```

{ l[lines++] = $0 }
END {
    for (i = lines - 1; i >= 0; i--)
        print l[i]
}

```

Here, the ‘++’ forces `lines` to be numeric, thus making the “old value” numeric zero. This is then converted to `"0"` as the array subscript.



Even though it is somewhat unusual, the null string (`""`) is a valid array subscript. `gawk` warns about the use of the null string as a subscript if `--lint` is provided on the command line (see [Section 2.2 \[Command-Line Options\]](#), page 31).

8.4 The delete Statement

To remove an individual element of an array, use the `delete` statement:

```
delete array[index-expression]
```

Once an array element has been deleted, any value the element once had is no longer available. It is as if the element had never been referred to or been given a value. The following is an example of deleting elements in an array:

```

for (i in frequencies)
    delete frequencies[i]

```

This example removes all the elements from the array `frequencies`. Once an element is deleted, a subsequent `for` statement to scan the array does not report that element and using the `in` operator to check for the presence of that element returns zero (i.e., false):

```

delete foo[4]
if (4 in foo)
    print "This will never be printed"

```

It is important to note that deleting an element is *not* the same as assigning it a null value (the empty string, `""`). For example:

```

foo[4] = ""
if (4 in foo)
    print "This is printed, even though foo[4] is empty"

```

It is not an error to delete an element that does not exist. However, if `--lint` is provided on the command line (see [Section 2.2 \[Command-Line Options\]](#), page 31), `gawk` issues a warning message when an element that is not in the array is deleted.

All the elements of an array may be deleted with a single statement by leaving off the subscript in the `delete` statement, as follows:

```
delete array
```

Using this version of the `delete` statement is about three times more efficient than the equivalent loop that deletes each element one at a time.

This form of the `delete` statement is also supported by BWK `awk` and `mawk`, as well as by a number of other implementations.

NOTE: For many years, using `delete` without a subscript was a common extension. In September 2012, it was accepted for inclusion into the POSIX standard. See [the Austin Group website](#).

The following statement provides a portable but nonobvious way to clear out an array:³

```
split("", array)
```

The `split()` function (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177) clears out the target array first. This call asks it to split apart the null string. Because there is no data to split out, the function simply clears the array and then returns.

CAUTION: Deleting all the elements from an array does not change its type; you cannot clear an array and then use the array's name as a scalar (i.e., a regular variable). For example, the following does not work:

```
a[1] = 3
delete a
a = 3
```

8.5 Multidimensional Arrays

A *multidimensional array* is an array in which an element is identified by a sequence of indices instead of a single index. For example, a two-dimensional array requires two indices. The usual way (in many languages, including `awk`) to refer to an element of a two-dimensional array named `grid` is with `grid[x,y]`.

Multidimensional arrays are supported in `awk` through concatenation of indices into one string. `awk` converts the indices into strings (see [Section 6.1.4 \[Conversion of Strings and Numbers\]](#), page 111) and concatenates them together, with a separator between them. This creates a single string that describes the values of the separate indices. The combined string is used as a single index into an ordinary, one-dimensional array. The separator used is the value of the built-in variable `SUBSEP`.

For example, suppose we evaluate the expression `foo[5,12] = "value"` when the value of `SUBSEP` is `"@"`. The numbers 5 and 12 are converted to strings and concatenated with an `@` between them, yielding `"5@12"`; thus, the array element `foo["5@12"]` is set to `"value"`.

Once the element's value is stored, `awk` has no record of whether it was stored with a single index or a sequence of indices. The two expressions `foo[5,12]` and `foo[5 SUBSEP 12]` are always equivalent.

³ Thanks to Michael Brennan for pointing this out.

The default value of `SUBSEP` is the string `"\034"`, which contains a nonprinting character that is unlikely to appear in an `awk` program or in most input data. The usefulness of choosing an unlikely character comes from the fact that index values that contain a string matching `SUBSEP` can lead to combined strings that are ambiguous. Suppose that `SUBSEP` is `"@"`; then `foo["a@b", "c"]` and `foo["a", "b@c"]` are indistinguishable because both are actually stored as `foo["a@b@c"]`.

To test whether a particular index sequence exists in a multidimensional array, use the same operator (`in`) that is used for single-dimensional arrays. Write the whole sequence of indices in parentheses, separated by commas, as the left operand:

```
if ((subscript1, subscript2, ...) in array)
    ...
```

Here is an example that treats its input as a two-dimensional array of fields; it rotates this array 90 degrees clockwise and prints the result. It assumes that all lines have the same number of elements:

```
{
    if (max_nf < NF)
        max_nf = NF
    max_nr = NR
    for (x = 1; x <= NF; x++)
        vector[x, NR] = $x
}

END {
    for (x = 1; x <= max_nf; x++) {
        for (y = max_nr; y >= 1; --y)
            printf("%s ", vector[x, y])
        printf("\n")
    }
}
```

When given the input:

```
1 2 3 4 5 6
2 3 4 5 6 1
3 4 5 6 1 2
4 5 6 1 2 3
```

the program produces the following output:

```
4 3 2 1
5 4 3 2
6 5 4 3
1 6 5 4
2 1 6 5
3 2 1 6
```

8.5.1 Scanning Multidimensional Arrays

There is no special `for` statement for scanning a “multidimensional” array. There cannot be one, because, in truth, `awk` does not have multidimensional arrays or elements—there is only a multidimensional *way of accessing* an array.

However, if your program has an array that is always accessed as multidimensional, you can get the effect of scanning it by combining the scanning `for` statement (see [Section 8.1.5 \[Scanning All Elements of an Array\]](#), page 163) with the built-in `split()` function (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177). It works in the following manner:

```
for (combined in array) {
    split(combined, separate, SUBSEP)
    ...
}
```

This sets the variable `combined` to each concatenated combined index in the array, and splits it into the individual indices by breaking it apart where the value of `SUBSEP` appears. The individual indices then become the elements of the array `separate`.

Thus, if a value is previously stored in `array[1, "foo"]`, then an element with index `"1\034foo"` exists in `array`. (Recall that the default value of `SUBSEP` is the character with code 034.) Sooner or later, the `for` statement finds that index and does an iteration with the variable `combined` set to `"1\034foo"`. Then the `split()` function is called as follows:

```
split("1\034foo", separate, "\034")
```

The result is to set `separate[1]` to `"1"` and `separate[2]` to `"foo"`. Presto! The original sequence of separate indices is recovered.

8.6 Arrays of Arrays

`gawk` goes beyond standard `awk`’s multidimensional array access and provides true arrays of arrays. Elements of a subarray are referred to by their own indices enclosed in square brackets, just like the elements of the main array. For example, the following creates a two-element subarray at index 1 of the main array `a`:

```
a[1][1] = 1
a[1][2] = 2
```

This simulates a true two-dimensional array. Each subarray element can contain another subarray as a value, which in turn can hold other arrays as well. In this way, you can create arrays of three or more dimensions. The indices can be any `awk` expressions, including scalars separated by commas (i.e., a regular `awk` simulated multidimensional subscript). So the following is valid in `gawk`:

```
a[1][3][1, "name"] = "barney"
```

Each subarray and the main array can be of different length. In fact, the elements of an array or its subarray do not all have to have the same type. This means that the main array and any of its subarrays can be nonrectangular, or jagged in structure. You can assign a scalar value to the index 4 of the main array `a`, even though `a[1]` is itself an array and not a scalar:

```
a[4] = "An element in a jagged array"
```

The terms *dimension*, *row*, and *column* are meaningless when applied to such an array, but we will use “dimension” henceforth to imply the maximum number of indices needed

to refer to an existing element. The type of any element that has already been assigned cannot be changed by assigning a value of a different type. You have to first delete the current element, which effectively makes **gawk** forget about the element at that index:

```
delete a[4]
a[4][5][6][7] = "An element in a four-dimensional array"
```

This removes the scalar value from index 4 and then inserts a three-level nested subarray containing a scalar. You can also delete an entire subarray or subarray of subarrays:

```
delete a[4][5]
a[4][5] = "An element in subarray a[4]"
```

But recall that you can not delete the main array **a** and then use it as a scalar.

The built-in functions that take array arguments can also be used with subarrays. For example, the following code fragment uses `length()` (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177) to determine the number of elements in the main array **a** and its subarrays:

```
print length(a), length(a[1]), length(a[1][3])
```

This results in the following output for our main array **a**:

```
2, 3, 1
```

The ‘*subscript in array*’ expression (see [Section 8.1.2 \[Referring to an Array Element\]](#), page 161) works similarly for both regular **awk**-style arrays and arrays of arrays. For example, the tests ‘1 in a’, ‘3 in a[1]’, and ‘(1, "name") in a[1][3]’ all evaluate to one (true) for our array **a**.

The ‘for (item in array)’ statement (see [Section 8.1.5 \[Scanning All Elements of an Array\]](#), page 163) can be nested to scan all the elements of an array of arrays if it is rectangular in structure. In order to print the contents (scalar values) of a two-dimensional array of arrays (i.e., in which each first-level element is itself an array, not necessarily of the same length), you could use the following code:

```
for (i in array)
    for (j in array[i])
        print array[i][j]
```

The `isarray()` function (see [Section 9.1.7 \[Getting Type Information\]](#), page 199) lets you test if an array element is itself an array:

```
for (i in array) {
    if (isarray(array[i])) {
        for (j in array[i]) {
            print array[i][j]
        }
    }
    else
        print array[i]
}
```

If the structure of a jagged array of arrays is known in advance, you can often devise workarounds using control statements. For example, the following code prints the elements of our main array **a**:

```
for (i in a) {
```

```

    for (j in a[i]) {
        if (j == 3) {
            for (k in a[i][j])
                print a[i][j][k]
        } else
            print a[i][j]
    }
}

```

See [Section 10.7 \[Traversing Arrays of Arrays\]](#), page 249, for a user-defined function that “walks” an arbitrarily dimensioned array of arrays.

Recall that a reference to an uninitialized array element yields a value of "", the null string. This has one important implication when you intend to use a subarray as an argument to a function, as illustrated by the following example:

```

$ gawk 'BEGIN { split("a b c d", b[1]); print b[1][1] }'
[error] gawk: cmd. line:1: fatal: split: second argument is not an array

```

The way to work around this is to first force `b[1]` to be an array by creating an arbitrary index:

```

$ gawk 'BEGIN { b[1][1] = ""; split("a b c d", b[1]); print b[1][1] }'
└─ a

```

8.7 Summary

- Standard `awk` provides one-dimensional associative arrays (arrays indexed by string values). All arrays are associative; numeric indices are converted automatically to strings.
- Array elements are referenced as `array[indx]`. Referencing an element creates it if it did not exist previously.
- The proper way to see if an array has an element with a given index is to use the `in` operator: `'indx in array'`.
- Use `'for (indx in array) ...'` to scan through all the individual elements of an array. In the body of the loop, `indx` takes on the value of each element's index in turn.
- The order in which a `'for (indx in array)'` loop traverses an array is undefined in POSIX `awk` and varies among implementations. `gawk` lets you control the order by assigning special predefined values to `PROCINFO["sorted_in"]`.
- Use `'delete array[indx]'` to delete an individual element. To delete all of the elements in an array, use `'delete array'`. This latter feature has been a common extension for many years and is now standard, but may not be supported by all commercial versions of `awk`.
- Standard `awk` simulates multidimensional arrays by separating subscript values with commas. The values are concatenated into a single string, separated by the value of `SUBSEP`. The fact that such a subscript was created in this way is not retained; thus, changing `SUBSEP` may have unexpected consequences. You can use `'(sub1, sub2, ...) in array'` to see if such a multidimensional subscript exists in `array`.

- **gawk** provides true arrays of arrays. You use a separate set of square brackets for each dimension in such an array: `data[row][col]`, for example. Array elements may thus be either scalar values (number or string) or other arrays.
- Use the `isarray()` built-in function to determine if an array element is itself a subarray.

9 Functions

This chapter describes **awk**'s built-in functions, which fall into three categories: numeric, string, and I/O. **gawk** provides additional groups of functions to work with values that represent time, do bit manipulation, sort arrays, provide type information, and internationalize and localize programs.

Besides the built-in functions, **awk** has provisions for writing new functions that the rest of a program can use. The second half of this chapter describes these *user-defined* functions. Finally, we explore indirect function calls, a **gawk**-specific extension that lets you determine at runtime what function is to be called.

9.1 Built-in Functions

Built-in functions are always available for your **awk** program to call. This section defines all the built-in functions in **awk**; some of these are mentioned in other sections but are summarized here for your convenience.

9.1.1 Calling Built-in Functions

To call one of **awk**'s built-in functions, write the name of the function followed by arguments in parentheses. For example, `'atan2(y + z, 1)'` is a call to the function `atan2()` and has two arguments.

Whitespace is ignored between the built-in function name and the opening parenthesis, but nonetheless it is good practice to avoid using whitespace there. User-defined functions do not permit whitespace in this way, and it is easier to avoid mistakes by following a simple convention that always works—no whitespace after a function name.

Each built-in function accepts a certain number of arguments. In some cases, arguments can be omitted. The defaults for omitted arguments vary from function to function and are described under the individual functions. In some **awk** implementations, extra arguments given to built-in functions are ignored. However, in **gawk**, it is a fatal error to give extra arguments to a built-in function.

When a function is called, expressions that create the function's actual parameters are evaluated completely before the call is performed. For example, in the following code fragment:

```
i = 4
j = sqrt(i++)
```

the variable `i` is incremented to the value five before `sqrt()` is called with a value of four for its actual parameter. The order of evaluation of the expressions used for the function's parameters is undefined. Thus, avoid writing programs that assume that parameters are evaluated from left to right or from right to left. For example:

```
i = 5
j = atan2(++i, i *= 2)
```

If the order of evaluation is left to right, then `i` first becomes six, and then 12, and `atan2()` is called with the two arguments six and 12. But if the order of evaluation is right to left, `i` first becomes 10, then 11, and `atan2()` is called with the two arguments 11 and 10.

9.1.2 Numeric Functions

The following list describes all of the built-in functions that work with numbers. Optional parameters are enclosed in square brackets ([]):

- atan2(y, x)** Return the arctangent of y / x in radians. You can use `'pi = atan2(0, -1)'` to retrieve the value of π .
- cos(x)** Return the cosine of x , with x in radians.
- exp(x)** Return the exponential of x (e^x) or report an error if x is out of range. The range of values x can have depends on your machine's floating-point representation.
- int(x)** Return the nearest integer to x , located between x and zero and truncated toward zero. For example, `int(3)` is 3, `int(3.9)` is 3, `int(-3.9)` is -3, and `int(-3)` is -3 as well.
- log(x)** Return the natural logarithm of x , if x is positive; otherwise, return NaN ("not a number") on IEEE 754 systems. Additionally, **gawk** prints a warning message when x is negative.
- rand()** Return a random number. The values of `rand()` are uniformly distributed between zero and one. The value could be zero but is never one.¹

Often random integers are needed instead. Following is a user-defined function that can be used to obtain a random nonnegative integer less than n :

```
function randint(n)
{
    return int(n * rand())
}
```

The multiplication produces a random number greater than or equal to zero and less than n . Using `int()`, this result is made into an integer between zero and $n - 1$, inclusive.

The following example uses a similar function to produce random integers between one and n . This program prints a new random number for each input record:

```
# Function to roll a simulated die.
function roll(n) { return 1 + int(rand() * n) }

# Roll 3 six-sided dice and
# print total number of points.
{
    printf("%d points\n", roll(6) + roll(6) + roll(6))
}
```

¹ The C version of `rand()` on many Unix systems is known to produce fairly poor sequences of random numbers. However, nothing requires that an **awk** implementation use the C `rand()` to implement the **awk** version of `rand()`. In fact, **gawk** uses the BSD `random()` function, which is considerably better than `rand()`, to produce random numbers.

CAUTION: In most `awk` implementations, including `gawk`, `rand()` starts generating numbers from the same starting number, or *seed*, each time you run `awk`.² Thus, a program generates the same results each time you run it. The numbers are random within one `awk` run but predictable from run to run. This is convenient for debugging, but if you want a program to do different things each time it is used, you must change the seed to a value that is different in each run. To do this, use `srand()`.

`sin(x)` Return the sine of `x`, with `x` in radians.

`sqrt(x)` Return the positive square root of `x`. `gawk` prints a warning message if `x` is negative. Thus, `sqrt(4)` is 2.

`srand([x])` Set the starting point, or seed, for generating random numbers to the value `x`. Each seed value leads to a particular sequence of random numbers.³ Thus, if the seed is set to the same value a second time, the same sequence of random numbers is produced again.

CAUTION: Different `awk` implementations use different random-number generators internally. Don't expect the same `awk` program to produce the same series of random numbers when executed by different versions of `awk`.

If the argument `x` is omitted, as in '`srand()`', then the current date and time of day are used for a seed. This is the way to get random numbers that are truly unpredictable.

The return value of `srand()` is the previous seed. This makes it easy to keep track of the seeds in case you need to consistently reproduce sequences of random numbers.

POSIX does not specify the initial seed; it differs among `awk` implementations.

9.1.3 String-Manipulation Functions

The functions in this section look at or change the text of one or more strings.

`gawk` understands locales (see [Section 6.6 \[Where You Are Makes a Difference\]](#), page 129) and does all string processing in terms of *characters*, not *bytes*. This distinction is particularly important to understand for locales where one character may be represented by multiple bytes. Thus, for example, `length()` returns the number of characters in a string, and not the number of bytes used to represent those characters. Similarly, `index()` works with character indices, and not byte indices.

CAUTION: A number of functions deal with indices into strings. For these functions, the first character of a string is at position (index) one. This is different from C and the languages descended from it, where the first character

² `mawk` uses a different seed each time.

³ Computer-generated random numbers really are not truly random. They are technically known as *pseudorandom*. This means that although the numbers in a sequence appear to be random, you can in fact generate the same sequence of random numbers over and over again.

is at position zero. You need to remember this when doing index calculations, particularly if you are used to C.

In the following list, optional parameters are enclosed in square brackets ([]). Several functions perform string substitution; the full discussion is provided in the description of the `sub()` function, which comes toward the end, because the list is presented alphabetically.

Those functions that are specific to **gawk** are marked with a pound sign ('#'). They are not available in compatibility mode (see [Section 2.2 \[Command-Line Options\]](#), page 31):

```
asort(source [, dest [, how ]]) #
asorti(source [, dest [, how ]]) #
```

These two functions are similar in behavior, so they are described together.

NOTE: The following description ignores the third argument, *how*, as it requires understanding features that we have not discussed yet. Thus, the discussion here is a deliberate simplification. (We do provide all the details later on; see [Section 12.2.2 \[Sorting Array Values and Indices with gawk\]](#), page 306, for the full story.)

Both functions return the number of elements in the array *source*. For `asort()`, **gawk** sorts the values of *source* and replaces the indices of the sorted values of *source* with sequential integers starting with one. If the optional array *dest* is specified, then *source* is duplicated into *dest*. *dest* is then sorted, leaving the indices of *source* unchanged.

When comparing strings, `IGNORECASE` affects the sorting (see [Section 12.2.2 \[Sorting Array Values and Indices with gawk\]](#), page 306). If the *source* array contains subarrays as values (see [Section 8.6 \[Arrays of Arrays\]](#), page 171), they will come last, after all scalar values. Subarrays are *not* recursively sorted.

For example, if the contents of **a** are as follows:

```
a["last"] = "de"
a["first"] = "sac"
a["middle"] = "cul"
```

A call to `asort()`:

```
asort(a)
```

results in the following contents of **a**:

```
a[1] = "cul"
a[2] = "de"
a[3] = "sac"
```

The `asorti()` function works similarly to `asort()`; however, the *indices* are sorted, instead of the values. Thus, in the previous example, starting with the same initial set of indices and values in **a**, calling '`asorti(a)`' would yield:

```
a[1] = "first"
a[2] = "last"
a[3] = "middle"
```

```
gensub(regexp, replacement, how [, target]) #
```

Search the target string *target* for matches of the regular expression *regexp*. If *how* is a string beginning with 'g' or 'G' (short for "global"), then replace all

matches of *regexp* with *replacement*. Otherwise, *how* is treated as a number indicating which match of *regexp* to replace. If no *target* is supplied, use `$0`. It returns the modified string as the result of the function and the original target string is *not* changed.

`gensub()` is a general substitution function. Its purpose is to provide more features than the standard `sub()` and `gsub()` functions.

`gensub()` provides an additional feature that is not available in `sub()` or `gsub()`: the ability to specify components of a *regexp* in the replacement text. This is done by using parentheses in the *regexp* to mark the components and then specifying `\N` in the replacement text, where *N* is a digit from 1 to 9. For example:

```
$ gawk '
> BEGIN {
>     a = "abc def"
>     b = gensub(/(.+) (.+)/, "\\2 \\1", "g", a)
>     print b
> }'
└─ def abc
```

As with `sub()`, you must type two backslashes in order to get one into the string. In the replacement text, the sequence `\0` represents the entire matched text, as does the character `&`.

The following example shows how you can use the third argument to control which match of the *regexp* should be changed:

```
$ echo a b c a b c |
> gawk '{ print gensub(/a/, "AA", 2) }'
└─ a b c AA b c
```

In this case, `$0` is the default target string. `gensub()` returns the new string as its result, which is passed directly to `print` for printing.

If the *how* argument is a string that does not begin with `'g'` or `'G'`, or if it is a number that is less than or equal to zero, only one substitution is performed. If *how* is zero, `gawk` issues a warning message.

If *regexp* does not match *target*, `gensub()`'s return value is the original unchanged value of *target*.

`gsub(regexp, replacement [, target])`

Search *target* for *all* of the longest, leftmost, *nonoverlapping* matching substrings it can find and replace them with *replacement*. The `'g'` in `gsub()` stands for "global," which means replace everywhere. For example:

```
{ gsub(/Britain/, "United Kingdom"); print }
```

replaces all occurrences of the string `'Britain'` with `'United Kingdom'` for all input records.

The `gsub()` function returns the number of substitutions made. If the variable to search and alter (*target*) is omitted, then the entire input record (`$0`) is used. As in `sub()`, the characters `&` and `\` are special, and the third argument must be assignable.

index(*in*, *find*)

Search the string *in* for the first occurrence of the string *find*, and return the position in characters where that occurrence begins in the string *in*. Consider the following example:

```
$ awk 'BEGIN { print index("peanut", "an") }'
+ 3
```

If *find* is not found, **index()** returns zero.

With BWK **awk** and **gawk**, it is a fatal error to use a regexp constant for *find*. Other implementations allow it, simply treating the regexp constant as an expression meaning '\$0 ~ /regexp/'.

length([*string*])

Return the number of characters in *string*. If *string* is a number, the length of the digit string representing that number is returned. For example, **length("abcde")** is five. By contrast, **length(15 * 35)** works out to three. In this example, $15 \cdot 35 = 525$, and 525 is then converted to the string "525", which has three characters.

If no argument is supplied, **length()** returns the length of \$0.

NOTE: In older versions of **awk**, the **length()** function could be called without any parentheses. Doing so is considered poor practice, although the 2008 POSIX standard explicitly allows it, to support historical practice. For programs to be maximally portable, always supply the parentheses.

If **length()** is called with a variable that has not been used, **gawk** forces the variable to be a scalar. Other implementations of **awk** leave the variable without a type. Consider:

```
$ gawk 'BEGIN { print length(x) ; x[1] = 1 }'
+ 0
error gawk: fatal: attempt to use scalar 'x' as array

$ nawk 'BEGIN { print length(x) ; x[1] = 1 }'
+ 0
```

If **--lint** has been specified on the command line, **gawk** issues a warning about this.

With **gawk** and several other **awk** implementations, when given an array argument, the **length()** function returns the number of elements in the array. (c.e.) This is less useful than it might seem at first, as the array is not guaranteed to be indexed from one to the number of elements in it. If **--lint** is provided on the command line (see [Section 2.2 \[Command-Line Options\]](#), page 31), **gawk** warns that passing an array argument is not portable. If **--posix** is supplied, using an array argument is a fatal error (see [Chapter 8 \[Arrays in awk\]](#), page 159).

match(*string*, *regexp* [, *array*])

Search *string* for the longest, leftmost substring matched by the regular expression *regexp* and return the character position (index) at which that substring begins (one, if it starts at the beginning of *string*). If no match is found, return zero.

The *regexp* argument may be either a regexp constant (*/.../*) or a string constant (*"..."*). In the latter case, the string is treated as a regexp to be matched. See [Section 3.6 \[Using Dynamic Regexp\], page 53](#), for a discussion of the difference between the two forms, and the implications for writing your program correctly.

The order of the first two arguments is the opposite of most other string functions that work with regular expressions, such as *sub()* and *gsub()*. It might help to remember that for *match()*, the order is the same as for the *'~'* operator: *'string ~ regexp'*.

The *match()* function sets the predefined variable *RSTART* to the index. It also sets the predefined variable *RLENGTH* to the length in characters of the matched substring. If no match is found, *RSTART* is set to zero, and *RLENGTH* to *-1*.

For example:

```
{
    if ($1 == "FIND")
        regex = $2
    else {
        where = match($0, regex)
        if (where != 0)
            print "Match of", regex, "found at", where, "in", $0
    }
}
```

This program looks for lines that match the regular expression stored in the variable *regex*. This regular expression can be changed. If the first word on a line is *'FIND'*, *regex* is changed to be the second word on that line. Therefore, if given:

```
FIND ru+n
My program runs
but not very quickly
FIND Melvin
JF+KM
This line is property of Reality Engineering Co.
Melvin was here.
```

awk prints:

```
Match of ru+n found at 12 in My program runs
Match of Melvin found at 1 in Melvin was here.
```

If *array* is present, it is cleared, and then the zeroth element of *array* is set to the entire portion of *string* matched by *regexp*. If *regexp* contains parentheses, the integer-indexed elements of *array* are set to contain the portion of *string* matching the corresponding parenthesized subexpression. For example:

```
$ echo fo000bazbarrrrr |
> gawk '{ match($0, /(fo+).(bar*)/, arr)
>         print arr[1], arr[2] }'
-1 fo000 barrrrr
```

In addition, multidimensional subscripts are available providing the start index and length of each matched subexpression:

```
$ echo foobazbarrrrr |
> gawk '{ match($0, /(fo+).(bar*)/, arr)
>         print arr[1], arr[2]
>         print arr[1, "start"], arr[1, "length"]
>         print arr[2, "start"], arr[2, "length"]
> }'
+ foobazbarrrrr
+ 1 5
+ 9 7
```

There may not be subscripts for the start and index for every parenthesized subexpression, because they may not all have matched text; thus, they should be tested for with the `in` operator (see [Section 8.1.2 \[Referring to an Array Element\]](#), page 161).

The `array` argument to `match()` is a `gawk` extension. In compatibility mode (see [Section 2.2 \[Command-Line Options\]](#), page 31), using a third argument is a fatal error.

`pat_split(string, array [, fieldpat [, seps]]) #`

Divide *string* into pieces defined by *fieldpat* and store the pieces in *array* and the separator strings in the *seps* array. The first piece is stored in `array[1]`, the second piece in `array[2]`, and so forth. The third argument, *fieldpat*, is a regexp describing the fields in *string* (just as `FPAT` is a regexp describing the fields in input records). It may be either a regexp constant or a string. If *fieldpat* is omitted, the value of `FPAT` is used. `pat_split()` returns the number of elements created. `seps[i]` is the separator string between `array[i]` and `array[i+1]`. Any leading separator will be in `seps[0]`.

The `pat_split()` function splits strings into pieces in a manner similar to the way input lines are split into fields using `FPAT` (see [Section 4.7 \[Defining Fields by Content\]](#), page 74).

Before splitting the string, `pat_split()` deletes any previously existing elements in the arrays *array* and *seps*.

`split(string, array [, fieldsep [, seps]])`

Divide *string* into pieces separated by *fieldsep* and store the pieces in *array* and the separator strings in the *seps* array. The first piece is stored in `array[1]`, the second piece in `array[2]`, and so forth. The string value of the third argument, *fieldsep*, is a regexp describing where to split *string* (much as `FS` can be a regexp describing where to split input records). If *fieldsep* is omitted, the value of `FS` is used. `split()` returns the number of elements created. *seps* is a `gawk` extension, with `seps[i]` being the separator string between `array[i]` and `array[i+1]`. If *fieldsep* is a single space, then any leading whitespace goes into `seps[0]` and any trailing whitespace goes into `seps[n]`, where *n* is the return value of `split()` (i.e., the number of elements in *array*).

The `split()` function splits strings into pieces in a manner similar to the way input lines are split into fields. For example:


```
split("cul-de-sac", a, "-", seps)
```

splits the string "cul-de-sac" into three fields using '-' as the separator. It sets the contents of the array `a` as follows:

```
a[1] = "cul"
a[2] = "de"
a[3] = "sac"
```

and sets the contents of the array `seps` as follows:

```
seps[1] = "-"
seps[2] = "-"
```

The value returned by this call to `split()` is three.

As with input field-splitting, when the value of *fieldsep* is " ", leading and trailing whitespace is ignored in values assigned to the elements of *array* but not in *seps*, and the elements are separated by runs of whitespace. Also, as with input field splitting, if *fieldsep* is the null string, each individual character in the string is split into its own array element. (c.e.)

Note, however, that `RS` has no effect on the way `split()` works. Even though '`RS = ""`' causes the newline character to also be an input field separator, this does not affect how `split()` splits strings.

Modern implementations of `awk`, including `gawk`, allow the third argument to be a regexp constant (`/.../`) as well as a string. The POSIX standard allows this as well. See [Section 3.6 \[Using Dynamic Regexp\], page 53](#), for a discussion of the difference between using a string constant or a regexp constant, and the implications for writing your program correctly.



Before splitting the string, `split()` deletes any previously existing elements in the arrays *array* and *seps*.

If *string* is null, the array has no elements. (So this is a portable way to delete an entire array with one statement. See [Section 8.4 \[The delete Statement\], page 168](#).)

If *string* does not match *fieldsep* at all (but is not null), *array* has one element only. The value of that element is the original *string*.

In POSIX mode (see [Section 2.2 \[Command-Line Options\], page 31](#)), the fourth argument is not allowed.

```
sprintf(format, expression1, ...)
```

Return (without printing) the string that `printf` would have printed out with the same arguments (see [Section 5.5 \[Using printf Statements for Fancier Printing\], page 92](#)). For example:

```
pival = sprintf("pi = %.2f (approx.)", 22/7)
```

assigns the string 'pi = 3.14 (approx.)' to the variable `pival`.

```
strtonum(str) #
```

Examine *str* and return its numeric value. If *str* begins with a leading '0', `strtonum()` assumes that *str* is an octal number. If *str* begins with a leading '0x' or '0X', `strtonum()` assumes that *str* is a hexadecimal number. For example:

```
$ echo 0x11 |
```

```
> gawk '{ printf "%d\n", strtonum($1) }'
+ 17
```

Using the `strtonum()` function is *not* the same as adding zero to a string value; the automatic coercion of strings to numbers works only for decimal data, not for octal or hexadecimal.⁴

Note also that `strtonum()` uses the current locale's decimal point for recognizing numbers (see [Section 6.6 \[Where You Are Makes a Difference\]](#), page 129).

`sub(regex, replacement [, target])`

Search *target*, which is treated as a string, for the leftmost, longest substring matched by the regular expression *regex*. Modify the entire string by replacing the matched text with *replacement*. The modified string becomes the new value of *target*. Return the number of substitutions made (zero or one).

The *regex* argument may be either a regexp constant (`/.../`) or a string constant (`"..."`). In the latter case, the string is treated as a regexp to be matched. See [Section 3.6 \[Using Dynamic Regexp\]](#), page 53, for a discussion of the difference between the two forms, and the implications for writing your program correctly.

This function is peculiar because *target* is not simply used to compute a value, and not just any expression will do—it must be a variable, field, or array element so that `sub()` can store a modified value there. If this argument is omitted, then the default is to use and alter `$0`.⁵ For example:

```
str = "water, water, everywhere"
sub(/at/, "ith", str)
```

sets `str` to `'withere, water, everywhere'`, by replacing the leftmost longest occurrence of `'at'` with `'ith'`.

If the special character `'&'` appears in *replacement*, it stands for the precise substring that was matched by *regex*. (If the regexp can match more than one string, then this precise substring may vary.) For example:

```
{ sub(/candidate/, "& and his wife"); print }
```

changes the first occurrence of `'candidate'` to `'candidate and his wife'` on each input line. Here is another example:

```
$ awk 'BEGIN {
>     str = "daabaaa"
>     sub(/a+/, "C&C", str)
>     print str
> }'
+ dCaaCbaaa
```

This shows how `'&'` can represent a nonconstant string and also illustrates the “leftmost, longest” rule in regexp matching (see [Section 3.5 \[How Much Text Matches?\]](#), page 52).

⁴ Unless you use the `--non-decimal-data` option, which isn't recommended. See [Section 12.1 \[Allowing Nondecimal Input Data\]](#), page 301, for more information.

⁵ Note that this means that the record will first be regenerated using the value of `OFS` if any fields have been changed, and that the fields will be updated after the substitution, even if the operation is a “no-op” such as `'sub(/~/, "")'`.

The effect of this special character ('&') can be turned off by putting a backslash before it in the string. As usual, to insert one backslash in the string, you must write two backslashes. Therefore, write '\\&' in a string constant to include a literal '&' in the replacement. For example, the following shows how to replace the first '|' on each line with an '&':

```
{ sub(/\|/, "\\&"); print }
```

As mentioned, the third argument to `sub()` must be a variable, field, or array element. Some versions of `awk` allow the third argument to be an expression that is not an lvalue. In such a case, `sub()` still searches for the pattern and returns zero or one, but the result of the substitution (if any) is thrown away because there is no place to put it. Such versions of `awk` accept expressions like the following:

```
sub(/USA/, "United States", "the USA and Canada")
```

For historical compatibility, `gawk` accepts such erroneous code. However, using any other nonchangeable object as the third parameter causes a fatal error and your program will not run.

Finally, if the *regexp* is not a regexp constant, it is converted into a string, and then the value of that string is treated as the regexp to match.

substr(*string*, *start* [, *length*])

Return a *length*-character-long substring of *string*, starting at character number *start*. The first character of a string is character number one.⁶ For example, `substr("washington", 5, 3)` returns "ing".

If *length* is not present, `substr()` returns the whole suffix of *string* that begins at character number *start*. For example, `substr("washington", 5)` returns "ington". The whole suffix is also returned if *length* is greater than the number of characters remaining in the string, counting from character *start*.

If *start* is less than one, `substr()` treats it as if it was one. (POSIX doesn't specify what to do in this case: BWK `awk` acts this way, and therefore `gawk` does too.) If *start* is greater than the number of characters in the string, `substr()` returns the null string. Similarly, if *length* is present but less than or equal to zero, the null string is returned.

The string returned by `substr()` *cannot* be assigned. Thus, it is a mistake to attempt to change a portion of a string, as shown in the following example:

```
string = "abcdef"
# try to get "abCDEf", won't work
substr(string, 3, 3) = "CDE"
```

It is also a mistake to use `substr()` as the third argument of `sub()` or `gsub()`:

```
gsub(/xyz/, "pdq", substr($0, 5, 20)) # WRONG
```

(Some commercial versions of `awk` treat `substr()` as assignable, but doing so is not portable.)

If you need to replace bits and pieces of a string, combine `substr()` with string concatenation, in the following manner:

```
string = "abcdef"
```

⁶ This is different from C and C++, in which the first character is number zero.

```
...
string = substr(string, 1, 2) "CDE" substr(string, 6)
```

tolower(*string*)

Return a copy of *string*, with each uppercase character in the string replaced with its corresponding lowercase character. Nonalphabetic characters are left unchanged. For example, `tolower("MiXeD cAsE 123")` returns `"mixed case 123"`.

toupper(*string*)

Return a copy of *string*, with each lowercase character in the string replaced with its corresponding uppercase character. Nonalphabetic characters are left unchanged. For example, `toupper("MiXeD cAsE 123")` returns `"MIXED CASE 123"`.

Matching the Null String

In `awk`, the `*` operator can match the null string. This is particularly important for the `sub()`, `gsub()`, and `gensub()` functions. For example:

```
$ echo abc | awk '{ gsub(/m*/, "X"); print }'
→ XaXbXcX
```

Although this makes a certain amount of sense, it can be surprising.

9.1.3.1 More about ‘\’ and ‘&’ with `sub()`, `gsub()`, and `gensub()`

CAUTION: This subsection has been reported to cause headaches. You might want to skip it upon first reading.

When using `sub()`, `gsub()`, or `gensub()`, and trying to get literal backslashes and ampersands into the replacement text, you need to remember that there are several levels of *escape processing* going on.

First, there is the *lexical* level, which is when `awk` reads your program and builds an internal copy of it to execute. Then there is the runtime level, which is when `awk` actually scans the replacement string to determine what to generate.

At both levels, `awk` looks for a defined set of characters that can come after a backslash. At the lexical level, it looks for the escape sequences listed in [Section 3.2 \[Escape Sequences\]](#), [page 46](#). Thus, for every ‘\’ that `awk` processes at the runtime level, you must type two backslashes at the lexical level. When a character that is not valid for an escape sequence follows the ‘\’, `BWK awk` and `gawk` both simply remove the initial ‘\’ and put the next character into the string. Thus, for example, `"a\qb"` is treated as `"aqb"`.

At the runtime level, the various functions handle sequences of ‘\’ and ‘&’ differently. The situation is (sadly) somewhat complex. Historically, the `sub()` and `gsub()` functions treated the two-character sequence ‘&’ specially; this sequence was replaced in the generated text with a single ‘&’. Any other ‘\’ within the *replacement* string that did not precede an ‘&’ was passed through unchanged. This is illustrated in [Table 9.1](#).

You type	<code>sub()</code> sees	<code>sub()</code> generates
<code>\&</code>	<code>&</code>	The matched text
<code>\\&</code>	<code>\&</code>	A literal ‘&’
<code>\\\&</code>	<code>\&</code>	A literal ‘&’
<code>\\\\&</code>	<code>\\&</code>	A literal ‘\&’
<code>\\\&</code>	<code>\\&</code>	A literal ‘\&’
<code>\\\\\&</code>	<code>\\\&</code>	A literal ‘\\&’
<code>\\q</code>	<code>\q</code>	A literal ‘\q’

Table 9.1: Historical escape sequence processing for `sub()` and `gsub()`

This table shows the lexical-level processing, where an odd number of backslashes becomes an even number at the runtime level, as well as the runtime processing done by `sub()`. (For the sake of simplicity, the rest of the following tables only show the case of even numbers of backslashes entered at the lexical level.)

The problem with the historical approach is that there is no way to get a literal ‘\’ followed by the matched text.

Several editions of the POSIX standard attempted to fix this problem but weren’t successful. The details are irrelevant at this point in time.

At one point, the `gawk` maintainer submitted proposed text for a revised standard that reverts to rules that correspond more closely to the original existing practice. The proposed rules have special cases that make it possible to produce a ‘\’ preceding the matched text. This is shown in [Table 9.2](#).

You type	<code>sub()</code> sees	<code>sub()</code> generates
<code>\\\\\\&</code>	<code>\\\&</code>	A literal ‘\&’
<code>\\\\\&</code>	<code>\\&</code>	A literal ‘\’, followed by the matched text
<code>\\&</code>	<code>\&</code>	A literal ‘&’
<code>\\q</code>	<code>\q</code>	A literal ‘\q’
<code>\\\\</code>	<code>\\</code>	<code>\\</code>

Table 9.2: `gawk` rules for `sub()` and backslash

In a nutshell, at the runtime level, there are now three special sequences of characters (‘\\\\&’, ‘\\\\\&’, and ‘\&’) whereas historically there was only one. However, as in the historical case, any ‘\’ that is not part of one of these three sequences is not special and appears in the output literally.

`gawk` 3.0 and 3.1 follow these rules for `sub()` and `gsub()`. The POSIX standard took much longer to be revised than was expected. In addition, the `gawk` maintainer’s proposal was lost during the standardization process. The final rules are somewhat simpler. The results are similar except for one case.

The POSIX rules state that ‘\&’ in the replacement string produces a literal ‘&’, ‘\\’ produces a literal ‘\’, and ‘\’ followed by anything else is not special; the ‘\’ is placed straight into the output. These rules are presented in [Table 9.3](#).

You type	sub() sees	sub() generates
\\\\\\&	\\&	A literal ‘\&’
\\\\&	\\&	A literal ‘\’, followed by the matched text
\\&	\\&	A literal ‘&’
\\q	\\q	A literal ‘\q’
\\\\	\\	\\

Table 9.3: POSIX rules for `sub()` and `gsub()`

The only case where the difference is noticeable is the last one: ‘\\\\’ is seen as ‘\\’ and produces ‘\’ instead of ‘\\’.

Starting with version 3.1.4, **gawk** followed the POSIX rules when `--posix` was specified (see [Section 2.2 \[Command-Line Options\]](#), page 31). Otherwise, it continued to follow the proposed rules, as that had been its behavior for many years.

When version 4.0.0 was released, the **gawk** maintainer made the POSIX rules the default, breaking well over a decade’s worth of backward compatibility.⁷ Needless to say, this was a bad idea, and as of version 4.0.1, **gawk** resumed its historical behavior, and only follows the POSIX rules when `--posix` is given.

The rules for `gensub()` are considerably simpler. At the runtime level, whenever **gawk** sees a ‘\’, if the following character is a digit, then the text that matched the corresponding parenthesized subexpression is placed in the generated output. Otherwise, no matter what character follows the ‘\’, it appears in the generated text and the ‘\’ does not, as shown in [Table 9.4](#).

You type	gensub() sees	gensub() generates
&	&	The matched text
\\&	\\&	A literal ‘&’
\\\\	\\	A literal ‘\’
\\\\&	\\&	A literal ‘\’, then the matched text
\\\\\\&	\\\\&	A literal ‘\&’
\\q	\\q	A literal ‘q’

Table 9.4: Escape sequence processing for `gensub()`

Because of the complexity of the lexical- and runtime-level processing and the special cases for `sub()` and `gsub()`, we recommend the use of **gawk** and `gensub()` when you have to do substitutions.

⁷ This was rather naive of him, despite there being a note in this section indicating that the next major version would move to the POSIX rules.

9.1.4 Input/Output Functions

The following functions relate to input/output (I/O). Optional parameters are enclosed in square brackets ([]):

`close(filename [, how])`

Close the file *filename* for input or output. Alternatively, the argument may be a shell command that was used for creating a coprocess, or for redirecting to or from a pipe; then the coprocess or pipe is closed. See [Section 5.9 \[Closing Input and Output Redirections\]](#), page 102, for more information.

When closing a coprocess, it is occasionally useful to first close one end of the two-way pipe and then to close the other. This is done by providing a second argument to `close()`. This second argument (*how*) should be one of the two string values "to" or "from", indicating which end of the pipe to close. Case in the string does not matter. See [Section 12.3 \[Two-Way Communications with Another Process\]](#), page 308, which discusses this feature in more detail and gives an example.

Note that the second argument to `close()` is a **gawk** extension; it is not available in compatibility mode (see [Section 2.2 \[Command-Line Options\]](#), page 31).

`fflush([filename])`

Flush any buffered output associated with *filename*, which is either a file opened for writing or a shell command for redirecting output to a pipe or coprocess.

Many utility programs *buffer* their output (i.e., they save information to write to a disk file or the screen in memory until there is enough for it to be worthwhile to send the data to the output device). This is often more efficient than writing every little bit of information as soon as it is ready. However, sometimes it is necessary to force a program to *flush* its buffers (i.e., write the information to its destination, even if a buffer is not full). This is the purpose of the `fflush()` function—**gawk** also buffers its output, and the `fflush()` function forces **gawk** to flush its buffers.

Brian Kernighan added `fflush()` to his **awk** in April 1992. For two decades, it was a common extension. In December 2012, it was accepted for inclusion into the POSIX standard. See [the Austin Group website](#).

POSIX standardizes `fflush()` as follows: if there is no argument, or if the argument is the null string (""), then **awk** flushes the buffers for *all* open output files and pipes.

NOTE: Prior to version 4.0.2, **gawk** would flush only the standard output if there was no argument, and flush all output files and pipes if the argument was the null string. This was changed in order to be compatible with Brian Kernighan's **awk**, in the hope that standardizing this feature in POSIX would then be easier (which indeed proved to be the case).

With **gawk**, you can use '`fflush("/dev/stdout")`' if you wish to flush only the standard output.

`fflush()` returns zero if the buffer is successfully flushed; otherwise, it returns a nonzero value. (**gawk** returns `-1`.) In the case where all buffers are flushed,

the return value is zero only if all buffers were flushed successfully. Otherwise, it is `-1`, and **gawk** warns about the problem *filename*.

gawk also issues a warning message if you attempt to flush a file or pipe that was opened for reading (such as with `getline`), or if *filename* is not an open file, pipe, or coprocess. In such a case, `fflush()` returns `-1`, as well.

Interactive Versus Noninteractive Buffering

As a side point, buffering issues can be even more confusing if your program is *interactive* (i.e., communicating with a user sitting at a keyboard).⁸

Interactive programs generally *line buffer* their output (i.e., they write out every line). Noninteractive programs wait until they have a full buffer, which may be many lines of output. Here is an example of the difference:

```
$ awk '{ print $1 + $2 }'
1 1
+ 2
2 3
+ 5
Ctrl-d
```

Each line of output is printed immediately. Compare that behavior with this example:

```
$ awk '{ print $1 + $2 }' | cat
1 1
2 3
Ctrl-d
+ 2
+ 5
```

Here, no output is printed until after the `Ctrl-d` is typed, because it is all buffered and sent down the pipe to `cat` in one shot.

`system(command)`

Execute the operating system command *command* and then return to the **awk** program. Return *command*'s exit status (see further on).

For example, if the following fragment of code is put in your **awk** program:

```
END {
    system("date | mail -s 'awk run done' root")
}
```

the system administrator is sent mail when the **awk** program finishes processing input and begins its end-of-input processing.

Note that redirecting `print` or `printf` into a pipe is often enough to accomplish your task. If you need to run many commands, it is more efficient to simply print them down a pipeline to the shell:

```
while (more stuff to do)
```

⁸ A program is interactive if the standard output is connected to a terminal device. On modern systems, this means your keyboard and screen.


```
print command | "/bin/sh"
close("/bin/sh")
```

However, if your `awk` program is interactive, `system()` is useful for running large self-contained programs, such as a shell or an editor. Some operating systems cannot implement the `system()` function. `system()` causes a fatal error if it is not supported.

NOTE: When `--sandbox` is specified, the `system()` function is disabled (see [Section 2.2 \[Command-Line Options\]](#), page 31).

On POSIX systems, a command's exit status is a 16-bit number. The exit value passed to the C `exit()` function is held in the high-order eight bits. The low-order bits indicate if the process was killed by a signal (bit 7) and if so, the guilty signal number (bits 0–6).

Traditionally, `awk`'s `system()` function has simply returned the exit status value divided by 256. In the normal case this gives the exit status but in the case of death-by-signal it yields a fractional floating-point value.⁹ POSIX states that `awk`'s `system()` should return the full 16-bit value.

`gawk` steers a middle ground. The return values are summarized in [Table 9.5](#).

Situation	Return value from <code>system()</code>
<code>--traditional</code>	C <code>system()</code> 's value divided by 256
<code>--posix</code>	C <code>system()</code> 's value
Normal exit of command	Command's exit status
Death by signal of command	256 + number of murderous signal
Death by signal of command with core dump	512 + number of murderous signal
Some kind of error	−1

Table 9.5: Return values from `system()`

⁹ In private correspondence, Dr. Kernighan has indicated to me that the way this was done was probably a mistake.

Controlling Output Buffering with `system()`

The `fflush()` function provides explicit control over output buffering for individual files and pipes. However, its use is not portable to many older `awk` implementations. An alternative method to flush output buffers is to call `system()` with a null string as its argument:

```
system("")    # flush output
```

`gawk` treats this use of the `system()` function as a special case and is smart enough not to run a shell (or other command interpreter) with the empty command. Therefore, with `gawk`, this idiom is not only useful, it is also efficient. Although this method should work with other `awk` implementations, it does not necessarily avoid starting an unnecessary shell. (Other implementations may only flush the buffer associated with the standard output and not necessarily all buffered output.)

If you think about what a programmer expects, it makes sense that `system()` should flush any pending output. The following program:

```
BEGIN {
    print "first print"
    system("echo system echo")
    print "second print"
}
```

must print:

```
first print
system echo
second print
```

and not:

```
system echo
first print
second print
```

If `awk` did not flush its buffers before calling `system()`, you would see the latter (undesirable) output.

9.1.5 Time Functions

`awk` programs are commonly used to process log files containing timestamp information, indicating when a particular log record was written. Many programs log their timestamps in the form returned by the `time()` system call, which is the number of seconds since a particular epoch. On POSIX-compliant systems, it is the number of seconds since 1970-01-01 00:00:00 UTC, not counting leap seconds.¹⁰ All known POSIX-compliant systems support timestamps from 0 through $2^{31} - 1$, which is sufficient to represent times through 2038-01-19 03:14:07 UTC. Many systems support a wider range of timestamps, including negative timestamps that represent times before the epoch.

In order to make it easier to process such log files and to produce useful reports, `gawk` provides the following functions for working with timestamps. They are `gawk` extensions;

¹⁰ See [Glossary], page 467, especially the entries “Epoch” and “UTC.”

they are not specified in the POSIX standard.¹¹ However, recent versions of **mawk** (see [Section B.5 \[Other Freely Available awk Implementations\]](#), page 446) also support these functions. Optional parameters are enclosed in square brackets ([]):

mktime(*datespec*)

Turn *datespec* into a timestamp in the same form as is returned by **systemtime()**. It is similar to the function of the same name in ISO C. The argument, *datespec*, is a string of the form "*YYYY MM DD HH MM SS [DST]*". The string consists of six or seven numbers representing, respectively, the full year including century, the month from 1 to 12, the day of the month from 1 to 31, the hour of the day from 0 to 23, the minute from 0 to 59, the second from 0 to 60,¹² and an optional daylight-savings flag.

The values of these numbers need not be within the ranges specified; for example, an hour of -1 means 1 hour before midnight. The origin-zero Gregorian calendar is assumed, with year 0 preceding year 1 and year -1 preceding year 0. The time is assumed to be in the local time zone. If the daylight-savings flag is positive, the time is assumed to be daylight savings time; if zero, the time is assumed to be standard time; and if negative (the default), **mktime()** attempts to determine whether daylight savings time is in effect for the specified time.

If *datespec* does not contain enough elements or if the resulting time is out of range, **mktime()** returns -1 .

strftime([*format* [, *timestamp* [, *utc-flag*]]])

Format the time specified by *timestamp* based on the contents of the *format* string and return the result. It is similar to the function of the same name in ISO C. If *utc-flag* is present and is either nonzero or non-null, the value is formatted as UTC (Coordinated Universal Time, formerly GMT or Greenwich Mean Time). Otherwise, the value is formatted for the local time zone. The *timestamp* is in the same format as the value returned by the **systemtime()** function. If no *timestamp* argument is supplied, **gawk** uses the current time of day as the timestamp. Without a *format* argument, **strftime()** uses the value of **PROCINFO["strftime"]** as the format string (see [Section 7.5 \[Predefined Variables\]](#), page 147). The default string value is "%a %b %e %H:%M:%S %Z %Y". This format string produces output that is equivalent to that of the **date** utility. You can assign a new value to **PROCINFO["strftime"]** to change the default format; see the following list for the various format directives.

systemtime()

Return the current time as the number of seconds since the system epoch. On POSIX systems, this is the number of seconds since 1970-01-01 00:00:00 UTC, not counting leap seconds. It may be a different number on other systems.

The **systemtime()** function allows you to compare a timestamp from a log file with the current time of day. In particular, it is easy to determine how long ago a particular record was logged. It also allows you to produce log records using the “seconds since the epoch” format.

¹¹ The GNU **date** utility can also do many of the things described here. Its use may be preferable for simple time-related operations in shell scripts.

¹² Occasionally there are minutes in a year with a leap second, which is why the seconds can go up to 60.

The `mktime()` function allows you to convert a textual representation of a date and time into a timestamp. This makes it easy to do before/after comparisons of dates and times, particularly when dealing with date and time data coming from an external source, such as a log file.

The `strftime()` function allows you to easily turn a timestamp into human-readable information. It is similar in nature to the `sprintf()` function (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177), in that it copies nonformat specification characters verbatim to the returned string, while substituting date and time values for format specifications in the *format* string.

`strftime()` is guaranteed by the 1999 ISO C standard¹³ to support the following date format specifications:

<code>%a</code>	The locale's abbreviated weekday name.
<code>%A</code>	The locale's full weekday name.
<code>%b</code>	The locale's abbreviated month name.
<code>%B</code>	The locale's full month name.
<code>%c</code>	The locale's "appropriate" date and time representation. (This is ' <code>%A %B %d %T %Y</code> ' in the "C" locale.)
<code>%C</code>	The century part of the current year. This is the year divided by 100 and truncated to the next lower integer.
<code>%d</code>	The day of the month as a decimal number (01–31).
<code>%D</code>	Equivalent to specifying ' <code>%m/%d/%y</code> '.
<code>%e</code>	The day of the month, padded with a space if it is only one digit.
<code>%F</code>	Equivalent to specifying ' <code>%Y-%m-%d</code> '. This is the ISO 8601 date format.
<code>%g</code>	The year modulo 100 of the ISO 8601 week number, as a decimal number (00–99). For example, January 1, 2012, is in week 53 of 2011. Thus, the year of its ISO 8601 week number is 2011, even though its year is 2012. Similarly, December 31, 2012, is in week 1 of 2013. Thus, the year of its ISO week number is 2013, even though its year is 2012.
<code>%G</code>	The full year of the ISO week number, as a decimal number.
<code>%h</code>	Equivalent to ' <code>%b</code> '.
<code>%H</code>	The hour (24-hour clock) as a decimal number (00–23).
<code>%I</code>	The hour (12-hour clock) as a decimal number (01–12).
<code>%j</code>	The day of the year as a decimal number (001–366).
<code>%m</code>	The month as a decimal number (01–12).
<code>%M</code>	The minute as a decimal number (00–59).
<code>%n</code>	A newline character (ASCII LF).

¹³ Unfortunately, not every system's `strftime()` necessarily supports all of the conversions listed here.

%p	The locale's equivalent of the AM/PM designations associated with a 12-hour clock.
%r	The locale's 12-hour clock time. (This is '%I:%M:%S %p' in the "C" locale.)
%R	Equivalent to specifying '%H:%M'.
%S	The second as a decimal number (00–60).
%t	A TAB character.
%T	Equivalent to specifying '%H:%M:%S'.
%u	The weekday as a decimal number (1–7). Monday is day one.
%U	The week number of the year (with the first Sunday as the first day of week one) as a decimal number (00–53).
%V	The week number of the year (with the first Monday as the first day of week one) as a decimal number (01–53). The method for determining the week number is as specified by ISO 8601. (To wit: if the week containing January 1 has four or more days in the new year, then it is week one; otherwise it is week 53 of the previous year and the next week is week one.)
%w	The weekday as a decimal number (0–6). Sunday is day zero.
%W	The week number of the year (with the first Monday as the first day of week one) as a decimal number (00–53).
%x	The locale's "appropriate" date representation. (This is '%A %B %d %Y' in the "C" locale.)
%X	The locale's "appropriate" time representation. (This is '%T' in the "C" locale.)
%y	The year modulo 100 as a decimal number (00–99).
%Y	The full year as a decimal number (e.g., 2015).
%z	The time zone offset in a '+HHMM' format (e.g., the format necessary to produce RFC 822/RFC 1036 date headers).
%Z	The time zone name or abbreviation; no characters if no time zone is determinable.
%Ec %EC %Ex %EX %Ey %EY %Od %Oe %OH %OI %Om %OM %OS %Ou %OU %OV %Ow %OW %Oy	
	"Alternative representations" for the specifications that use only the second letter ('%c', '%C', and so on). ¹⁴ (These facilitate compliance with the POSIX date utility.)
%%	A literal '%'.

¹⁴ If you don't understand any of this, don't worry about it; these facilities are meant to make it easier to "internationalize" programs. Other internationalization features are described in [Chapter 13 \[Internationalization with gawk\]](#), page 317.

If a conversion specifier is not one of those just listed, the behavior is undefined.¹⁵

For systems that are not yet fully standards-compliant, **gawk** supplies a copy of **strftime()** from the GNU C Library. It supports all of the just-listed format specifications. If that version is used to compile **gawk** (see [Appendix B \[Installing gawk\]](#), [page 431](#)), then the following additional format specifications are available:

%k	The hour (24-hour clock) as a decimal number (0–23). Single-digit numbers are padded with a space.
%l	The hour (12-hour clock) as a decimal number (1–12). Single-digit numbers are padded with a space.
%s	The time as a decimal timestamp in seconds since the epoch.

Additionally, the alternative representations are recognized but their normal representations are used.

The following example is an **awk** implementation of the POSIX **date** utility. Normally, the **date** utility prints the current date and time of day in a well-known format. However, if you provide an argument to it that begins with a '+', **date** copies nonformat specifier characters to the standard output and interprets the current time according to the format specifiers in the string. For example:

```
$ date '+Today is %A, %B %d, %Y.'
- Today is Monday, September 22, 2014.
```

Here is the **gawk** version of the **date** utility. It has a shell “wrapper” to handle the **-u** option, which requires that **date** run as if the time zone is set to UTC:

```
#!/bin/sh
#
# date --- approximate the POSIX 'date' command

case $1 in
-u) TZ=UTC0      # use UTC
    export TZ
    shift ;;
esac

gawk 'BEGIN {
    format = PROCINFO["strftime"]
    exitval = 0

    if (ARGC > 2)
        exitval = 1
    else if (ARGC == 2) {
        format = ARGV[1]
        if (format ~ /\+\/)
            format = substr(format, 2)    # remove leading +
    }
}
```

¹⁵ This is because ISO C leaves the behavior of the C version of **strftime()** undefined and **gawk** uses the system's version of **strftime()** if it's there. Typically, the conversion specifier either does not appear in the returned string or appears literally.

```

    }
    print strftime(format)
    exit exitval
}, "$@"

```

9.1.6 Bit-Manipulation Functions

I can explain it for you, but I can't understand it for you.

—Anonymous

Many languages provide the ability to perform *bitwise* operations on two integer numbers. In other words, the operation is performed on each successive pair of bits in the operands. Three common operations are bitwise AND, OR, and XOR. The operations are described in Table 9.6.

Operands	Bit operator					
	AND		OR		XOR	
	0	1	0	1	0	1
0	0	0	0	1	0	1
1	0	1	1	1	1	0

Table 9.6: Bitwise operations

As you can see, the result of an AND operation is 1 only when *both* bits are 1. The result of an OR operation is 1 if *either* bit is 1. The result of an XOR operation is 1 if either bit is 1, but not both. The next operation is the *complement*; the complement of 1 is 0 and the complement of 0 is 1. Thus, this operation “flips” all the bits of a given value.

Finally, two other common operations are to shift the bits left or right. For example, if you have a bit string ‘10111001’ and you shift it right by three bits, you end up with ‘00010111’.¹⁶ If you start over again with ‘10111001’ and shift it left by three bits, you end up with ‘11001000’. The following list describes **gawk**’s built-in functions that implement the bitwise operations. Optional parameters are enclosed in square brackets ([]):

and(v1, v2 [, ...])

Return the bitwise AND of the arguments. There must be at least two.

compl(val)

Return the bitwise complement of *val*.

lshift(val, count)

Return the value of *val*, shifted left by *count* bits.

or(v1, v2 [, ...])

Return the bitwise OR of the arguments. There must be at least two.

rshift(val, count)

Return the value of *val*, shifted right by *count* bits.

xor(v1, v2 [, ...])

Return the bitwise XOR of the arguments. There must be at least two.

¹⁶ This example shows that zeros come in on the left side. For **gawk**, this is always true, but in some languages, it’s possible to have the left side fill with ones.

For all of these functions, first the double-precision floating-point value is converted to the widest C unsigned integer type, then the bitwise operation is performed. If the result cannot be represented exactly as a C `double`, leading nonzero bits are removed one by one until it can be represented exactly. The result is then converted back into a C `double`. (If you don't understand this paragraph, don't worry about it.)

Here is a user-defined function (see [Section 9.2 \[User-Defined Functions\]](#), page 200) that illustrates the use of these functions:

```
# bits2str --- turn a byte into readable ones and zeros

function bits2str(bits,          data, mask)
{
    if (bits == 0)
        return "0"

    mask = 1
    for (; bits != 0; bits = rshift(bits, 1))
        data = (and(bits, mask) ? "1" : "0") data

    while ((length(data) % 8) != 0)
        data = "0" data

    return data
}

BEGIN {
    printf "123 = %s\n", bits2str(123)
    printf "0123 = %s\n", bits2str(0123)
    printf "0x99 = %s\n", bits2str(0x99)
    comp = compl(0x99)
    printf "compl(0x99) = %#x = %s\n", comp, bits2str(comp)
    shift = lshift(0x99, 2)
    printf "lshift(0x99, 2) = %#x = %s\n", shift, bits2str(shift)
    shift = rshift(0x99, 2)
    printf "rshift(0x99, 2) = %#x = %s\n", shift, bits2str(shift)
}
```

This program produces the following output when run:

[illegible]

The `bits2str()` function turns a binary number into a string. Initializing `mask` to one creates a binary value where the rightmost bit is set to one. Using this mask, the function repeatedly checks the rightmost bit. ANDing the mask with the value indicates whether

the rightmost bit is one or not. If so, a "1" is concatenated onto the front of the string. Otherwise, a "0" is added. The value is then shifted right by one bit and the loop continues until there are no more one bits.

If the initial value is zero, it returns a simple "0". Otherwise, at the end, it pads the value with zeros to represent multiples of 8-bit quantities. This is typical in modern computers.

The main code in the `BEGIN` rule shows the difference between the decimal and octal values for the same numbers (see [Section 6.1.1.2 \[Octal and Hexadecimal Numbers\]](#), page 107), and then demonstrates the results of the `compl()`, `lshift()`, and `rshift()` functions.

9.1.7 Getting Type Information

`gawk` provides a single function that lets you distinguish an array from a scalar variable. This is necessary for writing code that traverses every element of an array of arrays (see [Section 8.6 \[Arrays of Arrays\]](#), page 171).

`isarray(x)`

Return a true value if `x` is an array. Otherwise, return false.

`isarray()` is meant for use in two circumstances. The first is when traversing a multidimensional array: you can test if an element is itself an array or not. The second is inside the body of a user-defined function (not discussed yet; see [Section 9.2 \[User-Defined Functions\]](#), page 200), to test if a parameter is an array or not.

NOTE: Using `isarray()` at the global level to test variables makes no sense. Because you are the one writing the program, you are supposed to know if your variables are arrays or not. And in fact, due to the way `gawk` works, if you pass the name of a variable that has not been previously used to `isarray()`, `gawk` ends up turning it into a scalar.

9.1.8 String-Translation Functions

`gawk` provides facilities for internationalizing `awk` programs. These include the functions described in the following list. The descriptions here are purposely brief. See [Chapter 13 \[Internationalization with gawk\]](#), page 317, for the full story. Optional parameters are enclosed in square brackets ([]):

`bindtextdomain(directory [, domain])`

Set the directory in which `gawk` will look for message translation files, in case they will not or cannot be placed in the “standard” locations (e.g., during testing). It returns the directory in which `domain` is “bound.”

The default `domain` is the value of `TEXTDOMAIN`. If `directory` is the null string (“”), then `bindtextdomain()` returns the current binding for the given `domain`.

`dcgettext(string [, domain [, category]])`

Return the translation of `string` in text domain `domain` for locale category `category`. The default value for `domain` is the current value of `TEXTDOMAIN`. The default value for `category` is “LC_MESSAGES”.

`dcngettext(string1, string2, number [, domain [, category]])`

Return the plural form used for `number` of the translation of `string1` and `string2` in text domain `domain` for locale category `category`. `string1` is the English

singular variant of a message, and *string2* is the English plural variant of the same message. The default value for *domain* is the current value of `TEXTDOMAIN`. The default value for *category* is `"LC_MESSAGES"`.

9.2 User-Defined Functions

Complicated **awk** programs can often be simplified by defining your own functions. User-defined functions can be called just like built-in ones (see [Section 6.4 \[Function Calls\]](#), [page 126](#)), but it is up to you to define them (i.e., to tell **awk** what they should do).

9.2.1 Function Definition Syntax

It's entirely fair to say that the awk syntax for local variable definitions is appallingy awful.

—Brian Kernighan

Definitions of functions can appear anywhere between the rules of an **awk** program. Thus, the general form of an **awk** program is extended to include sequences of rules *and* user-defined function definitions. There is no need to put the definition of a function before all uses of the function. This is because **awk** reads the entire program before starting to execute any of it.

The definition of a function named *name* looks like this:

```
function name([parameter-list])
{
    body-of-function
}
```

Here, *name* is the name of the function to define. A valid function name is like a valid variable name: a sequence of letters, digits, and underscores that doesn't start with a digit. Here too, only the 52 upper- and lowercase English letters may be used in a function name. Within a single **awk** program, any particular name can only be used as a variable, array, or function.

parameter-list is an optional list of the function's arguments and local variable names, separated by commas. When the function is called, the argument names are used to hold the argument values given in the call.

A function cannot have two parameters with the same name, nor may it have a parameter with the same name as the function itself.

CAUTION: According to the POSIX standard, function parameters cannot have the same name as one of the special predefined variables (see [Section 7.5 \[Predefined Variables\]](#), [page 147](#)), nor may a function parameter have the same name as another function.

Not all versions of **awk** enforce these restrictions. **gawk** always enforces the first restriction. With `--posix` (see [Section 2.2 \[Command-Line Options\]](#), [page 31](#)), it also enforces the second restriction.

Local variables act like the empty string if referenced where a string value is required, and like zero if referenced where a numeric value is required. This is the same as the behavior of regular variables that have never been assigned a value. (There is more to understand

about local variables; see [Section 9.2.5 \[Functions and Their Effects on Variable Typing\]](#), [page 208](#).)

The *body-of-function* consists of **awk** statements. It is the most important part of the definition, because it says what the function should actually *do*. The argument names exist to give the body a way to talk about the arguments; local variables exist to give the body places to keep temporary values.

Argument names are not distinguished syntactically from local variable names. Instead, the number of arguments supplied when the function is called determines how many argument variables there are. Thus, if three argument values are given, the first three names in *parameter-list* are arguments and the rest are local variables.

It follows that if the number of arguments is not the same in all calls to the function, some of the names in *parameter-list* may be arguments on some occasions and local variables on others. Another way to think of this is that omitted arguments default to the null string.

Usually when you write a function, you know how many names you intend to use for arguments and how many you intend to use as local variables. It is conventional to place some extra space between the arguments and the local variables, in order to document how your function is supposed to be used.

During execution of the function body, the arguments and local variable values hide, or *shadow*, any variables of the same names used in the rest of the program. The shadowed variables are not accessible in the function definition, because there is no way to name them while their names have been taken away for the arguments and local variables. All other variables used in the **awk** program can be referenced or set normally in the function's body.

The arguments and local variables last only as long as the function body is executing. Once the body finishes, you can once again access the variables that were shadowed while the function was running.

The function body can contain expressions that call functions. They can even call this function, either directly or by way of another function. When this happens, we say the function is *recursive*. The act of a function calling itself is called *recursion*.

All the built-in functions return a value to their caller. User-defined functions can do so also, using the **return** statement, which is described in detail in [Section 9.2.4 \[The **return** Statement\]](#), [page 207](#). Many of the subsequent examples in this section use the **return** statement.

In many **awk** implementations, including **gawk**, the keyword **function** may be abbreviated **func**. (c.e.) However, POSIX only specifies the use of the keyword **function**. This actually has some practical implications. If **gawk** is in POSIX-compatibility mode (see [Section 2.2 \[Command-Line Options\]](#), [page 31](#)), then the following statement does *not* define a function:

```
func foo() { a = sqrt($1) ; print a }
```

Instead, it defines a rule that, for each record, concatenates the value of the variable '**func**' with the return value of the function '**foo**'. If the resulting string is non-null, the action is executed. This is probably not what is desired. (**awk** accepts this input as syntactically valid, because functions may be used before they are defined in **awk** programs.¹⁷)

¹⁷ This program won't actually run, because **foo()** is undefined.

To ensure that your `awk` programs are portable, always use the keyword `function` when defining a function.

9.2.2 Function Definition Examples

Here is an example of a user-defined function, called `myprint()`, that takes a number and prints it in a specific format:

```
function myprint(num)
{
    printf "%6.3g\n", num
}
```

To illustrate, here is an `awk` rule that uses our `myprint()` function:

```
$3 > 0    { myprint($3) }
```

This program prints, in our special format, all the third fields that contain a positive number in our input. Therefore, when given the following input:

```
1.2   3.4   5.6   7.8
9.10 11.12 -13.14 15.16
17.18 19.20 21.22 23.24
```

this program, using our function to format the results, prints:

```
5.6
21.2
```

This function deletes all the elements in an array (recall that the extra whitespace signifies the start of the local variable list):

```
function delarray(a, i)
{
    for (i in a)
        delete a[i]
}
```

When working with arrays, it is often necessary to delete all the elements in an array and start over with a new list of elements (see [Section 8.4 \[The `delete` Statement\]](#), page 168). Instead of having to repeat this loop everywhere that you need to clear out an array, your program can just call `delarray()`. (This guarantees portability. The use of ‘`delete array`’ to delete the contents of an entire array is a relatively recent¹⁸ addition to the POSIX standard.)

The following is an example of a recursive function. It takes a string as an input parameter and returns the string in reverse order. Recursive functions must always have a test that stops the recursion. In this case, the recursion terminates when the input string is already empty:

```
function rev(str)
{
    if (str == "")
        return ""
```

¹⁸ Late in 2012.

```
    return (rev(substr(str, 2)) substr(str, 1, 1))
}
```

If this function is in a file named `rev.awk`, it can be tested this way:

```
$ echo "Don't Panic!" |
> gawk -e '{ print rev($0) }' -f rev.awk
└─ !cinaP t'noD
```

The C `ctime()` function takes a timestamp and returns it as a string, formatted in a well-known fashion. The following example uses the built-in `strftime()` function (see [Section 9.1.5 \[Time Functions\], page 192](#)) to create an `awk` version of `ctime()`:

```
# ctime.awk
#
# awk version of C ctime(3) function

function ctime(ts,    format)
{
    format = "%a %b %e %H:%M:%S %Z %Y"

    if (ts == 0)
        ts = systime()    # use current time as default
    return strftime(format, ts)
}
```

You might think that `ctime()` could use `PROCINFO["strftime"]` for its format string. That would be a mistake, because `ctime()` is supposed to return the time formatted in a standard fashion, and user-level code could have changed `PROCINFO["strftime"]`.

9.2.3 Calling User-Defined Functions

Calling a function means causing the function to run and do its job. A function call is an expression and its value is the value returned by the function.

9.2.3.1 Writing a Function Call

A function call consists of the function name followed by the arguments in parentheses. `awk` expressions are what you write in the call for the arguments. Each time the call is executed, these expressions are evaluated, and the values become the actual arguments. For example, here is a call to `foo()` with three arguments (the first being a string concatenation):

```
foo(x y, "lose", 4 * z)
```

CAUTION: Whitespace characters (spaces and TABs) are not allowed between the function name and the opening parenthesis of the argument list. If you write whitespace by mistake, `awk` might think that you mean to concatenate a variable with an expression in parentheses. However, it notices that you used a function name and not a variable name, and reports an error.

9.2.3.2 Controlling Variable Scope

Unlike in many languages, there is no way to make a variable local to a `{ ... }` block in `awk`, but you can make a variable local to a function. It is good practice to do so whenever a variable is needed only in that function.

To make a variable local to a function, simply declare the variable as an argument after the actual function arguments (see [Section 9.2.1 \[Function Definition Syntax\]](#), page 200). Look at the following example, where variable `i` is a global variable used by both functions `foo()` and `bar()`:

```
function bar()
{
    for (i = 0; i < 3; i++)
        print "bar's i=" i
}

function foo(j)
{
    i = j + 1
    print "foo's i=" i
    bar()
    print "foo's i=" i
}

BEGIN {
    i = 10
    print "top's i=" i
    foo(0)
    print "top's i=" i
}
```

Running this script produces the following, because the `i` in functions `foo()` and `bar()` and at the top level refer to the same variable instance:

```
top's i=10
foo's i=1
bar's i=0
bar's i=1
bar's i=2
foo's i=3
top's i=3
```

If you want `i` to be local to both `foo()` and `bar()`, do as follows (the extra space before `i` is a coding convention to indicate that `i` is a local variable, not an argument):

```
function bar(    i)
{
    for (i = 0; i < 3; i++)
        print "bar's i=" i
}

function foo(j,    i)
{
    i = j + 1
    print "foo's i=" i
    bar()
}
```

```

        print "foo's i=" i
    }

    BEGIN {
        i = 10
        print "top's i=" i
        foo(0)
        print "top's i=" i
    }

```

Running the corrected script produces the following:

```

top's i=10
foo's i=1
bar's i=0
bar's i=1
bar's i=2
foo's i=1
top's i=10

```

Besides scalar values (strings and numbers), you may also have local arrays. By using a parameter name as an array, `awk` treats it as an array, and it is local to the function. In addition, recursive calls create new arrays. Consider this example:

```

function some_func(p1,      a)
{
    if (p1++ > 3)
        return

    a[p1] = p1

    some_func(p1)

    printf("At level %d, index %d %s found in a\n",
        p1, (p1 - 1), (p1 - 1) in a ? "is" : "is not")
    printf("At level %d, index %d %s found in a\n",
        p1, p1, p1 in a ? "is" : "is not")
    print ""
}

BEGIN {
    some_func(1)
}

```

When run, this program produces the following output:

```

At level 4, index 3 is not found in a
At level 4, index 4 is found in a

At level 3, index 2 is not found in a
At level 3, index 3 is found in a

```

```
At level 2, index 1 is not found in a
At level 2, index 2 is found in a
```

9.2.3.3 Passing Function Arguments by Value Or by Reference

In **awk**, when you declare a function, there is no way to declare explicitly whether the arguments are passed *by value* or *by reference*.

Instead, the passing convention is determined at runtime when the function is called, according to the following rule: if the argument is an array variable, then it is passed by reference. Otherwise, the argument is passed by value.

Passing an argument by value means that when a function is called, it is given a *copy* of the value of this argument. The caller may use a variable as the expression for the argument, but the called function does not know this—it only knows what value the argument had. For example, if you write the following code:

```
foo = "bar"
z = myfunc(foo)
```

then you should not think of the argument to **myfunc()** as being “the variable **foo**.” Instead, think of the argument as the string value **"bar"**. If the function **myfunc()** alters the values of its local variables, this has no effect on any other variables. Thus, if **myfunc()** does this:

```
function myfunc(str)
{
    print str
    str = "zzz"
    print str
}
```

to change its first argument variable **str**, it does *not* change the value of **foo** in the caller. The role of **foo** in calling **myfunc()** ended when its value (**"bar"**) was computed. If **str** also exists outside of **myfunc()**, the function body cannot alter this outer value, because it is shadowed during the execution of **myfunc()** and cannot be seen or changed from there.

However, when arrays are the parameters to functions, they are *not* copied. Instead, the array itself is made available for direct manipulation by the function. This is usually termed *call by reference*. Changes made to an array parameter inside the body of a function *are* visible outside that function.

NOTE: Changing an array parameter inside a function can be very dangerous if you do not watch what you are doing. For example:

```
function changeit(array, ind, nvalue)
{
    array[ind] = nvalue
}

BEGIN {
    a[1] = 1; a[2] = 2; a[3] = 3
    changeit(a, 2, "two")
    printf "a[1] = %s, a[2] = %s, a[3] = %s\n",
        a[1], a[2], a[3]
```



```
    }
```

prints 'a[1] = 1, a[2] = two, a[3] = 3', because `changeit()` stores "two" in the second element of `a`.

Some `awk` implementations allow you to call a function that has not been defined. They only report a problem at runtime, when the program actually tries to call the function. For example:

```
BEGIN {
    if (0)
        foo()
    else
        bar()
}
function bar() { ... }
# note that 'foo' is not defined
```

Because the 'if' statement will never be true, it is not really a problem that `foo()` has not been defined. Usually, though, it is a problem if a program calls an undefined function.

If `--lint` is specified (see [Section 2.2 \[Command-Line Options\]](#), page 31), `gawk` reports calls to undefined functions.

Some `awk` implementations generate a runtime error if you use either the `next` statement or the `nextfile` statement (see [Section 7.4.8 \[The next Statement\]](#), page 144, and see [Section 7.4.9 \[The nextfile Statement\]](#), page 145) inside a user-defined function. `gawk` does not have this limitation.

9.2.4 The return Statement

As seen in several earlier examples, the body of a user-defined function can contain a `return` statement. This statement returns control to the calling part of the `awk` program. It can also be used to return a value for use in the rest of the `awk` program. It looks like this:

```
return [expression]
```

The *expression* part is optional. Due most likely to an oversight, POSIX does not define what the return value is if you omit the *expression*. Technically speaking, this makes the returned value undefined, and therefore, unpredictable. In practice, though, all versions of `awk` simply return the null string, which acts like zero if used in a numeric context.

A `return` statement without an *expression* is assumed at the end of every function definition. So, if control reaches the end of the function body, then technically the function returns an unpredictable value. In practice, it returns the empty string. `awk` does *not* warn you if you use the return value of such a function.

Sometimes, you want to write a function for what it does, not for what it returns. Such a function corresponds to a `void` function in C, C++, or Java, or to a `procedure` in Ada. Thus, it may be appropriate to not return any value; simply bear in mind that you should not be using the return value of such a function.

The following is an example of a user-defined function that returns a value for the largest number among the elements of an array:

```
function maxelt(vec, i, ret)
{
```

```

    for (i in vec) {
        if (ret == "" || vec[i] > ret)
            ret = vec[i]
    }
    return ret
}

```

You call `maxelt()` with one argument, which is an array name. The local variables `i` and `ret` are not intended to be arguments; there is nothing to stop you from passing more than one argument to `maxelt()` but the results would be strange. The extra space before `i` in the function parameter list indicates that `i` and `ret` are local variables. You should follow this convention when defining functions.

The following program uses the `maxelt()` function. It loads an array, calls `maxelt()`, and then reports the maximum number in that array:

```

function maxelt(vec,  i, ret)
{
    for (i in vec) {
        if (ret == "" || vec[i] > ret)
            ret = vec[i]
    }
    return ret
}

# Load all fields of each record into nums.
{
    for(i = 1; i <= NF; i++)
        nums[NR, i] = $i
}

END {
    print maxelt(nums)
}

```

Given the following input:

```

1 5 23 8 16
44 3 5 2 8 26
256 291 1396 2962 100
-6 467 998 1101
99385 11 0 225

```

the program reports (predictably) that 99,385 is the largest value in the array.

9.2.5 Functions and Their Effects on Variable Typing

`awk` is a very fluid language. It is possible that `awk` can't tell if an identifier represents a scalar variable or an array until runtime. Here is an annotated sample program:

```

function foo(a)
{
    a[1] = 1    # parameter is an array
}

```

```

}

BEGIN {
    b = 1
    foo(b)  # invalid: fatal type mismatch

    foo(x)  # x uninitialized, becomes an array dynamically
    x = 1   # now not allowed, runtime error
}

```

In this example, the first call to `foo()` generates a fatal error, so `awk` will not report the second error. If you comment out that call, though, then `awk` does report the second error.

Usually, such things aren't a big issue, but it's worth being aware of them.

9.3 Indirect Function Calls

This section describes an advanced, `gawk`-specific extension.

Often, you may wish to defer the choice of function to call until runtime. For example, you may have different kinds of records, each of which should be processed differently.

Normally, you would have to use a series of `if-else` statements to decide which function to call. By using *indirect* function calls, you can specify the name of the function to call as a string variable, and then call the function. Let's look at an example.

Suppose you have a file with your test scores for the classes you are taking, and you wish to get the sum and the average of your test scores. The first field is the class name. The following fields are the functions to call to process the data, up to a "marker" field `'data:.'`. Following the marker, to the end of the record, are the various numeric test scores.

Here is the initial file:

```

Biology_101 sum average data: 87.0 92.4 78.5 94.9
Chemistry_305 sum average data: 75.2 98.3 94.7 88.2
English_401 sum average data: 100.0 95.6 87.1 93.4

```

To process the data, you might write initially:

```

{
    class = $1
    for (i = 2; $i != "data:."; i++) {
        if ($i == "sum")
            sum()    # processes the whole record
        else if ($i == "average")
            average()
        ...          # and so on
    }
}

```

This style of programming works, but can be awkward. With *indirect* function calls, you tell `gawk` to use the *value* of a variable as the *name* of the function to call.

The syntax is similar to that of a regular function call: an identifier immediately followed by an opening parenthesis, any arguments, and then a closing parenthesis, with the addition of a leading '@' character:

```

the_func = "sum"
result = @the_func()  # calls the sum() function

```

Here is a full program that processes the previously shown data, using indirect function calls:

```

# indirectcall.awk --- Demonstrate indirect function calls

# average --- return the average of the values in fields $first - $last

function average(first, last, sum, i)
{
    sum = 0;
    for (i = first; i <= last; i++)
        sum += $i

    return sum / (last - first + 1)
}

# sum --- return the sum of the values in fields $first - $last

function sum(first, last, ret, i)
{
    ret = 0;
    for (i = first; i <= last; i++)
        ret += $i

    return ret
}

```

These two functions expect to work on fields; thus, the parameters `first` and `last` indicate where in the fields to start and end. Otherwise, they perform the expected computations and are not unusual:

```

# For each record, print the class name and the requested statistics
{
    class_name = $1
    gsub(/_/, " ", class_name)  # Replace _ with spaces

    # find start
    for (i = 1; i <= NF; i++) {
        if ($i == "data:") {
            start = i + 1
            break
        }
    }

    printf("%s:\n", class_name)
    for (i = 2; $i != "data:"; i++) {
        the_function = $i
    }
}

```

```

        printf("\t%s: <%s>\n", $i, @the_function(start, NF) "")
    }
    print ""
}

```

This is the main processing for each record. It prints the class name (with underscores replaced with spaces). It then finds the start of the actual data, saving it in `start`. The last part of the code loops through each function name (from `$2` up to the marker, `'data:'`), calling the function named by the field. The indirect function call itself occurs as a parameter in the call to `printf`. (The `printf` format string uses `'%s'` as the format specifier so that we can use functions that return strings, as well as numbers. Note that the result from the indirect call is concatenated with the empty string, in order to force it to be a string value.)

Here is the result of running the program:

```

$ gawk -f indirectcall.awk class_data1
+ Biology 101:
+   sum: <352.8>
+   average: <88.2>
+
+ Chemistry 305:
+   sum: <356.4>
+   average: <89.1>
+
+ English 401:
+   sum: <376.1>
+   average: <94.025>

```

The ability to use indirect function calls is more powerful than you may think at first. The C and C++ languages provide “function pointers,” which are a mechanism for calling a function chosen at runtime. One of the most well-known uses of this ability is the C `qsort()` function, which sorts an array using the famous “quicksort” algorithm (see [the Wikipedia article](#) for more information). To use this function, you supply a pointer to a comparison function. This mechanism allows you to sort arbitrary data in an arbitrary fashion.

We can do something similar using `gawk`, like this:

```

# quicksort.awk --- Quicksort algorithm, with user-supplied
#                               comparison function

# quicksort --- C.A.R. Hoare's quicksort algorithm. See Wikipedia
#                               or almost any algorithms or computer science text.

function quicksort(data, left, right, less_than,    i, last)
{
    if (left >= right) # do nothing if array contains fewer
        return        # than two elements

    quicksort_swap(data, left, int((left + right) / 2))
    last = left

```

```

    for (i = left + 1; i <= right; i++)
        if (@less_than(data[i], data[left]))
            quicksort_swap(data, ++last, i)
    quicksort_swap(data, left, last)
    quicksort(data, left, last - 1, less_than)
    quicksort(data, last + 1, right, less_than)
}

# quicksort_swap --- helper function for quicksort, should really be inline

function quicksort_swap(data, i, j,      temp)
{
    temp = data[i]
    data[i] = data[j]
    data[j] = temp
}

```

The `quicksort()` function receives the `data` array, the starting and ending indices to sort (`left` and `right`), and the name of a function that performs a “less than” comparison. It then implements the quicksort algorithm.

To make use of the sorting function, we return to our previous example. The first thing to do is write some comparison functions:

```

# num_lt --- do a numeric less than comparison

function num_lt(left, right)
{
    return ((left + 0) < (right + 0))
}

# num_ge --- do a numeric greater than or equal to comparison

function num_ge(left, right)
{
    return ((left + 0) >= (right + 0))
}

```

The `num_ge()` function is needed to perform a descending sort; when used to perform a “less than” test, it actually does the opposite (greater than or equal to), which yields data sorted in descending order.

Next comes a sorting function. It is parameterized with the starting and ending field numbers and the comparison function. It builds an array with the data and calls `quicksort()` appropriately, and then formats the results as a single string:

```

# do_sort --- sort the data according to 'compare'
#              and return it as a string

function do_sort(first, last, compare,      data, i, retval)
{

```

```

delete data
for (i = 1; first <= last; first++) {
    data[i] = $first
    i++
}

quicksort(data, 1, i-1, compare)

retval = data[1]
for (i = 2; i in data; i++)
    retval = retval " " data[i]

return retval
}

```

Finally, the two sorting functions call `do_sort()`, passing in the names of the two comparison functions:

```

# sort --- sort the data in ascending order and return it as a string

function sort(first, last)
{
    return do_sort(first, last, "num_lt")
}

# rsort --- sort the data in descending order and return it as a string

function rsort(first, last)
{
    return do_sort(first, last, "num_ge")
}

```

Here is an extended version of the data file:

```

Biology_101 sum average sort rsort data: 87.0 92.4 78.5 94.9
Chemistry_305 sum average sort rsort data: 75.2 98.3 94.7 88.2
English_401 sum average sort rsort data: 100.0 95.6 87.1 93.4

```

Finally, here are the results when the enhanced program is run:

```

$ gawk -f quicksort.awk -f indirectcall.awk class_data2
+ Biology 101:
+   sum: <352.8>
+   average: <88.2>
+   sort: <78.5 87.0 92.4 94.9>
+   rsort: <94.9 92.4 87.0 78.5>
+
+ Chemistry 305:
+   sum: <356.4>
+   average: <89.1>
+   sort: <75.2 88.2 94.7 98.3>

```

```

+      rsort: <98.3 94.7 88.2 75.2>
+
+ English 401:
+      sum: <376.1>
+      average: <94.025>
+      sort: <87.1 93.4 95.6 100.0>
+      rsort: <100.0 95.6 93.4 87.1>

```

Another example where indirect functions calls are useful can be found in processing arrays. This is described in [Section 10.7 \[Traversing Arrays of Arrays\]](#), page 249.

Remember that you must supply a leading '@' in front of an indirect function call.

Starting with version 4.1.2 of **gawk**, indirect function calls may also be used with built-in functions and with extension functions (see [Chapter 16 \[Writing Extensions for gawk\]](#), page 357). There are some limitations when calling built-in functions indirectly, as follows.

- You cannot pass a regular expression constant to a built-in function through an indirect function call.¹⁹ This applies to the `sub()`, `gsub()`, `gensub()`, `match()`, `split()` and `pat_split()` functions.
- If calling `sub()` or `gsub()`, you may only pass two arguments, since those functions are unusual in that they update their third argument. This means that `$0` will be updated.

gawk does its best to make indirect function calls efficient. For example, in the following case:

```

for (i = 1; i <= n; i++)
    @the_func()

```

gawk looks up the actual function to call only once.

9.4 Summary

- **awk** provides built-in functions and lets you define your own functions.
- POSIX **awk** provides three kinds of built-in functions: numeric, string, and I/O. **gawk** provides functions that sort arrays, work with values representing time, do bit manipulation, determine variable type (array versus scalar), and internationalize and localize programs. **gawk** also provides several extensions to some of standard functions, typically in the form of additional arguments.
- Functions accept zero or more arguments and return a value. The expressions that provide the argument values are completely evaluated before the function is called. Order of evaluation is not defined. The return value can be ignored.
- The handling of backslash in `sub()` and `gsub()` is not simple. It is more straightforward in **gawk**'s `gensub()` function, but that function still requires care in its use.
- User-defined functions provide important capabilities but come with some syntactic inelegancies. In a function call, there cannot be any space between the function name and the opening left parenthesis of the argument list. Also, there is no provision for local variables, so the convention is to add extra parameters, and to separate them visually from the real parameters by extra whitespace.

¹⁹ This may change in a future version; recheck the documentation that comes with your version of **gawk** to see if it has.

- User-defined functions may call other user-defined (and built-in) functions and may call themselves recursively. Function parameters “hide” any global variables of the same names. You cannot use the name of a reserved variable (such as `ARGC`) as the name of a parameter in user-defined functions.
- Scalar values are passed to user-defined functions by value. Array parameters are passed by reference; any changes made by the function to array parameters are thus visible after the function has returned.
- Use the `return` statement to return from a user-defined function. An optional expression becomes the function’s return value. Only scalar values may be returned by a function.
- If a variable that has never been used is passed to a user-defined function, how that function treats the variable can set its nature: either scalar or array.
- `gawk` provides indirect function calls using a special syntax. By setting a variable to the name of a function, you can determine at runtime what function will be called at that point in the program. This is equivalent to function pointers in C and C++.

Part II:

Problem Solving with awk

10 A Library of awk Functions

Section 9.2 [User-Defined Functions], page 200, describes how to write your own **awk** functions. Writing functions is important, because it allows you to encapsulate algorithms and program tasks in a single place. It simplifies programming, making program development more manageable and making programs more readable.

In their seminal 1976 book, *Software Tools*,¹ Brian Kernighan and P.J. Plauger wrote:

Good Programming is not learned from generalities, but by seeing how significant programs can be made clean, easy to read, easy to maintain and modify, human-engineered, efficient and reliable, by the application of common sense and good programming practices. Careful study and imitation of good programs leads to better writing.

In fact, they felt this idea was so important that they placed this statement on the cover of their book. Because we believe strongly that their statement is correct, this chapter and Chapter 11 [Practical **awk** Programs], page 253, provide a good-sized body of code for you to read and, we hope, to learn from.

This chapter presents a library of useful **awk** functions. Many of the sample programs presented later in this book use these functions. The functions are presented here in a progression from simple to complex.

Section 11.3.7 [Extracting Programs from Texinfo Source Files], page 283, presents a program that you can use to extract the source code for these example library functions and programs from the Texinfo source for this book. (This has already been done as part of the **gawk** distribution.)

If you have written one or more useful, general-purpose **awk** functions and would like to contribute them to the **awk** user community, see [How to Contribute], page 11, for more information.

The programs in this chapter and in Chapter 11 [Practical **awk** Programs], page 253, freely use **gawk**-specific features. Rewriting these programs for different implementations of **awk** is pretty straightforward:

- Diagnostic error messages are sent to `/dev/stderr`. Use `'| "cat 1>&2"'` instead of `'> "/dev/stderr"'` if your system does not have a `/dev/stderr`, or if you cannot use **gawk**.
- A number of programs use `nextfile` (see Section 7.4.9 [The `nextfile` Statement], page 145) to skip any remaining input in the input file.
- Finally, some of the programs choose to ignore upper- and lowercase distinctions in their input. They do so by assigning one to `IGNORECASE`. You can achieve almost the same effect² by adding the following rule to the beginning of the program:

```
# ignore case
{ $0 = tolower($0) }
```

Also, verify that all regexp and string constants used in comparisons use only lowercase letters.

¹ Sadly, over 35 years later, many of the lessons taught by this book have yet to be learned by a vast number of practicing programmers.

² The effects are not identical. Output of the transformed record will be in all lowercase, while `IGNORECASE` preserves the original contents of the input record.

10.1 Naming Library Function Global Variables

Due to the way the `awk` language evolved, variables are either *global* (usable by the entire program) or *local* (usable just by a specific function). There is no intermediate state analogous to `static` variables in C.

Library functions often need to have global variables that they can use to preserve state information between calls to the function—for example, `getopt()`'s variable `_opti` (see [Section 10.4 \[Processing Command-Line Options\], page 236](#)). Such variables are called *private*, as the only functions that need to use them are the ones in the library.

When writing a library function, you should try to choose names for your private variables that will not conflict with any variables used by either another library function or a user's main program. For example, a name like `i` or `j` is not a good choice, because user programs often use variable names like these for their own purposes.

The example programs shown in this chapter all start the names of their private variables with an underscore ('_'). Users generally don't use leading underscores in their variable names, so this convention immediately decreases the chances that the variable names will be accidentally shared with the user's program.

In addition, several of the library functions use a prefix that helps indicate what function or set of functions use the variables—for example, `_pw_byname()` in the user database routines (see [Section 10.5 \[Reading the User Database\], page 241](#)). This convention is recommended, as it even further decreases the chance of inadvertent conflict among variable names. Note that this convention is used equally well for variable names and for private function names.³

As a final note on variable naming, if a function makes global variables available for use by a main program, it is a good convention to start those variables' names with a capital letter—for example, `getopt()`'s `Opterr` and `Optind` variables (see [Section 10.4 \[Processing Command-Line Options\], page 236](#)). The leading capital letter indicates that it is global, while the fact that the variable name is not all capital letters indicates that the variable is not one of `awk`'s predefined variables, such as `FS`.

It is also important that *all* variables in library functions that do not need to save state are, in fact, declared local.⁴ If this is not done, the variables could accidentally be used in the user's program, leading to bugs that are very difficult to track down:

```
function lib_func(x, y,    11, 12)
{
    ...
    # some_var should be local but by oversight is not
    use variable some_var
    ...
}
```

A different convention, common in the Tcl community, is to use a single associative array to hold the values needed by the library function(s), or “package.” This significantly

³ Although all the library routines could have been rewritten to use this convention, this was not done, in order to show how our own `awk` programming style has evolved and to provide some basis for this discussion.

⁴ `gawk`'s `--dump-variables` command-line option is useful for verifying this.

decreases the number of actual global names in use. For example, the functions described in [Section 10.5 \[Reading the User Database\]](#), page 241, might have used array elements `PW_data["inited"]`, `PW_data["total"]`, `PW_data["count"]`, and `PW_data["awklib"]`, instead of `_pw_inited`, `_pw_awklib`, `_pw_total`, and `_pw_count`.

The conventions presented in this section are exactly that: conventions. You are not required to write your programs this way—we merely recommend that you do so.

10.2 General Programming

This section presents a number of functions that are of general programming use.

10.2.1 Converting Strings to Numbers

The `strtonum()` function (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177) is a `gawk` extension. The following function provides an implementation for other versions of `awk`:

```
# mystrtonum --- convert string to number

function mystrtonum(str,          ret, n, i, k, c)
{
    if (str ~ /^0[0-7]*$/ ) {
        # octal
        n = length(str)
        ret = 0
        for (i = 1; i <= n; i++) {
            c = substr(str, i, 1)
            # index() returns 0 if c not in string,
            # includes c == "0"
            k = index("1234567", c)

            ret = ret * 8 + k
        }
    } else if (str ~ /^0[xX][[:xdigit:]]+$/ ) {
        # hexadecimal
        str = substr(str, 3)      # lop off leading 0x
        n = length(str)
        ret = 0
        for (i = 1; i <= n; i++) {
            c = substr(str, i, 1)
            c = tolower(c)
            # index() returns 0 if c not in string,
            # includes c == "0"
            k = index("123456789abcdef", c)

            ret = ret * 16 + k
        }
    } else if (str ~ \
/^[-+]?([0-9]+([.][0-9]*([Ee][0-9]+)?)|([.][0-9]+([Ee][-+]?[0-9]+)?))$/ ) {
```

```

        # decimal number, possibly floating point
        ret = str + 0
    } else
        ret = "NOT-A-NUMBER"

    return ret
}

# BEGIN {      # gawk test harness
#     a[1] = "25"
#     a[2] = ".31"
#     a[3] = "0123"
#     a[4] = "0xdeadBEEF"
#     a[5] = "123.45"
#     a[6] = "1.e3"
#     a[7] = "1.32"
#     a[8] = "1.32E2"
#
#     for (i = 1; i in a; i++)
#         print a[i], strtonum(a[i]), mystrtonum(a[i])
# }

```

The function first looks for C-style octal numbers (base 8). If the input string matches a regular expression describing octal numbers, then `mystrtonum()` loops through each character in the string. It sets `k` to the index in "1234567" of the current octal digit. The return value will either be the same number as the digit, or zero if the character is not there, which will be true for a '0'. This is safe, because the regexp test in the `if` ensures that only octal values are converted.

Similar logic applies to the code that checks for and converts a hexadecimal value, which starts with '0x' or '0X'. The use of `tolower()` simplifies the computation for finding the correct numeric value for each hexadecimal digit.

Finally, if the string matches the (rather complicated) regexp for a regular decimal integer or floating-point number, the computation '`ret = str + 0`' lets `awk` convert the value to a number.

A commented-out test program is included, so that the function can be tested with `gawk` and the results compared to the built-in `strtonum()` function.

10.2.2 Assertions

When writing large programs, it is often useful to know that a condition or set of conditions is true. Before proceeding with a particular computation, you make a statement about what you believe to be the case. Such a statement is known as an *assertion*. The C language provides an `<assert.h>` header file and corresponding `assert()` macro that a programmer can use to make assertions. If an assertion fails, the `assert()` macro arranges to print a diagnostic message describing the condition that should have been true but was not, and then it kills the program. In C, using `assert()` looks this:

```
#include <assert.h>
```



```
int myfunc(int a, double b)
{
    assert(a <= 5 && b >= 17.1);
    ...
}
```

If the assertion fails, the program prints a message similar to this:

```
prog.c:5: assertion failed: a <= 5 && b >= 17.1
```

The C language makes it possible to turn the condition into a string for use in printing the diagnostic message. This is not possible in `awk`, so this `assert()` function also requires a string version of the condition that is being tested. Following is the function:

```
# assert --- assert that a condition is true. Otherwise, exit.

function assert(condition, string)
{
    if (! condition) {
        printf("%s:%d: assertion failed: %s\n",
            FILENAME, FNR, string) > "/dev/stderr"
        _assert_exit = 1
        exit 1
    }
}

END {
    if (_assert_exit)
        exit 1
}
```

The `assert()` function tests the `condition` parameter. If it is false, it prints a message to standard error, using the `string` parameter to describe the failed condition. It then sets the variable `_assert_exit` to one and executes the `exit` statement. The `exit` statement jumps to the `END` rule. If the `END` rule finds `_assert_exit` to be true, it exits immediately.

The purpose of the test in the `END` rule is to keep any other `END` rules from running. When an assertion fails, the program should exit immediately. If no assertions fail, then `_assert_exit` is still false when the `END` rule is run normally, and the rest of the program's `END` rules execute. For all of this to work correctly, `assert.awk` must be the first source file read by `awk`. The function can be used in a program in the following way:

```
function myfunc(a, b)
{
    assert(a <= 5 && b >= 17.1, "a <= 5 && b >= 17.1")
    ...
}
```

If the assertion fails, you see a message similar to the following:

```
mydata:1357: assertion failed: a <= 5 && b >= 17.1
```

There is a small problem with this version of `assert()`. An `END` rule is automatically added to the program calling `assert()`. Normally, if a program consists of just a `BEGIN` rule, the input files and/or standard input are not read. However, now that the program has

an END rule, `awk` attempts to read the input data files or standard input (see [Section 7.1.4.1 \[Startup and Cleanup Actions\]](#), page 134), most likely causing the program to hang as it waits for input.

There is a simple workaround to this: make sure that such a BEGIN rule always ends with an `exit` statement.

10.2.3 Rounding Numbers

The way `printf` and `sprintf()` (see [Section 5.5 \[Using printf Statements for Fancier Printing\]](#), page 92) perform rounding often depends upon the system's C `sprintf()` subroutine. On many machines, `sprintf()` rounding is *unbiased*, which means it doesn't always round a trailing .5 up, contrary to naive expectations. In unbiased rounding, .5 rounds to even, rather than always up, so 1.5 rounds to 2 but 4.5 rounds to 4. This means that if you are using a format that does rounding (e.g., "%.0f"), you should check what your system does. The following function does traditional rounding; it might be useful if your `awk`'s `printf` does unbiased rounding:

```
# round.awk --- do normal rounding

function round(x, ival, aval, fraction)
{
    ival = int(x)    # integer part, int() truncates

    # see if fractional part
    if (ival == x)   # no fraction
        return ival # ensure no decimals

    if (x < 0) {
        aval = -x    # absolute value
        ival = int(aval)
        fraction = aval - ival
        if (fraction >= .5)
            return int(x) - 1 # -2.5 --> -3
        else
            return int(x)     # -2.3 --> -2
    } else {
        fraction = x - ival
        if (fraction >= .5)
            return ival + 1
        else
            return ival
    }
}

# test harness
# { print $0, round($0) }
```

10.2.4 The Cliff Random Number Generator

The **Cliff random number generator** is a very simple random number generator that “passes the noise sphere test for randomness by showing no structure.” It is easily programmed, in less than 10 lines of **awk** code:

```
# cliff_rand.awk --- generate Cliff random numbers

BEGIN { _cliff_seed = 0.1 }

function cliff_rand()
{
    _cliff_seed = (100 * log(_cliff_seed)) % 1
    if (_cliff_seed < 0)
        _cliff_seed = - _cliff_seed
    return _cliff_seed
}
```

This algorithm requires an initial “seed” of 0.1. Each new value uses the current seed as input for the calculation. If the built-in **rand()** function (see [Section 9.1.2 \[Numeric Functions\]](#), page 176) isn’t random enough, you might try using this function instead.

10.2.5 Translating Between Characters and Numbers

One commercial implementation of **awk** supplies a built-in function, **ord()**, which takes a character and returns the numeric value for that character in the machine’s character set. If the string passed to **ord()** has more than one character, only the first one is used.

The inverse of this function is **chr()** (from the function of the same name in Pascal), which takes a number and returns the corresponding character. Both functions are written very nicely in **awk**; there is no real reason to build them into the **awk** interpreter:

```
# ord.awk --- do ord and chr

# Global identifiers:
#   _ord_:      numerical values indexed by characters
#   _ord_init_: function to initialize _ord_

BEGIN    { _ord_init() }

function _ord_init(    low, high, i, t)
{
    low = sprintf("%c", 7) # BEL is ascii 7
    if (low == "\a") {     # regular ascii
        low = 0
        high = 127
    } else if (sprintf("%c", 128 + 7) == "\a") {
        # ascii, mark parity
        low = 128
        high = 255
    } else {               # ebcdic(!)

```

```

        low = 0
        high = 255
    }

    for (i = low; i <= high; i++) {
        t = sprintf("%c", i)
        _ord_[t] = i
    }
}

```

Some explanation of the numbers used by `_ord_init()` is worthwhile. The most prominent character set in use today is ASCII.⁵ Although an 8-bit byte can hold 256 distinct values (from 0 to 255), ASCII only defines characters that use the values from 0 to 127.⁶ In the now distant past, at least one minicomputer manufacturer used ASCII, but with mark parity, meaning that the leftmost bit in the byte is always 1. This means that on those systems, characters have numeric values from 128 to 255. Finally, large mainframe systems use the EBCDIC character set, which uses all 256 values. There are other character sets in use on some older systems, but they are not really worth worrying about:

```

function ord(str,    c)
{
    # only first character is of interest
    c = substr(str, 1, 1)
    return _ord_[c]
}

function chr(c)
{
    # force c to be numeric by adding 0
    return sprintf("%c", c + 0)
}

#### test code ####
# BEGIN {
#     for (;;) {
#         printf("enter a character: ")
#         if (getline var <= 0)
#             break
#         printf("ord(%s) = %d\n", var, ord(var))
#     }
# }

```

An obvious improvement to these functions is to move the code for the `_ord_init` function into the body of the `BEGIN` rule. It was written this way initially for ease of development.

⁵ This is changing; many systems use Unicode, a very large character set that includes ASCII as a subset. On systems with full Unicode support, a character can occupy up to 32 bits, making simple tests such as used here prohibitively expensive.

⁶ ASCII has been extended in many countries to use the values from 128 to 255 for country-specific characters. If your system uses these extensions, you can simplify `_ord_init()` to loop from 0 to 255.

There is a “test program” in a `BEGIN` rule, to test the function. It is commented out for production use.

10.2.6 Merging an Array into a String

When doing string processing, it is often useful to be able to join all the strings in an array into one long string. The following function, `join()`, accomplishes this task. It is used later in several of the application programs (see [Chapter 11 \[Practical awk Programs\]](#), page 253).

Good function design is important; this function needs to be general, but it should also have a reasonable default behavior. It is called with an array as well as the beginning and ending indices of the elements in the array to be merged. This assumes that the array indices are numeric—a reasonable assumption, as the array was likely created with `split()` (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177):

```
# join.awk --- join an array into a string

function join(array, start, end, sep,    result, i)
{
    if (sep == "")
        sep = " "
    else if (sep == SUBSEP) # magic value
        sep = ""
    result = array[start]
    for (i = start + 1; i <= end; i++)
        result = result sep array[i]
    return result
}
```

An optional additional argument is the separator to use when joining the strings back together. If the caller supplies a nonempty value, `join()` uses it; if it is not supplied, it has a null value. In this case, `join()` uses a single space as a default separator for the strings. If the value is equal to `SUBSEP`, then `join()` joins the strings with no separator between them. `SUBSEP` serves as a “magic” value to indicate that there should be no separation between the component strings.⁷

10.2.7 Managing the Time of Day

The `sysptime()` and `strftime()` functions described in [Section 9.1.5 \[Time Functions\]](#), page 192, provide the minimum functionality necessary for dealing with the time of day in human-readable form. Although `strftime()` is extensive, the control formats are not necessarily easy to remember or intuitively obvious when reading a program.

The following function, `getlocaltime()`, populates a user-supplied array with preformatted time information. It returns a string with the current time formatted in the same way as the `date` utility:

```
# getlocaltime.awk --- get the time of day in a usable format

# Returns a string in the format of output of date(1)
```

⁷ It would be nice if `awk` had an assignment operator for concatenation. The lack of an explicit operator for concatenation makes string operations more difficult than they really need to be.

```

# Populates the array argument time with individual values:
#   time["second"]      -- seconds (0 - 59)
#   time["minute"]     -- minutes (0 - 59)
#   time["hour"]       -- hours (0 - 23)
#   time["althour"]    -- hours (0 - 12)
#   time["monthday"]   -- day of month (1 - 31)
#   time["month"]      -- month of year (1 - 12)
#   time["monthname"]  -- name of the month
#   time["shortmonth"] -- short name of the month
#   time["year"]       -- year modulo 100 (0 - 99)
#   time["fullyear"]   -- full year
#   time["weekday"]    -- day of week (Sunday = 0)
#   time["altweekday"] -- day of week (Monday = 0)
#   time["dayname"]    -- name of weekday
#   time["shortdayname"] -- short name of weekday
#   time["yearday"]    -- day of year (0 - 365)
#   time["timezone"]   -- abbreviation of timezone name
#   time["ampm"]       -- AM or PM designation
#   time["weeknum"]    -- week number, Sunday first day
#   time["altweeknum"] -- week number, Monday first day

function getlocaltime(time,    ret, now, i)
{
    # get time once, avoids unnecessary system calls
    now = systime()

    # return date(1)-style output
    ret = strftime("%a %b %e %H:%M:%S %Z %Y", now)

    # clear out target array
    delete time

    # fill in values, force numeric values to be
    # numeric by adding 0
    time["second"]      = strftime("%S", now) + 0
    time["minute"]     = strftime("%M", now) + 0
    time["hour"]       = strftime("%H", now) + 0
    time["althour"]    = strftime("%I", now) + 0
    time["monthday"]   = strftime("%d", now) + 0
    time["month"]      = strftime("%m", now) + 0
    time["monthname"]  = strftime("%B", now)
    time["shortmonth"] = strftime("%b", now)
    time["year"]       = strftime("%y", now) + 0
    time["fullyear"]   = strftime("%Y", now) + 0
    time["weekday"]    = strftime("%w", now) + 0
    time["altweekday"] = strftime("%u", now) + 0
    time["dayname"]    = strftime("%A", now)

```

```

time["shortdayname"] = strftime("%a", now)
time["yearday"]      = strftime("%j", now) + 0
time["timezone"]     = strftime("%Z", now)
time["ampm"]         = strftime("%p", now)
time["weeknum"]      = strftime("%U", now) + 0
time["altweeknum"]   = strftime("%W", now) + 0

return ret
}

```

The string indices are easier to use and read than the various formats required by `strftime()`. The `alarm` program presented in [Section 11.3.2 \[An Alarm Clock Program\]](#), [page 274](#), uses this function. A more general design for the `getlocaltime()` function would have allowed the user to supply an optional timestamp value to use instead of the current time.

10.2.8 Reading a Whole File at Once

Often, it is convenient to have the entire contents of a file available in memory as a single string. A straightforward but naive way to do that might be as follows:

```

function readfile(file,    tmp, contents)
{
    if ((getline tmp < file) < 0)
        return

    contents = tmp
    while (getline tmp < file) > 0)
        contents = contents RT tmp

    close(file)
    return contents
}

```

This function reads from `file` one record at a time, building up the full contents of the file in the local variable `contents`. It works, but is not necessarily efficient.

The following function, based on a suggestion by Denis Shirokov, reads the entire contents of the named file in one shot:

```

# readfile.awk --- read an entire file at once

function readfile(file,    tmp, save_rs)
{
    save_rs = RS
    RS = "^$"
    getline tmp < file
    close(file)
    RS = save_rs

    return tmp
}

```

It works by setting `RS` to `‘^$’`, a regular expression that will never match if the file has contents. `gawk` reads data from the file into `tmp`, attempting to match `RS`. The match fails after each read, but fails quickly, such that `gawk` fills `tmp` with the entire contents of the file. (See [Section 4.1 \[How Input Is Split into Records\]](#), page 59, for information on `RT` and `RS`.)

In the case that `file` is empty, the return value is the null string. Thus, calling code may use something like:

```
contents = readfile("/some/path")
if (length(contents) == 0)
    # file was empty ...
```

This tests the result to see if it is empty or not. An equivalent test would be `‘contents == “”’`.

See [Section 16.7.10 \[Reading an Entire File\]](#), page 408, for an extension function that also reads an entire file into memory.

10.2.9 Quoting Strings to Pass to the Shell

Michael Brennan offers the following programming pattern, which he uses frequently:

```
#!/bin/sh
```

```
awkp='
...
,
```

```
input_program | awk "$awkp" | /bin/sh
```

For example, a program of his named `flac-edit` has this form:

```
$ flac-edit -song="Whoope! That's Great" file.flac
```

It generates the following output, which is to be piped to the shell (`/bin/sh`):

```
chmod +w file.flac
metaflac --remove-tag=TITLE file.flac
LANG=en_US.88591 metaflac --set-tag=TITLE='Whoope! That''''s Great' file.flac
chmod -w file.flac
```

Note the need for shell quoting. The function `shell_quote()` does it. `SINGLE` is the one-character string `“'”` and `QSINGLE` is the three-character string `“\”\”\”`:

```
# shell_quote --- quote an argument for passing to the shell
```

```
function shell_quote(s,                # parameter
    SINGLE, QSINGLE, i, X, n, ret)    # locals
{
    if (s == "")
        return "\"\""

    SINGLE = "\x27" # single quote
    QSINGLE = "\"\x27\"
    n = split(s, X, SINGLE)
```



```

    ret = SINGLE X[1] SINGLE
    for (i = 2; i <= n; i++)
        ret = ret QSINGLE SINGLE X[i] SINGLE

    return ret
}

```

10.3 Data file Management

This section presents functions that are useful for managing command-line data files.

10.3.1 Noting Data file Boundaries

The **BEGIN** and **END** rules are each executed exactly once, at the beginning and end of your **awk** program, respectively (see [Section 7.1.4 \[The BEGIN and END Special Patterns\]](#), [page 134](#)). We (the **gawk** authors) once had a user who mistakenly thought that the **BEGIN** rules were executed at the beginning of each data file and the **END** rules were executed at the end of each data file.

When informed that this was not the case, the user requested that we add new special patterns to **gawk**, named **BEGIN_FILE** and **END_FILE**, that would have the desired behavior. He even supplied us the code to do so.

Adding these special patterns to **gawk** wasn't necessary; the job can be done cleanly in **awk** itself, as illustrated by the following library program. It arranges to call two user-supplied functions, **beginfile()** and **endfile()**, at the beginning and end of each data file. Besides solving the problem in only nine(!) lines of code, it does so *portably*; this works with any implementation of **awk**:

```

# transfile.awk
#
# Give the user a hook for filename transitions
#
# The user must supply functions beginfile() and endfile()
# that each take the name of the file being started or
# finished, respectively.

FILENAME != _oldfilename {
    if (_oldfilename != "")
        endfile(_oldfilename)
    _oldfilename = FILENAME
    beginfile(FILENAME)
}

END { endfile(FILENAME) }

```

This file must be loaded before the user's "main" program, so that the rule it supplies is executed first.

This rule relies on **awk**'s **FILENAME** variable, which automatically changes for each new data file. The current file name is saved in a private variable, **_oldfilename**. If **FILENAME**

does not equal `_oldfilename`, then a new data file is being processed and it is necessary to call `endfile()` for the old file. Because `endfile()` should only be called if a file has been processed, the program first checks to make sure that `_oldfilename` is not the null string. The program then assigns the current file name to `_oldfilename` and calls `beginfile()` for the file. Because, like all `awk` variables, `_oldfilename` is initialized to the null string, this rule executes correctly even for the first data file.

The program also supplies an `END` rule to do the final processing for the last file. Because this `END` rule comes before any `END` rules supplied in the “main” program, `endfile()` is called first. Once again, the value of multiple `BEGIN` and `END` rules should be clear.

If the same data file occurs twice in a row on the command line, then `endfile()` and `beginfile()` are not executed at the end of the first pass and at the beginning of the second pass. The following version solves the problem:

```
# ftrans.awk --- handle datafile transitions
#
# user supplies beginfile() and endfile() functions

FNR == 1 {
    if (_filename_ != "")
        endfile(_filename_)
    _filename_ = FILENAME
    beginfile(FILENAME)
}

END { endfile(_filename_) }
```

Section 11.2.7 [Counting Things], page 271, shows how this library function can be used and how it simplifies writing the main program.

So Why Does `gawk` Have `BEGINFILE` and `ENDFILE`?

You are probably wondering, if `beginfile()` and `endfile()` functions can do the job, why does `gawk` have `BEGINFILE` and `ENDFILE` patterns?

Good question. Normally, if `awk` cannot open a file, this causes an immediate fatal error. In this case, there is no way for a user-defined function to deal with the problem, as the mechanism for calling it relies on the file being open and at the first record. Thus, the main reason for `BEGINFILE` is to give you a “hook” to catch files that cannot be processed. `ENDFILE` exists for symmetry, and because it provides an easy way to do per-file cleanup processing. For more information, refer to Section 7.1.5 [The `BEGINFILE` and `ENDFILE` Special Patterns], page 135.

10.3.2 Rereading the Current File

Another request for a new built-in function was for a function that would make it possible to reread the current file. The requesting user didn’t want to have to use `getline` (see Section 4.9 [Explicit Input with `getline`], page 78) inside a loop.

However, as long as you are not in the `END` rule, it is quite easy to arrange to immediately close the current input file and then start over with it from the top. For lack of a better name, we’ll call the function `rewind()`:

```
# rewind.awk --- rewind the current file and start over

function rewind(    i)
{
    # shift remaining arguments up
    for (i = ARGC; i > ARGIND; i--)
        ARGV[i] = ARGV[i-1]

    # make sure gawk knows to keep going
    ARGC++

    # make current file next to get done
    ARGV[ARGIND+1] = FILENAME

    # do it
    nextfile
}
```

The `rewind()` function relies on the `ARGIND` variable (see [Section 7.5.2 \[Built-in Variables That Convey Information\]](#), page 149), which is specific to **gawk**. It also relies on the `nextfile` keyword (see [Section 7.4.9 \[The `nextfile` Statement\]](#), page 145). Because of this, you should not call it from an `ENDFILE` rule. (This isn't necessary anyway, because **gawk** goes to the next file as soon as an `ENDFILE` rule finishes!)

You need to be careful calling `rewind()`. You can end up causing infinite recursion if you don't pay attention. Here is an example use:

```
$ cat data
+ a
+ b
+ c
+ d
+ e

$ cat test.awk
+ FNR == 3 && ! rewound {
+   rewound = 1
+   rewind()
+ }
+
+ { print FILENAME, FNR, $0 }
```

```
$ gawk -f rewind.awk -f test.awk data
+ data 1 a
+ data 2 b
+ data 1 a
+ data 2 b
+ data 3 c
+ data 4 d
```

```
└─ data 5 e
```

10.3.3 Checking for Readable Data files

Normally, if you give `awk` a data file that isn't readable, it stops with a fatal error. There are times when you might want to just ignore such files and keep going.⁸ You can do this by prepending the following program to your `awk` program:

```
# readable.awk --- library file to skip over unreadable files

BEGIN {
    for (i = 1; i < ARGV; i++) {
        if (ARGV[i] ~ /^[a-zA-Z_][a-zA-Z0-9_]*=.*\/ \
            || ARGV[i] == "-" || ARGV[i] == "/dev/stdin")
            continue      # assignment or standard input
        else if ((getline junk < ARGV[i]) < 0) # unreadable
            delete ARGV[i]
        else
            close(ARGV[i])
    }
}
```

This works, because the `getline` won't be fatal. Removing the element from `ARGV` with `delete` skips the file (because it's no longer in the list). See also [Section 7.5.3 \[Using ARGV and ARGV\], page 155](#).

Because `awk` variable names only allow the English letters, the regular expression check purposely does not use character classes such as `[:alpha:]` and `[:alnum:]` (see [Section 3.4 \[Using Bracket Expressions\], page 50](#)).

10.3.4 Checking for Zero-Length Files

All known `awk` implementations silently skip over zero-length files. This is a by-product of `awk`'s implicit read-a-record-and-match-against-the-rules loop: when `awk` tries to read a record from an empty file, it immediately receives an end-of-file indication, closes the file, and proceeds on to the next command-line data file, *without* executing any user-level `awk` program code.

Using `gawk`'s `ARGIND` variable (see [Section 7.5 \[Predefined Variables\], page 147](#)), it is possible to detect when an empty data file has been skipped. Similar to the library file presented in [Section 10.3.1 \[Noting Data file Boundaries\], page 231](#), the following library file calls a function named `zerofile()` that the user must provide. The arguments passed are the file name and the position in `ARGV` where it was found:

```
# zerofile.awk --- library file to process empty input files

BEGIN { Argind = 0 }

ARGIND > Argind + 1 {
```

⁸ The `BEGINFILE` special pattern (see [Section 7.1.5 \[The BEGINFILE and ENDFILE Special Patterns\], page 135](#)) provides an alternative mechanism for dealing with files that can't be opened. However, the code here provides a portable solution.

```

    for (Argind++; Argind < ARGIND; Argind++)
        zerofile(ARGV[Argind], Argind)
}

ARGIND != Argind { Argind = ARGIND }

END {
    if (ARGIND > Argind)
        for (Argind++; Argind <= ARGIND; Argind++)
            zerofile(ARGV[Argind], Argind)
}

```

The user-level variable `Argind` allows the `awk` program to track its progress through `ARGV`. Whenever the program detects that `ARGIND` is greater than `'Argind + 1'`, it means that one or more empty files were skipped. The action then calls `zerofile()` for each such file, incrementing `Argind` along the way.

The `'Argind != ARGIND'` rule simply keeps `Argind` up to date in the normal case.

Finally, the `END` rule catches the case of any empty files at the end of the command-line arguments. Note that the test in the condition of the `for` loop uses the `'<='` operator, not `'<'`.

10.3.5 Treating Assignments as File names

Occasionally, you might not want `awk` to process command-line variable assignments (see [Section 6.1.3.2 \[Assigning Variables on the Command Line\], page 111](#)). In particular, if you have a file name that contains an `'='` character, `awk` treats the file name as an assignment and does not process it.

Some users have suggested an additional command-line option for `gawk` to disable command-line assignments. However, some simple programming with a library file does the trick:

```

# noassign.awk --- library file to avoid the need for a
# special option that disables command-line assignments

function disable_assigns(argc, argv,    i)
{
    for (i = 1; i < argc; i++)
        if (argv[i] ~ /^[a-zA-Z_][a-zA-Z0-9_]*=.*/)
            argv[i] = ("./" argv[i])
}

BEGIN {
    if (No_command_assign)
        disable_assigns(ARGC, ARGV)
}

```

You then run your program this way:

```
awk -v No_command_assign=1 -f noassign.awk -f yourprog.awk *
```

The function works by looping through the arguments. It prepends ‘./’ to any argument that matches the form of a variable assignment, turning that argument into a file name.

The use of `No_command_assign` allows you to disable command-line assignments at invocation time, by giving the variable a true value. When not set, it is initially zero (i.e., false), so the command-line arguments are left alone.

10.4 Processing Command-Line Options

Most utilities on POSIX-compatible systems take options on the command line that can be used to change the way a program behaves. `awk` is an example of such a program (see [Section 2.2 \[Command-Line Options\], page 31](#)). Often, options take *arguments* (i.e., data that the program needs to correctly obey the command-line option). For example, `awk`’s `-F` option requires a string to use as the field separator. The first occurrence on the command line of either `--` or a string that does not begin with ‘-’ ends the options.

Modern Unix systems provide a C function named `getopt()` for processing command-line arguments. The programmer provides a string describing the one-letter options. If an option requires an argument, it is followed in the string with a colon. `getopt()` is also passed the count and values of the command-line arguments and is called in a loop. `getopt()` processes the command-line arguments for option letters. Each time around the loop, it returns a single character representing the next option letter that it finds, or ‘?’ if it finds an invalid option. When it returns `-1`, there are no options left on the command line.

When using `getopt()`, options that do not take arguments can be grouped together. Furthermore, options that take arguments require that the argument be present. The argument can immediately follow the option letter, or it can be a separate command-line argument.

Given a hypothetical program that takes three command-line options, `-a`, `-b`, and `-c`, where `-b` requires an argument, all of the following are valid ways of invoking the program:

```
prog -a -b foo -c data1 data2 data3
prog -ac -bfoo -- data1 data2 data3
prog -acbfoo data1 data2 data3
```

Notice that when the argument is grouped with its option, the rest of the argument is considered to be the option’s argument. In this example, `-acbfoo` indicates that all of the `-a`, `-b`, and `-c` options were supplied, and that ‘foo’ is the argument to the `-b` option.

`getopt()` provides four external variables that the programmer can use:

<code>optind</code>	The index in the argument value array (<code>argv</code>) where the first nonoption command-line argument can be found.
<code>optarg</code>	The string value of the argument to an option.
<code>opterr</code>	Usually <code>getopt()</code> prints an error message when it finds an invalid option. Setting <code>opterr</code> to zero disables this feature. (An application might want to print its own error message.)
<code>optopt</code>	The letter representing the command-line option.

The following C fragment shows how `getopt()` might process command-line arguments for `awk`:

```
int
main(int argc, char *argv[])
{
    ...
    /* print our own message */
    opterr = 0;
    while ((c = getopt(argc, argv, "v:f:F:W:")) != -1) {
        switch (c) {
            case 'f':    /* file */
                ...
                break;
            case 'F':    /* field separator */
                ...
                break;
            case 'v':    /* variable assignment */
                ...
                break;
            case 'W':    /* extension */
                ...
                break;
            case '?':
            default:
                usage();
                break;
        }
    }
    ...
}
```

As a side point, `gawk` actually uses the GNU `getopt_long()` function to process both normal and GNU-style long options (see [Section 2.2 \[Command-Line Options\]](#), page 31).

The abstraction provided by `getopt()` is very useful and is quite handy in `awk` programs as well. Following is an `awk` version of `getopt()`. This function highlights one of the greatest weaknesses in `awk`, which is that it is very poor at manipulating single characters. Repeated calls to `substr()` are necessary for accessing individual characters (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177).⁹

The discussion that follows walks through the code a bit at a time:

```
# getopt.awk --- Do C library getopt(3) function in awk

# External variables:
#   Optind -- index in ARGV of first nonoption argument
#   Optarg  -- string value of argument to current option
```

⁹ This function was written before `gawk` acquired the ability to split strings into single characters using `" "` as the separator. We have left it alone, as using `substr()` is more portable.

```

#   Opterr -- if nonzero, print our own diagnostic
#   Optopt -- current option letter

# Returns:
#   -1      at end of options
#   "?"     for unrecognized option
#   <c>     a character representing the current option

# Private Data:
#   _opti   -- index in multiflag option, e.g., -abc

```

The function starts out with comments presenting a list of the global variables it uses, what the return values are, what they mean, and any global variables that are “private” to this library function. Such documentation is essential for any program, and particularly for library functions.

The `getopt()` function first checks that it was indeed called with a string of options (the `options` parameter). If `options` has a zero length, `getopt()` immediately returns `-1`:

```

function getopt(argc, argv, options,    thisopt, i)
{
    if (length(options) == 0)    # no options given
        return -1

    if (argv[Optind] == "--") { # all done
        Optind++
        _opti = 0
        return -1
    } else if (argv[Optind] !~ /^-[^:[:space:]]/) {
        _opti = 0
        return -1
    }
}

```

The next thing to check for is the end of the options. A `--` ends the command-line options, as does any command-line argument that does not begin with a ‘-’. `Optind` is used to step through the array of command-line arguments; it retains its value across calls to `getopt()`, because it is a global variable.

The regular expression that is used, `/^-[^:[:space:]]/`, checks for a ‘-’ followed by anything that is not whitespace and not a colon. If the current command-line argument does not match this pattern, it is not an option, and it ends option processing. Continuing on:

```

    if (_opti == 0)
        _opti = 2
    thisopt = substr(argv[Optind], _opti, 1)
    Optopt = thisopt
    i = index(options, thisopt)
    if (i == 0) {
        if (Opterr)
            printf("%c -- invalid option\n", thisopt) > "/dev/stderr"
    }
}

```



```

        if (_opti >= length(argv[Optind])) {
            Optind++
            _opti = 0
        } else
            _opti++
        return "?"
    }
}

```

The `_opti` variable tracks the position in the current command-line argument (`argv[Optind]`). If multiple options are grouped together with one `'-'` (e.g., `-abx`), it is necessary to return them to the user one at a time.

If `_opti` is equal to zero, it is set to two, which is the index in the string of the next character to look at (we skip the `'-'`, which is at position one). The variable `thisopt` holds the character, obtained with `substr()`. It is saved in `Optopt` for the main program to use.

If `thisopt` is not in the `options` string, then it is an invalid option. If `Opterr` is nonzero, `getopt()` prints an error message on the standard error that is similar to the message from the C version of `getopt()`.

Because the option is invalid, it is necessary to skip it and move on to the next option character. If `_opti` is greater than or equal to the length of the current command-line argument, it is necessary to move on to the next argument, so `Optind` is incremented and `_opti` is reset to zero. Otherwise, `Optind` is left alone and `_opti` is merely incremented.

In any case, because the option is invalid, `getopt()` returns `"?"`. The main program can examine `Optopt` if it needs to know what the invalid option letter actually is. Continuing on:

```

    if (substr(options, i + 1, 1) == ":") {
        # get option argument
        if (length(substr(argv[Optind], _opti + 1)) > 0)
            Optarg = substr(argv[Optind], _opti + 1)
        else
            Optarg = argv[++Optind]
        _opti = 0
    } else
        Optarg = ""

```

If the option requires an argument, the option letter is followed by a colon in the `options` string. If there are remaining characters in the current command-line argument (`argv[Optind]`), then the rest of that string is assigned to `Optarg`. Otherwise, the next command-line argument is used (`'-xF00'` versus `'-x F00'`). In either case, `_opti` is reset to zero, because there are no more characters left to examine in the current command-line argument. Continuing:

```

        if (_opti == 0 || _opti >= length(argv[Optind])) {
            Optind++
            _opti = 0
        } else
            _opti++
        return thisopt
    }
}

```

Finally, if `_opti` is either zero or greater than the length of the current command-line argument, it means this element in `argv` is through being processed, so `Optind` is incremented to point to the next element in `argv`. If neither condition is true, then only `_opti` is incremented, so that the next option letter can be processed on the next call to `getopt()`.

The **BEGIN** rule initializes both `Opterr` and `Optind` to one. `Opterr` is set to one, because the default behavior is for `getopt()` to print a diagnostic message upon seeing an invalid option. `Optind` is set to one, because there's no reason to look at the program name, which is in `ARGV[0]`:

```
BEGIN {
    Opterr = 1    # default is to diagnose
    Optind = 1    # skip ARGV[0]

    # test program
    if (_getopt_test) {
        while ((_go_c = getopt(ARGC, ARGV, "ab:cd")) != -1)
            printf("c = <%c>, Optarg = <%s>\n",
                    _go_c, Optarg)
        printf("non-option arguments:\n")
        for (; Optind < ARGC; Optind++)
            printf("\tARGV[%d] = <%s>\n",
                    Optind, ARGV[Optind])
    }
}
```

The rest of the **BEGIN** rule is a simple test program. Here are the results of two sample runs of the test program:

```
$ awk -f getopt.awk -v _getopt_test=1 -- -a -cbARG bax -x
+ c = <a>, Optarg = <>
+ c = <c>, Optarg = <>
+ c = <b>, Optarg = <ARG>
+ non-option arguments:
+     ARGV[3] = <bax>
+     ARGV[4] = <-x>

$ awk -f getopt.awk -v _getopt_test=1 -- -a -x -- xyz abc
+ c = <a>, Optarg = <>
[error] x -- invalid option
+ c = <?>, Optarg = <>
+ non-option arguments:
+     ARGV[4] = <xyz>
+     ARGV[5] = <abc>
```

In both runs, the first `--` terminates the arguments to `awk`, so that it does not try to interpret the `-a`, etc., as its own options.

NOTE: After `getopt()` is through, user-level code must clear out all the elements of `ARGV` from 1 to `Optind`, so that `awk` does not try to process the command-line options as file names.

Using ‘#!’ with the `-E` option may help avoid conflicts between your program’s options and `gawk`’s options, as `-E` causes `gawk` to abandon processing of further options (see Section 1.1.4 [Executable awk Programs], page 19, and see Section 2.2 [Command-Line Options], page 31).

Several of the sample programs presented in Chapter 11 [Practical awk Programs], page 253, use `getopt()` to process their arguments.

10.5 Reading the User Database

The `PROCFINFO` array (see Section 7.5 [Predefined Variables], page 147) provides access to the current user’s real and effective user and group ID numbers, and, if available, the user’s supplementary group set. However, because these are numbers, they do not provide very useful information to the average user. There needs to be some way to find the user information associated with the user and group ID numbers. This section presents a suite of functions for retrieving information from the user database. See Section 10.6 [Reading the Group Database], page 245, for a similar suite that retrieves information from the group database.

The POSIX standard does not define the file where user information is kept. Instead, it provides the `<pwd.h>` header file and several C language subroutines for obtaining user information. The primary function is `getpwent()`, for “get password entry.” The “password” comes from the original user database file, `/etc/passwd`, which stores user information along with the encrypted passwords (hence the name).

Although an `awk` program could simply read `/etc/passwd` directly, this file may not contain complete information about the system’s set of users.¹⁰ To be sure you are able to produce a readable and complete version of the user database, it is necessary to write a small C program that calls `getpwent()`. `getpwent()` is defined as returning a pointer to a `struct passwd`. Each time it is called, it returns the next entry in the database. When there are no more entries, it returns `NULL`, the null pointer. When this happens, the C program should call `endpwent()` to close the database. Following is `pwcat`, a C program that “cats” the password database:

```
/*
 * pwcat.c
 *
 * Generate a printable version of the password database.
 */
#include <stdio.h>
#include <pwd.h>

int
main(int argc, char **argv)
{
    struct passwd *p;

    while ((p = getpwent()) != NULL)
```

¹⁰ It is often the case that password information is stored in a network database.

```

        printf("%s:%s:%ld:%ld:%s:%s:%s\n",
            p->pw_name, p->pw_passwd, (long) p->pw_uid,
            (long) p->pw_gid, p->pw_gecos, p->pw_dir, p->pw_shell);

    endpwent();
    return 0;
}

```

If you don't understand C, don't worry about it. The output from `pwcat` is the user database, in the traditional `/etc/passwd` format of colon-separated fields. The fields are:

Login name

The user's login name.

Encrypted password

The user's encrypted password. This may not be available on some systems.

User-ID The user's numeric user ID number. (On some systems, it's a C `long`, and not an `int`. Thus, we cast it to `long` for all cases.)

Group-ID The user's numeric group ID number. (Similar comments about `long` versus `int` apply here.)

Full name The user's full name, and perhaps other information associated with the user.

Home directory

The user's login (or "home") directory (familiar to shell programmers as `$HOME`).

Login shell

The program that is run when the user logs in. This is usually a shell, such as Bash.

A few lines representative of `pwcat`'s output are as follows:

```

$ pwcat
+ root:x:0:1:Operator:/:/bin/sh
+ nobody:*:65534:65534:/:
+ daemon:*:1:1:/:
+ sys:*:2:2:/:/bin/csh
+ bin:*:3:3:/:bin:
+ arnold:xyzy:2076:10:Arnold Robbins:/home/arnold:/bin/sh
+ miriam:xyaay:112:10:Miriam Robbins:/home/miriam:/bin/sh
+ andy:abcca2:113:10:Andy Jacobs:/home/andy:/bin/sh
...

```

With that introduction, following is a group of functions for getting user information. There are several functions here, corresponding to the C functions of the same names:

```

# passwd.awk --- access password file information

BEGIN {
    # tailor this to suit your system
    _pw_awklib = "/usr/local/libexec/awk/"
}

```

```

function _pw_init(    oldfs, oldrs, olddol0, pwcat, using_fw, using_fpat)
{
    if (_pw_initied)
        return

    oldfs = FS
    oldrs = RS
    olddol0 = $0
    using_fw = (PROCINFO["FS"] == "FIELDWIDTHS")
    using_fpat = (PROCINFO["FS"] == "FPAT")
    FS = ":"
    RS = "\n"

    pwcat = _pw_awklib "pwcat"
    while ((pwcat | getline) > 0) {
        _pw_byname[$1] = $0
        _pw_byuid[$3] = $0
        _pw_bycount[++_pw_total] = $0
    }
    close(pwcat)
    _pw_count = 0
    _pw_initied = 1
    FS = oldfs
    if (using_fw)
        FIELDWIDTHS = FIELDWIDTHS
    else if (using_fpat)
        FPAT = FPAT
    RS = oldrs
    $0 = olddol0
}

```

The `BEGIN` rule sets a private variable to the directory where `pwcat` is stored. Because it is used to help out an `awk` library routine, we have chosen to put it in `/usr/local/libexec/awk`; however, you might want it to be in a different directory on your system.

The function `_pw_init()` fills three copies of the user information into three associative arrays. The arrays are indexed by username (`_pw_byname`), by user ID number (`_pw_byuid`), and by order of occurrence (`_pw_bycount`). The variable `_pw_initied` is used for efficiency, as `_pw_init()` needs to be called only once.

Because this function uses `getline` to read information from `pwcat`, it first saves the values of `FS`, `RS`, and `$0`. It notes in the variable `using_fw` whether field splitting with `FIELDWIDTHS` is in effect or not. Doing so is necessary, as these functions could be called from anywhere within a user's program, and the user may have his or her own way of splitting records and fields. This makes it possible to restore the correct field-splitting mechanism later. The test can only be true for `gawk`. It is false if using `FS` or `FPAT`, or on some other `awk` implementation.

The code that checks for using FPAT, using `using_fpat` and `PROCINFO["FS"]`, is similar.

The main part of the function uses a loop to read database lines, split the lines into fields, and then store the lines into each array as necessary. When the loop is done, `_pw_init()` cleans up by closing the pipeline, setting `_pw_inited` to one, and restoring FS (and `FIELDWIDTHS` or `FPAT` if necessary), `RS`, and `$0`. The use of `_pw_count` is explained shortly.

The `getpwnam()` function takes a username as a string argument. If that user is in the database, it returns the appropriate line. Otherwise, it relies on the array reference to a nonexistent element to create the element with the null string as its value:

```
function getpwnam(name)
{
    _pw_init()
    return _pw_byname[name]
}
```

Similarly, the `getpwuid()` function takes a user ID number argument. If that user number is in the database, it returns the appropriate line. Otherwise, it returns the null string:

```
function getpwuid(uid)
{
    _pw_init()
    return _pw_byuid[uid]
}
```

The `getpwent()` function simply steps through the database, one entry at a time. It uses `_pw_count` to track its current position in the `_pw_bycount` array:

```
function getpwent()
{
    _pw_init()
    if (_pw_count < _pw_total)
        return _pw_bycount[++_pw_count]
    return ""
}
```

The `endpwent()` function resets `_pw_count` to zero, so that subsequent calls to `getpwent()` start over again:

```
function endpwent()
{
    _pw_count = 0
}
```

A conscious design decision in this suite is that each subroutine calls `_pw_init()` to initialize the database arrays. The overhead of running a separate process to generate the user database, and the I/O to scan it, are only incurred if the user's main program actually calls one of these functions. If this library file is loaded along with a user's program, but none of the routines are ever called, then there is no extra runtime overhead. (The alternative is move the body of `_pw_init()` into a `BEGIN` rule, which always runs `pwcat`. This simplifies the code but runs an extra process that may never be needed.)

In turn, calling `_pw_init()` is not too expensive, because the `_pw_init` variable keeps the program from reading the data more than once. If you are worried about squeezing every last cycle out of your `awk` program, the check of `_pw_init` could be moved out of `_pw_init()` and duplicated in all the other functions. In practice, this is not necessary, as most `awk` programs are I/O-bound, and such a change would clutter up the code.

The `id` program in [Section 11.2.3 \[Printing Out User Information\]](#), page 262, uses these functions.

10.6 Reading the Group Database

Much of the discussion presented in [Section 10.5 \[Reading the User Database\]](#), page 241, applies to the group database as well. Although there has traditionally been a well-known file (`/etc/group`) in a well-known format, the POSIX standard only provides a set of C library routines (`<grp.h>` and `getgrent()`) for accessing the information. Even though this file may exist, it may not have complete information. Therefore, as with the user database, it is necessary to have a small C program that generates the group database as its output. `grcat`, a C program that “cats” the group database, is as follows:

```
/*
 * grcat.c
 *
 * Generate a printable version of the group database.
 */
#include <stdio.h>
#include <grp.h>

int
main(int argc, char **argv)
{
    struct group *g;
    int i;

    while ((g = getgrent()) != NULL) {
        printf("%s:%s:%ld:", g->gr_name, g->gr_passwd,
               (long) g->gr_gid);
        for (i = 0; g->gr_mem[i] != NULL; i++) {
            printf("%s", g->gr_mem[i]);
            if (g->gr_mem[i+1] != NULL)
                putchar(',');
        }
        putchar('\n');
    }
    endgrent();
    return 0;
}
```

Each line in the group database represents one group. The fields are separated with colons and represent the following information:

Group Name

The group's name.

Group Password

The group's encrypted password. In practice, this field is never used; it is usually empty or set to '*'.

Group ID Number

The group's numeric group ID number; the association of name to number must be unique within the file. (On some systems it's a C `long`, and not an `int`. Thus, we cast it to `long` for all cases.)

Group Member List

A comma-separated list of usernames. These users are members of the group. Modern Unix systems allow users to be members of several groups simultaneously. If your system does, then there are elements "group1" through "groupN" in `PROCINFO` for those group ID numbers. (Note that `PROCINFO` is a `gawk` extension; see [Section 7.5 \[Predefined Variables\]](#), page 147.)

Here is what running `grcat` might produce:

```
$ grcat
+ wheel:*:0:arnold
+ nogroup:*:65534:
+ daemon:*:1:
+ kmem:*:2:
+ staff:*:10:arnold,miriam,andy
+ other:*:20:
...
```

Here are the functions for obtaining information from the group database. There are several, modeled after the C library functions of the same names:

```
# group.awk --- functions for dealing with the group file

BEGIN {
    # Change to suit your system
    _gr_awklib = "/usr/local/libexec/awk/"
}

function _gr_init(    oldfs, oldrs, olddol0, grcat,
                    using_fw, using_fpat, n, a, i)
{
    if (_gr_initied)
        return

    oldfs = FS
    oldrs = RS
    olddol0 = $0
    using_fw = (PROCINFO["FS"] == "FIELDWIDTHS")
    using_fpat = (PROCINFO["FS"] == "FPAT")
}
```



```

FS = ":"
RS = "\n"

grcat = _gr_awklib "grcat"
while ((grcat | getline) > 0) {
    if ($1 in _gr_byname)
        _gr_byname[$1] = _gr_byname[$1] "," $4
    else
        _gr_byname[$1] = $0
    if ($3 in _gr_bygid)
        _gr_bygid[$3] = _gr_bygid[$3] "," $4
    else
        _gr_bygid[$3] = $0

    n = split($4, a, "[ \\t]*,[ \\t]*")
    for (i = 1; i <= n; i++)
        if (a[i] in _gr_groupsbyuser)
            _gr_groupsbyuser[a[i]] = gr_groupsbyuser[a[i]] " " $1
        else
            _gr_groupsbyuser[a[i]] = $1

    _gr_bycount[++_gr_count] = $0
}
close(grcat)
_gr_count = 0
_gr_initied++
FS = oldfs
if (using_fw)
    FIELDWIDTHS = FIELDWIDTHS
else if (using_fpat)
    FPAT = FPAT
RS = oldrs
$0 = olddolo
}

```

The BEGIN rule sets a private variable to the directory where `grcat` is stored. Because it is used to help out an `awk` library routine, we have chosen to put it in `/usr/local/libexec/awk`. You might want it to be in a different directory on your system.

These routines follow the same general outline as the user database routines (see [Section 10.5 \[Reading the User Database\]](#), page 241). The `_gr_initied` variable is used to ensure that the database is scanned no more than once. The `_gr_init()` function first saves `FS`, `RS`, and `$0`, and then sets `FS` and `RS` to the correct values for scanning the group information. It also takes care to note whether `FIELDWIDTHS` or `FPAT` is being used, and to restore the appropriate field-splitting mechanism.

The group information is stored in several associative arrays. The arrays are indexed by group name (`_gr_byname`), by group ID number (`_gr_bygid`), and by position

in the database (`_gr_bycount`). There is an additional array indexed by username (`_gr_groupsbyuser`), which is a space-separated list of groups to which each user belongs.

Unlike in the user database, it is possible to have multiple records in the database for the same group. This is common when a group has a large number of members. A pair of such entries might look like the following:

```
tvpeople:*:101:johnny,jay,arsenio
tvpeople:*:101:david,conan,tom,joan
```

For this reason, `_gr_init()` looks to see if a group name or group ID number is already seen. If so, the usernames are simply concatenated onto the previous list of users.¹¹

Finally, `_gr_init()` closes the pipeline to `grcat`, restores `FS` (and `FIELDWIDTHS` or `FPAT`, if necessary), `RS`, and `$0`, initializes `_gr_count` to zero (it is used later), and makes `_gr_initied` nonzero.

The `getgrnam()` function takes a group name as its argument, and if that group exists, it is returned. Otherwise, it relies on the array reference to a nonexistent element to create the element with the null string as its value:

```
function getgrnam(group)
{
    _gr_init()
    return _gr_byname[group]
}
```

The `getgrgid()` function is similar; it takes a numeric group ID and looks up the information associated with that group ID:

```
function getgrgid(gid)
{
    _gr_init()
    return _gr_bygid[gid]
}
```

The `getgruser()` function does not have a C counterpart. It takes a username and returns the list of groups that have the user as a member:

```
function getgruser(user)
{
    _gr_init()
    return _gr_groupsbyuser[user]
}
```

The `getgrent()` function steps through the database one entry at a time. It uses `_gr_count` to track its position in the list:

```
function getgrent()
{
    _gr_init()
    if (++_gr_count in _gr_bycount)
        return _gr_bycount[_gr_count]
    return ""
}
```

¹¹ There is a subtle problem with the code just presented. Suppose that the first time there were no names. This code adds the names with a leading comma. It also doesn't check that there is a `$4`.

```
}
```

The `endgrent()` function resets `_gr_count` to zero so that `getgrent()` can start over again:

```
function endgrent()
{
    _gr_count = 0
}
```

As with the user database routines, each function calls `_gr_init()` to initialize the arrays. Doing so only incurs the extra overhead of running `grcat` if these functions are used (as opposed to moving the body of `_gr_init()` into a `BEGIN` rule).

Most of the work is in scanning the database and building the various associative arrays. The functions that the user calls are themselves very simple, relying on `awk`'s associative arrays to do work.

The `id` program in [Section 11.2.3 \[Printing Out User Information\]](#), page 262, uses these functions.

10.7 Traversing Arrays of Arrays

[Section 8.6 \[Arrays of Arrays\]](#), page 171, described how `gawk` provides arrays of arrays. In particular, any element of an array may be either a scalar or another array. The `isarray()` function (see [Section 9.1.7 \[Getting Type Information\]](#), page 199) lets you distinguish an array from a scalar. The following function, `walk_array()`, recursively traverses an array, printing the element indices and values. You call it with the array and a string representing the name of the array:

```
function walk_array(arr, name, i)
{
    for (i in arr) {
        if (isarray(arr[i]))
            walk_array(arr[i], (name "[" i "]"))
        else
            printf("%s[%s] = %s\n", name, i, arr[i])
    }
}
```

It works by looping over each element of the array. If any given element is itself an array, the function calls itself recursively, passing the subarray and a new string representing the current index. Otherwise, the function simply prints the element's name, index, and value. Here is a main program to demonstrate:

```
BEGIN {
    a[1] = 1
    a[2][1] = 21
    a[2][2] = 22
    a[3] = 3
    a[4][1][1] = 411
    a[4][2] = 42
}
```

```

        walk_array(a, "a")
    }

```

When run, the program produces the following output:

```

$ gawk -f walk_array.awk
+ a[1] = 1
+ a[2][1] = 21
+ a[2][2] = 22
+ a[3] = 3
+ a[4][1][1] = 411
+ a[4][2] = 42

```

The function just presented simply prints the name and value of each scalar array element. However, it is easy to generalize it, by passing in the name of a function to call when walking an array. The modified function looks like this:

```

function process_array(arr, name, process, do_arrays,    i, new_name)
{
    for (i in arr) {
        new_name = (name "[" i "]")
        if (isarray(arr[i])) {
            if (do_arrays)
                @process(new_name, arr[i])
            process_array(arr[i], new_name, process, do_arrays)
        } else
            @process(new_name, arr[i])
    }
}

```

The arguments are as follows:

arr The array.

name The name of the array (a string).

process The name of the function to call.

do_arrays

If this is true, the function can handle elements that are subarrays.

If subarrays are to be processed, that is done before walking them further.

When run with the following scaffolding, the function produces the same results as does the earlier version of `walk_array()`:

```

BEGIN {
    a[1] = 1
    a[2][1] = 21
    a[2][2] = 22
    a[3] = 3
    a[4][1][1] = 411
    a[4][2] = 42

    process_array(a, "a", "do_print", 0)
}

```

```

}

function do_print(name, element)
{
    printf "%s = %s\n", name, element
}

```

10.8 Summary

- Reading programs is an excellent way to learn Good Programming. The functions and programs provided in this chapter and the next are intended to serve that purpose.
- When writing general-purpose library functions, put some thought into how to name any global variables so that they won't conflict with variables from a user's program.
- The functions presented here fit into the following categories:

General problems

Number-to-string conversion, testing assertions, rounding, random number generation, converting characters to numbers, joining strings, getting easily usable time-of-day information, and reading a whole file in one shot

Managing data files

Noting data file boundaries, rereading the current file, checking for readable files, checking for zero-length files, and treating assignments as file names

Processing command-line options

An **awk** version of the standard C `getopt()` function

Reading the user and group databases

Two sets of routines that parallel the C library versions

Traversing arrays of arrays

Two functions that traverse an array of arrays to any depth

10.9 Exercises

1. In [Section 10.3.4 \[Checking for Zero-Length Files\]](#), [page 234](#), we presented the `zerofile.awk` program, which made use of **gawk**'s `ARGIND` variable. Can this problem be solved without relying on `ARGIND`? If so, how?
2. As a related challenge, revise that code to handle the case where an intervening value in `ARGV` is a variable assignment.

11 Practical awk Programs

Chapter 10 [A Library of awk Functions], page 219, presents the idea that reading programs in a language contributes to learning that language. This chapter continues that theme, presenting a potpourri of awk programs for your reading enjoyment. There are three sections. The first describes how to run the programs presented in this chapter.

The second presents awk versions of several common POSIX utilities. These are programs that you are hopefully already familiar with, and therefore whose problems are understood. By reimplementing these programs in awk, you can focus on the awk-related aspects of solving the programming problems.

The third is a grab bag of interesting programs. These solve a number of different data-manipulation and management problems. Many of the programs are short, which emphasizes awk’s ability to do a lot in just a few lines of code.

Many of these programs use library functions presented in Chapter 10 [A Library of awk Functions], page 219.

11.1 Running the Example Programs

To run a given program, you would typically do something like this:

```
awk -f program -- options files
```

Here, *program* is the name of the awk program (such as `cut.awk`), *options* are any command-line options for the program that start with a ‘-’, and *files* are the actual data files.

If your system supports the ‘#!’ executable interpreter mechanism (see Section 1.1.4 [Executable awk Programs], page 19), you can instead run your program directly:

```
cut.awk -c1-8 myfiles > results
```

If your awk is not gawk, you may instead need to use this:

```
cut.awk -- -c1-8 myfiles > results
```

11.2 Reinventing Wheels for Fun and Profit

This section presents a number of POSIX utilities implemented in awk. Reinventing these programs in awk is often enjoyable, because the algorithms can be very clearly expressed, and the code is usually very concise and simple. This is true because awk does so much for you.

It should be noted that these programs are not necessarily intended to replace the installed versions on your system. Nor may all of these programs be fully compliant with the most recent POSIX standard. This is not a problem; their purpose is to illustrate awk language programming for “real-world” tasks.

The programs are presented in alphabetical order.

11.2.1 Cutting Out Fields and Columns

The `cut` utility selects, or “cuts,” characters or fields from its standard input and sends them to its standard output. Fields are separated by TABs by default, but you may supply a command-line option to change the field *delimiter* (i.e., the field-separator character). `cut`’s definition of fields is less general than awk’s.

A common use of `cut` might be to pull out just the login names of logged-on users from the output of `who`. For example, the following pipeline generates a sorted, unique list of the logged-on users:

```
who | cut -c1-8 | sort | uniq
```

The options for `cut` are:

- `-c list` Use *list* as the list of characters to cut out. Items within the list may be separated by commas, and ranges of characters can be separated with dashes. The list '1-8,15,22-35' specifies characters 1 through 8, 15, and 22 through 35.
- `-f list` Use *list* as the list of fields to cut out.
- `-d delim` Use *delim* as the field-separator character instead of the TAB character.
- `-s` Suppress printing of lines that do not contain the field delimiter.

The `awk` implementation of `cut` uses the `getopt()` library function (see [Section 10.4 \[Processing Command-Line Options\]](#), page 236) and the `join()` library function (see [Section 10.2.6 \[Merging an Array into a String\]](#), page 227).

The program begins with a comment describing the options, the library functions needed, and a `usage()` function that prints out a usage message and exits. `usage()` is called if invalid arguments are supplied:

```
# cut.awk --- implement cut in awk

# Options:
#   -f list      Cut fields
#   -d c         Field delimiter character
#   -c list      Cut characters
#
#   -s           Suppress lines without the delimiter
#
# Requires getopt() and join() library functions

function usage()
{
    print("usage: cut [-f list] [-d c] [-s] [files...]" > "/dev/stderr")
    print("usage: cut [-c list] [files...]" > "/dev/stderr")
    exit 1
}
```

Next comes a `BEGIN` rule that parses the command-line options. It sets `FS` to a single TAB character, because that is `cut`'s default field separator. The rule then sets the output field separator to be the same as the input field separator. A loop using `getopt()` steps through the command-line options. Exactly one of the variables `by_fields` or `by_chars` is set to true, to indicate that processing should be done by fields or by characters, respectively. When cutting by characters, the output field separator is set to the null string:

```
BEGIN {
    FS = "\t"    # default
```



```

OFS = FS
while ((c = getopt(ARGC, ARGV, "sf:c:d:")) != -1) {
    if (c == "f") {
        by_fields = 1
        fieldlist = Optarg
    } else if (c == "c") {
        by_chars = 1
        fieldlist = Optarg
        OFS = ""
    } else if (c == "d") {
        if (length(Optarg) > 1) {
            printf("cut: using first character of %s" \
                  " for delimiter\n", Optarg) > "/dev/stderr"
            Optarg = substr(Optarg, 1, 1)
        }
        fs = FS = Optarg
        OFS = FS
        if (FS == " ")      # defeat awk semantics
            FS = "[ ]"
    } else if (c == "s")
        suppress = 1
    else
        usage()
}

# Clear out options
for (i = 1; i < Optind; i++)
    ARGV[i] = ""

```

The code must take special care when the field delimiter is a space. Using a single space (" ") for the value of FS is incorrect—awk would separate fields with runs of spaces, TABs, and/or newlines, and we want them to be separated with individual spaces. To this end, we save the original space character in the variable `fs` for later use; after setting FS to "[]" we can't use it directly to see if the field delimiter character is in the string.

Also remember that after `getopt()` is through (as described in [Section 10.4 \[Processing Command-Line Options\]](#), page 236), we have to clear out all the elements of ARGV from 1 to `Optind`, so that awk does not try to process the command-line options as file names.

After dealing with the command-line options, the program verifies that the options make sense. Only one or the other of `-c` and `-f` should be used, and both require a field list. Then the program calls either `set_fieldlist()` or `set_charlist()` to pull apart the list of fields or characters:

```

if (by_fields && by_chars)
    usage()

if (by_fields == 0 && by_chars == 0)
    by_fields = 1    # default

```

```

    if (fieldlist == "") {
        print "cut: needs list for -c or -f" > "/dev/stderr"
        exit 1
    }

    if (by_fields)
        set_fieldlist()
    else
        set_charlist()
}

```

`set_fieldlist()` splits the field list apart at the commas into an array. Then, for each element of the array, it looks to see if the element is actually a range, and if so, splits it apart. The function checks the range to make sure that the first number is smaller than the second. Each number in the list is added to the `flist` array, which simply lists the fields that will be printed. Normal field splitting is used. The program lets `awk` handle the job of doing the field splitting:

```

function set_fieldlist(      n, m, i, j, k, f, g)
{
    n = split(fieldlist, f, ",")
    j = 1      # index in flist
    for (i = 1; i <= n; i++) {
        if (index(f[i], "-") != 0) { # a range
            m = split(f[i], g, "-")
            if (m != 2 || g[1] >= g[2]) {
                printf("cut: bad field list: %s\n",
                    f[i]) > "/dev/stderr"

                exit 1
            }
            for (k = g[1]; k <= g[2]; k++)
                flist[j++] = k
        } else
            flist[j++] = f[i]
    }
    nfields = j - 1
}

```

The `set_charlist()` function is more complicated than `set_fieldlist()`. The idea here is to use `gawk`'s `FIELDWIDTHS` variable (see [Section 4.6 \[Reading Fixed-Width Data\]](#), [page 72](#)), which describes constant-width input. When using a character list, that is exactly what we have.

Setting up `FIELDWIDTHS` is more complicated than simply listing the fields that need to be printed. We have to keep track of the fields to print and also the intervening characters that have to be skipped. For example, suppose you wanted characters 1 through 8, 15, and 22 through 35. You would use `'-c 1-8,15,22-35'`. The necessary value for `FIELDWIDTHS` is `"8 6 1 6 14"`. This yields five fields, and the fields to print are `$1`, `$3`, and `$5`. The intermediate fields are *filler*, which is stuff in between the desired data. `flist` lists the fields to print, and `t` tracks the complete field list, including filler fields:

```

function set_charlist(    field, i, j, f, g, n, m, t,
                        filler, last, len)
{
    field = 1    # count total fields
    n = split(fieldlist, f, ",")
    j = 1        # index in flist
    for (i = 1; i <= n; i++) {
        if (index(f[i], "-") != 0) { # range
            m = split(f[i], g, "-")
            if (m != 2 || g[1] >= g[2]) {
                printf("cut: bad character list: %s\n",
                       f[i]) > "/dev/stderr"
                exit 1
            }
            len = g[2] - g[1] + 1
            if (g[1] > 1) # compute length of filler
                filler = g[1] - last - 1
            else
                filler = 0
            if (filler)
                t[field++] = filler
            t[field++] = len # length of field
            last = g[2]
            flist[j++] = field - 1
        } else {
            if (f[i] > 1)
                filler = f[i] - last - 1
            else
                filler = 0
            if (filler)
                t[field++] = filler
            t[field++] = 1
            last = f[i]
            flist[j++] = field - 1
        }
    }
    FIELDWIDTHS = join(t, 1, field - 1)
    nfields = j - 1
}

```

Next is the rule that processes the data. If the `-s` option is given, then `suppress` is true. The first `if` statement makes sure that the input record does have the field separator. If `cut` is processing fields, `suppress` is true, and the field separator character is not in the record, then the record is skipped.

If the record is valid, then `gawk` has split the data into fields, either using the character in `FS` or using fixed-length fields and `FIELDWIDTHS`. The loop goes through the list of fields

that should be printed. The corresponding field is printed if it contains data. If the next field also has data, then the separator character is written out between the fields:

```
{
    if (by_fields && suppress && index($0, fs) == 0)
        next

    for (i = 1; i <= nfields; i++) {
        if ($flist[i] != "") {
            printf "%s", $flist[i]
            if (i < nfields && $flist[i+1] != "")
                printf "%s", OFS
        }
    }
    print ""
}
```

This version of `cut` relies on `gawk`'s `FIELDWIDTHS` variable to do the character-based cutting. It is possible in other `awk` implementations to use `substr()` (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177), but it is also extremely painful. The `FIELDWIDTHS` variable supplies an elegant solution to the problem of picking the input line apart by characters.

11.2.2 Searching for Regular Expressions in Files

The **egrep** utility searches files for patterns. It uses regular expressions that are almost identical to those available in **awk** (see [Chapter 3 \[Regular Expressions\]](#), page 45). You invoke it as follows:

```
egrep [options] 'pattern' files ...
```

The *pattern* is a regular expression. In typical usage, the regular expression is quoted to prevent the shell from expanding any of the special characters as file name wildcards. Normally, **egrep** prints the lines that matched. If multiple file names are provided on the command line, each output line is preceded by the name of the file and a colon.

The options to `egrep` are as follows:

- c Print out a count of the lines that matched the pattern, instead of the lines themselves.
- s Be silent. No output is produced and the exit value indicates whether the pattern was matched.
- v Invert the sense of the test. **egrep** prints the lines that do *not* match the pattern and exits successfully if the pattern is not matched.
- i Ignore case distinctions in both the pattern and the input data.
- l Only print (list) the names of the files that matched, not the lines that matched.
- e *pattern* Use *pattern* as the regexp to match. The purpose of the -e option is to allow patterns that start with a '-'.
The purpose of the -e option is to allow patterns that start with a '-'.
The purpose of the -e option is to allow patterns that start with a '-'.

This version uses the `getopt()` library function (see [Section 10.4 \[Processing Command-Line Options\]](#), page 236) and the file transition library program (see [Section 10.3.1 \[Noting Data file Boundaries\]](#), page 231).

The program begins with a descriptive comment and then a `BEGIN` rule that processes the command-line arguments with `getopt()`. The `-i` (ignore case) option is particularly easy with `gawk`; we just use the `IGNORECASE` predefined variable (see [Section 7.5 \[Predefined Variables\]](#), page 147):

```
# egrep.awk --- simulate egrep in awk
#
# Options:
#   -c      count of lines
#   -s      silent - use exit value
#   -v      invert test, success if no match
#   -i      ignore case
#   -l      print filenames only
#   -e      argument is pattern
#
# Requires getopt and file transition library functions

BEGIN {
    while ((c = getopt(ARGC, ARGV, "ce:svil")) != -1) {
        if (c == "c")
            count_only++
        else if (c == "s")
            no_print++
        else if (c == "v")
            invert++
        else if (c == "i")
            IGNORECASE = 1
        else if (c == "l")
            filenames_only++
        else if (c == "e")
            pattern = Optarg
        else
            usage()
    }
}
```

Next comes the code that handles the `egrep`-specific behavior. If no pattern is supplied with `-e`, the first nonoption on the command line is used. The `awk` command-line arguments up to `ARGV[Optind]` are cleared, so that `awk` won't try to process them as files. If no files are specified, the standard input is used, and if multiple files are specified, we make sure to note this so that the file names can precede the matched lines in the output:

```
if (pattern == "")
    pattern = ARGV[Optind++]

for (i = 1; i < Optind; i++)
    ARGV[i] = ""
```

```

    if (Optind >= ARGV) {
        ARGV[1] = "-"
        ARGV = 2
    } else if (ARGC - Optind > 1)
        do_filenames++

#    if (IGNORECASE)
#        pattern = tolower(pattern)
#}

```

The last two lines are commented out, as they are not needed in **gawk**. They should be uncommented if you have to use another version of **awk**.

The next set of lines should be uncommented if you are not using **gawk**. This rule translates all the characters in the input line into lowercase if the **-i** option is specified.¹ The rule is commented out as it is not necessary with **gawk**:

```

#{
#    if (IGNORECASE)
#        $0 = tolower($0)
#}

```

The **beginfile()** function is called by the rule in **ftrans.awk** when each new file is processed. In this case, it is very simple; all it does is initialize a variable **fcount** to zero. **fcount** tracks how many lines in the current file matched the pattern. Naming the parameter **junk** shows we know that **beginfile()** is called with a parameter, but that we're not interested in its value:

```

function beginfile(junk)
{
    fcount = 0
}

```

The **endfile()** function is called after each file has been processed. It affects the output only when the user wants a count of the number of lines that matched. **no_print** is true only if the exit status is desired. **count_only** is true if line counts are desired. **egrep** therefore only prints line counts if printing and counting are enabled. The output format must be adjusted depending upon the number of files to process. Finally, **fcount** is added to **total**, so that we know the total number of lines that matched the pattern:

```

function endfile(file)
{
    if (! no_print && count_only) {
        if (do_filenames)
            print file ":" fcount
        else
            print fcount
    }

    total += fcount
}

```

¹ It also introduces a subtle bug; if a match happens, we output the translated line, not the original.

```
}
```

The `BEGINFILE` and `ENDFILE` special patterns (see [Section 7.1.5 \[The `BEGINFILE` and `ENDFILE` Special Patterns\]](#), page 135) could be used, but then the program would be `gawk`-specific. Additionally, this example was written before `gawk` acquired `BEGINFILE` and `ENDFILE`.

The following rule does most of the work of matching lines. The variable `matches` is true if the line matched the pattern. If the user wants lines that did not match, the sense of `matches` is inverted using the `!` operator. `fcount` is incremented with the value of `matches`, which is either one or zero, depending upon a successful or unsuccessful match. If the line does not match, the `next` statement just moves on to the next record.

A number of additional tests are made, but they are only done if we are not counting lines. First, if the user only wants the exit status (`no_print` is true), then it is enough to know that *one* line in this file matched, and we can skip on to the next file with `nextfile`. Similarly, if we are only printing file names, we can print the file name, and then skip to the next file with `nextfile`. Finally, each line is printed, with a leading file name and colon if necessary:

```
{
    matches = ($0 ~ pattern)
    if (invert)
        matches = ! matches

    fcount += matches    # 1 or 0

    if (! matches)
        next

    if (! count_only) {
        if (no_print)
            nextfile

        if (filenames_only) {
            print FILENAME
            nextfile
        }

        if (do_filenames)
            print FILENAME ":" $0
        else
            print
    }
}
```

The `END` rule takes care of producing the correct exit status. If there are no matches, the exit status is one; otherwise, it is zero:

```
END {
    exit (total == 0)
```

```
}
```

The `usage()` function prints a usage message in case of invalid options, and then exits:

```
function usage()
{
    print("Usage: egrep [-csvil] [-e pat] [files ...]") > "/dev/stderr"
    print("\n\tgrep [-csvil] pat [files ...]") > "/dev/stderr"
    exit 1
}
```

11.2.3 Printing Out User Information

The `id` utility lists a user's real and effective user ID numbers, real and effective group ID numbers, and the user's group set, if any. `id` only prints the effective user ID and group ID if they are different from the real ones. If possible, `id` also supplies the corresponding user and group names. The output might look like this:

```
$ id
+ uid=1000(arnold) gid=1000(arnold) groups=1000(arnold),4(adm),7(lp),27(sudo)
```

This information is part of what is provided by `gawk`'s `PROCINFO` array (see [Section 7.5 \[Predefined Variables\]](#), page 147). However, the `id` utility provides a more palatable output than just individual numbers.

Here is a simple version of `id` written in `awk`. It uses the user database library functions (see [Section 10.5 \[Reading the User Database\]](#), page 241) and the group database library functions (see [Section 10.6 \[Reading the Group Database\]](#), page 245) from [Chapter 10 \[A Library of `awk` Functions\]](#), page 219.

The program is fairly straightforward. All the work is done in the `BEGIN` rule. The user and group ID numbers are obtained from `PROCINFO`. The code is repetitive. The entry in the user database for the real user ID number is split into parts at the `':'`. The name is the first field. Similar code is used for the effective user ID number and the group numbers:

```
# id.awk --- implement id in awk
#
# Requires user and group library functions
# output is:
# uid=12(foo) euid=34(bar) gid=3(baz) \
#           egid=5(blat) groups=9(nine),2(two),1(one)

BEGIN {
    uid = PROCINFO["uid"]
    euid = PROCINFO["euid"]
    gid = PROCINFO["gid"]
    egid = PROCINFO["egid"]

    printf("uid=%d", uid)
    pw = getpwuid(uid)
    pr_first_field(pw)

    if (euid != uid) {
```



```

        printf(" euid=%d", euid)
        pw = getpwuid(euid)
        pr_first_field(pw)
    }

    printf(" gid=%d", gid)
    pw = getgrgid(gid)
    pr_first_field(pw)

    if (egid != gid) {
        printf(" egid=%d", egid)
        pw = getgrgid(egid)
        pr_first_field(pw)
    }

    for (i = 1; ("group" i) in PROCINFO; i++) {
        if (i == 1)
            printf(" groups=")
        group = PROCINFO["group" i]
        printf("%d", group)
        pw = getgrgid(group)
        pr_first_field(pw)
        if (("group" (i+1)) in PROCINFO)
            printf(",")
    }

    print ""

function pr_first_field(str, a)
{
    if (str != "") {
        split(str, a, ":")
        printf("(%s)", a[1])
    }
}

```

The test in the `for` loop is worth noting. Any supplementary groups in the `PROCINFO` array have the indices `"group1"` through `"groupN"` for some N (i.e., the total number of supplementary groups). However, we don't know in advance how many of these groups there are.

This loop works by starting at one, concatenating the value with `"group"`, and then using `in` to see if that value is in the array (see [Section 8.1.2 \[Referring to an Array Element\]](#), [page 161](#)). Eventually, `i` is incremented past the last group in the array and the loop exits.

The loop is also correct if there are *no* supplementary groups; then the condition is false the first time it's tested, and the loop body never executes.

The `pr_first_field()` function simply isolates out some code that is used repeatedly, making the whole program shorter and cleaner. In particular, moving the check for the empty string into this function saves several lines of code.

11.2.4 Splitting a Large File into Pieces

The `split` program splits large text files into smaller pieces. Usage is as follows:²

```
split [-count] [file] [prefix]
```

By default, the output files are named `xaa`, `xab`, and so on. Each file has 1,000 lines in it, with the likely exception of the last file. To change the number of lines in each file, supply a number on the command line preceded with a minus sign (e.g., `-500` for files with 500 lines in them instead of 1,000). To change the names of the output files to something like `myfileaa`, `myfileab`, and so on, supply an additional argument that specifies the file name prefix.

Here is a version of `split` in `awk`. It uses the `ord()` and `chr()` functions presented in [Section 10.2.5 \[Translating Between Characters and Numbers\]](#), page 225.

The program first sets its defaults, and then tests to make sure there are not too many arguments. It then looks at each argument in turn. The first argument could be a minus sign followed by a number. If it is, this happens to look like a negative number, so it is made positive, and that is the count of lines. The data file name is skipped over and the final argument is used as the prefix for the output file names:

```
# split.awk --- do split in awk
#
# Requires ord() and chr() library functions
# usage: split [-count] [file] [outname]

BEGIN {
    outfile = "x"      # default
    count = 1000
    if (ARGC > 4)
        usage()

    i = 1
    if (i in ARGV && ARGV[i] ~ /^-[[[:digit:]]+$/ ) {
        count = -ARGV[i]
        ARGV[i] = ""
        i++
    }
    # test argv in case reading from stdin instead of file
    if (i in ARGV)
        i++      # skip datafile name
    if (i in ARGV) {
        outfile = ARGV[i]
        ARGV[i] = ""
    }
}
```

² This is the traditional usage. The POSIX usage is different, but not relevant for what the program aims to demonstrate.

```

    }

    s1 = s2 = "a"
    out = (outfile s1 s2)
}

```

The next rule does most of the work. `tcount` (temporary count) tracks how many lines have been printed to the output file so far. If it is greater than `count`, it is time to close the current file and start a new one. `s1` and `s2` track the current suffixes for the file name. If they are both ‘z’, the file is just too big. Otherwise, `s1` moves to the next letter in the alphabet and `s2` starts over again at ‘a’:

```

{
    if (++tcount > count) {
        close(out)
        if (s2 == "z") {
            if (s1 == "z") {
                printf("split: %s is too large to split\n",
                       FILENAME) > "/dev/stderr"
                exit 1
            }
            s1 = chr(ord(s1) + 1)
            s2 = "a"
        }
        else
            s2 = chr(ord(s2) + 1)
        out = (outfile s1 s2)
        tcount = 1
    }
    print > out
}

```

The `usage()` function simply prints an error message and exits:

```

function usage()
{
    print("usage: split [-num] [file] [outname]") > "/dev/stderr"
    exit 1
}

```

This program is a bit sloppy; it relies on `awk` to automatically close the last file instead of doing it in an `END` rule. It also assumes that letters are contiguous in the character set, which isn’t true for EBCDIC systems.

11.2.5 Duplicating Output into Multiple Files

The `tee` program is known as a “pipe fitting.” `tee` copies its standard input to its standard output and also duplicates it to the files named on the command line. Its usage is as follows:

```
tee [-a] file ...
```

The `-a` option tells `tee` to append to the named files, instead of truncating them and starting over.

The `BEGIN` rule first makes a copy of all the command-line arguments into an array named `copy`. `ARGV[0]` is not needed, so it is not copied. `tee` cannot use `ARGV` directly, because `awk` attempts to process each file name in `ARGV` as input data.

If the first argument is `-a`, then the flag variable `append` is set to true, and both `ARGV[1]` and `copy[1]` are deleted. If `ARGC` is less than two, then no file names were supplied and `tee` prints a usage message and exits. Finally, `awk` is forced to read the standard input by setting `ARGV[1]` to `"-"` and `ARGC` to two:

```
# tee.awk --- tee in awk
#
# Copy standard input to all named output files.
# Append content if -a option is supplied.
#
BEGIN {
    for (i = 1; i < ARGC; i++)
        copy[i] = ARGV[i]

    if (ARGV[1] == "-a") {
        append = 1
        delete ARGV[1]
        delete copy[1]
        ARGC--
    }
    if (ARGC < 2) {
        print "usage: tee [-a] file ..." > "/dev/stderr"
        exit 1
    }
    ARGV[1] = "-"
    ARGC = 2
}
```

The following single rule does all the work. Because there is no pattern, it is executed for each line of input. The body of the rule simply prints the line into each file on the command line, and then to the standard output:

```
{
    # moving the if outside the loop makes it run faster
    if (append)
        for (i in copy)
            print >> copy[i]
    else
        for (i in copy)
            print > copy[i]
    print
}
```

It is also possible to write the loop this way:

```
for (i in copy)
    if (append)
```

```

        print >> copy[i]
    else
        print > copy[i]

```

This is more concise, but it is also less efficient. The ‘if’ is tested for each record and for each output file. By duplicating the loop body, the ‘if’ is only tested once for each input record. If there are N input records and M output files, the first method only executes N ‘if’ statements, while the second executes $N*M$ ‘if’ statements.

Finally, the END rule cleans up by closing all the output files:

```

END {
    for (i in copy)
        close(copy[i])
}

```

11.2.6 Printing Nonduplicated Lines of Text

The **uniq** utility reads sorted lines of data on its standard input, and by default removes duplicate lines. In other words, it only prints unique lines—hence the name. **uniq** has a number of options. The usage is as follows:

```
uniq [-udc [-n]] [+n] [inputfile [outputfile]]
```

The options for **uniq** are:

- d** Print only repeated (duplicated) lines.
- u** Print only nonrepeated (unique) lines.
- c** Count lines. This option overrides **-d** and **-u**. Both repeated and nonrepeated lines are counted.
- n** Skip n fields before comparing lines. The definition of fields is similar to **awk**’s default: nonwhitespace characters separated by runs of spaces and/or TABs.
- +n** Skip n characters before comparing lines. Any fields specified with ‘**-n**’ are skipped first.

inputfile

Data is read from the input file named on the command line, instead of from the standard input.

outputfile

The generated output is sent to the named output file, instead of to the standard output.

Normally **uniq** behaves as if both the **-d** and **-u** options are provided.

uniq uses the **getopt()** library function (see [Section 10.4 \[Processing Command-Line Options\]](#), page 236) and the **join()** library function (see [Section 10.2.6 \[Merging an Array into a String\]](#), page 227).

The program begins with a **usage()** function and then a brief outline of the options and their meanings in comments. The BEGIN rule deals with the command-line arguments and options. It uses a trick to get **getopt()** to handle options of the form ‘**-25**’, treating such an option as the option letter ‘2’ with an argument of ‘5’. If indeed two or more digits are supplied (**Optarg** looks like a number), **Optarg** is concatenated with the option digit

and then the result is added to zero to make it into a number. If there is only one digit in the option, then `Optarg` is not needed. In this case, `Optind` must be decremented so that `getopt()` processes it next time. This code is admittedly a bit tricky.

If no options are supplied, then the default is taken, to print both repeated and nonrepeated lines. The output file, if provided, is assigned to `outputfile`. Early on, `outputfile` is initialized to the standard output, `/dev/stdout`:

```
# uniq.awk --- do uniq in awk
#
# Requires getopt() and join() library functions

function usage()
{
    print("Usage: uniq [-udc [-n]] [+n] [ in [ out ]]") > "/dev/stderr"
    exit 1
}

# -c    count lines. overrides -d and -u
# -d    only repeated lines
# -u    only nonrepeated lines
# -n    skip n fields
# +n    skip n characters, skip fields first

BEGIN {
    count = 1
    outputfile = "/dev/stdout"
    opts = "udc0:1:2:3:4:5:6:7:8:9:"
    while ((c = getopt(ARGC, ARGV, opts)) != -1) {
        if (c == "u")
            non_repeated_only++
        else if (c == "d")
            repeated_only++
        else if (c == "c")
            do_count++
        else if (index("0123456789", c) != 0) {
            # getopt() requires args to options
            # this messes us up for things like -5
            if (Optarg ~ /^[[:digit:]]+$/ )
                fcount = (c Optarg) + 0
            else {
                fcount = c + 0
                Optind--
            }
        } else
            usage()
    }
}
```

```

if (ARGV[Optind] ~ /^\[[:digit:]]+$/) {
    charcount = substr(ARGV[Optind], 2) + 0
    Optind++
}

for (i = 1; i < Optind; i++)
    ARGV[i] = ""

if (repeated_only == 0 && non_repeated_only == 0)
    repeated_only = non_repeated_only = 1

if (ARGC - Optind == 2) {
    outputfile = ARGV[ARGC - 1]
    ARGV[ARGC - 1] = ""
}
}

```

The following function, `are_equal()`, compares the current line, `$0`, to the previous line, `last`. It handles skipping fields and characters. If no field count and no character count are specified, `are_equal()` returns one or zero depending upon the result of a simple string comparison of `last` and `$0`.

Otherwise, things get more complicated. If fields have to be skipped, each line is broken into an array using `split()` (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177); the desired fields are then joined back into a line using `join()`. The joined lines are stored in `clast` and `cline`. If no fields are skipped, `clast` and `cline` are set to `last` and `$0`, respectively. Finally, if characters are skipped, `substr()` is used to strip off the leading `charcount` characters in `clast` and `cline`. The two strings are then compared and `are_equal()` returns the result:

```

function are_equal(    n, m, clast, cline, alast, aline)
{
    if (fcount == 0 && charcount == 0)
        return (last == $0)

    if (fcount > 0) {
        n = split(last, alast)
        m = split($0, aline)
        clast = join(alast, fcount+1, n)
        cline = join(aline, fcount+1, m)
    } else {
        clast = last
        cline = $0
    }
    if (charcount) {
        clast = substr(clast, charcount + 1)
        cline = substr(cline, charcount + 1)
    }
}

```

```

    return (clast == cline)
}

```

The following two rules are the body of the program. The first one is executed only for the very first line of data. It sets `last` equal to `$0`, so that subsequent lines of text have something to be compared to.

The second rule does the work. The variable `equal` is one or zero, depending upon the results of `are_equal()`'s comparison. If `uniq` is counting repeated lines, and the lines are equal, then it increments the `count` variable. Otherwise, it prints the line and resets `count`, because the two lines are not equal.

If `uniq` is not counting, and if the lines are equal, `count` is incremented. Nothing is printed, as the point is to remove duplicates. Otherwise, if `uniq` is counting repeated lines and more than one line is seen, or if `uniq` is counting nonrepeated lines and only one line is seen, then the line is printed, and `count` is reset.

Finally, similar logic is used in the `END` rule to print the final line of input data:

```

NR == 1 {
    last = $0
    next
}

{
    equal = are_equal()

    if (do_count) {    # overrides -d and -u
        if (equal)
            count++
        else {
            printf("%4d %s\n", count, last) > outputfile
            last = $0
            count = 1    # reset
        }
        next
    }

    if (equal)
        count++
    else {
        if ((repeated_only && count > 1) ||
            (non_repeated_only && count == 1))
            print last > outputfile
        last = $0
        count = 1
    }
}

END {
    if (do_count)

```



```

        printf("%4d %s\n", count, last) > outputfile
    else if ((repeated_only && count > 1) ||
        (non_repeated_only && count == 1))
        print last > outputfile
    close(outputfile)
}

```

11.2.7 Counting Things

The `wc` (word count) utility counts lines, words, and characters in one or more input files. Its usage is as follows:

```
wc [-lwc] [files ...]
```

If no files are specified on the command line, `wc` reads its standard input. If there are multiple files, it also prints total counts for all the files. The options and their meanings are as follows:

- `-l` Count only lines.
- `-w` Count only words. A “word” is a contiguous sequence of nonwhitespace characters, separated by spaces and/or TABs. Luckily, this is the normal way `awk` separates fields in its input data.
- `-c` Count only characters.

Implementing `wc` in `awk` is particularly elegant, because `awk` does a lot of the work for us; it splits lines into words (i.e., fields) and counts them, it counts lines (i.e., records), and it can easily tell us how long a line is.

This program uses the `getopt()` library function (see [Section 10.4 \[Processing Command-Line Options\]](#), page 236) and the file-transition functions (see [Section 10.3.1 \[Noting Data file Boundaries\]](#), page 231).

This version has one notable difference from traditional versions of `wc`: it always prints the counts in the order lines, words, and characters. Traditional versions note the order of the `-l`, `-w`, and `-c` options on the command line, and print the counts in that order.

The `BEGIN` rule does the argument processing. The variable `print_total` is true if more than one file is named on the command line:

```

# wc.awk --- count lines, words, characters

# Options:
#   -l    only count lines
#   -w    only count words
#   -c    only count characters
#
# Default is to count lines, words, characters
#
# Requires getopt() and file transition library functions

BEGIN {
    # let getopt() print a message about
    # invalid options. we ignore them

```

```

while ((c = getopt(ARGC, ARGV, "lwc")) != -1) {
    if (c == "l")
        do_lines = 1
    else if (c == "w")
        do_words = 1
    else if (c == "c")
        do_chars = 1
}
for (i = 1; i < Optind; i++)
    ARGV[i] = ""

# if no options, do all
if (! do_lines && ! do_words && ! do_chars)
    do_lines = do_words = do_chars = 1

print_total = (ARGC - i > 1)
}

```

The `beginfile()` function is simple; it just resets the counts of lines, words, and characters to zero, and saves the current file name in `fname`:

```

function beginfile(file)
{
    lines = words = chars = 0
    fname = FILENAME
}

```

The `endfile()` function adds the current file's numbers to the running totals of lines, words, and characters. It then prints out those numbers for the file that was just read. It relies on `beginfile()` to reset the numbers for the following data file:

```

function endfile(file)
{
    tlines += lines
    twords += words
    tchars += chars
    if (do_lines)
        printf "\t%d", lines
    if (do_words)
        printf "\t%d", words
    if (do_chars)
        printf "\t%d", chars
    printf "\t%s\n", fname
}

```

There is one rule that is executed for each line. It adds the length of the record, plus one, to `chars`.³ Adding one plus the record length is needed because the newline character separating records (the value of `RS`) is not part of the record itself, and thus not included

³ Because `gawk` understands multibyte locales, this code counts characters, not bytes.

in its length. Next, `lines` is incremented for each line read, and `words` is incremented by the value of `NF`, which is the number of “words” on this line:

```
# do per line
{
    chars += length($0) + 1    # get newline
    lines++
    words += NF
}
```

Finally, the `END` rule simply prints the totals for all the files:

```
END {
    if (print_total) {
        if (do_lines)
            printf "\t%d", tlines
        if (do_words)
            printf "\t%d", twords
        if (do_chars)
            printf "\t%d", tchars
        print "\ttotal"
    }
}
```

11.3 A Grab Bag of awk Programs

This section is a large “grab bag” of miscellaneous programs. We hope you find them both interesting and enjoyable.

11.3.1 Finding Duplicated Words in a Document

A common error when writing large amounts of prose is to accidentally duplicate words. Typically you will see this in text as something like “the the program does the following. . .” When the text is online, often the duplicated words occur at the end of one line and the the beginning of another, making them very difficult to spot.

This program, `dupword.awk`, scans through a file one line at a time and looks for adjacent occurrences of the same word. It also saves the last word on a line (in the variable `prev`) for comparison with the first word on the next line.

The first two statements make sure that the line is all lowercase, so that, for example, “The” and “the” compare equal to each other. The next statement replaces nonalphanumeric and nonwhitespace characters with spaces, so that punctuation does not affect the comparison either. The characters are replaced with spaces so that formatting controls don’t create nonsense words (e.g., the Texinfo ‘`@code{NF}`’ becomes ‘`codeNF`’ if punctuation is simply deleted). The record is then resplit into fields, yielding just the actual words on the line, and ensuring that there are no empty fields.

If there are no fields left after removing all the punctuation, the current record is skipped. Otherwise, the program loops through each word, comparing it to the previous one:

```
# dupword.awk --- find duplicate words in text
{
```

```

$0 = tolower($0)
gsub(/[[:alnum:][:blank:]]/, " ");
$0 = $0          # re-split
if (NF == 0)
    next
if ($1 == prev)
    printf("%s:%d: duplicate %s\n",
           FILENAME, FNR, $1)
for (i = 2; i <= NF; i++)
    if ($i == $(i-1))
        printf("%s:%d: duplicate %s\n",
               FILENAME, FNR, $i)
prev = $NF
}

```

11.3.2 An Alarm Clock Program

Nothing cures insomnia like a ringing alarm clock.

—Arnold Robbins

Sleep is for web developers.

—Erik Quantstrom

The following program is a simple “alarm clock” program. You give it a time of day and an optional message. At the specified time, it prints the message on the standard output. In addition, you can give it the number of times to repeat the message as well as a delay between repetitions.

This program uses the `getlocaltime()` function from [Section 10.2.7 \[Managing the Time of Day\]](#), page 227.

All the work is done in the `BEGIN` rule. The first part is argument checking and setting of defaults: the delay, the count, and the message to print. If the user supplied a message without the ASCII BEL character (known as the “alert” character, `"\a"`), then it is added to the message. (On many systems, printing the ASCII BEL generates an audible alert. Thus, when the alarm goes off, the system calls attention to itself in case the user is not looking at the computer.) Just for a change, this program uses a `switch` statement (see [Section 7.4.5 \[The switch Statement\]](#), page 141), but the processing could be done with a series of `if-else` statements instead. Here is the program:

```

# alarm.awk --- set an alarm
#
# Requires getlocaltime() library function
# usage: alarm time [ "message" [ count [ delay ] ] ]

BEGIN {
    # Initial argument sanity checking
    usage1 = "usage: alarm time ['message' [count [delay]]]"
    usage2 = sprintf("\t(%)s time ::= hh:mm", ARGV[1])

    if (ARGC < 2) {
        print usage1 > "/dev/stderr"
    }
}

```

```

        print usage2 > "/dev/stderr"
        exit 1
    }
    switch (ARGC) {
    case 5:
        delay = ARGV[4] + 0
        # fall through
    case 4:
        count = ARGV[3] + 0
        # fall through
    case 3:
        message = ARGV[2]
        break
    default:
        if (ARGV[1] !~ /[[:digit:]]?[[:digit:]]{2}/) {
            print usage1 > "/dev/stderr"
            print usage2 > "/dev/stderr"
            exit 1
        }
        break
    }
}

# set defaults for once we reach the desired time
if (delay == 0)
    delay = 180    # 3 minutes
if (count == 0)
    count = 5
if (message == "")
    message = sprintf("\aIt is now %s!\a", ARGV[1])
else if (index(message, "\a") == 0)
    message = "\a" message "\a"

```

The next section of code turns the alarm time into hours and minutes, converts it (if necessary) to a 24-hour clock, and then turns that time into a count of the seconds since midnight. Next it turns the current time into a count of seconds since midnight. The difference between the two is how long to wait before setting off the alarm:

```

# split up alarm time
split(ARGV[1], atime, ":")
hour = atime[1] + 0    # force numeric
minute = atime[2] + 0 # force numeric

# get current broken down time
getlocaltime(now)

# if time given is 12-hour hours and it's after that
# hour, e.g., 'alarm 5:30' at 9 a.m. means 5:30 p.m.,
# then add 12 to real hour

```

```

if (hour < 12 && now["hour"] > hour)
    hour += 12

# set target time in seconds since midnight
target = (hour * 60 * 60) + (minute * 60)

# get current time in seconds since midnight
current = (now["hour"] * 60 * 60) + \
    (now["minute"] * 60) + now["second"]

# how long to sleep for
naptime = target - current
if (naptime <= 0) {
    print "alarm: time is in the past!" > "/dev/stderr"
    exit 1
}

```

Finally, the program uses the `system()` function (see [Section 9.1.4 \[Input/Output Functions\]](#), page 189) to call the `sleep` utility. The `sleep` utility simply pauses for the given number of seconds. If the exit status is not zero, the program assumes that `sleep` was interrupted and exits. If `sleep` exited with an OK status (zero), then the program prints the message in a loop, again using `sleep` to delay for however many seconds are necessary:

```

# zzzzzz..... go away if interrupted
if (system(sprintf("sleep %d", naptime)) != 0)
    exit 1

# time to notify!
command = sprintf("sleep %d", delay)
for (i = 1; i <= count; i++) {
    print message
    # if sleep command interrupted, go away
    if (system(command) != 0)
        break
}

exit 0
}

```

11.3.3 Transliterating Characters

The system `tr` utility transliterates characters. For example, it is often used to map uppercase letters into lowercase for further processing:

```
generate data | tr 'A-Z' 'a-z' | process data ...
```

`tr` requires two lists of characters.⁴ When processing the input, the first character in the first list is replaced with the first character in the second list, the second character in

⁴ On some older systems, including Solaris, the system version of `tr` may require that the lists be written as range expressions enclosed in square brackets (`'[a-z]'`) and quoted, to prevent the shell from attempting a file name expansion. This is not a feature.

the first list is replaced with the second character in the second list, and so on. If there are more characters in the “from” list than in the “to” list, the last character of the “to” list is used for the remaining characters in the “from” list.

Once upon a time, a user proposed adding a transliteration function to **gawk**. The following program was written to prove that character transliteration could be done with a user-level function. This program is not as complete as the system **tr** utility, but it does most of the job.

The **translate** program was written long before **gawk** acquired the ability to split each character in a string into separate array elements. Thus, it makes repeated use of the **substr()**, **index()**, and **gsub()** built-in functions (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177). There are two functions. The first, **stranslate()**, takes three arguments:

```
from      A list of characters from which to translate
to        A list of characters to which to translate
target    The string on which to do the translation
```

Associative arrays make the translation part fairly easy. **t_ar** holds the “to” characters, indexed by the “from” characters. Then a simple loop goes through **from**, one character at a time. For each character in **from**, if the character appears in **target**, it is replaced with the corresponding **to** character.

The **translate()** function calls **stranslate()**, using **\$0** as the target. The main program sets two global variables, **FROM** and **TO**, from the command line, and then changes **ARGV** so that **awk** reads from the standard input.

Finally, the processing rule simply calls **translate()** for each record:

```
# translate.awk --- do tr-like stuff
# Bugs: does not handle things like tr A-Z a-z; it has
# to be spelled out. However, if 'to' is shorter than 'from',
# the last character in 'to' is used for the rest of 'from'.

function stranslate(from, to, target,      lf, lt, ltarget, t_ar, i, c,
                    result)
{
    lf = length(from)
    lt = length(to)
    ltarget = length(target)
    for (i = 1; i <= lt; i++)
        t_ar[substr(from, i, 1)] = substr(to, i, 1)
    if (lt < lf)
        for (; i <= lf; i++)
            t_ar[substr(from, i, 1)] = substr(to, lt, 1)
    for (i = 1; i <= ltarget; i++) {
        c = substr(target, i, 1)
        if (c in t_ar)
            c = t_ar[c]
        result = result c
    }
}
```

```

    }
    return result
}

function translate(from, to)
{
    return $0 = stranslate(from, to, $0)
}

# main program
BEGIN {
    if (ARGC < 3) {
        print "usage: translate from to" > "/dev/stderr"
        exit
    }
    FROM = ARGV[1]
    TO = ARGV[2]
    ARGC = 2
    ARGV[1] = "-"
}

{
    translate(FROM, TO)
    print
}

```

It is possible to do character transliteration in a user-level function, but it is not necessarily efficient, and we (the **gawk** developers) started to consider adding a built-in function. However, shortly after writing this program, we learned that Brian Kernighan had added the `toupper()` and `tolower()` functions to his **awk** (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177). These functions handle the vast majority of the cases where character transliteration is necessary, and so we chose to simply add those functions to **gawk** as well and then leave well enough alone.

An obvious improvement to this program would be to set up the `t_ar` array only once, in a `BEGIN` rule. However, this assumes that the “from” and “to” lists will never change throughout the lifetime of the program.

Another obvious improvement is to enable the use of ranges, such as ‘a-z’, as allowed by the `tr` utility. Look at the code for `cut.awk` (see [Section 11.2.1 \[Cutting Out Fields and Columns\]](#), page 253) for inspiration.

11.3.4 Printing Mailing Labels

Here is a “real-world”⁵ program. This script reads lists of names and addresses and generates mailing labels. Each page of labels has 20 labels on it, two across and 10 down. The addresses are guaranteed to be no more than five lines of data. Each address is separated from the next by a blank line.

⁵ “Real world” is defined as “a program actually used to get something done.”

The basic idea is to read 20 labels' worth of data. Each line of each label is stored in the `line` array. The single rule takes care of filling the `line` array and printing the page when 20 labels have been read.

The `BEGIN` rule simply sets `RS` to the empty string, so that `awk` splits records at blank lines (see [Section 4.1 \[How Input Is Split into Records\]](#), page 59). It sets `MAXLINES` to 100, because 100 is the maximum number of lines on the page ($20 \cdot 5 = 100$).

Most of the work is done in the `printpage()` function. The label lines are stored sequentially in the `line` array. But they have to print horizontally: `line[1]` next to `line[6]`, `line[2]` next to `line[7]`, and so on. Two loops accomplish this. The outer loop, controlled by `i`, steps through every 10 lines of data; this is each row of labels. The inner loop, controlled by `j`, goes through the lines within the row. As `j` goes from 0 to 4, '`i+j`' is the `j`th line in the row, and '`i+j+5`' is the entry next to it. The output ends up looking something like this:

```

line 1          line 6
line 2          line 7
line 3          line 8
line 4          line 9
line 5          line 10
...

```

The `printf` format string '`%-41s`' left-aligns the data and prints it within a fixed-width field.

As a final note, an extra blank line is printed at lines 21 and 61, to keep the output lined up on the labels. This is dependent on the particular brand of labels in use when the program was written. You will also note that there are two blank lines at the top and two blank lines at the bottom.

The `END` rule arranges to flush the final page of labels; there may not have been an even multiple of 20 labels in the data:

```

# labels.awk --- print mailing labels

# Each label is 5 lines of data that may have blank lines.
# The label sheets have 2 blank lines at the top and 2 at
# the bottom.

BEGIN    { RS = "" ; MAXLINES = 100 }

function printpage(    i, j)
{
    if (Nlines <= 0)
        return

    printf "\n\n"          # header

    for (i = 1; i <= Nlines; i += 10) {
        if (i == 21 || i == 61)
            print ""
    }
}

```

```

        for (j = 0; j < 5; j++) {
            if (i + j > MAXLINES)
                break
            printf "    %-41s %s\n", line[i+j], line[i+j+5]
        }
        print ""

    printf "\n\n"          # footer

    delete line
}

# main rule
{
    if (Count >= 20) {
        printpage()
        Count = 0
        Nlines = 0
    }
    n = split($0, a, "\n")
    for (i = 1; i <= n; i++)
        line[++Nlines] = a[i]
    for (; i <= 5; i++)
        line[++Nlines] = ""
    Count++
}

END {
    printpage()
}

```

11.3.5 Generating Word-Usage Counts

When working with large amounts of text, it can be interesting to know how often different words appear. For example, an author may overuse certain words, in which case he or she might wish to find synonyms to substitute for words that appear too often. This subsection develops a program for counting words and presenting the frequency information in a useful format.

At first glance, a program like this would seem to do the job:

```

# wordfreq-first-try.awk --- print list of word frequencies

{
    for (i = 1; i <= NF; i++)
        freq[$i]++
}

```

```

END {
    for (word in freq)
        printf "%s\t%d\n", word, freq[word]
}

```

The program relies on `awk`'s default field-splitting mechanism to break each line up into “words” and uses an associative array named `freq`, indexed by each word, to count the number of times the word occurs. In the `END` rule, it prints the counts.

This program has several problems that prevent it from being useful on real text files:

- The `awk` language considers upper- and lowercase characters to be distinct. Therefore, “bartender” and “Bartender” are not treated as the same word. This is undesirable, because words are capitalized if they begin sentences in normal text, and a frequency analyzer should not be sensitive to capitalization.
- Words are detected using the `awk` convention that fields are separated just by white-space. Other characters in the input (except newlines) don’t have any special meaning to `awk`. This means that punctuation characters count as part of words.
- The output does not come out in any useful order. You’re more likely to be interested in which words occur most frequently or in having an alphabetized table of how frequently each word occurs.

The first problem can be solved by using `tolower()` to remove case distinctions. The second problem can be solved by using `gsub()` to remove punctuation characters. Finally, we solve the third problem by using the system `sort` utility to process the output of the `awk` script. Here is the new version of the program:

```

# wordfreq.awk --- print list of word frequencies

{
    $0 = tolower($0)    # remove case distinctions
    # remove punctuation
    gsub(/[^[[:alnum:]]_[:blank:]]/, "", $0)
    for (i = 1; i <= NF; i++)
        freq[$i]++
}

END {
    for (word in freq)
        printf "%s\t%d\n", word, freq[word]
}

```

The regexp `/[^[[:alnum:]]_[:blank:]]/` might have been written `/[[:punct:]]/`, but then underscores would also be removed, and we want to keep them.

Assuming we have saved this program in a file named `wordfreq.awk`, and that the data is in `file1`, the following pipeline:

```
awk -f wordfreq.awk file1 | sort -k 2nr
```

produces a table of the words appearing in `file1` in order of decreasing frequency.

The `awk` program suitably massages the data and produces a word frequency table, which is not ordered. The `awk` script’s output is then sorted by the `sort` utility and printed on the screen.

The options given to `sort` specify a sort that uses the second field of each input line (skipping one field), that the sort keys should be treated as numeric quantities (otherwise '15' would come before '5'), and that the sorting should be done in descending (reverse) order.

The `sort` could even be done from within the program, by changing the `END` action to:

```
END {
    sort = "sort -k 2nr"
    for (word in freq)
        printf "%s\t%d\n", word, freq[word] | sort
    close(sort)
}
```

This way of sorting must be used on systems that do not have true pipes at the command-line (or batch-file) level. See the general operating system documentation for more information on how to use the `sort` program.

11.3.6 Removing Duplicates from Unsorted Text

The `uniq` program (see [Section 11.2.6 \[Printing Nonduplicated Lines of Text\], page 267](#)) removes duplicate lines from *sorted* data.

Suppose, however, you need to remove duplicate lines from a data file but that you want to preserve the order the lines are in. A good example of this might be a shell history file. The history file keeps a copy of all the commands you have entered, and it is not unusual to repeat a command several times in a row. Occasionally you might want to compact the history by removing duplicate entries. Yet it is desirable to maintain the order of the original commands.

This simple program does the job. It uses two arrays. The `data` array is indexed by the text of each line. For each line, `data[$0]` is incremented. If a particular line has not been seen before, then `data[$0]` is zero. In this case, the text of the line is stored in `lines[count]`. Each element of `lines` is a unique command, and the indices of `lines` indicate the order in which those lines are encountered. The `END` rule simply prints out the lines, in order:

```
# histsort.awk --- compact a shell history file
# Thanks to Byron Rakitzis for the general idea

{
    if (data[$0]++ == 0)
        lines[++count] = $0
}

END {
    for (i = 1; i <= count; i++)
        print lines[i]
}
```

This program also provides a foundation for generating other useful information. For example, using the following `print` statement in the `END` rule indicates how often a particular command is used:

```
print data[lines[i]], lines[i]
```

This works because `data[$0]` is incremented each time a line is seen.

11.3.7 Extracting Programs from Texinfo Source Files

Both this chapter and the previous chapter (Chapter 10 [A Library of awk Functions], page 219) present a large number of `awk` programs. If you want to experiment with these programs, it is tedious to type them in by hand. Here we present a program that can extract parts of a Texinfo input file into separate files.

This book is written in `Texinfo`, the GNU Project’s document formatting language. A single Texinfo source file can be used to produce both printed documentation, with `TEX`, and online documentation. (Texinfo is fully documented in the book *Texinfo—The GNU Documentation Format*, available from the Free Software Foundation, and also available [online](#).)

For our purposes, it is enough to know three things about Texinfo input files:

- The “at” symbol (`@`) is special in Texinfo, much as the backslash (`\`) is in C or `awk`. Literal `@` symbols are represented in Texinfo source files as `@@`.
- Comments start with either `@c` or `@comment`. The file-extraction program works by using special comments that start at the beginning of a line.
- Lines containing `@group` and `@end group` commands bracket example text that should not be split across a page boundary. (Unfortunately, `TEX` isn’t always smart enough to do things exactly right, so we have to give it some help.)

The following program, `extract.awk`, reads through a Texinfo source file and does two things, based on the special comments. Upon seeing `@c system ...`, it runs a command, by extracting the command text from the control line and passing it on to the `system()` function (see Section 9.1.4 [Input/Output Functions], page 189). Upon seeing `@c file filename`, each subsequent line is sent to the file `filename`, until `@c endfile` is encountered. The rules in `extract.awk` match either `@c` or `@comment` by letting the `omment` part be optional. Lines containing `@group` and `@end group` are simply removed. `extract.awk` uses the `join()` library function (see Section 10.2.6 [Merging an Array into a String], page 227).

The example programs in the online Texinfo source for *GAWK: Effective AWK Programming* (`gawktexi.in`) have all been bracketed inside `file` and `endfile` lines. The `gawk` distribution uses a copy of `extract.awk` to extract the sample programs and install many of them in a standard directory where `gawk` can find them. The Texinfo file looks something like this:

```
...
This program has a @code{BEGIN} rule
that prints a nice message:

@example
@c file examples/messages.awk
BEGIN @ { print "Don't panic!" @}
@c endfile
@end example
```

It also prints some final advice:

```
@example
@c file examples/messages.awk
END @ { print "Always avoid bored archaeologists!" @}
@c endfile
@end example
...
```

`extract.awk` begins by setting `IGNORECASE` to one, so that mixed upper- and lowercase letters in the directives won't matter.

The first rule handles calling `system()`, checking that a command is given (`NF` is at least three) and also checking that the command exits with a zero exit status, signifying OK:

```
# extract.awk --- extract files and run programs from Texinfo files

BEGIN    { IGNORECASE = 1 }

/^@c(omment)?[ \t]+system/ {
    if (NF < 3) {
        e = ("extract: " FILENAME ":" FNR)
        e = (e ": badly formed 'system' line")
        print e > "/dev/stderr"
        next
    }
    $1 = ""
    $2 = ""
    stat = system($0)
    if (stat != 0) {
        e = ("extract: " FILENAME ":" FNR)
        e = (e ": warning: system returned " stat)
        print e > "/dev/stderr"
    }
}
```

The variable `e` is used so that the rule fits nicely on the page.

The second rule handles moving data into files. It verifies that a file name is given in the directive. If the file named is not the current file, then the current file is closed. Keeping the current file open until a new file is encountered allows the use of the `>` redirection for printing the contents, keeping open-file management simple.

The `for` loop does the work. It reads lines using `getline` (see [Section 4.9 \[Explicit Input with `getline`\]](#), page 78). For an unexpected end-of-file, it calls the `unexpected_eof()` function. If the line is an “endfile” line, then it breaks out of the loop. If the line is an `@group` or `@end group` line, then it ignores it and goes on to the next line. Similarly, comments within examples are also ignored.

Most of the work is in the following few lines. If the line has no `@` symbols, the program can print it directly. Otherwise, each leading `@` must be stripped off. To remove the `@`

symbols, the line is split into separate elements of the array `a`, using the `split()` function (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177). The `@` symbol is used as the separator character. Each element of `a` that is empty indicates two successive `@` symbols in the original line. For each two empty elements (`@@` in the original file), we have to add a single `@` symbol back in.

When the processing of the array is finished, `join()` is called with the value of `SUBSEP` (see [Section 8.5 \[Multidimensional Arrays\]](#), page 169), to rejoin the pieces back into a single line. That line is then printed to the output file:

```

/^@c(omment)?[ \t]+file/ {
    if (NF != 3) {
        e = ("extract: " FILENAME ":" FNR ": badly formed 'file' line")
        print e > "/dev/stderr"
        next
    }
    if ($3 != curfile) {
        if (curfile != "")
            close(curfile)
        curfile = $3
    }

    for (;;) {
        if ((getline line) <= 0)
            unexpected_eof()
        if (line ~ /^@c(omment)?[ \t]+endfile/)
            break
        else if (line ~ /^@(end[ \t]+)?group/)
            continue
        else if (line ~ /^@c(omment+)?[ \t]+/)
            continue
        if (index(line, "@") == 0) {
            print line > curfile
            continue
        }
        n = split(line, a, "@")
        # if a[1] == "", means leading @,
        # don't add one back in.
        for (i = 2; i <= n; i++) {
            if (a[i] == "") { # was an @@
                a[i] = "@"
                if (a[i+1] == "")
                    i++
            }
        }
        print join(a, 1, n, SUBSEP) > curfile
    }
}

```

An important thing to note is the use of the ‘>’ redirection. Output done with ‘>’ only opens the file once; it stays open and subsequent output is appended to the file (see [Section 5.6 \[Redirecting Output of `print` and `printf`\]](#), page 97). This makes it easy to mix program text and explanatory prose for the same sample source file (as has been done here!) without any hassle. The file is only closed when a new data file name is encountered or at the end of the input file.

Finally, the function `unexpected_eof()` prints an appropriate error message and then exits. The `END` rule handles the final cleanup, closing the open file:

```
function unexpected_eof()
{
    printf("extract: %s:%d: unexpected EOF or error\n",
          FILENAME, FNR) > "/dev/stderr"
    exit 1
}

END {
    if (curfile)
        close(curfile)
}
```

11.3.8 A Simple Stream Editor

The `sed` utility is a *stream editor*, a program that reads a stream of data, makes changes to it, and passes it on. It is often used to make global changes to a large file or to a stream of data generated by a pipeline of commands. Although `sed` is a complicated program in its own right, its most common use is to perform global substitutions in the middle of a pipeline:

```
command1 < orig.data | sed 's/old/new/g' | command2 > result
```

Here, ‘s/old/new/g’ tells `sed` to look for the regexp ‘old’ on each input line and globally replace it with the text ‘new’ (i.e., all the occurrences on a line). This is similar to `awk`’s `gsub()` function (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177).

The following program, `awksed.awk`, accepts at least two command-line arguments: the pattern to look for and the text to replace it with. Any additional arguments are treated as data file names to process. If none are provided, the standard input is used:

```
# awksed.awk --- do s/foo/bar/g using just print
#   Thanks to Michael Brennan for the idea

function usage()
{
    print "usage: awksed pat repl [files...]" > "/dev/stderr"
    exit 1
}

BEGIN {
    # validate arguments
    if (ARGC < 3)
```



```

        usage()

    RS = ARGV[1]
    ORS = ARGV[2]

    # don't use arguments as files
    ARGV[1] = ARGV[2] = ""
}

# look ma, no hands!
{
    if (RT == "")
        printf "%s", $0
    else
        print
}

```

The program relies on **gawk**'s ability to have **RS** be a regexp, as well as on the setting of **RT** to the actual text that terminates the record (see [Section 4.1 \[How Input Is Split into Records\]](#), page 59).

The idea is to have **RS** be the pattern to look for. **gawk** automatically sets **\$0** to the text between matches of the pattern. This is text that we want to keep, unmodified. Then, by setting **ORS** to the replacement text, a simple **print** statement outputs the text we want to keep, followed by the replacement text.

There is one wrinkle to this scheme, which is what to do if the last record doesn't end with text that matches **RS**. Using a **print** statement unconditionally prints the replacement text, which is not correct. However, if the file did not end in text that matches **RS**, **RT** is set to the null string. In this case, we can print **\$0** using **printf** (see [Section 5.5 \[Using printf Statements for Fancier Printing\]](#), page 92).

The **BEGIN** rule handles the setup, checking for the right number of arguments and calling **usage()** if there is a problem. Then it sets **RS** and **ORS** from the command-line arguments and sets **ARGV[1]** and **ARGV[2]** to the null string, so that they are not treated as file names (see [Section 7.5.3 \[Using ARGV and ARGV\]](#), page 155).

The **usage()** function prints an error message and exits. Finally, the single rule handles the printing scheme outlined earlier, using **print** or **printf** as appropriate, depending upon the value of **RT**.

11.3.9 An Easy Way to Use Library Functions

In [Section 2.7 \[Including Other Files into Your Program\]](#), page 42, we saw how **gawk** provides a built-in file-inclusion capability. However, this is a **gawk** extension. This section provides the motivation for making file inclusion available for standard **awk**, and shows how to do it using a combination of shell and **awk** programming.

Using library functions in **awk** can be very beneficial. It encourages code reuse and the writing of general functions. Programs are smaller and therefore clearer. However, using library functions is only easy when writing **awk** programs; it is painful when running them, requiring multiple **-f** options. If **gawk** is unavailable, then so too is the **AWKPATH** environment variable and the ability to put **awk** functions into a library directory (see [Section 2.2](#)

[[Command-Line Options](#)], page 31). It would be nice to be able to write programs in the following manner:

```
# library functions
@include getopt.awk
@include join.awk
...

# main program
BEGIN {
    while ((c = getopt(ARGC, ARGV, "a:b:cde")) != -1)
        ...
    ...
}
```

The following program, `igawk.sh`, provides this service. It simulates `gawk`'s searching of the `AWKPATH` variable and also allows *nested* includes (i.e., a file that is included with `@include` can contain further `@include` statements). `igawk` makes an effort to only include files once, so that nested includes don't accidentally include a library function twice.

`igawk` should behave just like `gawk` externally. This means it should accept all of `gawk`'s command-line arguments, including the ability to have multiple source files specified via `-f` and the ability to mix command-line and library source files.

The program is written using the POSIX Shell (`sh`) command language.⁶ It works as follows:

1. Loop through the arguments, saving anything that doesn't represent `awk` source code for later, when the expanded program is run.
2. For any arguments that do represent `awk` text, put the arguments into a shell variable that will be expanded. There are two cases:
 - a. Literal text, provided with `-e` or `--source`. This text is just appended directly.
 - b. Source file names, provided with `-f`. We use a neat trick and append `'@include filename'` to the shell variable's contents. Because the file-inclusion program works the way `gawk` does, this gets the text of the file included in the program at the correct point.
3. Run an `awk` program (naturally) over the shell variable's contents to expand `@include` statements. The expanded program is placed in a second shell variable.
4. Run the expanded program with `gawk` and any other original command-line arguments that the user supplied (such as the data file names).

This program uses shell variables extensively: for storing command-line arguments and the text of the `awk` program that will expand the user's program, for the user's original program, and for the expanded program. Doing so removes some potential problems that might arise were we to use temporary files instead, at the cost of making the script somewhat more complicated.

The initial part of the program turns on shell tracing if the first argument is `'debug'`.

⁶ Fully explaining the `sh` language is beyond the scope of this book. We provide some minimal explanations, but see a good shell programming book if you wish to understand things in more depth.

The next part loops through all the command-line arguments. There are several cases of interest:

- This ends the arguments to **igawk**. Anything else should be passed on to the user's **awk** program without being evaluated.
- W This indicates that the next option is specific to **gawk**. To make argument processing easier, the **-W** is appended to the front of the remaining arguments and the loop continues. (This is an **sh** programming trick. Don't worry about it if you are not familiar with **sh**.)
- v, -F These are saved and passed on to **gawk**.
- f, --file, --file=, -Wfile=
 - The file name is appended to the shell variable **program** with an **@include** statement. The **expr** utility is used to remove the leading option part of the argument (e.g., '--file='). (Typical **sh** usage would be to use the **echo** and **sed** utilities to do this work. Unfortunately, some versions of **echo** evaluate escape sequences in their arguments, possibly mangling the program text. Using **expr** avoids this problem.)
- source, --source=, -Wsource=
 - The source text is appended to **program**.
- version, -Wversion
 - igawk** prints its version number, runs '**gawk --version**' to get the **gawk** version information, and then exits.

If none of the **-f**, **--file**, **-Wfile**, **--source**, or **-Wsource** arguments are supplied, then the first nonoption argument should be the **awk** program. If there are no command-line arguments left, **igawk** prints an error message and exits. Otherwise, the first argument is appended to **program**. In any case, after the arguments have been processed, the shell variable **program** contains the complete text of the original **awk** program.

The program is as follows:

```
#!/bin/sh
# igawk --- like gawk but do @include processing

if [ "$1" = debug ]
then
    set -x
    shift
fi

# A literal newline, so that program text is formatted correctly
n=
,

# Initialize variables to empty
program=
opts=
```

```

while [ $# -ne 0 ] # loop over arguments
do
    case $1 in
        --)      shift
                  break ;;

        -W)      shift
                  # The ${x?'message here'} construct prints a
                  # diagnostic if $x is the null string
                  set -- -W"${@?'missing operand'}"
                  continue ;;

        -[vF])   opts="$opts $1 '${2?'missing operand'}'"
                  shift ;;

        -[vF]*)  opts="$opts '$1'" ;;

        -f)      program="$program$@include ${2?'missing operand'}"
                  shift ;;

        -f*)     f=$(expr "$1" : '-f\(.*\)\')
                  program="$program$@include $f" ;;

        -[W-]file=*)
                  f=$(expr "$1" : '-.file=\(.*\)\')
                  program="$program$@include $f" ;;

        -[W-]file)
                  program="$program$@include ${2?'missing operand'}"
                  shift ;;

        -[W-]source=*)
                  t=$(expr "$1" : '-.source=\(.*\)\')
                  program="$program$@t" ;;

        -[W-]source)
                  program="$program$@${2?'missing operand'}"
                  shift ;;

        -[W-]version)
                  echo igawk: version 3.0 1>&2
                  gawk --version
                  exit 0 ;;

        -[W-]*)  opts="$opts '$1'" ;;
    esac
done

```

```

        *)      break ;;
    esac
    shift
done

if [ -z "$program" ]
then
    program=${1?'missing program'}
    shift
fi

# At this point, 'program' has the program.

```

The awk program to process `@include` directives is stored in the shell variable `expand_prog`. Doing this keeps the shell script readable. The awk program reads through the user's program, one line at a time, using `getline` (see [Section 4.9 \[Explicit Input with `getline`\]](#), [page 78](#)). The input file names and `@include` statements are managed using a stack. As each `@include` is encountered, the current file name is “pushed” onto the stack and the file named in the `@include` directive becomes the current file name. As each file is finished, the stack is “popped,” and the previous input file becomes the current input file again. The process is started by making the original file the first one on the stack.

The `paththo()` function does the work of finding the full path to a file. It simulates gawk's behavior when searching the `AWKPATH` environment variable (see [Section 2.5.1 \[The `AWKPATH` Environment Variable\]](#), [page 39](#)). If a file name has a `'/'` in it, no path search is done. Similarly, if the file name is `"-"`, then that string is used as-is. Otherwise, the file name is concatenated with the name of each directory in the path, and an attempt is made to open the generated file name. The only way to test if a file can be read in awk is to go ahead and try to read it with `getline`; this is what `paththo()` does.⁷ If the file can be read, it is closed and the file name is returned:

```

expand_prog='

function paththo(file,    i, t, junk)
{
    if (index(file, "/") != 0)
        return file

    if (file == "-")
        return file

    for (i = 1; i <= ndirs; i++) {
        t = (pathlist[i] "/" file)
    }
}

```

⁷ On some very old versions of awk, the test `'getline junk < t'` can loop forever if the file exists but is empty.

```

        if ((getline junk < t) > 0) {
            # found it
            close(t)
            return t
        }
    }
    return ""
}

```

The main program is contained inside one **BEGIN** rule. The first thing it does is set up the **pathlist** array that **pathto()** uses. After splitting the path on **:**, null elements are replaced with **."**, which represents the current directory:

```

BEGIN {
    path = ENVIRON["AWKPATH"]
    ndirs = split(path, pathlist, ":")
    for (i = 1; i <= ndirs; i++) {
        if (pathlist[i] == "")
            pathlist[i] = "."
    }
}

```

The stack is initialized with **ARGV[1]**, which will be **"/dev/stdin"**. The main loop comes next. Input lines are read in succession. Lines that do not start with **@include** are printed verbatim. If the line does start with **@include**, the file name is in **\$2**. **pathto()** is called to generate the full path. If it cannot, then the program prints an error message and continues.

The next thing to check is if the file is included already. The **processed** array is indexed by the full file name of each included file and it tracks this information for us. If the file is seen again, a warning message is printed. Otherwise, the new file name is pushed onto the stack and processing continues.

Finally, when **getline** encounters the end of the input file, the file is closed and the stack is popped. When **stackptr** is less than zero, the program is done:

```

stackptr = 0
input[stackptr] = ARGV[1] # ARGV[1] is first file

for (; stackptr >= 0; stackptr--) {
    while ((getline < input[stackptr]) > 0) {
        if (tolower($1) != "@include") {
            print
            continue
        }
        fpath = pathto($2)
        if (fpath == "") {
            printf("igawk: %s:%d: cannot find %s\n",
                input[stackptr], FNR, $2) > "/dev/stderr"
            continue
        }
        if (! (fpath in processed)) {

```

```

        processed[fpath] = input[stackptr]
        input[++stackptr] = fpath # push onto stack
    } else
        print $2, "included in", input[stackptr],
            "already included in",
            processed[fpath] > "/dev/stderr"
    }
    close(input[stackptr])
}
}' # close quote ends 'expand_prog' variable

processed_program=$(gawk -- "$expand_prog" /dev/stdin << EOF
$program
EOF
)

```

The shell construct '*command << marker*' is called a *here document*. Everything in the shell script up to the *marker* is fed to *command* as input. The shell processes the contents of the here document for variable and command substitution (and possibly other things as well, depending upon the shell).

The shell construct '*\$(...)*' is called *command substitution*. The output of the command inside the parentheses is substituted into the command line. Because the result is used in a variable assignment, it is saved as a single string, even if the results contain whitespace.

The expanded program is saved in the variable `processed_program`. It's done in these steps:

1. Run `gawk` with the `@include`-processing program (the value of the `expand_prog` shell variable) reading standard input.
2. Standard input is the contents of the user's program, from the shell variable `program`. Feed its contents to `gawk` via a here document.
3. Save the results of this processing in the shell variable `processed_program` by using command substitution.

The last step is to call `gawk` with the expanded program, along with the original options and command-line arguments that the user supplied:

```
eval gawk $opts -- "$processed_program" "$@"
```

The `eval` command is a shell construct that reruns the shell's parsing process. This keeps things properly quoted.

This version of `igawk` represents the fifth version of this program. There are four key simplifications that make the program work better:

- Using `@include` even for the files named with `-f` makes building the initial collected `awk` program much simpler; all the `@include` processing can be done once.
- Not trying to save the line read with `getline` in the `path_to()` function when testing for the file's accessibility for use with the main program simplifies things considerably.
- Using a `getline` loop in the `BEGIN` rule does it all in one place. It is not necessary to call out to a separate loop for processing nested `@include` statements.

- Instead of saving the expanded program in a temporary file, putting it in a shell variable avoids some potential security problems. This has the disadvantage that the script relies upon more features of the `sh` language, making it harder to follow for those who aren't familiar with `sh`.

Also, this program illustrates that it is often worthwhile to combine `sh` and `awk` programming together. You can usually accomplish quite a lot, without having to resort to low-level programming in C or C++, and it is frequently easier to do certain kinds of string and argument manipulation using the shell than it is in `awk`.

Finally, `igawk` shows that it is not always necessary to add new features to a program; they can often be layered on top.⁸

11.3.10 Finding Anagrams from a Dictionary

An interesting programming challenge is to search for *anagrams* in a word list (such as `/usr/share/dict/words` on many GNU/Linux systems). One word is an anagram of another if both words contain the same letters (e.g., “babbling” and “blabbing”).

Column 2, Problem C, of Jon Bentley's *Programming Pearls*, Second Edition, presents an elegant algorithm. The idea is to give words that are anagrams a common signature, sort all the words together by their signatures, and then print them. Dr. Bentley observes that taking the letters in each word and sorting them produces those common signatures.

The following program uses arrays of arrays to bring together words with the same signature and array sorting to print the words in sorted order:

```
# anagram.awk --- An implementation of the anagram-finding algorithm
#                  from Jon Bentley's "Programming Pearls," 2nd edition.
#                  Addison Wesley, 2000, ISBN 0-201-65788-0.
#                  Column 2, Problem C, section 2.8, pp 18-20.
```

```
/'s$/ { next }      # Skip possessives
```

The program starts with a header, and then a rule to skip possessives in the dictionary file. The next rule builds up the data structure. The first dimension of the array is indexed by the signature; the second dimension is the word itself:

```
{
    key = word2key($1) # Build signature
    data[key][$1] = $1 # Store word with signature
}
```

The `word2key()` function creates the signature. It splits the word apart into individual letters, sorts the letters, and then joins them back together:

```
# word2key --- split word apart into letters, sort, and join back together

function word2key(word,    a, i, n, result)
{
    n = split(word, a, "")
    asort(a)
```

⁸ `gawk` does `@include` processing itself in order to support the use of `awk` programs as Web CGI scripts.


```

    for (i = 1; i <= n; i++)
        result = result a[i]

    return result
}

```

Finally, the `END` rule traverses the array and prints out the anagram lists. It sends the output to the system `sort` command because otherwise the anagrams would appear in arbitrary order:

```

END {
    sort = "sort"
    for (key in data) {
        # Sort words with same key
        nwords = asorti(data[key], words)
        if (nwords == 1)
            continue

        # And print. Minor glitch: trailing space at end of each line
        for (j = 1; j <= nwords; j++)
            printf("%s ", words[j]) | sort
        print "" | sort
    }
    close(sort)
}

```

Here is some partial output when the program is run:

```

$ gawk -f anagram.awk /usr/share/dict/words | grep '^b'
...
babbled blabbed
babbler blabber brabble
babblers blabbers brabbles
babbling blabbing
babbly blabby
babel bable
babels beslab
babery yabber
...

```

11.3.11 And Now for Something Completely Different

The following program was written by Davide Brini and is published on [his website](#). It serves as his signature in the Usenet group `comp.lang.awk`. He supplies the following copyright terms:

Copyright © 2008 Davide Brini

Copying and distribution of the code published in this page, with or without modification, are permitted in any medium without royalty provided the copyright notice and this notice are preserved.

Here is the program:

```
awk 'BEGIN{0="~::~~";o="====";o+=+o;x=0"0";while(X++<=x+o+o)c=c"%c";
printf c,(x-0)*(x-0),x*(x-o)-o,x*(x-0)+x-0-o,+x*(x-0)-x+o,X*(o+o+0)+x-0,
X*(X-x)-o*o,(x+X)*o*o+o,x*(X-x)-0-0,x-0+(0+o+X+x)*(o+0),X*X-X*(x-0)-x+0,
0+X*(o*(o+0)+0),+x+0+X*o,x*(x-o),(o+X+x)*o*o-(x-0-0),0+(X-x)*(X+0),x-0}'
```

We leave it to you to determine what the program does. (If you are truly desperate to understand it, see Chris Johansen's explanation, which is embedded in the Texinfo source file for this book.)

11.4 Summary

- The programs provided in this chapter continue on the theme that reading programs is an excellent way to learn Good Programming.
- Using `#!` to make `awk` programs directly runnable makes them easier to use. Otherwise, invoke the program using `awk -f ...`.
- Reimplementing standard POSIX programs in `awk` is a pleasant exercise; `awk`'s expressive power lets you write such programs in relatively few lines of code, yet they are functionally complete and usable.
- One of standard `awk`'s weaknesses is working with individual characters. The ability to use `split()` with the empty string as the separator can considerably simplify such tasks.
- The examples here demonstrate the usefulness of the library functions from [Chapter 10 \[A Library of `awk` Functions\]](#), page 219, for a number of real (if small) programs.
- Besides reinventing POSIX wheels, other programs solved a selection of interesting problems, such as finding duplicate words in text, printing mailing labels, and finding anagrams.

11.5 Exercises

1. Rewrite `cut.awk` (see [Section 11.2.1 \[Cutting Out Fields and Columns\]](#), page 253) using `split()` with `"` as the separator.
2. In [Section 11.2.2 \[Searching for Regular Expressions in Files\]](#), page 258, we mentioned that `egrep -i` could be simulated in versions of `awk` without `IGNORECASE` by using `tolower()` on the line and the pattern. In a footnote there, we also mentioned that this solution has a bug: the translated line is output, and not the original one. Fix this problem.
3. The POSIX version of `id` takes options that control which information is printed. Modify the `awk` version (see [Section 11.2.3 \[Printing Out User Information\]](#), page 262) to accept the same arguments and perform in the same way.
4. The `split.awk` program (see [Section 11.2.4 \[Splitting a Large File into Pieces\]](#), page 264) assumes that letters are contiguous in the character set, which isn't true for EBCDIC systems. Fix this problem. (Hint: Consider a different way to work through the alphabet, without relying on `ord()` and `chr()`.)
5. In `uniq.awk` (see [Section 11.2.6 \[Printing Nonduplicated Lines of Text\]](#), page 267, the logic for choosing which lines to print represents a *state machine*, which is “a device that can be in one of a set number of stable conditions depending on its previous

condition and on the present values of its inputs.”⁹ Brian Kernighan suggests that “an alternative approach to state machines is to just read the input into an array, then use indexing. It’s almost always easier code, and for most inputs where you would use this, just as fast.” Rewrite the logic to follow this suggestion.

6. Why can’t the `wc.awk` program (see [Section 11.2.7 \[Counting Things\]](#), page 271) just use the value of `FNR` in `endfile()`? Hint: Examine the code in [Section 10.3.1 \[Noting Data file Boundaries\]](#), page 231.
7. Manipulation of individual characters in the `translate` program (see [Section 11.3.3 \[Transliterating Characters\]](#), page 276) is painful using standard `awk` functions. Given that `gawk` can split strings into individual characters using `"` as the separator, how might you use this feature to simplify the program?
8. The `extract.awk` program (see [Section 11.3.7 \[Extracting Programs from Texinfo Source Files\]](#), page 283) was written before `gawk` had the `gensub()` function. Use it to simplify the code.
9. Compare the performance of the `awksed.awk` program (see [Section 11.3.8 \[A Simple Stream Editor\]](#), page 286) with the more straightforward:

```
BEGIN {
    pat = ARGV[1]
    repl = ARGV[2]
    ARGV[1] = ARGV[2] = ""
}

{ gsub(pat, repl); print }
```

10. What are the advantages and disadvantages of `awksed.awk` versus the real `sed` utility?
11. In [Section 11.3.9 \[An Easy Way to Use Library Functions\]](#), page 287, we mentioned that not trying to save the line read with `getline` in the `path_to()` function when testing for the file’s accessibility for use with the main program simplifies things considerably. What problem does this engender though?
12. As an additional example of the idea that it is not always necessary to add new features to a program, consider the idea of having two files in a directory in the search path:

`default.awk`

This file contains a set of default library functions, such as `getopt()` and `assert()`.

`site.awk`

This file contains library functions that are specific to a site or installation; i.e., locally developed functions. Having a separate file allows `default.awk` to change with new `gawk` releases, without requiring the system administrator to update it each time by adding the local functions.

One user suggested that `gawk` be modified to automatically read these files upon startup. Instead, it would be very simple to modify `igawk` to do this. Since `igawk` can process nested `@include` directives, `default.awk` could simply contain `@include` statements for the desired library functions. Make this change.

⁹ This is the definition returned from entering `define: state machine` into Google.

13. Modify `anagram.awk` (see [Section 11.3.10 \[Finding Anagrams from a Dictionary\]](#), [page 294](#)), to avoid the use of the external `sort` utility.

Part III:

Moving Beyond Standard awk with gawk

12 Advanced Features of gawk

Write documentation as if whoever reads it is a violent psychopath who knows where you live.

—Steve English, as quoted by Peter Langston

This chapter discusses advanced features in **gawk**. It's a bit of a “grab bag” of items that are otherwise unrelated to each other. First, we look at a command-line option that allows **gawk** to recognize nondecimal numbers in input data, not just in **awk** programs. Then, **gawk**'s special features for sorting arrays are presented. Next, two-way I/O, discussed briefly in earlier parts of this book, is described in full detail, along with the basics of TCP/IP networking. Finally, we see how **gawk** can *profile* an **awk** program, making it possible to tune it for performance.

Additional advanced features are discussed in separate chapters of their own:

- **Chapter 13 [Internationalization with gawk]**, page 317, discusses how to internationalize your **awk** programs, so that they can speak multiple national languages.
- **Chapter 14 [Debugging awk Programs]**, page 327, describes **gawk**'s built-in command-line debugger for debugging **awk** programs.
- **Chapter 15 [Arithmetic and Arbitrary-Precision Arithmetic with gawk]**, page 343, describes how you can use **gawk** to perform arbitrary-precision arithmetic.
- **Chapter 16 [Writing Extensions for gawk]**, page 357, discusses the ability to dynamically add new built-in functions to **gawk**.

12.1 Allowing Nondecimal Input Data

If you run **gawk** with the `--non-decimal-data` option, you can have nondecimal values in your input data:

```
$ echo 0123 123 0x123 |
> gawk --non-decimal-data '{ printf "%d, %d, %d\n", $1, $2, $3 }'
+ 83, 123, 291
```

For this feature to work, write your program so that **gawk** treats your data as numeric:

```
$ echo 0123 123 0x123 | gawk '{ print $1, $2, $3 }'
+ 0123 123 0x123
```

The **print** statement treats its expressions as strings. Although the fields can act as numbers when necessary, they are still strings, so **print** does not try to treat them numerically. You need to add zero to a field to force it to be treated as a number. For example:

```
$ echo 0123 123 0x123 | gawk --non-decimal-data '
> { print $1, $2, $3
>   print $1 + 0, $2 + 0, $3 + 0 }'
+ 0123 123 0x123
+ 83 123 291
```

Because it is common to have decimal data with leading zeros, and because using this facility could lead to surprising results, the default is to leave it disabled. If you want it, you must explicitly request it.

CAUTION: *Use of this option is not recommended.* It can break old programs very badly. Instead, use the **strtonum()** function to convert your data (see

[Section 9.1.3 \[String-Manipulation Functions\]](#), page 177). This makes your programs easier to write and easier to read, and leads to less surprising results. This option may disappear in a future version of `gawk`.

12.2 Controlling Array Traversal and Array Sorting

`gawk` lets you control the order in which a `for (indx in array)` loop traverses an array.

In addition, two built-in functions, `asort()` and `asorti()`, let you sort arrays based on the array values and indices, respectively. These two functions also provide control over the sorting criteria used to order the elements during sorting.

12.2.1 Controlling Array Traversal

By default, the order in which a `for (indx in array)` loop scans an array is not defined; it is generally based upon the internal implementation of arrays inside `awk`.

Often, though, it is desirable to be able to loop over the elements in a particular order that you, the programmer, choose. `gawk` lets you do this.

[Section 8.1.6 \[Using Predefined Array Scanning Orders with gawk\]](#), page 164, describes how you can assign special, predefined values to `PROCINFO["sorted_in"]` in order to control the order in which `gawk` traverses an array during a `for` loop.

In addition, the value of `PROCINFO["sorted_in"]` can be a function name.¹ This lets you traverse an array based on any custom criterion. The array elements are ordered according to the return value of this function. The comparison function should be defined with at least four arguments:

```
function comp_func(i1, v1, i2, v2)
{
    compare elements 1 and 2 in some fashion
    return < 0; 0; or > 0
}
```

Here, `i1` and `i2` are the indices, and `v1` and `v2` are the corresponding values of the two elements being compared. Either `v1` or `v2`, or both, can be arrays if the array being traversed contains subarrays as values. (See [Section 8.6 \[Arrays of Arrays\]](#), page 171, for more information about subarrays.) The three possible return values are interpreted as follows:

```
comp_func(i1, v1, i2, v2) < 0
    Index i1 comes before index i2 during loop traversal.
```

```
comp_func(i1, v1, i2, v2) == 0
    Indices i1 and i2 come together, but the relative order with respect to each
    other is undefined.
```

```
comp_func(i1, v1, i2, v2) > 0
    Index i1 comes after index i2 during loop traversal.
```

Our first comparison function can be used to scan an array in numerical order of the indices:

```
function cmp_num_idx(i1, v1, i2, v2)
```

¹ This is why the predefined sorting orders start with an '@' character, which cannot be part of an identifier.


```

{
    # numerical index comparison, ascending order
    return (i1 - i2)
}

```

Our second function traverses an array based on the string order of the element values rather than by indices:

```

function cmp_str_val(i1, v1, i2, v2)
{
    # string value comparison, ascending order
    v1 = v1 ""
    v2 = v2 ""
    if (v1 < v2)
        return -1
    return (v1 != v2)
}

```

The third comparison function makes all numbers, and numeric strings without any leading or trailing spaces, come out first during loop traversal:

```

function cmp_num_str_val(i1, v1, i2, v2, n1, n2)
{
    # numbers before string value comparison, ascending order
    n1 = v1 + 0
    n2 = v2 + 0
    if (n1 == v1)
        return (n2 == v2) ? (n1 - n2) : -1
    else if (n2 == v2)
        return 1
    return (v1 < v2) ? -1 : (v1 != v2)
}

```

Here is a main program to demonstrate how **gawk** behaves using each of the previous functions:

```

BEGIN {
    data["one"] = 10
    data["two"] = 20
    data[10] = "one"
    data[100] = 100
    data[20] = "two"

    f[1] = "cmp_num_idx"
    f[2] = "cmp_str_val"
    f[3] = "cmp_num_str_val"
    for (i = 1; i <= 3; i++) {
        printf("Sort function: %s\n", f[i])
        PROCINFO["sorted_in"] = f[i]
        for (j in data)
            printf("\tdata[%s] = %s\n", j, data[j])
    }
}

```

```

        print ""
    }
}

```

Here are the results when the program is run:

```

$ gawk -f compdemo.awk
+ Sort function: cmp_num_idx      Sort by numeric index
+   data[two] = 20
+   data[one] = 10                Both strings are numerically zero
+   data[10] = one
+   data[20] = two
+   data[100] = 100
+
+ Sort function: cmp_str_val      Sort by element values as strings
+   data[one] = 10
+   data[100] = 100              String 100 is less than string 20
+   data[two] = 20
+   data[10] = one
+   data[20] = two
+
+ Sort function: cmp_num_str_val  Sort all numeric values before all strings
+   data[one] = 10
+   data[two] = 20
+   data[100] = 100
+   data[10] = one
+   data[20] = two

```

Consider sorting the entries of a GNU/Linux system password file according to login name. The following program sorts records by a specific field position and can be used for this purpose:

```

# passwd-sort.awk --- simple program to sort by field position
# field position is specified by the global variable POS

function cmp_field(i1, v1, i2, v2)
{
    # comparison by value, as string, and ascending order
    return v1[POS] < v2[POS] ? -1 : (v1[POS] != v2[POS])
}

{
    for (i = 1; i <= NF; i++)
        a[NR][i] = $i
}

END {
    PROCINFO["sorted_in"] = "cmp_field"
    if (POS < 1 || POS > NF)
        POS = 1
}

```

```

    for (i in a) {
        for (j = 1; j <= NF; j++)
            printf("%s%c", a[i][j], j < NF ? ":" : "")
        print ""
    }
}

```

The first field in each entry of the password file is the user's login name, and the fields are separated by colons. Each record defines a subarray, with each field as an element in the subarray. Running the program produces the following output:

```

$ gawk -v POS=1 -F: -f sort.awk /etc/passwd
+ adm:x:3:4:adm:/var/adm:/sbin/nologin
+ apache:x:48:48:Apache:/var/www:/sbin/nologin
+ avahi:x:70:70:Avahi daemon:/sbin/nologin
...

```

The comparison should normally always return the same value when given a specific pair of array elements as its arguments. If inconsistent results are returned, then the order is undefined. This behavior can be exploited to introduce random order into otherwise seemingly ordered data:

```

function cmp_randomize(i1, v1, i2, v2)
{
    # random order (caution: this may never terminate!)
    return (2 - 4 * rand())
}

```

As already mentioned, the order of the indices is arbitrary if two elements compare equal. This is usually not a problem, but letting the tied elements come out in arbitrary order can be an issue, especially when comparing item values. The partial ordering of the equal elements may change the next time the array is traversed, if other elements are added to or removed from the array. One way to resolve ties when comparing elements with otherwise equal values is to include the indices in the comparison rules. Note that doing this may make the loop traversal less efficient, so consider it only if necessary. The following comparison functions force a deterministic order, and are based on the fact that the (string) indices of two elements are never equal:

```

function cmp_numeric(i1, v1, i2, v2)
{
    # numerical value (and index) comparison, descending order
    return (v1 != v2) ? (v2 - v1) : (i2 - i1)
}

function cmp_string(i1, v1, i2, v2)
{
    # string value (and index) comparison, descending order
    v1 = v1 i1
    v2 = v2 i2
    return (v1 > v2) ? -1 : (v1 != v2)
}

```

A custom comparison function can often simplify ordered loop traversal, and the sky is really the limit when it comes to designing such a function.

When string comparisons are made during a sort, either for element values where one or both aren't numbers, or for element indices handled as strings, the value of `IGNORECASE` (see [Section 7.5 \[Predefined Variables\]](#), page 147) controls whether the comparisons treat corresponding upper- and lowercase letters as equivalent or distinct.

Another point to keep in mind is that in the case of subarrays, the element values can themselves be arrays; a production comparison function should use the `isarray()` function (see [Section 9.1.7 \[Getting Type Information\]](#), page 199) to check for this, and choose a defined sorting order for subarrays.

All sorting based on `PROCINFO["sorted_in"]` is disabled in POSIX mode, because the `PROCINFO` array is not special in that case.

As a side note, sorting the array indices before traversing the array has been reported to add a 15% to 20% overhead to the execution time of `awk` programs. For this reason, sorted array traversal is not the default.

12.2.2 Sorting Array Values and Indices with `gawk`

In most `awk` implementations, sorting an array requires writing a `sort()` function. This can be educational for exploring different sorting algorithms, but usually that's not the point of the program. `gawk` provides the built-in `asort()` and `asorti()` functions (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177) for sorting arrays. For example:

```
populate the array data
n = asort(data)
for (i = 1; i <= n; i++)
    do something with data[i]
```

After the call to `asort()`, the array `data` is indexed from 1 to some number `n`, the total number of elements in `data`. (This count is `asort()`'s return value.) `data[1] ≤ data[2] ≤ data[3]`, and so on. The default comparison is based on the type of the elements (see [Section 6.3.2 \[Variable Typing and Comparison Expressions\]](#), page 120). All numeric values come before all string values, which in turn come before all subarrays.

An important side effect of calling `asort()` is that *the array's original indices are irrevocably lost*. As this isn't always desirable, `asort()` accepts a second argument:

```
populate the array source
n = asort(source, dest)
for (i = 1; i <= n; i++)
    do something with dest[i]
```

In this case, `gawk` copies the `source` array into the `dest` array and then sorts `dest`, destroying its indices. However, the `source` array is not affected.

Often, what's needed is to sort on the values of the *indices* instead of the values of the elements. To do that, use the `asorti()` function. The interface and behavior are identical to that of `asort()`, except that the index values are used for sorting and become the values of the result array:

```
{ source[$0] = some_func($0) }
```

```

END {
    n = asorti(source, dest)
    for (i = 1; i <= n; i++) {
        Work with sorted indices directly:
        do something with dest[i]
        ...
        Access original array via sorted indices:
        do something with source[dest[i]]
    }
}

```

So far, so good. Now it starts to get interesting. Both `asort()` and `asorti()` accept a third string argument to control comparison of array elements. When we introduced `asort()` and `asorti()` in [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177, we ignored this third argument; however, now is the time to describe how this argument affects these two functions.

Basically, the third argument specifies how the array is to be sorted. There are two possibilities. As with `PROCINFO["sorted_in"]`, this argument may be one of the predefined names that `gawk` provides (see [Section 8.1.6 \[Using Predefined Array Scanning Orders with gawk\]](#), page 164), or it may be the name of a user-defined function (see [Section 12.2.1 \[Controlling Array Traversal\]](#), page 302).

In the latter case, *the function can compare elements in any way it chooses*, taking into account just the indices, just the values, or both. This is extremely powerful.

Once the array is sorted, `asort()` takes the *values* in their final order and uses them to fill in the result array, whereas `asorti()` takes the *indices* in their final order and uses them to fill in the result array.

NOTE: Copying array indices and elements isn't expensive in terms of memory. Internally, `gawk` maintains *reference counts* to data. For example, when `asort()` copies the first array to the second one, there is only one copy of the original array elements' data, even though both arrays use the values.

Because `IGNORECASE` affects string comparisons, the value of `IGNORECASE` also affects sorting for both `asort()` and `asorti()`. Note also that the locale's sorting order does *not* come into play; comparisons are based on character values only.²

The following example demonstrates the use of a comparison function with `asort()`. The comparison function, `case_fold_compare()`, maps both values to lowercase in order to compare them ignoring case.

```

# case_fold_compare --- compare as strings, ignoring case

function case_fold_compare(i1, v1, i2, v2,    l, r)
{
    l = tolower(v1)
    r = tolower(v2)

```

² This is true because locale-based comparison occurs only when in POSIX-compatibility mode, and because `asort()` and `asorti()` are `gawk` extensions, they are not available in that case.

```

    if (l < r)
        return -1
    else if (l == r)
        return 0
    else
        return 1
}

```

And here is the test program for it:

```

# Test program

BEGIN {
    Letters = "abcdefghijklmnopqrstuvwxyz" \
              "ABCDEFGHIJKLMNOPQRSTUVWXYZ"
    split(Letters, data, "")

    asort(data, result, "case_fold_compare")

    j = length(result)
    for (i = 1; i <= j; i++) {
        printf("%s", result[i])
        if (i % (j/2) == 0)
            printf("\n")
        else
            printf(" ")
    }
}

```

When run, we get the following:

```

$ gawk -f case_fold_compare.awk
+ A a B b c C D d e E F f g G H h i I J j k K l L M m
+ n N O o p P Q q r R S s t T u U V v w W X x y Y z Z

```

12.3 Two-Way Communications with Another Process

It is often useful to be able to send data to a separate program for processing and then read the result. This can always be done with temporary files:

```

# Write the data for processing
tempfile = ("mydata." PROCINFO["pid"])
while (not done with data)
    print data | ("subprogram > " tempfile)
close("subprogram > " tempfile)

# Read the results, remove tempfile when done
while ((getline newdata < tempfile) > 0)
    process newdata appropriately
close(tempfile)
system("rm " tempfile)

```

This works, but not elegantly. Among other things, it requires that the program be run in a directory that cannot be shared among users; for example, `/tmp` will not do, as another user might happen to be using a temporary file with the same name.³

However, with **gawk**, it is possible to open a *two-way* pipe to another process. The second process is termed a *coprocess*, as it runs in parallel with **gawk**. The two-way connection is created using the `'|&'` operator (borrowed from the Korn shell, **ksh**):⁴

```
do {
    print data |& "subprogram"
    "subprogram" |& getline results
} while (data left to process)
close("subprogram")
```

The first time an I/O operation is executed using the `'|&'` operator, **gawk** creates a two-way pipeline to a child process that runs the other program. Output created with **print** or **printf** is written to the program's standard input, and output from the program's standard output can be read by the **gawk** program using **getline**. As is the case with processes started by `'|'`, the subprogram can be any program, or pipeline of programs, that can be started by the shell.

There are some cautionary items to be aware of:

- As the code inside **gawk** currently stands, the coprocess's standard error goes to the same place that the parent **gawk**'s standard error goes. It is not possible to read the child's standard error separately.
- I/O buffering may be a problem. **gawk** automatically flushes all output down the pipe to the coprocess. However, if the coprocess does not flush its output, **gawk** may hang when doing a **getline** in order to read the coprocess's results. This could lead to a situation known as *deadlock*, where each process is waiting for the other one to do something.

It is possible to close just one end of the two-way pipe to a coprocess, by supplying a second argument to the **close()** function of either `"to"` or `"from"` (see [Section 5.9 \[Closing Input and Output Redirections\]](#), page 102). These strings tell **gawk** to close the end of the pipe that sends data to the coprocess or the end that reads from it, respectively.

This is particularly necessary in order to use the system **sort** utility as part of a coprocess; **sort** must read *all* of its input data before it can produce any output. The **sort** program does not receive an end-of-file indication until **gawk** closes the write end of the pipe.

When you have finished writing data to the **sort** utility, you can close the `"to"` end of the pipe, and then start reading sorted data via **getline**. For example:

```
BEGIN {
    command = "LC_ALL=C sort"
    n = split("abcdefghijklmnopqrstuvwxyz", a, "")

    for (i = n; i > 0; i--)
```

³ Michael Brennan suggests the use of **rand()** to generate unique file names. This is a valid point; nevertheless, temporary files remain more difficult to use than two-way pipes.

⁴ This is very different from the same operator in the C shell and in Bash.

```

        print a[i] |& command
    close(command, "to")

    while ((command |& getline line) > 0)
        print "got", line
    close(command)
}

```

This program writes the letters of the alphabet in reverse order, one per line, down the two-way pipe to `sort`. It then closes the write end of the pipe, so that `sort` receives an end-of-file indication. This causes `sort` to sort the data and write the sorted data back to the `gawk` program. Once all of the data has been read, `gawk` terminates the coprocess and exits.

As a side note, the assignment ‘`LC_ALL=C`’ in the `sort` command ensures traditional Unix (ASCII) sorting from `sort`. This is not strictly necessary here, but it’s good to know how to do this.

Be careful when closing the “`from`” end of a two-way pipe; in this case `gawk` waits for the child process to exit, which may cause your program to hang. (Thus, this particular feature is of much less use in practice than being able to close the “`to`” end.)

CAUTION: It is a fatal error to write to the “`to`” end of a two-way pipe which has been closed. It is also a fatal error to read from the “`from`” end of a two-way pipe that has been closed.

You may also use pseudo-ttys (ptys) for two-way communication instead of pipes, if your system supports them. This is done on a per-command basis, by setting a special element in the `PROCINFO` array (see [Section 7.5.2 \[Built-in Variables That Convey Information\]](#), [page 149](#)), like so:

```

command = "sort -nr"           # command, save in convenience variable
PROCINFO[command, "pty"] = 1  # update PROCINFO
print ... |& command           # start two-way pipe
...

```

If your system does not have ptys, or if all the system’s ptys are in use, `gawk` automatically falls back to using regular pipes.

Using ptys usually avoids the buffer deadlock issues described earlier, at some loss in performance. This is because the tty driver buffers and sends data line-by-line. On systems with the `stdbuf` (part of the [GNU Coreutils package](#)), you can use that program instead of ptys.

Note also that ptys are not fully transparent. Certain binary control codes, such as `Ctrl-d` for end-of-file, are interpreted by the tty driver and not passed through.

CAUTION: Finally, coprocesses open up the possibility of *deadlock* between `gawk` and the program running in the coprocess. This can occur if you send “too much” data to the coprocess before reading any back; each process is blocked writing data with no one available to read what they’ve already written. There is no workaround for deadlock; careful programming and knowledge of the behavior of the coprocess are required.

12.4 Using gawk for Network Programming

EMRED:

*A host is a host from coast to coast,
and nobody talks to a host that's close,
unless the host that isn't close
is busy, hung, or dead.*

—Mike O'Brien (aka Mr. Protocol)

In addition to being able to open a two-way pipeline to a coprocess on the same system (see [Section 12.3 \[Two-Way Communications with Another Process\]](#), page 308), it is possible to make a two-way connection to another process on another system across an IP network connection.

You can think of this as just a *very long* two-way pipeline to a coprocess. The way **gawk** decides that you want to use TCP/IP networking is by recognizing special file names that begin with one of `‘/inet/’`, `‘/inet4/’`, or `‘/inet6/’`.

The full syntax of the special file name is `/net-type/protocol/local-port/remote-host/remote-port`. The components are:

net-type Specifies the kind of Internet connection to make. Use `‘/inet4/’` to force IPv4, and `‘/inet6/’` to force IPv6. Plain `‘/inet/’` (which used to be the only option) uses the system default, most likely IPv4.

protocol The protocol to use over IP. This must be either `‘tcp’`, or `‘udp’`, for a TCP or UDP IP connection, respectively. TCP should be used for most applications.

local-port The local TCP or UDP port number to use. Use a port number of `‘0’` when you want the system to pick a port. This is what you should do when writing a TCP or UDP client. You may also use a well-known service name, such as `‘smtp’` or `‘http’`, in which case **gawk** attempts to determine the predefined port number using the C `getaddrinfo()` function.

remote-host The IP address or fully qualified domain name of the Internet host to which you want to connect.

remote-port The TCP or UDP port number to use on the given *remote-host*. Again, use `‘0’` if you don't care, or else a well-known service name.

NOTE: Failure in opening a two-way socket will result in a nonfatal error being returned to the calling code. The value of `ERRNO` indicates the error (see [Section 7.5.2 \[Built-in Variables That Convey Information\]](#), page 149).

Consider the following very simple example:

```
BEGIN {
    Service = "/inet/tcp/0/localhost/daytime"
    Service |& getline
    print $0
    close(Service)
}
```

This program reads the current date and time from the local system's TCP `daytime` server. It then prints the results and closes the connection.

Because this topic is extensive, the use of `gawk` for TCP/IP programming is documented separately. See *TCP/IP Internetworking with gawk*, which comes as part of the `gawk` distribution, for a much more complete introduction and discussion, as well as extensive examples.

NOTE: `gawk` can only open direct sockets. There is currently no way to access services available over Secure Socket Layer (SSL); this includes any web service whose URL starts with `'https://'`.

12.5 Profiling Your awk Programs

You may produce execution traces of your `awk` programs. This is done by passing the option `--profile` to `gawk`. When `gawk` has finished running, it creates a profile of your program in a file named `awkprof.out`. Because it is profiling, it also executes up to 45% slower than `gawk` normally does.

As shown in the following example, the `--profile` option can be used to change the name of the file where `gawk` will write the profile:

```
gawk --profile=myprog.prof -f myprog.awk data1 data2
```

In the preceding example, `gawk` places the profile in `myprog.prof` instead of in `awkprof.out`.

Here is a sample session showing a simple `awk` program, its input data, and the results from running `gawk` with the `--profile` option. First, the `awk` program:

```
BEGIN { print "First BEGIN rule" }

END { print "First END rule" }

/foo/ {
    print "matched /foo/, gosh"
    for (i = 1; i <= 3; i++)
        sing()
}

{
    if (/foo/)
        print "if is true"
    else
        print "else is true"
}

BEGIN { print "Second BEGIN rule" }

END { print "Second END rule" }

function sing(    dummy)
{
    print "I gotta be me!"
}
```

```
}
```

Following is the input data:

```
foo
bar
baz
foo
junk
```

Here is the `awkprof.out` that results from running the `gawk` profiler on this program and data (this example also illustrates that `awk` programmers sometimes get up very early in the morning to work):

```
# gawk profile, created Mon Sep 29 05:16:21 2014

# BEGIN rule(s)

BEGIN {
1      print "First BEGIN rule"
}

BEGIN {
1      print "Second BEGIN rule"
}

# Rule(s)

5 /foo/ { # 2
2      print "matched /foo/, gosh"
6      for (i = 1; i <= 3; i++) {
6          sing()
        }
}

5 {
5      if (/foo/) { # 2
2          print "if is true"
3      } else {
3          print "else is true"
        }
}

# END rule(s)

END {
1      print "First END rule"
}

END {
```

```

1      print "Second END rule"
    }

    # Functions, listed alphabetically

6  function sing(dummy)
    {
6      print "I gotta be me!"
    }

```

This example illustrates many of the basic features of profiling output. They are as follows:

- The program is printed in the order **BEGIN** rules, **BEGINFILE** rules, pattern-action rules, **ENDFILE** rules, **END** rules, and functions, listed alphabetically. Multiple **BEGIN** and **END** rules retain their separate identities, as do multiple **BEGINFILE** and **ENDFILE** rules.
- Pattern-action rules have two counts. The first count, to the left of the rule, shows how many times the rule's pattern was *tested*. The second count, to the right of the rule's opening left brace in a comment, shows how many times the rule's action was *executed*. The difference between the two indicates how many times the rule's pattern evaluated to false.
- Similarly, the count for an **if-else** statement shows how many times the condition was tested. To the right of the opening left brace for the **if**'s body is a count showing how many times the condition was true. The count for the **else** indicates how many times the test failed.
- The count for a loop header (such as **for** or **while**) shows how many times the loop test was executed. (Because of this, you can't just look at the count on the first statement in a rule to determine how many times the rule was executed. If the first statement is a loop, the count is misleading.)
- For user-defined functions, the count next to the **function** keyword indicates how many times the function was called. The counts next to the statements in the body show how many times those statements were executed.
- The layout uses "K&R" style with TABs. Braces are used everywhere, even when the body of an **if**, **else**, or loop is only a single statement.
- Parentheses are used only where needed, as indicated by the structure of the program and the precedence rules. For example, `'(3 + 5) * 4'` means add three and five, then multiply the total by four. However, `'3 + 5 * 4'` has no parentheses, and means `'3 + (5 * 4)'`.
- Parentheses are used around the arguments to **print** and **printf** only when the **print** or **printf** statement is followed by a redirection. Similarly, if the target of a redirection isn't a scalar, it gets parenthesized.
- **gawk** supplies leading comments in front of the **BEGIN** and **END** rules, the **BEGINFILE** and **ENDFILE** rules, the pattern-action rules, and the functions.

The profiled version of your program may not look exactly like what you typed when you wrote it. This is because **gawk** creates the profiled version by "pretty-printing" its internal

representation of the program. The advantage to this is that **gawk** can produce a standard representation. The disadvantage is that all source code comments are lost. Also, things such as:

```
/foo/
```

come out as:

```
/foo/  {
    print $0
}
```

which is correct, but possibly unexpected.

Besides creating profiles when a program has completed, **gawk** can produce a profile while it is running. This is useful if your **awk** program goes into an infinite loop and you want to see what has been executed. To use this feature, run **gawk** with the **--profile** option in the background:

```
$ gawk --profile -f myprog &
[1] 13992
```

The shell prints a job number and process ID number; in this case, 13992. Use the **kill** command to send the **USR1** signal to **gawk**:

```
$ kill -USR1 13992
```

As usual, the profiled version of the program is written to **awkprof.out**, or to a different file if one was specified with the **--profile** option.

Along with the regular profile, as shown earlier, the profile file includes a trace of any active functions:

```
# Function Call Stack:

#   3. baz
#   2. bar
#   1. foo
# -- main --
```

You may send **gawk** the **USR1** signal as many times as you like. Each time, the profile and function call trace are appended to the output profile file.

If you use the **HUP** signal instead of the **USR1** signal, **gawk** produces the profile and the function call trace and then exits.

When **gawk** runs on MS-Windows systems, it uses the **INT** and **QUIT** signals for producing the profile, and in the case of the **INT** signal, **gawk** exits. This is because these systems don't support the **kill** command, so the only signals you can deliver to a program are those generated by the keyboard. The **INT** signal is generated by the **Ctrl-c** or **Ctrl-BREAK** key, while the **QUIT** signal is generated by the **Ctrl-** key.

Finally, **gawk** also accepts another option, **--pretty-print**. When called this way, **gawk** “pretty-prints” the program into **awkprof.out**, without any execution counts.

NOTE: The **--pretty-print** option still runs your program. This will change in the next major release.

12.6 Summary

- The `--non-decimal-data` option causes `gawk` to treat octal- and hexadecimal-looking input data as octal and hexadecimal. This option should be used with caution or not at all; use of `strtonum()` is preferable. Note that this option may disappear in a future version of `gawk`.
- You can take over complete control of sorting in `for (indx in array)` array traversal by setting `PROCINFO["sorted_in"]` to the name of a user-defined function that does the comparison of array elements based on index and value.
- Similarly, you can supply the name of a user-defined comparison function as the third argument to either `asort()` or `asorti()` to control how those functions sort arrays. Or you may provide one of the predefined control strings that work for `PROCINFO["sorted_in"]`.
- You can use the `|&` operator to create a two-way pipe to a coprocess. You read from the coprocess with `getline` and write to it with `print` or `printf`. Use `close()` to close off the coprocess completely, or optionally, close off one side of the two-way communications.
- By using special file names with the `|&` operator, you can open a TCP/IP (or UDP/IP) connection to remote hosts on the Internet. `gawk` supports both IPv4 and IPv6.
- You can generate statement count profiles of your program. This can help you determine which parts of your program may be taking the most time and let you tune them more easily. Sending the `USR1` signal while profiling causes `gawk` to dump the profile and keep going, including a function call stack.
- You can also just “pretty-print” the program. This currently also runs the program, but that will change in the next major release.

13 Internationalization with gawk

Once upon a time, computer makers wrote software that worked only in English. Eventually, hardware and software vendors noticed that if their systems worked in the native languages of non-English-speaking countries, they were able to sell more systems. As a result, internationalization and localization of programs and software systems became a common practice.

For many years, the ability to provide internationalization was largely restricted to programs written in C and C++. This chapter describes the underlying library **gawk** uses for internationalization, as well as how **gawk** makes internationalization features available at the **awk** program level. Having internationalization available at the **awk** level gives software developers additional flexibility—they are no longer forced to write in C or C++ when internationalization is a requirement.

13.1 Internationalization and Localization

Internationalization means writing (or modifying) a program once, in such a way that it can use multiple languages without requiring further source code changes. *Localization* means providing the data necessary for an internationalized program to work in a particular language. Most typically, these terms refer to features such as the language used for printing error messages, the language used to read responses, and information related to how numerical and monetary values are printed and read.

13.2 GNU gettext

gawk uses GNU **gettext** to provide its internationalization features. The facilities in GNU **gettext** focus on messages: strings printed by a program, either directly or via formatting with **printf** or **sprintf()**.¹

When using GNU **gettext**, each application has its own *text domain*. This is a unique name, such as `'kpilot'` or `'gawk'`, that identifies the application. A complete application may have multiple components—programs written in C or C++, as well as scripts written in **sh** or **awk**. All of the components use the same text domain.

To make the discussion concrete, assume we're writing an application named **guide**. Internationalization consists of the following steps, in this order:

1. The programmer reviews the source for all of **guide**'s components and marks each string that is a candidate for translation. For example, `"'-F': option required"` is a good candidate for translation. A table with strings of option names is not (e.g., **gawk**'s `--profile` option should remain the same, no matter what the local language).
2. The programmer indicates the application's text domain (`"guide"`) to the **gettext** library, by calling the `textdomain()` function.
3. Messages from the application are extracted from the source code and collected into a portable object template file (`guide.pot`), which lists the strings and their translations. The translations are initially empty. The original (usually English) messages serve as the key for lookup of the translations.

¹ For some operating systems, the **gawk** port doesn't support GNU **gettext**. Therefore, these features are not available if you are using one of those operating systems. Sorry.

4. For each language with a translator, `guide.pot` is copied to a portable object file (`.po`) and translations are created and shipped with the application. For example, there might be a `fr.po` for a French translation.
5. Each language's `.po` file is converted into a binary message object (`.gmo`) file. A message object file contains the original messages and their translations in a binary format that allows fast lookup of translations at runtime.
6. When `guide` is built and installed, the binary translation files are installed in a standard place.
7. For testing and development, it is possible to tell `gettext` to use `.gmo` files in a different directory than the standard one by using the `bindtextdomain()` function.
8. At runtime, `guide` looks up each string via a call to `gettext()`. The returned string is the translated string if available, or the original string if not.
9. If necessary, it is possible to access messages from a different text domain than the one belonging to the application, without having to switch the application's default text domain back and forth.

In C (or C++), the string marking and dynamic translation lookup are accomplished by wrapping each string in a call to `gettext()`:

```
printf("%s", gettext("Don't Panic!\n"));
```

The tools that extract messages from source code pull out all strings enclosed in calls to `gettext()`.

The GNU `gettext` developers, recognizing that typing '`gettext(...)`' over and over again is both painful and ugly to look at, use the macro '`_`' (an underscore) to make things easier:

```
/* In the standard header file: */
#define _(str) gettext(str)

/* In the program text: */
printf("%s", _("Don't Panic!\n"));
```

This reduces the typing overhead to just three extra characters per string and is considerably easier to read as well.

There are locale *categories* for different types of locale-related information. The defined locale categories that `gettext` knows about are:

LC_MESSAGES

Text messages. This is the default category for `gettext` operations, but it is possible to supply a different one explicitly, if necessary. (It is almost never necessary to supply a different category.)

LC_COLLATE

Text-collation information (i.e., how different characters and/or groups of characters sort in a given language).

LC_CTYPE Character-type information (alphabetic, digit, upper- or lowercase, and so on) as well as character encoding. This information is accessed via the POSIX character classes in regular expressions, such as `/[[[:alnum:]]/` (see [Section 3.4 \[Using Bracket Expressions\]](#), page 50).

LC_MONETARY

Monetary information, such as the currency symbol, and whether the symbol goes before or after a number.

LC_NUMERIC

Numeric information, such as which characters to use for the decimal point and the thousands separator.²

LC_TIME

Time- and date-related information, such as 12- or 24-hour clock, month printed before or after the day in a date, local month abbreviations, and so on.

LC_ALL

All of the above. (Not too useful in the context of `gettext`.)

NOTE: As described in [Section 6.6 \[Where You Are Makes a Difference\]](#), [page 129](#), environment variables with the same name as the locale categories (`LC_CTYPE`, `LC_ALL`, etc.) influence `gawk`'s behavior (and that of other utilities).

Normally, these variables also affect how the `gettext` library finds translations. However, the `LANGUAGE` environment variable overrides the `LC_XXX` variables. Many GNU/Linux systems may define this variable without your knowledge, causing `gawk` to not find the correct translations. If this happens to you, look to see if `LANGUAGE` is defined, and if so, use the shell's `unset` command to remove it.

For testing translations of `gawk` itself, you can set the `GAWK_LOCALE_DIR` environment variable. See the documentation for the C `bindtextdomain()` function and also see [Section 2.5.3 \[Other Environment Variables\]](#), [page 40](#).

13.3 Internationalizing awk Programs

`gawk` provides the following variables for internationalization:

TEXTDOMAIN

This variable indicates the application's text domain. For compatibility with GNU `gettext`, the default value is `"messages"`.

_"your message here"

String constants marked with a leading underscore are candidates for translation at runtime. String constants without a leading underscore are not translated.

`gawk` provides the following functions for internationalization:

dcgettext(*string* [, *domain* [, *category*]])

Return the translation of *string* in text domain *domain* for locale category *category*. The default value for *domain* is the current value of `TEXTDOMAIN`. The default value for *category* is `"LC_MESSAGES"`.

If you supply a value for *category*, it must be a string equal to one of the known locale categories described in the previous section. You must also supply a text domain. Use `TEXTDOMAIN` if you want to use the current domain.

² Americans use a comma every three decimal places and a period for the decimal point, while many Europeans do exactly the opposite: 1,234.56 versus 1.234,56.

CAUTION: The order of arguments to the `awk` version of the `dcgettext()` function is purposely different from the order for the C version. The `awk` version's order was chosen to be simple and to allow for reasonable `awk`-style default arguments.

`dcngettext(string1, string2, number [, domain [, category]])`

Return the plural form used for *number* of the translation of *string1* and *string2* in text domain *domain* for locale category *category*. *string1* is the English singular variant of a message, and *string2* is the English plural variant of the same message. The default value for *domain* is the current value of `TEXTDOMAIN`. The default value for *category* is `"LC_MESSAGES"`.

The same remarks about argument order as for the `dcgettext()` function apply.

`bindtextdomain(directory [, domain])`

Change the directory in which `gettext` looks for `.gmo` files, in case they will not or cannot be placed in the standard locations (e.g., during testing). Return the directory in which *domain* is “bound.”

The default *domain* is the value of `TEXTDOMAIN`. If *directory* is the null string (`""`), then `bindtextdomain()` returns the current binding for the given *domain*.

To use these facilities in your `awk` program, follow these steps:

1. Set the variable `TEXTDOMAIN` to the text domain of your program. This is best done in a `BEGIN` rule (see [Section 7.1.4 \[The BEGIN and END Special Patterns\]](#), page 134), or it can also be done via the `-v` command-line option (see [Section 2.2 \[Command-Line Options\]](#), page 31):

```
BEGIN {
    TEXTDOMAIN = "guide"
    ...
}
```

2. Mark all translatable strings with a leading underscore (`'_'`) character. It *must* be adjacent to the opening quote of the string. For example:

```
print _"hello, world"
x = _"you goofed"
printf(_"Number of users is %d\n", nusers)
```

3. If you are creating strings dynamically, you can still translate them, using the `dcgettext()` built-in function:³

```
if (groggy)
    message = dcgettext("%d customers disturbing me\n", "adminprog")
else
    message = dcgettext("enjoying %d customers\n", "adminprog")
printf(message, ncustomers)
```

Here, the call to `dcgettext()` supplies a different text domain (`"adminprog"`) in which to find the message, but it uses the default `"LC_MESSAGES"` category.

The previous example only works if `ncustomers` is greater than one. This example would be better done with `dcngettext()`:

³ Thanks to Bruno Haible for this example.

```

if (groggy)
    message = dcngettext("%d customer disturbing me\n",
                        "%d customers disturbing me\n", "adminprog")
else
    message = dcngettext("enjoying %d customer\n",
                        "enjoying %d customers\n", "adminprog")
printf(message, ncustomers)

```

4. During development, you might want to put the `.gmo` file in a private directory for testing. This is done with the `bindtextdomain()` built-in function:

```

BEGIN {
    TEXTDOMAIN = "guide"    # our text domain
    if (Testing) {
        # where to find our files
        bindtextdomain("testdir")
        # joe is in charge of adminprog
        bindtextdomain("../joe/testdir", "adminprog")
    }
    ...
}

```

See [Section 13.5 \[A Simple Internationalization Example\]](#), page 324, for an example program showing the steps to create and use translations from `awk`.

13.4 Translating `awk` Programs

Once a program's translatable strings have been marked, they must be extracted to create the initial `.pot` file. As part of translation, it is often helpful to rearrange the order in which arguments to `printf` are output.

`gawk`'s `--gen-pot` command-line option extracts the messages and is discussed next. After that, `printf`'s ability to rearrange the order for `printf` arguments at runtime is covered.

13.4.1 Extracting Marked Strings

Once your `awk` program is working, and all the strings have been marked and you've set (and perhaps bound) the text domain, it is time to produce translations. First, use the `--gen-pot` command-line option to create the initial `.pot` file:

```
gawk --gen-pot -f guide.awk > guide.pot
```

When run with `--gen-pot`, `gawk` does not execute your program. Instead, it parses it as usual and prints all marked strings to standard output in the format of a GNU `gettext` Portable Object file. Also included in the output are any constant strings that appear as the first argument to `dcgettext()` or as the first and second argument to `dcngettext()`.⁴ You should distribute the generated `.pot` file with your `awk` program; translators will eventually use it to provide you translations that you can also then distribute. See [Section 13.5 \[A Simple Internationalization Example\]](#), page 324, for the full list of steps to go through to create and test translations for `guide`.

⁴ The `xgettext` utility that comes with GNU `gettext` can handle `.awk` files.

13.4.2 Rearranging printf Arguments

Format strings for `printf` and `sprintf()` (see [Section 5.5 \[Using printf Statements for Fancier Printing\]](#), page 92) present a special problem for translation. Consider the following:⁵

```
printf(_"String '%s' has %d characters\n",
      string, length(string))
```

A possible German translation for this might be:

```
"%d Zeichen lang ist die Zeichenkette '%s'\n"
```

The problem should be obvious: the order of the format specifications is different from the original! Even though `gettext()` can return the translated string at runtime, it cannot change the argument order in the call to `printf`.

To solve this problem, `printf` format specifiers may have an additional optional element, which we call a *positional specifier*. For example:

```
"%2$d Zeichen lang ist die Zeichenkette '%1$s'\n"
```

Here, the positional specifier consists of an integer count, which indicates which argument to use, and a '\$'. Counts are one-based, and the format string itself is *not* included. Thus, in the following example, 'string' is the first argument and 'length(string)' is the second:

```
$ gawk 'BEGIN {
>     string = "Don\47t Panic"
>     printf "%2$d characters live in \"%1$s\"\n",
>           string, length(string)
> }'
+ 11 characters live in "Don't Panic"
```

If present, positional specifiers come first in the format specification, before the flags, the field width, and/or the precision.

Positional specifiers can be used with the dynamic field width and precision capability:

```
$ gawk 'BEGIN {
>     printf("%.5s\n", 10, 20, "hello")
>     printf("%3$*2$.1s\n", 20, 10, "hello")
> }'
+     hello
+     hello
```

NOTE: When using '*' with a positional specifier, the '*' comes first, then the integer position, and then the '\$'. This is somewhat counterintuitive.

`gawk` does not allow you to mix regular format specifiers and those with positional specifiers in the same string:

```
$ gawk 'BEGIN { printf "%d %3$s\n", 1, 2, "hi" }'
[error] gawk: cmd. line:1: fatal: must use 'count$' on all formats or none
```

NOTE: There are some pathological cases that `gawk` may fail to diagnose. In such cases, the output may not be what you expect. It's still a bad idea to try mixing them, even if `gawk` doesn't detect it.

⁵ This example is borrowed from the GNU `gettext` manual.

Although positional specifiers can be used directly in **awk** programs, their primary purpose is to help in producing correct translations of format strings into languages different from the one in which the program is first written.

13.4.3 **awk** Portability Issues

gawk's internationalization features were purposely chosen to have as little impact as possible on the portability of **awk** programs that use them to other versions of **awk**. Consider this program:

```
BEGIN {
    TEXTDOMAIN = "guide"
    if (Test_Guide) # set with -v
        bindtextdomain("/test/guide/messages")
    print _"don't panic!"
}
```

As written, it won't work on other versions of **awk**. However, it is actually almost portable, requiring very little change:

- Assignments to **TEXTDOMAIN** won't have any effect, because **TEXTDOMAIN** is not special in other **awk** implementations.
- Non-GNU versions of **awk** treat marked strings as the concatenation of a variable named **_** with the string following it.⁶ Typically, the variable **_** has the null string ("") as its value, leaving the original string constant as the result.
- By defining “dummy” functions to replace **dcgettext()**, **dcngettext()**, and **bindtextdomain()**, the **awk** program can be made to run, but all the messages are output in the original language. For example:

```
function bindtextdomain(dir, domain)
{
    return dir
}

function dcgettext(string, domain, category)
{
    return string
}

function dcngettext(string1, string2, number, domain, category)
{
    return (number == 1 ? string1 : string2)
}
```

- The use of positional specifications in **printf** or **sprintf()** is *not* portable. To support **gettext()** at the C level, many systems' C versions of **sprintf()** do support positional specifiers. But it works only if enough arguments are supplied in the function call. Many versions of **awk** pass **printf** formats and arguments unchanged to the underlying C library version of **sprintf()**, but only one format and argument at a time. What

⁶ This is good fodder for an “Obfuscated **awk**” contest.

happens if a positional specification is used is anybody's guess. However, because the positional specifications are primarily for use in *translated* format strings, and because non-GNU *awks* never retrieve the translated string, this should not be a problem in practice.

13.5 A Simple Internationalization Example

Now let's look at a step-by-step example of how to internationalize and localize a simple *awk* program, using *guide.awk* as our original source:

```
BEGIN {
    TEXTDOMAIN = "guide"
    bindtextdomain(".") # for testing
    print _"Don't Panic"
    print _"The Answer Is", 42
    print "Pardon me, Zaphod who?"
}
```

Run 'gawk --gen-pot' to create the .pot file:

```
$ gawk --gen-pot -f guide.awk > guide.pot
```

This produces:

```
#: guide.awk:4
msgid "Don't Panic"
msgstr ""

#: guide.awk:5
msgid "The Answer Is"
msgstr ""
```

This original portable object template file is saved and reused for each language into which the application is translated. The *msgid* is the original string and the *msgstr* is the translation.

NOTE: Strings not marked with a leading underscore do not appear in the *guide.pot* file.

Next, the messages must be translated. Here is a translation to a hypothetical dialect of English, called "Mellow":⁷

```
$ cp guide.pot guide-mellow.po
Add translations to guide-mellow.po ...
```

Following are the translations:

```
#: guide.awk:4
msgid "Don't Panic"
msgstr "Hey man, relax!"

#: guide.awk:5
msgid "The Answer Is"
```

⁷ Perhaps it would be better if it were called "Hippy." Ah, well.

```
msgstr "Like, the scoop is"
```

The next step is to make the directory to hold the binary message object file and then to create the `guide.mo` file. We pretend that our file is to be used in the `en_US.UTF-8` locale, because we have to use a locale name known to the C `gettext` routines. The directory layout shown here is standard for GNU `gettext` on GNU/Linux systems. Other versions of `gettext` may use a different layout:

```
$ mkdir en_US.UTF-8 en_US.UTF-8/LC_MESSAGES
```

The `msgfmt` utility does the conversion from human-readable `.po` file to machine-readable `.mo` file. By default, `msgfmt` creates a file named `messages`. This file must be renamed and placed in the proper directory (using the `-o` option) so that `gawk` can find it:

```
$ msgfmt guide-mellow.po -o en_US.UTF-8/LC_MESSAGES/guide.mo
```

Finally, we run the program to test it:

```
$ gawk -f guide.awk
+ Hey man, relax!
+ Like, the scoop is 42
+ Pardon me, Zaphod who?
```

If the three replacement functions for `dcgettext()`, `dcngettext()`, and `bindtextdomain()` (see [Section 13.4.3 \[awk Portability Issues\], page 323](#)) are in a file named `libintl.awk`, then we can run `guide.awk` unchanged as follows:

```
$ gawk --posix -f guide.awk -f libintl.awk
+ Don't Panic
+ The Answer Is 42
+ Pardon me, Zaphod who?
```

13.6 gawk Can Speak Your Language

`gawk` itself has been internationalized using the GNU `gettext` package. (GNU `gettext` is described in complete detail in [GNU gettext utilities](#).) As of this writing, the latest version of GNU `gettext` is [version 0.19.4](#).

If a translation of `gawk`'s messages exists, then `gawk` produces usage messages, warnings, and fatal errors in the local language.

13.7 Summary

- Internationalization means writing a program such that it can use multiple languages without requiring source code changes. Localization means providing the data necessary for an internationalized program to work in a particular language.
- `gawk` uses GNU `gettext` to let you internationalize and localize `awk` programs. A program's text domain identifies the program for grouping all messages and other data together.
- You mark a program's strings for translation by preceding them with an underscore. Once that is done, the strings are extracted into a `.pot` file. This file is copied for each language into a `.po` file, and the `.po` files are compiled into `.gmo` files for use at runtime.

- You can use positional specifications with `sprintf()` and `printf` to rearrange the placement of argument values in formatted strings and output. This is useful for the translation of format control strings.
- The internationalization features have been designed so that they can be easily worked around in a standard `awk`.
- `gawk` itself has been internationalized and ships with a number of translations for its messages.

14 Debugging awk Programs

It would be nice if computer programs worked perfectly the first time they were run, but in real life, this rarely happens for programs of any complexity. Thus, most programming languages have facilities available for “debugging” programs, and now `awk` is no exception.

The `gawk` debugger is purposely modeled after the GNU Debugger (GDB) command-line debugger. If you are familiar with GDB, learning how to use `gawk` for debugging your program is easy.

14.1 Introduction to the gawk Debugger

This section introduces debugging in general and begins the discussion of debugging in `gawk`.

14.1.1 Debugging in General

(If you have used debuggers in other languages, you may want to skip ahead to [Section 14.1.3 \[awk Debugging\]](#), page 328.)

Of course, a debugging program cannot remove bugs for you, because it has no way of knowing what you or your users consider a “bug” versus a “feature.” (Sometimes, we humans have a hard time with this ourselves.) In that case, what can you expect from such a tool? The answer to that depends on the language being debugged, but in general, you can expect at least the following:

- The ability to watch a program execute its instructions one by one, giving you, the programmer, the opportunity to think about what is happening on a time scale of seconds, minutes, or hours, rather than the nanosecond time scale at which the code usually runs.
- The opportunity to not only passively observe the operation of your program, but to control it and try different paths of execution, without having to change your source files.
- The chance to see the values of data in the program at any point in execution, and also to change that data on the fly, to see how that affects what happens afterward. (This often includes the ability to look at internal data structures besides the variables you actually defined in your code.)
- The ability to obtain additional information about your program’s state or even its internal structure.

All of these tools provide a great amount of help in using your own skills and understanding of the goals of your program to find where it is going wrong (or, for that matter, to better comprehend a perfectly functional program that you or someone else wrote).

14.1.2 Debugging Concepts

Before diving in to the details, we need to introduce several important concepts that apply to just about all debuggers. The following list defines terms used throughout the rest of this chapter:

Stack frame

Programs generally call functions during the course of their execution. One function can call another, or a function can call itself (recursion). You can

view the chain of called functions (main program calls A, which calls B, which calls C), as a stack of executing functions: the currently running function is the topmost one on the stack, and when it finishes (returns), the next one down then becomes the active function. Such a stack is termed a *call stack*.

For each function on the call stack, the system maintains a data area that contains the function's parameters, local variables, and return value, as well as any other “bookkeeping” information needed to manage the call stack. This data area is termed a *stack frame*.

gawk also follows this model, and gives you access to the call stack and to each stack frame. You can see the call stack, as well as from where each function on the stack was invoked. Commands that print the call stack print information about each stack frame (as detailed later on).

Breakpoint

During debugging, you often wish to let the program run until it reaches a certain point, and then continue execution from there one statement (or instruction) at a time. The way to do this is to set a *breakpoint* within the program. A breakpoint is where the execution of the program should break off (stop), so that you can take over control of the program's execution. You can add and remove as many breakpoints as you like.

Watchpoint

A watchpoint is similar to a breakpoint. The difference is that breakpoints are oriented around the code: stop when a certain point in the code is reached. A watchpoint, however, specifies that program execution should stop when a *data value* is changed. This is useful, as sometimes it happens that a variable receives an erroneous value, and it's hard to track down where this happens just by looking at the code. By using a watchpoint, you can stop whenever a variable is assigned to, and usually find the errant code quite quickly.

14.1.3 awk Debugging

Debugging an **awk** program has some specific aspects that are not shared with programs written in other languages.

First of all, the fact that **awk** programs usually take input line by line from a file or files and operate on those lines using specific rules makes it especially useful to organize viewing the execution of the program in terms of these rules. As we will see, each **awk** rule is treated almost like a function call, with its own specific block of instructions.

In addition, because **awk** is by design a very concise language, it is easy to lose sight of everything that is going on “inside” each line of **awk** code. The debugger provides the opportunity to look at the individual primitive instructions carried out by the higher-level **awk** commands.

14.2 Sample gawk Debugging Session

In order to illustrate the use of **gawk** as a debugger, let's look at a sample debugging session. We will use the **awk** implementation of the POSIX **uniq** command described earlier (see [Section 11.2.6 \[Printing Nonduplicated Lines of Text\], page 267](#)) as our example.

14.2.1 How to Start the Debugger

Starting the debugger is almost exactly like running `gawk` normally, except you have to pass an additional option, `--debug`, or the corresponding short option, `-D`. The file(s) containing the program and any supporting code are given on the command line as arguments to one or more `-f` options. (`gawk` is not designed to debug command-line programs, only programs contained in files.) In our case, we invoke the debugger like this:

```
$ gawk -D -f getopt.awk -f join.awk -f uniq.awk -1 inputfile
```

where both `getopt.awk` and `uniq.awk` are in `$AWKPATH`. (Experienced users of GDB or similar debuggers should note that this syntax is slightly different from what you are used to. With the `gawk` debugger, you give the arguments for running the program in the command line to the debugger rather than as part of the `run` command at the debugger prompt.) The `-1` is an option to `uniq.awk`.

Instead of immediately running the program on `inputfile`, as `gawk` would ordinarily do, the debugger merely loads all the program source files, compiles them internally, and then gives us a prompt:

```
gawk>
```

from which we can issue commands to the debugger. At this point, no code has been executed.

14.2.2 Finding the Bug

Let's say that we are having a problem using (a faulty version of) `uniq.awk` in the "field-skipping" mode, and it doesn't seem to be catching lines which should be identical when skipping the first field, such as:

```
awk is a wonderful program!
gawk is a wonderful program!
```

This could happen if we were thinking (C-like) of the fields in a record as being numbered in a zero-based fashion, so instead of the lines:

```
clast = join(alast, fcount+1, n)
cline = join(aline, fcount+1, m)
```

we wrote:

```
clast = join(alast, fcount, n)
cline = join(aline, fcount, m)
```

The first thing we usually want to do when trying to investigate a problem like this is to put a breakpoint in the program so that we can watch it at work and catch what it is doing wrong. A reasonable spot for a breakpoint in `uniq.awk` is at the beginning of the function `are_equal()`, which compares the current line with the previous one. To set the breakpoint, use the `b` (breakpoint) command:

```
gawk> b are_equal
-| Breakpoint 1 set at file 'awklib/eg/prog/uniq.awk', line 63
```

The debugger tells us the file and line number where the breakpoint is. Now type `'r'` or `'run'` and the program runs until it hits the breakpoint for the first time:

```
gawk> r
-| Starting program:
```

```

-| Stopping in Rule ...
-| Breakpoint 1, are_equal(n, m, clast, cline, alast, aline)
    at 'awklib/eg/prog/uniq.awk':63
-| 63          if (fcount == 0 && charcount == 0)
gawk>

```

Now we can look at what's going on inside our program. First of all, let's see how we got to where we are. At the prompt, we type `'bt'` (short for "backtrace"), and the debugger responds with a listing of the current stack frames:

```

gawk> bt
-| #0  are_equal(n, m, clast, cline, alast, aline)
    at 'awklib/eg/prog/uniq.awk':68
-| #1  in main() at 'awklib/eg/prog/uniq.awk':88

```

This tells us that `are_equal()` was called by the main program at line 88 of `uniq.awk`. (This is not a big surprise, because this is the only call to `are_equal()` in the program, but in more complex programs, knowing who called a function and with what parameters can be the key to finding the source of the problem.)

Now that we're in `are_equal()`, we can start looking at the values of some variables. Let's say we type `'p n'` (`p` is short for "print"). We would expect to see the value of `n`, a parameter to `are_equal()`. Actually, the debugger gives us:

```

gawk> p n
-| n = untyped variable

```

In this case, `n` is an uninitialized local variable, because the function was called without arguments (see [Section 6.4 \[Function Calls\]](#), page 126).

A more useful variable to display might be the current record:

```

gawk> p $0
-| $0 = "gawk is a wonderful program!"

```

This might be a bit puzzling at first, as this is the second line of our test input. Let's look at `NR`:

```

gawk> p NR
-| NR = 2

```

So we can see that `are_equal()` was only called for the second record of the file. Of course, this is because our program contains a rule for `'NR == 1'`:

```

NR == 1 {
    last = $0
    next
}

```

OK, let's just check that that rule worked correctly:

```

gawk> p last
-| last = "awk is a wonderful program!"

```

Everything we have done so far has verified that the program has worked as planned, up to and including the call to `are_equal()`, so the problem must be inside this function. To investigate further, we must begin "stepping through" the lines of `are_equal()`. We start by typing `'n'` (for "next"):

```

gawk> n

```

```

+ 66          if (fcount > 0) {

```

This tells us that **gawk** is now ready to execute line 66, which decides whether to give the lines the special “field-skipping” treatment indicated by the **-1** command-line option. (Notice that we skipped from where we were before, at line 63, to here, because the condition in line 63, ‘**if (fcount == 0 && charcount == 0)**’, was false.)

Continuing to step, we now get to the splitting of the current and last records:

```

gawk> n
+ 67          n = split(last, alast)
gawk> n
+ 68          m = split($0, aline)

```

At this point, we should be curious to see what our records were split into, so we try to look:

```

gawk> p n m alast aline
+ n = 5
+ m = untyped variable
+ alast = array, 5 elements
+ aline = untyped variable

```

(The **p** command can take more than one argument, similar to **awk**’s **print** statement.)

This is kind of disappointing, though. All we found out is that there are five elements in **alast**; **m** and **aline** don’t have values because we are at line 68 but haven’t executed it yet. This information is useful enough (we now know that none of the words were accidentally left out), but what if we want to see inside the array?

The first choice would be to use subscripts:

```

gawk> p alast[0]
+ "0" not in array 'alast'

```

Oops!

```

gawk> p alast[1]
+ alast["1"] = "awk"

```

This would be kind of slow for a 100-member array, though, so **gawk** provides a shortcut (reminiscent of another language not to be mentioned):

```

gawk> p @alast
+ alast["1"] = "awk"
+ alast["2"] = "is"
+ alast["3"] = "a"
+ alast["4"] = "wonderful"
+ alast["5"] = "program!"

```

It looks like we got this far OK. Let’s take another step or two:

```

gawk> n
+ 69          clast = join(alast, fcount, n)
gawk> n
+ 70          cline = join(aline, fcount, m)

```

Well, here we are at our error (sorry to spoil the suspense). What we had in mind was to join the fields starting from the second one to make the virtual record to compare, and if the first field were numbered zero, this would work. Let’s look at what we’ve got:

```
gawk> p cline clast
└ cline = "gawk is a wonderful program!"
└ clast = "awk is a wonderful program!"
```

Hey, those look pretty familiar! They're just our original, unaltered input records. A little thinking (the human brain is still the best debugging tool), and we realize that we were off by one!

We get out of the debugger:

```
gawk> q
└ The program is running. Exit anyway (y/n)? y
```

Then we get into an editor:

```
clast = join(alast, fcount+1, n)
cline = join(aline, fcount+1, m)
```

and problem solved!

14.3 Main Debugger Commands

The **gawk** debugger command set can be divided into the following categories:

- Breakpoint control
- Execution control
- Viewing and changing data
- Working with the stack
- Getting information
- Miscellaneous

Each of these are discussed in the following subsections. In the following descriptions, commands that may be abbreviated show the abbreviation on a second description line. A debugger command name may also be truncated if that partial name is unambiguous. The debugger has the built-in capability to automatically repeat the previous command just by hitting **Enter**. This works for the commands **list**, **next**, **nexti**, **step**, **stepi**, and **continue** executed without any argument.

14.3.1 Control of Breakpoints

As we saw earlier, the first thing you probably want to do in a debugging session is to get your breakpoints set up, because your program will otherwise just run as if it was not under the debugger. The commands for controlling breakpoints are:

```
break [[filename:]n | function] ["expression"]
b [[filename:]n | function] ["expression"]
```

Without any argument, set a breakpoint at the next instruction to be executed in the selected stack frame. Arguments can be one of the following:

n Set a breakpoint at line number *n* in the current source file.

filename:n Set a breakpoint at line number *n* in source file *filename*.

function Set a breakpoint at entry to (the first instruction of) function *function*.

Each breakpoint is assigned a number that can be used to delete it from the breakpoint list using the **delete** command.

With a breakpoint, you may also supply a condition. This is an **awk** expression (enclosed in double quotes) that the debugger evaluates whenever the breakpoint is reached. If the condition is true, then the debugger stops execution and prompts for a command. Otherwise, it continues executing the program.

clear *[[filename:]n | function]*

Without any argument, delete any breakpoint at the next instruction to be executed in the selected stack frame. If the program stops at a breakpoint, this deletes that breakpoint so that the program does not stop at that location again. Arguments can be one of the following:

n Delete breakpoint(s) set at line number *n* in the current source file.

filename:n Delete breakpoint(s) set at line number *n* in source file *filename*.

function Delete breakpoint(s) set at entry to function *function*.

condition *n "expression"*

Add a condition to existing breakpoint or watchpoint *n*. The condition is an **awk** expression *enclosed in double quotes* that the debugger evaluates whenever the breakpoint or watchpoint is reached. If the condition is true, then the debugger stops execution and prompts for a command. Otherwise, the debugger continues executing the program. If the condition expression is not specified, any existing condition is removed (i.e., the breakpoint or watchpoint is made unconditional).

delete *[n1 n2 ...] [n-m]*

d *[n1 n2 ...] [n-m]*

Delete specified breakpoints or a range of breakpoints. Delete all defined breakpoints if no argument is supplied.

disable *[n1 n2 ... | n-m]*

Disable specified breakpoints or a range of breakpoints. Without any argument, disable all breakpoints.

enable *[del | once] [n1 n2 ...] [n-m]*

e *[del | once] [n1 n2 ...] [n-m]*

Enable specified breakpoints or a range of breakpoints. Without any argument, enable all breakpoints. Optionally, you can specify how to enable the breakpoints:

del Enable the breakpoints temporarily, then delete each one when the program stops at it.

once Enable the breakpoints temporarily, then disable each one when the program stops at it.

ignore *n count*

Ignore breakpoint number *n* the next *count* times it is hit.

tbreak *[[filename:]n | function]*

t *[[filename:]n | function]*

Set a temporary breakpoint (enabled for only one stop). The arguments are the same as for **break**.

14.3.2 Control of Execution

Now that your breakpoints are ready, you can start running the program and observing its behavior. There are more commands for controlling execution of the program than we saw in our earlier example:

commands *[n]*

silent

...

end Set a list of commands to be executed upon stopping at a breakpoint or watchpoint. *n* is the breakpoint or watchpoint number. Without a number, the last one set is used. The actual commands follow, starting on the next line, and terminated by the **end** command. If the command **silent** is in the list, the usual messages about stopping at a breakpoint and the source line are not printed. Any command in the list that resumes execution (e.g., **continue**) terminates the list (an implicit **end**), and subsequent commands are ignored. For example:

```
gawk> commands
> silent
> printf "A silent breakpoint; i = %d\n", i
> info locals
> set i = 10
> continue
> end
gawk>
```

continue *[count]*

c *[count]* Resume program execution. If continued from a breakpoint and *count* is specified, ignore the breakpoint at that location the next *count* times before stopping.

finish Execute until the selected stack frame returns. Print the returned value.

next *[count]*

n *[count]* Continue execution to the next source line, stepping over function calls. The argument *count* controls how many times to repeat the action, as in **step**.

nexti *[count]*

ni *[count]* Execute one (or *count*) instruction(s), stepping over function calls.

return *[value]*

Cancel execution of a function call. If *value* (either a string or a number) is specified, it is used as the function's return value. If used in a frame other than the innermost one (the currently executing function; i.e., frame number 0), discard all inner frames in addition to the selected one, and the caller of that frame becomes the innermost frame.

run
r Start/restart execution of the program. When restarting, the debugger retains the current breakpoints, watchpoints, command history, automatic display variables, and debugger options.

step [*count*]
s [*count*] Continue execution until control reaches a different source line in the current stack frame, stepping inside any function called within the line. If the argument *count* is supplied, steps that many times before stopping, unless it encounters a breakpoint or watchpoint.

stepi [*count*]
si [*count*] Execute one (or *count*) instruction(s), stepping inside function calls. (For illustration of what is meant by an “instruction” in **gawk**, see the output shown under **dump** in [Section 14.3.6 \[Miscellaneous Commands\]](#), page 339.)

until [[*filename:*]*n* | *function*]
u [[*filename:*]*n* | *function*] Without any argument, continue execution until a line past the current line in the current stack frame is reached. With an argument, continue execution until the specified location is reached, or the current stack frame returns.

14.3.3 Viewing and Changing Data

The commands for viewing and changing variables inside of **gawk** are:

display [*var* | *\$n*]
 Add variable *var* (or field *\$n*) to the display list. The value of the variable or field is displayed each time the program stops. Each variable added to the list is identified by a unique number:

```
gawk> display x
→ 10: x = 1
```

This displays the assigned item number, the variable name, and its current value. If the display variable refers to a function parameter, it is silently deleted from the list as soon as the execution reaches a context where no such variable of the given name exists. Without argument, **display** displays the current values of items on the list.

eval "*awk statements*"
 Evaluate *awk statements* in the context of the running program. You can do anything that an **awk** program would do: assign values to variables, call functions, and so on.

eval *param*, ...

awk statements

end This form of **eval** is similar, but it allows you to define “local variables” that exist in the context of the *awk statements*, instead of using variables or function parameters defined by the program.

```
print var1[, var2 ...]
p var1[, var2 ...]
```

Print the value of a **gawk** variable or field. Fields must be referenced by constants:

```
gawk> print $3
```

This prints the third field in the input record (if the specified field does not exist, it prints ‘Null field’). A variable can be an array element, with the subscripts being constant string values. To print the contents of an array, prefix the name of the array with the ‘@’ symbol:

```
gawk> print @a
```

This prints the indices and the corresponding values for all elements in the array **a**.

```
printf format [, arg ...]
```

Print formatted text. The *format* may include escape sequences, such as ‘\n’ (see [Section 3.2 \[Escape Sequences\]](#), page 46). No newline is printed unless one is specified.

```
set var=value
```

Assign a constant (number or string) value to an **awk** variable or field. String values must be enclosed between double quotes (“...”).

You can also set special **awk** variables, such as **FS**, **NF**, **NR**, and so on.

```
watch var | $n ["expression"]
```

```
w var | $n ["expression"]
```

Add variable *var* (or field *\$n*) to the watch list. The debugger then stops whenever the value of the variable or field changes. Each watched item is assigned a number that can be used to delete it from the watch list using the **unwatch** command.

With a watchpoint, you may also supply a condition. This is an **awk** expression (enclosed in double quotes) that the debugger evaluates whenever the watchpoint is reached. If the condition is true, then the debugger stops execution and prompts for a command. Otherwise, **gawk** continues executing the program.

```
undisplay [n]
```

Remove item number *n* (or all items, if no argument) from the automatic display list.

```
unwatch [n]
```

Remove item number *n* (or all items, if no argument) from the watch list.

14.3.4 Working with the Stack

Whenever you run a program that contains any function calls, **gawk** maintains a stack of all of the function calls leading up to where the program is right now. You can see how you got to where you are, and also move around in the stack to see what the state of things was in the functions that called the one you are in. The commands for doing this are:

backtrace [*count*]

bt [*count*]

where [*count*]

Print a backtrace of all function calls (stack frames), or innermost *count* frames if *count* > 0. Print the outermost *count* frames if *count* < 0. The backtrace displays the name and arguments to each function, the source file name, and the line number. The alias **where** for **backtrace** is provided for longtime GDB users who may be used to that command.

down [*count*]

Move *count* (default 1) frames down the stack toward the innermost frame. Then select and print the frame.

frame [*n*]

f [*n*]

Select and print stack frame *n*. Frame 0 is the currently executing, or *innermost*, frame (function call); frame 1 is the frame that called the innermost one. The highest-numbered frame is the one for the main program. The printed information consists of the frame number, function and argument names, source file, and the source line.

up [*count*] Move *count* (default 1) frames up the stack toward the outermost frame. Then select and print the frame.

14.3.5 Obtaining Information About the Program and the Debugger State

Besides looking at the values of variables, there is often a need to get other sorts of information about the state of your program and of the debugging environment itself. The **gawk** debugger has one command that provides this information, appropriately called **info**. **info** is used with one of a number of arguments that tell it exactly what you want to know:

info *what*

i *what* The value for *what* should be one of the following:

args List arguments of the selected frame.

break List all currently set breakpoints.

display List all items in the automatic display list.

frame Give a description of the selected stack frame.

functions

List all function definitions including source file names and line numbers.

locals List local variables of the selected frame.

source Print the name of the current source file. Each time the program stops, the current source file is the file containing the current instruction. When the debugger first starts, the current source file is the first file included via the **-f** option. The '**list filename:lineno**' command can be used at any time to change the current source.

sources List all program sources.

variables List all global variables.

watch List all items in the watch list.

Additional commands give you control over the debugger, the ability to save the debugger's state, and the ability to run debugger commands from a file. The commands are:

option [*name*[=*value*]]

o [*name*[=*value*]]

Without an argument, display the available debugger options and their current values. '**option** *name*' shows the current value of the named option. '**option** *name*=*value*' assigns a new value to the named option. The available options are:

history_size

Set the maximum number of lines to keep in the history file `./gawk_history`. The default is 100.

listsize Specify the number of lines that **list** prints. The default is 15.

outfile Send **gawk** output to a file; debugger output still goes to standard output. An empty string ("") resets output to standard output.

prompt Change the debugger prompt. The default is '**gawk>**'.

save_history [*on* | *off*]

Save command history to file `./gawk_history`. The default is **on**.

save_options [*on* | *off*]

Save current options to file `./gawkrc` upon exit. The default is **on**. Options are read back into the next session upon startup.

trace [*on* | *off*]

Turn instruction tracing on or off. The default is **off**.

save *filename*

Save the commands from the current session to the given file name, so that they can be replayed using the **source** command.

source *filename*

Run command(s) from a file; an error in any command does not terminate execution of subsequent commands. Comments (lines starting with '#') are allowed in a command file. Empty lines are ignored; they do *not* repeat the last command. You can't restart the program by having more than one **run** command in the file. Also, the list of commands may include additional **source** commands; however, the **gawk** debugger will not source the same file more than once in order to avoid infinite recursion.

In addition to, or instead of, the **source** command, you can use the `-D file` or `--debug=file` command-line options to execute commands from a file non-interactively (see [Section 2.2 \[Command-Line Options\]](#), page 31).

14.3.6 Miscellaneous Commands

There are a few more commands that do not fit into the previous categories, as follows:

`dump [filename]`

Dump byte code of the program to standard output or to the file named in *filename*. This prints a representation of the internal instructions that `gawk` executes to implement the `awk` commands in a program. This can be very enlightening, as the following partial dump of Davide Brini's obfuscated code (see [Section 11.3.11 \[And Now for Something Completely Different\]](#), page 295) demonstrates:

```
gawk> dump
+      # BEGIN
+
+ [ 1:0xfcd340] Op_rule      : [in_rule = BEGIN] [source_file = brini.awk]
+ [ 1:0xfcc240] Op_push_i   : "~" [MALLOC|STRING|STRCUR]
+ [ 1:0xfcc2a0] Op_push_i   : "~" [MALLOC|STRING|STRCUR]
+ [ 1:0xfcc280] Op_match    :
+ [ 1:0xfcc1e0] Op_store_var : 0
+ [ 1:0xfcc2e0] Op_push_i   : "==" [MALLOC|STRING|STRCUR]
+ [ 1:0xfcc340] Op_push_i   : "==" [MALLOC|STRING|STRCUR]
+ [ 1:0xfcc320] Op_equal    :
+ [ 1:0xfcc200] Op_store_var : o
+ [ 1:0xfcc380] Op_push     : o
+ [ 1:0xfcc360] Op_plus_i   : 0 [MALLOC|NUMCUR|NUMBER]
+ [ 1:0xfcc220] Op_push_lhs : o [do_reference = true]
+ [ 1:0xfcc300] Op_assign_plus :
+ [ :0xfcc2c0] Op_pop       :
+ [ 1:0xfcc400] Op_push     : 0
+ [ 1:0xfcc420] Op_push_i   : "" [MALLOC|STRING|STRCUR]
+ [ :0xfcc4a0] Op_no_op     :
+ [ 1:0xfcc480] Op_push     : 0
+ [ :0xfcc4c0] Op_concat    : [expr_count = 3] [concat_flag = 0]
+ [ 1:0xfcc3c0] Op_store_var : x
+ [ 1:0xfcc440] Op_push_lhs : X [do_reference = true]
+ [ 1:0xfcc3a0] Op_postincrement :
+ [ 1:0xfcc4e0] Op_push     : x
+ [ 1:0xfcc540] Op_push     : o
+ [ 1:0xfcc500] Op_plus     :
+ [ 1:0xfcc580] Op_push     : o
+ [ 1:0xfcc560] Op_plus     :
+ [ 1:0xfcc460] Op_leq      :
+ [ :0xfcc5c0] Op_jump_false : [target_jump = 0xfcc5e0]
+ [ 1:0xfcc600] Op_push_i   : "%c" [MALLOC|STRING|STRCUR]
+ [ :0xfcc660] Op_no_op     :
+ [ 1:0xfcc520] Op_assign_concat : c
+ [ :0xfcc620] Op_jump      : [target_jump = 0xfcc440]
+
+ ...
+
+ [ 2:0xfcc5a0] Op_K_printf   : [expr_count = 17] [redir_type = ""]
+ [ :0xfcc140] Op_no_op      :
+ [ :0xfcc1c0] Op_atexit     :
+ [ :0xfcc640] Op_stop       :
+ [ :0xfcc180] Op_no_op      :
+ [ :0xfcd150] Op_after_beginfile :
+ [ :0xfcc160] Op_no_op      :
```

```

      - [      :0xfcc1a0] Op_after_endfile      :
gawk>

```

exit Exit the debugger. See the entry for ‘quit’, later in this list.

help

h Print a list of all of the **gawk** debugger commands with a short summary of their usage. ‘**help command**’ prints the information about the command *command*.

list [- | + | *n* | *filename:n* | *n-m* | *function*]

l [- | + | *n* | *filename:n* | *n-m* | *function*]

Print the specified lines (default 15) from the current source file or the file named *filename*. The possible arguments to **list** are as follows:

- (Minus) Print lines before the lines last printed.
- + Print lines after the lines last printed. **list** without any argument does the same thing.
- n* Print lines centered around line number *n*.
- n-m* Print lines from *n* to *m*.
- filename:n* Print lines centered around line number *n* in source file *filename*. This command may change the current source file.
- function* Print lines centered around the beginning of the function *function*. This command may change the current source file.

quit

q Exit the debugger. Debugging is great fun, but sometimes we all have to tend to other obligations in life, and sometimes we find the bug and are free to go on to the next one! As we saw earlier, if you are running a program, the debugger warns you when you type ‘q’ or ‘quit’, to make sure you really want to quit.

trace [on | off]

Turn on or off continuous printing of the instructions that are about to be executed, along with the **awk** lines they implement. The default is **off**.

It is to be hoped that most of the “opcodes” in these instructions are fairly self-explanatory, and using **stepi** and **nexti** while **trace** is on will make them into familiar friends.

14.4 Readline Support

If **gawk** is compiled with [the GNU Readline library](#), you can take advantage of that library’s command completion and history expansion features. The following types of completion are available:

Command completion

Command names.

Source file name completion

Source file names. Relevant commands are **break**, **clear**, **list**, **tbreak**, and **until**.

Argument completion

Non-numeric arguments to a command. Relevant commands are `enable` and `info`.

Variable name completion

Global variable names, and function arguments in the current context if the program is running. Relevant commands are `display`, `print`, `set`, and `watch`.

14.5 Limitations

We hope you find the `gawk` debugger useful and enjoyable to work with, but as with any program, especially in its early releases, it still has some limitations. A few that it's worth being aware of are:

- At this point, the debugger does not give a detailed explanation of what you did wrong when you type in something it doesn't like. Rather, it just responds 'syntax error'. When you do figure out what your mistake was, though, you'll feel like a real guru.
- If you perused the dump of opcodes in [Section 14.3.6 \[Miscellaneous Commands\]](#), [page 339](#), (or if you are already familiar with `gawk` internals), you will realize that much of the internal manipulation of data in `gawk`, as in many interpreters, is done on a stack. `Op_push`, `Op_pop`, and the like are the "bread and butter" of most `gawk` code. Unfortunately, as of now, the `gawk` debugger does not allow you to examine the stack's contents. That is, the intermediate results of expression evaluation are on the stack, but cannot be printed. Rather, only variables that are defined in the program can be printed. Of course, a workaround for this is to use more explicit variables at the debugging stage and then change back to obscure, perhaps more optimal code later.
- There is no way to look "inside" the process of compiling regular expressions to see if you got it right. As an `awk` programmer, you are expected to know the meaning of `/[^\[:alnum:][:blank:]]/`.
- The `gawk` debugger is designed to be used by running a program (with all its parameters) on the command line, as described in [Section 14.2.1 \[How to Start the Debugger\]](#), [page 329](#). There is no way (as of now) to attach or "break into" a running program. This seems reasonable for a language that is used mainly for quickly executing, short programs.
- The `gawk` debugger only accepts source code supplied with the `-f` option.

14.6 Summary

- Programs rarely work correctly the first time. Finding bugs is called debugging, and a program that helps you find bugs is a debugger. `gawk` has a built-in debugger that works very similarly to the GNU Debugger, GDB.
- Debuggers let you step through your program one statement at a time, examine and change variable and array values, and do a number of other things that let you understand what your program is actually doing (as opposed to what it is supposed to do).
- Like most debuggers, the `gawk` debugger works in terms of stack frames, and lets you set both breakpoints (stop at a point in the code) and watchpoints (stop when a data value changes).

- The debugger command set is fairly complete, providing control over breakpoints, execution, viewing and changing data, working with the stack, getting information, and other tasks.
- If the GNU Readline library is available when **gawk** is compiled, it is used by the debugger to provide command-line history and editing.

15 Arithmetic and Arbitrary-Precision Arithmetic with gawk

This chapter introduces some basic concepts relating to how computers do arithmetic and defines some important terms. It then proceeds to describe floating-point arithmetic, which is what `awk` uses for all its computations, including a discussion of arbitrary-precision floating-point arithmetic, which is a feature available only in `gawk`. It continues on to present arbitrary-precision integers, and concludes with a description of some points where `gawk` and the POSIX standard are not quite in agreement.

NOTE: Most users of `gawk` can safely skip this chapter. But if you want to do scientific calculations with `gawk`, this is the place to be.

15.1 A General Description of Computer Arithmetic

Until now, we have worked with data as either numbers or strings. Ultimately, however, computers represent everything in terms of *binary digits*, or *bits*. A decimal digit can take on any of 10 values: zero through nine. A binary digit can take on any of two values, zero or one. Using binary, computers (and computer software) can represent and manipulate numerical and character data. In general, the more bits you can use to represent a particular thing, the greater the range of possible values it can take on.

Modern computers support at least two, and often more, ways to do arithmetic. Each kind of arithmetic uses a different representation (organization of the bits) for the numbers. The kinds of arithmetic that interest us are:

Decimal arithmetic

This is the kind of arithmetic you learned in elementary school, using paper and pencil (and/or a calculator). In theory, numbers can have an arbitrary number of digits on either side (or both sides) of the decimal point, and the results of a computation are always exact.

Some modern systems can do decimal arithmetic in hardware, but usually you need a special software library to provide access to these instructions. There are also libraries that do decimal arithmetic entirely in software.

Despite the fact that some users expect `gawk` to be performing decimal arithmetic,¹ it does not do so.

Integer arithmetic

In school, integer values were referred to as “whole” numbers—that is, numbers without any fractional part, such as 1, 42, or -17 . The advantage to integer numbers is that they represent values exactly. The disadvantage is that their range is limited.

In computers, integer values come in two flavors: *signed* and *unsigned*. Signed values may be negative or positive, whereas unsigned values are always greater than or equal to zero.

In computer systems, integer arithmetic is exact, but the possible range of values is limited. Integer arithmetic is generally faster than floating-point arithmetic.

¹ We don’t know why they expect this, but they do.

Floating-point arithmetic

Floating-point numbers represent what were called in school “real” numbers (i.e., those that have a fractional part, such as 3.1415927). The advantage to floating-point numbers is that they can represent a much larger range of values than can integers. The disadvantage is that there are numbers that they cannot represent exactly.

Modern systems support floating-point arithmetic in hardware, with a limited range of values. There are software libraries that allow the use of arbitrary-precision floating-point calculations.

POSIX **awk** uses *double-precision* floating-point numbers, which can hold more digits than *single-precision* floating-point numbers. **gawk** has facilities for performing arbitrary-precision floating-point arithmetic, which we describe in more detail shortly.

Computers work with integer and floating-point values of different ranges. Integer values are usually either 32 or 64 bits in size. Single-precision floating-point values occupy 32 bits, whereas double-precision floating-point values occupy 64 bits. Floating-point values are always signed. The possible ranges of values are shown in [Table 15.1](#).

Numeric representation	Minimum value	Maximum value
32-bit signed integer	−2,147,483,648	2,147,483,647
32-bit unsigned integer	0	4,294,967,295
64-bit signed integer	−9,223,372,036,854,775,808	9,223,372,036,854,775,807
64-bit unsigned integer	0	18,446,744,073,709,551,615
Single-precision floating point (approximate)	1.175494^{-38}	3.402823^{38}
Double-precision floating point (approximate)	2.225074^{-308}	1.797693^{308}

Table 15.1: Value ranges for different numeric representations

15.2 Other Stuff to Know

The rest of this chapter uses a number of terms. Here are some informal definitions that should help you work your way through the material here:

<i>Accuracy</i>	A floating-point calculation’s accuracy is how close it comes to the real (paper and pencil) value.
<i>Error</i>	The difference between what the result of a computation “should be” and what it actually is. It is best to minimize error as much as possible.
<i>Exponent</i>	The order of magnitude of a value; some number of bits in a floating-point value store the exponent.
<i>Inf</i>	A special value representing infinity. Operations involving another number and infinity produce infinity.

NaN “Not a number.”² A special value that results from attempting a calculation that has no answer as a real number. In such a case, programs can either receive a floating-point exception, or get NaN back as the result. The IEEE 754 standard recommends that systems return NaN. Some examples:

`sqrt(-1)` This makes sense in the range of complex numbers, but not in the range of real numbers, so the result is NaN.

`log(-8)` -8 is out of the domain of `log()`, so the result is NaN.

Normalized

How the significand (see later in this list) is usually stored. The value is adjusted so that the first bit is one, and then that leading one is assumed instead of physically stored. This provides one extra bit of precision.

Precision The number of bits used to represent a floating-point number. The more bits, the more digits you can represent. Binary and decimal precisions are related approximately, according to the formula:

$$prec = 3.322 \cdot dps$$

Here, *prec* denotes the binary precision (measured in bits) and *dps* (short for decimal places) is the decimal digits.

Rounding mode

How numbers are rounded up or down when necessary. More details are provided later.

Significand

A floating-point value consists of the significand multiplied by 10 to the power of the exponent. For example, in 1.2345e67, the significand is 1.2345.

Stability From [the Wikipedia article on numerical stability](#): “Calculations that can be proven not to magnify approximation errors are called *numerically stable*.”

See [the Wikipedia article on accuracy and precision](#) for more information on some of those terms.

On modern systems, floating-point hardware uses the representation and operations defined by the IEEE 754 standard. Three of the standard IEEE 754 types are 32-bit single precision, 64-bit double precision, and 128-bit quadruple precision. The standard also specifies extended precision formats to allow greater precisions and larger exponent ranges. (awk uses only the 64-bit double-precision format.)

Table 15.2 lists the precision and exponent field values for the basic IEEE 754 binary formats.

² Thanks to Michael Brennan for this description, which we have paraphrased, and for the examples.

Name	Total bits	Precision	Minimum exponent	Maximum exponent
Single	32	24	−126	+127
Double	64	53	−1022	+1023
Quadruple	128	113	−16382	+16383

Table 15.2: Basic IEEE format values

NOTE: The precision numbers include the implied leading one that gives them one extra bit of significand.

15.3 Arbitrary-Precision Arithmetic Features in gawk

By default, **gawk** uses the double-precision floating-point values supplied by the hardware of the system it runs on. However, if it was compiled to do so, and the `-M` command-line option is supplied, **gawk** uses the **GNU MPFR** and **GNU MP** (GMP) libraries for arbitrary-precision arithmetic on numbers. You can see if MPFR support is available like so:

```
$ gawk --version
+ GNU Awk 4.1.2, API: 1.1 (GNU MPFR 3.1.0-p3, GNU MP 5.0.2)
+ Copyright (C) 1989, 1991-2015 Free Software Foundation.
...
```

(You may see different version numbers than what’s shown here. That’s OK; what’s important is to see that GNU MPFR and GNU MP are listed in the output.)

Additionally, there are a few elements available in the `PROCINFO` array to provide information about the MPFR and GMP libraries (see [Section 7.5.2 \[Built-in Variables That Convey Information\]](#), page 149).

The MPFR library provides precise control over precisions and rounding modes, and gives correctly rounded, reproducible, platform-independent results. With the `-M` command-line option, all floating-point arithmetic operators and numeric functions can yield results to any desired precision level supported by MPFR.

Two predefined variables, `PREC` and `ROUNDMODE`, provide control over the working precision and the rounding mode. The precision and the rounding mode are set globally for every operation to follow. See [Section 15.4.4 \[Setting the Precision\]](#), page 350, and [Section 15.4.5 \[Setting the Rounding Mode\]](#), page 351, for more information.

15.4 Floating-Point Arithmetic: Caveat Emptor!

Math class is tough!

—Teen Talk Barbie, July 1992

This section provides a high-level overview of the issues involved when doing lots of floating-point arithmetic.³ The discussion applies to both hardware and arbitrary-precision floating-point arithmetic.

³ There is a very nice [paper on floating-point arithmetic](#) by David Goldberg, “What Every Computer Scientist Should Know About Floating-Point Arithmetic,” *ACM Computing Surveys* **23**, 1 (1991-03): 5-48. This is worth reading if you are interested in the details, but it does require a background in computer science.

CAUTION: The material here is purposely general. If you need to do serious computer arithmetic, you should do some research first, and not rely just on what we tell you.

15.4.1 Floating-Point Arithmetic Is Not Exact

Binary floating-point representations and arithmetic are inexact. Simple values like 0.1 cannot be precisely represented using binary floating-point numbers, and the limited precision of floating-point numbers means that slight changes in the order of operations or the precision of intermediate storage can change the result. To make matters worse, with arbitrary-precision floating-point arithmetic, you can set the precision before starting a computation, but then you cannot be sure of the number of significant decimal places in the final result.

15.4.1.1 Many Numbers Cannot Be Represented Exactly

So, before you start to write any code, you should think about what you really want and what's really happening. Consider the two numbers in the following example:

```
x = 0.875           # 1/2 + 1/4 + 1/8
y = 0.425
```

Unlike the number in `y`, the number stored in `x` is exactly representable in binary because it can be written as a finite sum of one or more fractions whose denominators are all powers of two. When `gawk` reads a floating-point number from program source, it automatically rounds that number to whatever precision your machine supports. If you try to print the numeric content of a variable using an output format string of `%.17g`, it may not produce the same number as you assigned to it:

```
$ gawk 'BEGIN { x = 0.875; y = 0.425
>               printf("%.17g", x, y) }'
+ 0.875, 0.42499999999999999
```

Often the error is so small you do not even notice it, and if you do, you can always specify how much precision you would like in your output. Usually this is a format string like `%.15g`, which, when used in the previous example, produces an output identical to the input.

15.4.1.2 Be Careful Comparing Values

Because the underlying representation can be a little bit off from the exact value, comparing floating-point values to see if they are exactly equal is generally a bad idea. Here is an example where it does not work like you would expect:

```
$ gawk 'BEGIN { print (0.1 + 12.2 == 12.3) }'
+ 0
```

The general wisdom when comparing floating-point values is to see if they are within some small range of each other (called a *delta*, or *tolerance*). You have to decide how small a delta is important to you. Code to do this looks something like the following:

```
delta = 0.00001           # for example
difference = abs(a) - abs(b) # subtract the two values
if (difference < delta)
    # all ok
```

```

else
    # not ok

```

(We assume that you have a simple absolute value function named `abs()` defined elsewhere in your program.)

15.4.1.3 Errors Accumulate

The loss of accuracy during a single computation with floating-point numbers usually isn't enough to worry about. However, if you compute a value that is the result of a sequence of floating-point operations, the error can accumulate and greatly affect the computation itself. Here is an attempt to compute the value of π using one of its many series representations:

```

BEGIN {
    x = 1.0 / sqrt(3.0)
    n = 6
    for (i = 1; i < 30; i++) {
        n = n * 2.0
        x = (sqrt(x * x + 1) - 1) / x
        printf("%.15f\n", n * x)
    }
}

```

When run, the early errors propagate through later computations, causing the loop to terminate prematurely after attempting to divide by zero:

```

$ gawk -f pi.awk
+ 3.215390309173475
+ 3.159659942097510
+ 3.146086215131467
+ 3.142714599645573
...
+ 3.224515243534819
+ 2.791117213058638
+ 0.000000000000000
[error] gawk: pi.awk:6: fatal: division by zero attempted

```

Here is an additional example where the inaccuracies in internal representations yield an unexpected result:

```

$ gawk 'BEGIN {
>   for (d = 1.1; d <= 1.5; d += 0.1)    # loop five times (?)
>       i++
>   print i
> }'
+ 4

```

15.4.2 Getting the Accuracy You Need

Can arbitrary-precision arithmetic give exact results? There are no easy answers. The standard rules of algebra often do not apply when using floating-point arithmetic. Among other things, the distributive and associative laws do not hold completely, and order of operation may be important for your computation. Rounding error, cumulative precision loss, and underflow are often troublesome.

When **gawk** tests the expressions `'0.1 + 12.2'` and `'12.3'` for equality using the machine double-precision arithmetic, it decides that they are not equal! (See [Section 15.4.1.2 \[Be Careful Comparing Values\]](#), page 347.) You can get the result you want by increasing the precision; 56 bits in this case does the job:

```
$ gawk -M -v PREC=56 'BEGIN { print (0.1 + 12.2 == 12.3) }'
+ 1
```

If adding more bits is good, perhaps adding even more bits of precision is better? Here is what happens if we use an even larger value of `PREC`:

```
$ gawk -M -v PREC=201 'BEGIN { print (0.1 + 12.2 == 12.3) }'
+ 0
```

This is not a bug in **gawk** or in the MPFR library. It is easy to forget that the finite number of bits used to store the value is often just an approximation after proper rounding. The test for equality succeeds if and only if *all* bits in the two operands are exactly the same. Because this is not necessarily true after floating-point computations with a particular precision and effective rounding mode, a straight test for equality may not work. Instead, compare the two numbers to see if they are within the desirable delta of each other.

In applications where 15 or fewer decimal places suffice, hardware double-precision arithmetic can be adequate, and is usually much faster. But you need to keep in mind that every floating-point operation can suffer a new rounding error with catastrophic consequences, as illustrated by our earlier attempt to compute the value of π . Extra precision can greatly enhance the stability and the accuracy of your computation in such cases.

Additionally, you should understand that repeated addition is not necessarily equivalent to multiplication in floating-point arithmetic. In the example in [Section 15.4.1.3 \[Errors Accumulate\]](#), page 348:

```
$ gawk 'BEGIN {
>   for (d = 1.1; d <= 1.5; d += 0.1)      # loop five times (?)
>       i++
>   print i
> }'
+ 4
```

you may or may not succeed in getting the correct result by choosing an arbitrarily large value for `PREC`. Reformulation of the problem at hand is often the correct approach in such situations.

15.4.3 Try a Few Extra Bits of Precision and Rounding

Instead of arbitrary-precision floating-point arithmetic, often all you need is an adjustment of your logic or a different order for the operations in your calculation. The stability and the accuracy of the computation of π in the earlier example can be enhanced by using the following simple algebraic transformation:

$$(\text{sqrt}(x * x + 1) - 1) / x \equiv x / (\text{sqrt}(x * x + 1) + 1)$$

After making this change, the program converges to π in under 30 iterations:

```
$ gawk -f pi2.awk
+ 3.215390309173473
+ 3.159659942097501
```

```

+ 3.146086215131436
+ 3.142714599645370
+ 3.141873049979825
...
+ 3.141592653589797
+ 3.141592653589797

```

15.4.4 Setting the Precision

gawk uses a global working precision; it does not keep track of the precision or accuracy of individual numbers. Performing an arithmetic operation or calling a built-in function rounds the result to the current working precision. The default working precision is 53 bits, which you can modify using the predefined variable **PREC**. You can also set the value to one of the predefined case-insensitive strings shown in [Table 15.3](#), to emulate an IEEE 754 binary format.

PREC	IEEE 754 binary format
"half"	16-bit half-precision
"single"	Basic 32-bit single precision
"double"	Basic 64-bit double precision
"quad"	Basic 128-bit quadruple precision
"oct"	256-bit octuple precision

Table 15.3: Predefined precision strings for **PREC**

The following example illustrates the effects of changing precision on arithmetic operations:

```

$ gawk -M -v PREC=100 'BEGIN { x = 1.0e-400; print x + 0
>   PREC = "double"; print x + 0 }'
+ 1e-400
+ 0

```

CAUTION: Be wary of floating-point constants! When reading a floating-point constant from program source code, **gawk** uses the default precision (that of a C **double**), unless overridden by an assignment to the special variable **PREC** on the command line, to store it internally as an MPFR number. Changing the precision using **PREC** in the program text does *not* change the precision of a constant.

If you need to represent a floating-point constant at a higher precision than the default and cannot use a command-line assignment to **PREC**, you should either specify the constant as a string, or as a rational number, whenever possible. The following example illustrates the differences among various ways to print a floating-point constant:

```

$ gawk -M 'BEGIN { PREC = 113; printf("%0.25f\n", 0.1) }'
+ 0.10000000000000000055511151
$ gawk -M -v PREC=113 'BEGIN { printf("%0.25f\n", 0.1) }'
+ 0.10000000000000000000000000
$ gawk -M 'BEGIN { PREC = 113; printf("%0.25f\n", "0.1") }'

```



```
2.5 => 2
3.5 => 4
4.5 => 4
```

The theory behind `roundTiesToEven` is that it more or less evenly distributes upward and downward rounds of exact halves, which might cause any accumulating round-off error to cancel itself out. This is the default rounding mode for IEEE 754 computing functions and operators.

The other rounding modes are rarely used. Rounding toward positive infinity (`roundTowardPositive`) and toward negative infinity (`roundTowardNegative`) are often used to implement interval arithmetic, where you adjust the rounding mode to calculate upper and lower bounds for the range of output. The `roundTowardZero` mode can be used for converting floating-point numbers to integers. The rounding mode `roundTiesToAway` rounds the result to the nearest number and selects the number with the larger magnitude if a tie occurs.

Some numerical analysts will tell you that your choice of rounding style has tremendous impact on the final outcome, and advise you to wait until final output for any rounding. Instead, you can often avoid round-off error problems by setting the precision initially to some value sufficiently larger than the final desired precision, so that the accumulation of round-off error does not influence the outcome. If you suspect that results from your computation are sensitive to accumulation of round-off error, look for a significant difference in output when you change the rounding mode to be sure.

15.5 Arbitrary-Precision Integer Arithmetic with gawk

When given the `-M` option, `gawk` performs all integer arithmetic using GMP arbitrary-precision integers. Any number that looks like an integer in a source or data file is stored as an arbitrary-precision integer. The size of the integer is limited only by the available memory. For example, the following computes $5^{4^3^2}$, the result of which is beyond the limits of ordinary hardware double-precision floating-point values:

```
$ gawk -M 'BEGIN {
>   x = 5^4^3^2
>   print "number of digits =", length(x)
>   print substr(x, 1, 20), "...", substr(x, length(x) - 19, 20)
> }'
+ number of digits = 183231
+ 62060698786608744707 ... 92256259918212890625
```

If instead you were to compute the same value using arbitrary-precision floating-point values, the precision needed for correct output (using the formula $prec = 3.322 \cdot dps$) would be $3.322 \cdot 183231$, or 608693.

The result from an arithmetic operation with an integer and a floating-point value is a floating-point value with a precision equal to the working precision. The following program calculates the eighth term in Sylvester's sequence⁵ using a recurrence:

```
$ gawk -M 'BEGIN {
```

⁵ Weisstein, Eric W. *Sylvester's Sequence*. From MathWorld—A Wolfram Web Resource (<http://mathworld.wolfram.com/SylvestersSequence.html>).

```

> s = 2.0
> for (i = 1; i <= 7; i++)
>     s = s * (s - 1) + 1
> print s
> }'
└─ 113423713055421845118910464

```

The output differs from the actual number, 113,423,713,055,421,844,361,000,443, because the default precision of 53 bits is not enough to represent the floating-point results exactly. You can either increase the precision (100 bits is enough in this case), or replace the floating-point constant ‘2.0’ with an integer, to perform all computations using integer arithmetic to get the correct output.

Sometimes **gawk** must implicitly convert an arbitrary-precision integer into an arbitrary-precision floating-point value. This is primarily because the MPFR library does not always provide the relevant interface to process arbitrary-precision integers or mixed-mode numbers as needed by an operation or function. In such a case, the precision is set to the minimum value necessary for exact conversion, and the working precision is not used for this purpose. If this is not what you need or want, you can employ a subterfuge and convert the integer to floating point first, like this:

```
gawk -M 'BEGIN { n = 13; print (n + 0.0) % 2.0 }'
```

You can avoid this issue altogether by specifying the number as a floating-point value to begin with:

```
gawk -M 'BEGIN { n = 13.0; print n % 2.0 }'
```

Note that for this particular example, it is likely best to just use the following:

```
gawk -M 'BEGIN { n = 13; print n % 2 }'
```

15.6 Standards Versus Existing Practice

Historically, **awk** has converted any nonnumeric-looking string to the numeric value zero, when required. Furthermore, the original definition of the language and the original POSIX standards specified that **awk** only understands decimal numbers (base 10), and not octal (base 8) or hexadecimal numbers (base 16).

Changes in the language of the 2001 and 2004 POSIX standards can be interpreted to imply that **awk** should support additional features. These features are:

- Interpretation of floating-point data values specified in hexadecimal notation (e.g., 0xDEADBEEF). (Note: data values, *not* source code constants.)
- Support for the special IEEE 754 floating-point values “not a number” (NaN), positive infinity (“inf”), and negative infinity (“-inf”). In particular, the format for these values is as specified by the ISO 1999 C standard, which ignores case and can allow implementation-dependent additional characters after the ‘nan’ and allow either ‘inf’ or ‘infinity’.

The first problem is that both of these are clear changes to historical practice:

- The **gawk** maintainer feels that supporting hexadecimal floating-point values, in particular, is ugly, and was never intended by the original designers to be part of the language.

- Allowing completely alphabetic strings to have valid numeric values is also a very severe departure from historical practice.

The second problem is that the **gawk** maintainer feels that this interpretation of the standard, which required a certain amount of “language lawyering” to arrive at in the first place, was not even intended by the standard developers. In other words, “We see how you got where you are, but we don’t think that that’s where you want to be.”

Recognizing these issues, but attempting to provide compatibility with the earlier versions of the standard, the 2008 POSIX standard added explicit wording to allow, but not require, that **awk** support hexadecimal floating-point values and special values for “not a number” and infinity.

Although the **gawk** maintainer continues to feel that providing those features is inadvisable, nevertheless, on systems that support IEEE floating point, it seems reasonable to provide *some* way to support NaN and infinity values. The solution implemented in **gawk** is as follows:

- With the `--posix` command-line option, **gawk** becomes “hands off.” String values are passed directly to the system library’s `strtod()` function, and if it successfully returns a numeric value, that is what’s used.⁶ By definition, the results are not portable across different systems. They are also a little surprising:

```
$ echo nanny | gawk --posix '{ print $1 + 0 }'
+ nan
$ echo 0xDeadBeef | gawk --posix '{ print $1 + 0 }'
+ 3735928559
```

- Without `--posix`, **gawk** interprets the four string values ‘+inf’, ‘-inf’, ‘+nan’, and ‘-nan’ specially, producing the corresponding special numeric values. The leading sign acts a signal to **gawk** (and the user) that the value is really numeric. Hexadecimal floating point is not supported (unless you also use `--non-decimal-data`, which is *not* recommended). For example:

```
$ echo nanny | gawk '{ print $1 + 0 }'
+ 0
$ echo +nan | gawk '{ print $1 + 0 }'
+ nan
$ echo 0xDeadBeef | gawk '{ print $1 + 0 }'
+ 0
```

gawk ignores case in the four special values. Thus, ‘+nan’ and ‘+NaN’ are the same.

15.7 Summary

- Most computer arithmetic is done using either integers or floating-point values. Standard **awk** uses double-precision floating-point values.
- In the early 1990s Barbie mistakenly said, “Math class is tough!” Although math isn’t tough, floating-point arithmetic isn’t the same as pencil-and-paper math, and care must be taken:
 - Not all numbers can be represented exactly.

⁶ You asked for it, you got it.

- Comparing values should use a delta, instead of being done directly with ‘==’ and ‘!=’.
- Errors accumulate.
- Operations are not always truly associative or distributive.
- Increasing the accuracy can help, but it is not a panacea.
- Often, increasing the accuracy and then rounding to the desired number of digits produces reasonable results.
- Use `-M` (or `--bignum`) to enable MPFR arithmetic. Use `PREC` to set the precision in bits, and `ROUNDMODE` to set the IEEE 754 rounding mode.
- With `-M`, `gawk` performs arbitrary-precision integer arithmetic using the GMP library. This is faster and more space-efficient than using MPFR for the same calculations.
- There are several areas with respect to floating-point numbers where `gawk` disagrees with the POSIX standard. It pays to be aware of them.
- Overall, there is no need to be unduly suspicious about the results from floating-point arithmetic. The lesson to remember is that floating-point arithmetic is always more complex than arithmetic using pencil and paper. In order to take advantage of the power of floating-point arithmetic, you need to know its limitations and work within them. For most casual use of floating-point arithmetic, you will often get the expected result if you simply round the display of your final results to the correct number of significant decimal digits.
- As general advice, avoid presenting numerical data in a manner that implies better precision than is actually the case.

16 Writing Extensions for gawk

It is possible to add new functions written in C or C++ to **gawk** using dynamically loaded libraries. This facility is available on systems that support the C `dlopen()` and `dlsym()` functions. This chapter describes how to create extensions using code written in C or C++.

If you don't know anything about C programming, you can safely skip this chapter, although you may wish to review the documentation on the extensions that come with **gawk** (see [Section 16.7 \[The Sample Extensions in the gawk Distribution\]](#), page 400), and the information on the **gawkextlib** project (see [Section 16.8 \[The gawkextlib Project\]](#), page 409). The sample extensions are automatically built and installed when **gawk** is.

NOTE: When `--sandbox` is specified, extensions are disabled (see [Section 2.2 \[Command-Line Options\]](#), page 31).

16.1 Introduction

An *extension* (sometimes called a *plug-in*) is a piece of external compiled code that **gawk** can load at runtime to provide additional functionality, over and above the built-in capabilities described in the rest of this book.

Extensions are useful because they allow you (of course) to extend **gawk**'s functionality. For example, they can provide access to system calls (such as `chdir()` to change directory) and to other C library routines that could be of use. As with most software, “the sky is the limit”; if you can imagine something that you might want to do and can write in C or C++, you can write an extension to do it!

Extensions are written in C or C++, using the *application programming interface* (API) defined for this purpose by the **gawk** developers. The rest of this chapter explains the facilities that the API provides and how to use them, and presents a small example extension. In addition, it documents the sample extensions included in the **gawk** distribution and describes the **gawkextlib** project. See [Section C.5 \[Extension API Design\]](#), page 457, for a discussion of the extension mechanism goals and design.

16.2 Extension Licensing

Every dynamic extension must be distributed under a license that is compatible with the GNU GPL (see [\[GNU General Public License\]](#), page 479).

In order for the extension to tell **gawk** that it is properly licensed, the extension must define the global symbol `plugin_is_GPL_compatible`. If this symbol does not exist, **gawk** emits a fatal error and exits when it tries to load your extension.

The declared type of the symbol should be `int`. It does not need to be in any allocated section, though. The code merely asserts that the symbol exists in the global scope. Something like this is enough:

```
int plugin_is_GPL_compatible;
```

16.3 How It Works at a High Level

Communication between **gawk** and an extension is two-way. First, when an extension is loaded, **gawk** passes it a pointer to a `struct` whose fields are function pointers. This is shown in [Figure 16.1](#).



Figure 16.1: Loading the extension

The extension can call functions inside **gawk** through these function pointers, at runtime, without needing (link-time) access to **gawk**'s symbols. One of these function pointers is to a function for "registering" new functions. This is shown in [Figure 16.2](#).

```
register_ext_func({ "chdir", do_chdir, 1 });
```



Figure 16.2: Registering a new function

In the other direction, the extension registers its new functions with **gawk** by passing function pointers to the functions that provide the new feature (`do_chdir()`, for example). **gawk** associates the function pointer with a name and can then call it, using a defined calling convention. This is shown in [Figure 16.3](#).

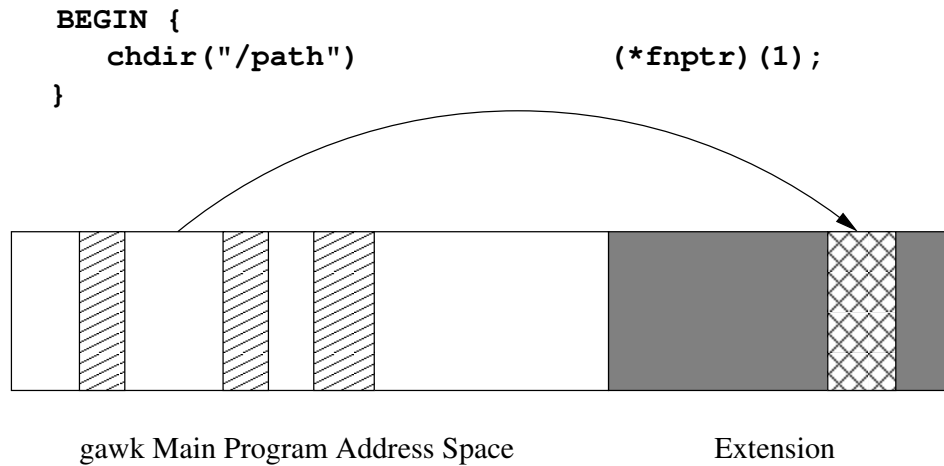


Figure 16.3: Calling the new function

The `do_xxx()` function, in turn, then uses the function pointers in the API struct to do its work, such as updating variables or arrays, printing messages, setting `ERRNO`, and so on.

Convenience macros make calling through the function pointers look like regular function calls so that extension code is quite readable and understandable.

Although all of this sounds somewhat complicated, the result is that extension code is quite straightforward to write and to read. You can see this in the sample extension `filefuncs.c` (see [Section 16.6 \[Example: Some File Functions\]](#), page 390) and also in the `testtext.c` code for testing the APIs.

Some other bits and pieces:

- The API provides access to gawk’s `do_xxx` values, reflecting command-line options, like `do_lint`, `do_profiling`, and so on (see [Section 16.4.12 \[API Variables\]](#), page 387). These are informational: an extension cannot affect their values inside gawk. In addition, attempting to assign to them produces a compile-time error.
- The API also provides major and minor version numbers, so that an extension can check if the gawk it is loaded with supports the facilities it was compiled with. (Version mismatches “shouldn’t” happen, but we all know how *that* goes.) See [Section 16.4.12.1 \[API Version Constants and Variables\]](#), page 387, for details.

16.4 API Description

C or C++ code for an extension must include the header file `gawkapi.h`, which declares the functions and defines the data types used to communicate with gawk. This (rather large) section describes the API in detail.

16.4.1 Introduction

Access to facilities within gawk is achieved by calling through function pointers passed into your extension.

API function pointers are provided for the following kinds of operations:

- Allocating, reallocating, and releasing memory.
- Registration functions. You may register:
 - Extension functions
 - Exit callbacks
 - A version string
 - Input parsers
 - Output wrappers
 - Two-way processors

All of these are discussed in detail later in this chapter.

- Printing fatal, warning, and “lint” warning messages.
- Updating `ERRNO`, or unsetting it.
- Accessing parameters, including converting an undefined parameter into an array.
- Symbol table access: retrieving a global variable, creating one, or changing one.
- Creating and releasing cached values; this provides an efficient way to use values for multiple variables and can be a big performance win.
- Manipulating arrays:
 - Retrieving, adding, deleting, and modifying elements
 - Getting the count of elements in an array
 - Creating a new array
 - Clearing an array
 - Flattening an array for easy C-style looping over all its indices and elements

Some points about using the API:

- The following types, macros, and/or functions are referenced in `gawkapi.h`. For correct use, you must therefore include the corresponding standard header file *before* including `gawkapi.h`:

C entity	Header file
EOF	<stdio.h>
Values for <code>errno</code>	<errno.h>
FILE	<stdio.h>
NULL	<stddef.h>
<code>memcpy()</code>	<string.h>
<code>memset()</code>	<string.h>
<code>size_t</code>	<sys/types.h>
<code>struct stat</code>	<sys/stat.h>

Due to portability concerns, especially to systems that are not fully standards-compliant, it is your responsibility to include the correct files in the correct way. This requirement is necessary in order to keep `gawkapi.h` clean, instead of becoming a portability hodge-podge as can be seen in some parts of the `gawk` source code.

- The `gawkapi.h` file may be included more than once without ill effect. Doing so, however, is poor coding practice.
- Although the API only uses ISO C 90 features, there is an exception; the “constructor” functions use the `inline` keyword. If your compiler does not support this keyword, you should either place `‘-Dinline=’` on your command line or use the GNU Autotools and include a `config.h` file in your extensions.
- All pointers filled in by `gawk` point to memory managed by `gawk` and should be treated by the extension as read-only. Memory for *all* strings passed into `gawk` from the extension *must* come from calling one of `gawk_malloc()`, `gawk_calloc()`, or `gawk_realloc()`, and is managed by `gawk` from then on.
- The API defines several simple `structs` that map values as seen from `awk`. A value can be a `double`, a string, or an array (as in multidimensional arrays, or when creating a new array). String values maintain both pointer and length, because embedded NUL characters are allowed.

NOTE: By intent, strings are maintained using the current multibyte encoding (as defined by `LC_XXX` environment variables) and not using wide characters. This matches how `gawk` stores strings internally and also how characters are likely to be input into and output from files.

- When retrieving a value (such as a parameter or that of a global variable or array element), the extension requests a specific type (number, string, scalar, value cookie, array, or “undefined”). When the request is “undefined,” the returned value will have the real underlying type.

However, if the request and actual type don’t match, the access function returns “false” and fills in the type of the actual value that is there, so that the extension can, e.g., print an error message (such as “scalar passed where array expected”).

You may call the API functions by using the function pointers directly, but the interface is not so pretty. To make extension code look more like regular code, the `gawkapi.h` header file defines several macros that you should use in your code. This section presents the macros as if they were functions.

16.4.2 General-Purpose Data Types

I have a true love/hate relationship with unions.

—Arnold Robbins

That’s the thing about unions: the compiler will arrange things so they can accommodate both love and hate.

—Chet Ramey

The extension API defines a number of simple types and structures for general-purpose use. Additional, more specialized, data structures are introduced in subsequent sections, together with the functions that use them.

The general-purpose types and structures are as follows:

```
typedef void *awk_ext_id_t;
```

A value of this type is received from `gawk` when an extension is loaded. That value must then be passed back to `gawk` as the first parameter of each API function.

```
#define awk_const ...
```

This macro expands to ‘const’ when compiling an extension, and to nothing when compiling **gawk** itself. This makes certain fields in the API data structures unwritable from extension code, while allowing **gawk** to use them as it needs to.

```
typedef enum awk_bool {
    awk_false = 0,
    awk_true
} awk_bool_t;
```

A simple Boolean type.

```
typedef struct awk_string {
    char *str;      /* data */
    size_t len;     /* length thereof, in chars */
} awk_string_t;
```

This represents a mutable string. **gawk** owns the memory pointed to if it supplied the value. Otherwise, it takes ownership of the memory pointed to. *Such memory must come from calling one of the **gawk_malloc()**, **gawk_calloc()**, or **gawk_realloc()** functions!*

As mentioned earlier, strings are maintained using the current multibyte encoding.

```
typedef enum {
    AWK_UNDEFINED,
    AWK_NUMBER,
    AWK_STRING,
    AWK_ARRAY,
    AWK_SCALAR,      /* opaque access to a variable */
    AWK_VALUE_COOKIE /* for updating a previously created value */
} awk_valtype_t;
```

This enum indicates the type of a value. It is used in the following **struct**.

```
typedef struct awk_value {
    awk_valtype_t val_type;
    union {
        awk_string_t    s;
        double           d;
        awk_array_t      a;
        awk_scalar_t     scl;
        awk_value_cookie_t vc;
    } u;
} awk_value_t;
```

An “awk value.” The **val_type** member indicates what kind of value the **union** holds, and each member is of the appropriate type.

```
#define str_value      u.s
#define num_value      u.d
#define array_cookie   u.a
#define scalar_cookie  u.scl
#define value_cookie   u.vc
```

Using these macros makes accessing the fields of the `awk_value_t` more readable.

```
typedef void *awk_scalar_t;
```

Scalars can be represented as an opaque type. These values are obtained from `gawk` and then passed back into it. This is discussed in a general fashion in the text following this list, and in more detail in [Section 16.4.10.2 \[Variable Access and Update by Cookie\]](#), page 375.

```
typedef void *awk_value_cookie_t;
```

A “value cookie” is an opaque type representing a cached value. This is also discussed in a general fashion in the text following this list, and in more detail in [Section 16.4.10.3 \[Creating and Using Cached Values\]](#), page 377.

Scalar values in `awk` are either numbers or strings. The `awk_value_t` struct represents values. The `val_type` member indicates what is in the `union`.

Representing numbers is easy—the API uses a C `double`. Strings require more work. Because `gawk` allows embedded NUL bytes in string values, a string must be represented as a pair containing a data pointer and length. This is the `awk_string_t` type.

Identifiers (i.e., the names of global variables) can be associated with either scalar values or with arrays. In addition, `gawk` provides true arrays of arrays, where any given array element can itself be an array. Discussion of arrays is delayed until [Section 16.4.11 \[Array Manipulation\]](#), page 379.

The various macros listed earlier make it easier to use the elements of the `union` as if they were fields in a `struct`; this is a common coding practice in C. Such code is easier to write and to read, but it remains *your* responsibility to make sure that the `val_type` member correctly reflects the type of the value in the `awk_value_t` struct.

Conceptually, the first three members of the `union` (number, string, and array) are all that is needed for working with `awk` values. However, because the API provides routines for accessing and changing the value of a global scalar variable only by using the variable’s name, there is a performance penalty: `gawk` must find the variable each time it is accessed and changed. This turns out to be a real issue, not just a theoretical one.

Thus, if you know that your extension will spend considerable time reading and/or changing the value of one or more scalar variables, you can obtain a *scalar cookie*¹ object for that variable, and then use the cookie for getting the variable’s value or for changing the variable’s value. The `awk_scalar_t` type holds a scalar cookie, and the `scalar_cookie` macro provides access to the value of that type in the `awk_value_t` struct. Given a scalar cookie, `gawk` can directly retrieve or modify the value, as required, without having to find it first.

¹ See the “cookie” entry in the *Jargon file* for a definition of *cookie*, and the “magic cookie” entry in the *Jargon file* for a nice example. See also the entry for “Cookie” in the [\[Glossary\]](#), page 467.

The `awk_value_cookie_t` type and `value_cookie` macro are similar. If you know that you wish to use the same numeric or string *value* for one or more variables, you can create the value once, retaining a *value cookie* for it, and then pass in that value cookie whenever you wish to set the value of a variable. This saves storage space within the running `gawk` process and reduces the time needed to create the value.

16.4.3 Memory Allocation Functions and Convenience Macros

The API provides a number of *memory allocation* functions for allocating memory that can be passed to `gawk`, as well as a number of convenience macros. This subsection presents them all as function prototypes, in the way that extension code would use them:

```
void *gawk_malloc(size_t size);
    Call the correct version of malloc() to allocate storage that may be passed to
    gawk.

void *gawk_calloc(size_t nmemb, size_t size);
    Call the correct version of calloc() to allocate storage that may be passed to
    gawk.

void *gawk_realloc(void *ptr, size_t size);
    Call the correct version of realloc() to allocate storage that may be passed
    to gawk.

void gawk_free(void *ptr);
    Call the correct version of free() to release storage that was allocated with
    gawk_malloc(), gawk_calloc(), or gawk_realloc().
```

The API has to provide these functions because it is possible for an extension to be compiled and linked against a different version of the C library than was used for the `gawk` executable.² If `gawk` were to use its version of `free()` when the memory came from an unrelated version of `malloc()`, unexpected behavior would likely result.

Two convenience macros may be used for allocating storage from `gawk_malloc()` and `gawk_realloc()`. If the allocation fails, they cause `gawk` to exit with a fatal error message. They should be used as if they were procedure calls that do not return a value:

```
#define emalloc(pointer, type, size, message) ...
    The arguments to this macro are as follows:

    pointer    The pointer variable to point at the allocated storage.

    type       The type of the pointer variable. This is used to create a cast for
               the call to gawk_malloc().

    size       The total number of bytes to be allocated.

    message    A message to be prefixed to the fatal error message. Typically this
               is the name of the function using the macro.
```

For example, you might allocate a string value like so:

```
awk_value_t result;
char *message;
```

² This is more common on MS-Windows systems, but it can happen on Unix-like systems as well.

```

    const char greet[] = "Don't Panic!";

    emalloc(message, char *, sizeof(greet), "myfunc");
    strcpy(message, greet);
    make_malloced_string(message, strlen(message), & result);
#define erealloc(pointer, type, size, message) ...
    This is like emalloc(), but it calls gawk_realloc() instead of gawk_malloc().
    The arguments are the same as for the emalloc() macro.

```

16.4.4 Constructor Functions

The API provides a number of *constructor* functions for creating string and numeric values, as well as a number of convenience macros. This subsection presents them all as function prototypes, in the way that extension code would use them:

```

static inline awk_value_t *
make_const_string(const char *string, size_t length, awk_value_t *result);
    This function creates a string value in the awk_value_t variable pointed to by
    result. It expects string to be a C string constant (or other string data),
    and automatically creates a copy of the data for storage in result. It returns
    result.

```

```

static inline awk_value_t *
make_malloced_string(const char *string, size_t length, awk_value_t *result);
    This function creates a string value in the awk_value_t variable pointed to by
    result. It expects string to be a 'char *' value pointing to data previously
    obtained from gawk_malloc(), gawk_calloc(), or gawk_realloc(). The idea
    here is that the data is passed directly to gawk, which assumes responsibility
    for it. It returns result.

```

```

static inline awk_value_t *
make_null_string(awk_value_t *result);
    This specialized function creates a null string (the "undefined" value) in the
    awk_value_t variable pointed to by result. It returns result.

```

```

static inline awk_value_t *
make_number(double num, awk_value_t *result);
    This function simply creates a numeric value in the awk_value_t variable
    pointed to by result.

```

16.4.5 Registration Functions

This section describes the API functions for registering parts of your extension with `gawk`.

16.4.5.1 Registering An Extension Function

Extension functions are described by the following record:

```

typedef struct awk_ext_func {
    const char *name;
    awk_value_t *(*function)(int num_actual_args, awk_value_t *result);
    size_t num_expected_args;
}

```

```
    } awk_ext_func_t;
```

The fields are:

```
const char *name;
```

The name of the new function. **awk**-level code calls the function by this name. This is a regular C string.

Function names must obey the rules for **awk** identifiers. That is, they must begin with either an English letter or an underscore, which may be followed by any number of letters, digits, and underscores. Letter case in function names is significant.

```
awk_value_t *(*function)(int num_actual_args, awk_value_t *result);
```

This is a pointer to the C function that provides the extension's functionality. The function must fill in ***result** with either a number or a string. **gawk** takes ownership of any string memory. As mentioned earlier, string memory *must* come from one of **gawk_malloc()**, **gawk_calloc()**, or **gawk_realloc()**.

The **num_actual_args** argument tells the C function how many actual parameters were passed from the calling **awk** code.

The function must return the value of **result**. This is for the convenience of the calling code inside **gawk**.

```
size_t num_expected_args;
```

This is the number of arguments the function expects to receive. Each extension function may decide what to do if the number of arguments isn't what it expected. As with real **awk** functions, it is likely OK to ignore extra arguments.

Once you have a record representing your extension function, you register it with **gawk** using this API function:

```
awk_bool_t add_ext_func(const char *namespace, const awk_ext_func_t *func);
```

This function returns true upon success, false otherwise. The **namespace** parameter is currently not used; you should pass in an empty string (**"**). The **func** pointer is the address of a **struct** representing your function, as just described.

16.4.5.2 Registering An Exit Callback Function

An *exit callback* function is a function that **gawk** calls before it exits. Such functions are useful if you have general “cleanup” tasks that should be performed in your extension (such as closing database connections or other resource deallocations). You can register such a function with **gawk** using the following function:

```
void awk_atexit(void (*funcp)(void *data, int exit_status),
               void *arg0);
```

The parameters are:

funcp	A pointer to the function to be called before gawk exits. The data parameter will be the original value of arg0 . The exit_status parameter is the exit status value that gawk intends to pass to the exit() system call.
--------------	---

arg0 A pointer to private data that **gawk** saves in order to pass to the function pointed to by **funcp**.

Exit callback functions are called in last-in, first-out (LIFO) order—that is, in the reverse order in which they are registered with **gawk**.

16.4.5.3 Registering An Extension Version String

You can register a version string that indicates the name and version of your extension with **gawk**, as follows:

```
void register_ext_version(const char *version);
```

Register the string pointed to by **version** with **gawk**. Note that **gawk** does *not* copy the **version** string, so it should not be changed.

gawk prints all registered extension version strings when it is invoked with the **--version** option.

16.4.5.4 Customized Input Parsers

By default, **gawk** reads text files as its input. It uses the value of **RS** to find the end of the record, and then uses **FS** (or **FIELDWIDTHS** or **FPAT**) to split it into fields (see [Chapter 4 \[Reading Input Files\]](#), page 59). Additionally, it sets the value of **RT** (see [Section 7.5 \[Predefined Variables\]](#), page 147).

If you want, you can provide your own custom input parser. An input parser's job is to return a record to the **gawk** record-processing code, along with indicators for the value and length of the data to be used for **RT**, if any.

To provide an input parser, you must first provide two functions (where **XXX** is a prefix name for your extension):

```
awk_bool_t XXX_can_take_file(const awk_input_buf_t *iobuf);
```

This function examines the information available in **iobuf** (which we discuss shortly). Based on the information there, it decides if the input parser should be used for this file. If so, it should return true. Otherwise, it should return false. It should not change any state (variable values, etc.) within **gawk**.

```
awk_bool_t XXX_take_control_of(awk_input_buf_t *iobuf);
```

When **gawk** decides to hand control of the file over to the input parser, it calls this function. This function in turn must fill in certain fields in the **awk_input_buf_t** structure and ensure that certain conditions are true. It should then return true. If an error of some kind occurs, it should not fill in any fields and should return false; then **gawk** will not use the input parser. The details are presented shortly.

Your extension should package these functions inside an **awk_input_parser_t**, which looks like this:

```
typedef struct awk_input_parser {
    const char *name;    /* name of parser */
    awk_bool_t (*can_take_file)(const awk_input_buf_t *iobuf);
    awk_bool_t (*take_control_of)(awk_input_buf_t *iobuf);
    awk_const struct awk_input_parser *awk_const next;    /* for gawk */
}
```

```
    } awk_input_parser_t;
```

The fields are:

```
const char *name;
```

The name of the input parser. This is a regular C string.

```
awk_bool_t (*can_take_file)(const awk_input_buf_t *iobuf);
```

A pointer to your `XXX_can_take_file()` function.

```
awk_bool_t (*take_control_of)(awk_input_buf_t *iobuf);
```

A pointer to your `XXX_take_control_of()` function.

```
awk_const struct input_parser *awk_const next;
```

This is for use by `gawk`; therefore it is marked `awk_const` so that the extension cannot modify it.

The steps are as follows:

1. Create a static `awk_input_parser_t` variable and initialize it appropriately.
2. When your extension is loaded, register your input parser with `gawk` using the `register_input_parser()` API function (described next).

An `awk_input_buf_t` looks like this:

```
typedef struct awk_input {
    const char *name;      /* filename */
    int fd;                /* file descriptor */
#define INVALID_HANDLE (-1)
    void *opaque;          /* private data for input parsers */
    int (*get_record)(char **out, struct awk_input *iobuf,
                     int *errcode, char **rt_start, size_t *rt_len);
    ssize_t (*read_func)();
    void (*close_func)(struct awk_input *iobuf);
    struct stat sbuf;      /* stat buf */
} awk_input_buf_t;
```

The fields can be divided into two categories: those for use (initially, at least) by `XXX_can_take_file()`, and those for use by `XXX_take_control_of()`. The first group of fields and their uses are as follows:

```
const char *name;
```

The name of the file.

```
int fd;
```

A file descriptor for the file. If `gawk` was able to open the file, then `fd` will *not* be equal to `INVALID_HANDLE`. Otherwise, it will.

```
struct stat sbuf;
```

If the file descriptor is valid, then `gawk` will have filled in this structure via a call to the `fstat()` system call.

The `XXX_can_take_file()` function should examine these fields and decide if the input parser should be used for the file. The decision can be made based upon `gawk` state (the value of a variable defined previously by the extension and set by `awk` code), the name of the file, whether or not the file descriptor is valid, the information in the `struct stat`, or any combination of these factors.

Once `XXX_can_take_file()` has returned true, and `gawk` has decided to use your input parser, it calls `XXX_take_control_of()`. That function then fills either the `get_record` field or the `read_func` field in the `awk_input_buf_t`. It must also ensure that `fd` is *not* set to `INVALID_HANDLE`. The following list describes the fields that may be filled by `XXX_take_control_of()`:

`void *opaque;`

This is used to hold any state information needed by the input parser for this file. It is “opaque” to `gawk`. The input parser is not required to use this pointer.

`int (*get_record)(char **out,
 struct awk_input *iobuf,
 int *errcode,
 char **rt_start,
 size_t *rt_len);`

This function pointer should point to a function that creates the input records. Said function is the core of the input parser. Its behavior is described in the text following this list.

`ssize_t (*read_func)();`

This function pointer should point to a function that has the same behavior as the standard POSIX `read()` system call. It is an alternative to the `get_record` pointer. Its behavior is also described in the text following this list.

`void (*close_func)(struct awk_input *iobuf);`

This function pointer should point to a function that does the “teardown.” It should release any resources allocated by `XXX_take_control_of()`. It may also close the file. If it does so, it should set the `fd` field to `INVALID_HANDLE`.

If `fd` is still not `INVALID_HANDLE` after the call to this function, `gawk` calls the regular `close()` system call.

Having a “teardown” function is optional. If your input parser does not need it, do not set this field. Then, `gawk` calls the regular `close()` system call on the file descriptor, so it should be valid.

The `XXX_get_record()` function does the work of creating input records. The parameters are as follows:

`char **out`

This is a pointer to a `char *` variable that is set to point to the record. `gawk` makes its own copy of the data, so the extension must manage this storage.

`struct awk_input *iobuf`

This is the `awk_input_buf_t` for the file. The fields should be used for reading data (`fd`) and for managing private state (`opaque`), if any.

`int *errcode`

If an error occurs, `*errcode` should be set to an appropriate code from `<errno.h>`.

```
char **rt_start
size_t *rt_len
```

If the concept of a “record terminator” makes sense, then `*rt_start` should be set to point to the data to be used for RT, and `*rt_len` should be set to the length of the data. Otherwise, `*rt_len` should be set to zero. `gawk` makes its own copy of this data, so the extension must manage this storage.

The return value is the length of the buffer pointed to by `*out`, or EOF if end-of-file was reached or an error occurred.

It is guaranteed that `errcode` is a valid pointer, so there is no need to test for a NULL value. `gawk` sets `*errcode` to zero, so there is no need to set it unless an error occurs.

If an error does occur, the function should return EOF and set `*errcode` to a value greater than zero. In that case, if `*errcode` does not equal zero, `gawk` automatically updates the `ERRNO` variable based on the value of `*errcode`. (In general, setting `*errcode = errno` should do the right thing.)

As an alternative to supplying a function that returns an input record, you may instead supply a function that simply reads bytes, and let `gawk` parse the data into records. If you do so, the data should be returned in the multibyte encoding of the current locale. Such a function should follow the same behavior as the `read()` system call, and you fill in the `read_func` pointer with its address in the `awk_input_buf_t` structure.

By default, `gawk` sets the `read_func` pointer to point to the `read()` system call. So your extension need not set this field explicitly.

NOTE: You must choose one method or the other: either a function that returns a record, or one that returns raw data. In particular, if you supply a function to get a record, `gawk` will call it, and will never call the raw read function.

`gawk` ships with a sample extension that reads directories, returning records for each entry in a directory (see [Section 16.7.6 \[Reading Directories\]](#), page 406). You may wish to use that code as a guide for writing your own input parser.

When writing an input parser, you should think about (and document) how it is expected to interact with `awk` code. You may want it to always be called, and to take effect as appropriate (as the `readdir` extension does). Or you may want it to take effect based upon the value of an `awk` variable, as the XML extension from the `gawkextlib` project does (see [Section 16.8 \[The gawkextlib Project\]](#), page 409). In the latter case, code in a `BEGINFILE` rule can look at `FILENAME` and `ERRNO` to decide whether or not to activate an input parser (see [Section 7.1.5 \[The BEGINFILE and ENDFILE Special Patterns\]](#), page 135).

You register your input parser with the following function:

```
void register_input_parser(awk_input_parser_t *input_parser);
    Register the input parser pointed to by input_parser with gawk.
```

16.4.5.5 Customized Output Wrappers

An *output wrapper* is the mirror image of an input parser. It allows an extension to take over the output to a file opened with the `>` or `>>` I/O redirection operators (see [Section 5.6 \[Redirecting Output of print and printf\]](#), page 97).

The output wrapper is very similar to the input parser structure:

```
typedef struct awk_output_wrapper {
```

```

    const char *name;    /* name of the wrapper */
    awk_bool_t (*can_take_file)(const awk_output_buf_t *outbuf);
    awk_bool_t (*take_control_of)(awk_output_buf_t *outbuf);
    awk_const struct awk_output_wrapper *awk_const next; /* for gawk */
} awk_output_wrapper_t;

```

The members are as follows:

```
const char *name;
```

This is the name of the output wrapper.

```
awk_bool_t (*can_take_file)(const awk_output_buf_t *outbuf);
```

This points to a function that examines the information in the `awk_output_buf_t` structure pointed to by `outbuf`. It should return true if the output wrapper wants to take over the file, and false otherwise. It should not change any state (variable values, etc.) within `gawk`.

```
awk_bool_t (*take_control_of)(awk_output_buf_t *outbuf);
```

The function pointed to by this field is called when `gawk` decides to let the output wrapper take control of the file. It should fill in appropriate members of the `awk_output_buf_t` structure, as described next, and return true if successful, false otherwise.

```
awk_const struct output_wrapper *awk_const next;
```

This is for use by `gawk`; therefore it is marked `awk_const` so that the extension cannot modify it.

The `awk_output_buf_t` structure looks like this:

```

typedef struct awk_output_buf {
    const char *name;    /* name of output file */
    const char *mode;    /* mode argument to fopen */
    FILE *fp;           /* stdio file pointer */
    awk_bool_t redirected; /* true if a wrapper is active */
    void *opaque;        /* for use by output wrapper */
    size_t (*gawk_fwrite)(const void *buf, size_t size, size_t count,
                          FILE *fp, void *opaque);
    int (*gawk_fflush)(FILE *fp, void *opaque);
    int (*gawk_ferror)(FILE *fp, void *opaque);
    int (*gawk_fclose)(FILE *fp, void *opaque);
} awk_output_buf_t;

```

Here too, your extension will define `XXX_can_take_file()` and `XXX_take_control_of()` functions that examine and update data members in the `awk_output_buf_t`. The data members are as follows:

```
const char *name;
```

The name of the output file.

```
const char *mode;
```

The mode string (as would be used in the second argument to `fopen()`) with which the file was opened.

`FILE *fp`; The `FILE` pointer from `<stdio.h>`. `gawk` opens the file before attempting to find an output wrapper.

`awk_bool_t redirected`;

This field must be set to true by the `XXX_take_control_of()` function.

`void *opaque`;

This pointer is opaque to `gawk`. The extension should use it to store a pointer to any private data associated with the file.

```
size_t (*gawk_fwrite)(const void *buf, size_t size, size_t count,
                     FILE *fp, void *opaque);
```

```
int (*gawk_fflush)(FILE *fp, void *opaque);
```

```
int (*gawk_ferror)(FILE *fp, void *opaque);
```

```
int (*gawk_fclose)(FILE *fp, void *opaque);
```

These pointers should be set to point to functions that perform the equivalent function as the `<stdio.h>` functions do, if appropriate. `gawk` uses these function pointers for all output. `gawk` initializes the pointers to point to internal “pass-through” functions that just call the regular `<stdio.h>` functions, so an extension only needs to redefine those functions that are appropriate for what it does.

The `XXX_can_take_file()` function should make a decision based upon the `name` and `mode` fields, and any additional state (such as `awk` variable values) that is appropriate.

When `gawk` calls `XXX_take_control_of()`, that function should fill in the other fields as appropriate, except for `fp`, which it should just use normally.

You register your output wrapper with the following function:

```
void register_output_wrapper(awk_output_wrapper_t *output_wrapper);
```

Register the output wrapper pointed to by `output_wrapper` with `gawk`.

16.4.5.6 Customized Two-way Processors

A *two-way processor* combines an input parser and an output wrapper for two-way I/O with the ‘|&’ operator (see [Section 5.6 \[Redirecting Output of `print` and `printf`\]](#), page 97). It makes identical use of the `awk_input_parser_t` and `awk_output_buf_t` structures as described earlier.

A two-way processor is represented by the following structure:

```
typedef struct awk_two_way_processor {
    const char *name; /* name of the two-way processor */
    awk_bool_t (*can_take_two_way)(const char *name);
    awk_bool_t (*take_control_of)(const char *name,
                                awk_input_buf_t *inbuf,
                                awk_output_buf_t *outbuf);
    awk_const struct awk_two_way_processor *awk_const next; /* for gawk */
} awk_two_way_processor_t;
```

The fields are as follows:

`const char *name`;

The name of the two-way processor.

```
awk_bool_t (*can_take_two_way)(const char *name);
```

The function pointed to by this field should return true if it wants to take over two-way I/O for this file name. It should not change any state (variable values, etc.) within gawk.

```
awk_bool_t (*take_control_of)(const char *name,
                              awk_input_buf_t *inbuf,
                              awk_output_buf_t *outbuf);
```

The function pointed to by this field should fill in the `awk_input_buf_t` and `awk_output_buf_t` structures pointed to by `inbuf` and `outbuf`, respectively. These structures were described earlier.

```
awk_const struct two_way_processor *awk_const next;
```

This is for use by gawk; therefore it is marked `awk_const` so that the extension cannot modify it.

As with the input parser and output processor, you provide “yes I can take this” and “take over for this” functions, `XXX_can_take_two_way()` and `XXX_take_control_of()`.

You register your two-way processor with the following function:

```
void register_two_way_processor(awk_two_way_processor_t *two_way_processor);
```

Register the two-way processor pointed to by `two_way_processor` with gawk.

16.4.6 Printing Messages

You can print different kinds of warning messages from your extension, as described here. Note that for these functions, you must pass in the extension ID received from gawk when the extension was loaded:³

```
void fatal(awk_ext_id_t id, const char *format, ...);
```

Print a message and then cause gawk to exit immediately.

```
void warning(awk_ext_id_t id, const char *format, ...);
```

Print a warning message.

```
void lintwarn(awk_ext_id_t id, const char *format, ...);
```

Print a “lint warning.” Normally this is the same as printing a warning message, but if gawk was invoked with ‘`--lint=fatal`’, then lint warnings become fatal error messages.

All of these functions are otherwise like the C `printf()` family of functions, where the `format` parameter is a string with literal characters and formatting codes intermixed.

16.4.7 Updating ERRNO

The following functions allow you to update the `ERRNO` variable:

```
void update_ERRNO_int(int errno_val);
```

Set `ERRNO` to the string equivalent of the error code in `errno_val`. The value should be one of the defined error codes in `<errno.h>`, and gawk turns it into a (possibly translated) string using the C `strerror()` function.

³ Because the API uses only ISO C 90 features, it cannot make use of the ISO C 99 variadic macro feature to hide that parameter. More’s the pity.

```
void update_ERRNO_string(const char *string);
    Set ERRNO directly to the string value of ERRNO. gawk makes a copy of the value
    of string.

void unset_ERRNO(void);
    Unset ERRNO.
```

16.4.8 Requesting Values

All of the functions that return values from `gawk` work in the same way. You pass in an `awk_valtype_t` value to indicate what kind of value you expect. If the actual value matches what you requested, the function returns true and fills in the `awk_value_t` result. Otherwise, the function returns false, and the `val_type` member indicates the type of the actual value. You may then print an error message or reissue the request for the actual value type, as appropriate. This behavior is summarized in [Table 16.1](#).

		Type of Actual Value			
Type Requested	String	String	String	False	False
	Number	Number if can be converted, else false	Number	False	False
	Array	False	False	Array	False
	Scalar	Scalar	Scalar	False	False
	Undefined	String	Number	Array	Undefined
	Value cookie	False	False	False	False

Table 16.1: API value types returned

16.4.9 Accessing and Updating Parameters

Two functions give you access to the arguments (parameters) passed to your extension function. They are:

```
awk_bool_t get_argument(size_t count,
                        awk_valtype_t wanted,
                        awk_value_t *result);
    Fill in the awk_value_t structure pointed to by result with the countth argu-
    ment. Return true if the actual type matches wanted, and false otherwise. In
    the latter case, result->val_type indicates the actual type (see Table 16.1).
    Counts are zero-based—the first argument is numbered zero, the second one,
    and so on. wanted indicates the type of value expected.

awk_bool_t set_argument(size_t count, awk_array_t array);
    Convert a parameter that was undefined into an array; this provides call by
    reference for arrays. Return false if count is too big, or if the argument's type
    is not undefined. See Section 16.4.11 \[Array Manipulation\], page 379, for more
    information on creating arrays.
```


16.4.10 Symbol Table Access

Two sets of routines provide access to global variables, and one set allows you to create and release cached values.

16.4.10.1 Variable Access and Update by Name

The following routines provide the ability to access and update global **awk**-level variables by name. In compiler terminology, identifiers of different kinds are termed *symbols*, thus the “sym” in the routines’ names. The data structure that stores information about symbols is termed a *symbol table*. The functions are as follows:

```
awk_bool_t sym_lookup(const char *name,
                      awk_valtype_t wanted,
                      awk_value_t *result);
```

Fill in the **awk_value_t** structure pointed to by **result** with the value of the variable named by the string **name**, which is a regular C string. **wanted** indicates the type of value expected. Return true if the actual type matches **wanted**, and false otherwise. In the latter case, **result->val_type** indicates the actual type (see [Table 16.1](#)).

```
awk_bool_t sym_update(const char *name, awk_value_t *value);
```

Update the variable named by the string **name**, which is a regular C string. The variable is added to **gawk**’s symbol table if it is not there. Return true if everything worked, and false otherwise.

Changing types (scalar to array or vice versa) of an existing variable is *not* allowed, nor may this routine be used to update an array. This routine cannot be used to update any of the predefined variables (such as **ARGC** or **NF**).

An extension can look up the value of **gawk**’s special variables. However, with the exception of the **PROCINFO** array, an extension cannot change any of those variables.

CAUTION: It is possible for the lookup of **PROCINFO** to fail. This happens if the **awk** program being run does not reference **PROCINFO**; in this case, **gawk** doesn’t bother to create the array and populate it.

16.4.10.2 Variable Access and Update by Cookie

A *scalar cookie* is an opaque handle that provides access to a global variable or array. It is an optimization that avoids looking up variables in **gawk**’s symbol table every time access is needed. This was discussed earlier, in [Section 16.4.2 \[General-Purpose Data Types\]](#), [page 361](#).

The following functions let you work with scalar cookies:

```
awk_bool_t sym_lookup_scalar(awk_scalar_t cookie,
                             awk_valtype_t wanted,
                             awk_value_t *result);
```

Retrieve the current value of a scalar cookie. Once you have obtained a scalar cookie using **sym_lookup()**, you can use this function to get its value more efficiently. Return false if the value cannot be retrieved.

```
awk_bool_t sym_update_scalar(awk_scalar_t cookie, awk_value_t *value);
```

Update the value associated with a scalar cookie. Return false if the new value is not of type `AWK_STRING` or `AWK_NUMBER`. Here too, the predefined variables may not be updated.

It is not obvious at first glance how to work with scalar cookies or what their *raison d'être* really is. In theory, the `sym_lookup()` and `sym_update()` routines are all you really need to work with variables. For example, you might have code that looks up the value of a variable, evaluates a condition, and then possibly changes the value of the variable based on the result of that evaluation, like so:

```
/* do_magic --- do something really great */

static awk_value_t *
do_magic(int nargs, awk_value_t *result)
{
    awk_value_t value;

    if (    sym_lookup("MAGIC_VAR", AWK_NUMBER, & value)
        && some_condition(value.num_value)) {
        value.num_value += 42;
        sym_update("MAGIC_VAR", & value);
    }

    return make_number(0.0, result);
}
```

This code looks (and is) simple and straightforward. So what's the problem?

Well, consider what happens if `awk`-level code associated with your extension calls the `magic()` function (implemented in C by `do_magic()`), once per record, while processing hundreds of thousands or millions of records. The `MAGIC_VAR` variable is looked up in the symbol table once or twice per function call!

The symbol table lookup is really pure overhead; it is considerably more efficient to get a cookie that represents the variable, and use that to get the variable's value and update it as needed.⁴

Thus, the way to use cookies is as follows. First, install your extension's variable in `gawk`'s symbol table using `sym_update()`, as usual. Then get a scalar cookie for the variable using `sym_lookup()`:

```
static awk_scalar_t magic_var_cookie;    /* cookie for MAGIC_VAR */

static void
my_extension_init()
{
    awk_value_t value;

    /* install initial value */
```

⁴ The difference is measurable and quite real. Trust us.

```

    sym_update("MAGIC_VAR", make_number(42.0, & value));

    /* get the cookie */
    sym_lookup("MAGIC_VAR", AWK_SCALAR, & value);

    /* save the cookie */
    magic_var_cookie = value.scalar_cookie;
    ...
}

```

Next, use the routines in this section for retrieving and updating the value through the cookie. Thus, `do_magic()` now becomes something like this:

```

/* do_magic --- do something really great */

static awk_value_t *
do_magic(int nargs, awk_value_t *result)
{
    awk_value_t value;

    if (    sym_lookup_scalar(magic_var_cookie, AWK_NUMBER, & value)
        && some_condition(value.num_value)) {
        value.num_value += 42;
        sym_update_scalar(magic_var_cookie, & value);
    }
    ...

    return make_number(0.0, result);
}

```

NOTE: The previous code omitted error checking for presentation purposes. Your extension code should be more robust and carefully check the return values from the API functions.

16.4.10.3 Creating and Using Cached Values

The routines in this section allow you to create and release cached values. Like scalar cookies, in theory, cached values are not necessary. You can create numbers and strings using the functions in [Section 16.4.4 \[Constructor Functions\], page 365](#). You can then assign those values to variables using `sym_update()` or `sym_update_scalar()`, as you like.

However, you can understand the point of cached values if you remember that *every* string value's storage *must* come from `gawk_malloc()`, `gawk_calloc()`, or `gawk_realloc()`. If you have 20 variables, all of which have the same string value, you must create 20 identical copies of the string.⁵

It is clearly more efficient, if possible, to create a value once, and then tell **gawk** to reuse the value for multiple variables. That is what the routines in this section let you do. The functions are as follows:

⁵ Numeric values are clearly less problematic, requiring only a C `double` to store.

```
awk_bool_t create_value(awk_value_t *value, awk_value_cookie_t *result);
```

Create a cached string or numeric value from `value` for efficient later assignment. Only values of type `AWK_NUMBER` and `AWK_STRING` are allowed. Any other type is rejected. `AWK_UNDEFINED` could be allowed, but doing so would result in inferior performance.

```
awk_bool_t release_value(awk_value_cookie_t vc);
```

Release the memory associated with a value cookie obtained from `create_value()`.

You use value cookies in a fashion similar to the way you use scalar cookies. In the extension initialization routine, you create the value cookie:

```
static awk_value_cookie_t answer_cookie; /* static value cookie */

static void
my_extension_init()
{
    awk_value_t value;
    char *long_string;
    size_t long_string_len;

    /* code from earlier */
    ...
    /* ... fill in long_string and long_string_len ... */
    make_malloced_string(long_string, long_string_len, & value);
    create_value(& value, & answer_cookie); /* create cookie */
    ...
}
```

Once the value is created, you can use it as the value of any number of variables:

```
static awk_value_t *
do_magic(int nargs, awk_value_t *result)
{
    awk_value_t new_value;

    ... /* as earlier */

    value.val_type = AWK_VALUE_COOKIE;
    value.value_cookie = answer_cookie;
    sym_update("VAR1", & value);
    sym_update("VAR2", & value);
    ...
    sym_update("VAR100", & value);
    ...
}
```

Using value cookies in this way saves considerable storage, as all of `VAR1` through `VAR100` share the same value.

You might be wondering, “Is this sharing problematic? What happens if `awk` code assigns a new value to `VAR1`; are all the others changed too?”

That’s a great question. The answer is that no, it’s not a problem. Internally, `gawk` uses *reference-counted strings*. This means that many variables can share the same string value, and `gawk` keeps track of the usage. When a variable’s value changes, `gawk` simply decrements the reference count on the old value and updates the variable to use the new value.

Finally, as part of your cleanup action (see [Section 16.4.5.2 \[Registering An Exit Callback Function\]](#), [page 366](#)) you should release any cached values that you created, using `release_value()`.

16.4.11 Array Manipulation

The primary data structure⁶ in `awk` is the associative array (see [Chapter 8 \[Arrays in awk\]](#), [page 159](#)). Extensions need to be able to manipulate `awk` arrays. The API provides a number of data structures for working with arrays, functions for working with individual elements, and functions for working with arrays as a whole. This includes the ability to “flatten” an array so that it is easy for C code to traverse every element in an array. The array data structures integrate nicely with the data structures for values to make it easy to both work with and create true arrays of arrays (see [Section 16.4.2 \[General-Purpose Data Types\]](#), [page 361](#)).

16.4.11.1 Array Data Types

The data types associated with arrays are as follows:

```
typedef void *awk_array_t;
```

If you request the value of an array variable, you get back an `awk_array_t` value. This value is opaque⁷ to the extension; it uniquely identifies the array but can only be used by passing it into API functions or receiving it from API functions. This is very similar to way ‘FILE *’ values are used with the `<stdio.h>` library routines.

```
typedef struct awk_element {
    /* convenience linked list pointer, not used by gawk */
    struct awk_element *next;
    enum {
        AWK_ELEMENT_DEFAULT = 0, /* set by gawk */
        AWK_ELEMENT_DELETE = 1   /* set by extension */
    } flags;
    awk_value_t index;
    awk_value_t value;
} awk_element_t;
```

The `awk_element_t` is a “flattened” array element. `awk` produces an array of these inside the `awk_flat_array_t` (see the next item). Individual elements may be marked for deletion. New elements must be added individually, one at a time, using the separate API for that purpose. The fields are as follows:

⁶ OK, the only data structure.

⁷ It is also a “cookie,” but the `gawk` developers did not wish to overuse this term.

```
struct awk_element *next;
```

This pointer is for the convenience of extension writers. It allows an extension to create a linked list of new elements that can then be added to an array in a loop that traverses the list.

```
enum { ... } flags;
```

A set of flag values that convey information between the extension and `gawk`. Currently there is only one: `AWK_ELEMENT_DELETE`. Setting it causes `gawk` to delete the element from the original array upon release of the flattened array.

```
index
```

The index and value of the element, respectively. *All* memory pointed to by `index` and `value` belongs to `gawk`.

```
typedef struct awk_flat_array {
    awk_const void *awk_const opaque1;    /* for use by gawk */
    awk_const void *awk_const opaque2;    /* for use by gawk */
    awk_const size_t count;               /* how many elements */
    awk_element_t elements[1];           /* will be extended */
} awk_flat_array_t;
```

This is a flattened array. When an extension gets one of these from `gawk`, the `elements` array is of actual size `count`. The `opaque1` and `opaque2` pointers are for use by `gawk`; therefore they are marked `awk_const` so that the extension cannot modify them.

16.4.11.2 Array Functions

The following functions relate to individual array elements:

```
awk_bool_t get_element_count(awk_array_t a_cookie, size_t *count);
```

For the array represented by `a_cookie`, place in `*count` the number of elements it contains. A subarray counts as a single element. Return false if there is an error.

```
awk_bool_t get_array_element(awk_array_t a_cookie,
                             const awk_value_t *const index,
                             awk_valtype_t wanted,
                             awk_value_t *result);
```

For the array represented by `a_cookie`, return in `*result` the value of the element whose index is `index`. `wanted` specifies the type of value you wish to retrieve. Return false if `wanted` does not match the actual type or if `index` is not in the array (see [Table 16.1](#)).

The value for `index` can be numeric, in which case `gawk` converts it to a string. Using nonintegral values is possible, but requires that you understand how such values are converted to strings (see [Section 6.1.4 \[Conversion of Strings and Numbers\]](#), page 111); thus, using integral values is safest.

As with *all* strings passed into `gawk` from an extension, the string value of `index` must come from `gawk_malloc()`, `gawk_calloc()`, or `gawk_realloc()`, and `gawk` releases the storage.

```
awk_bool_t set_array_element(awk_array_t a_cookie,
                             const awk_value_t *const index,
                             const awk_value_t *const value);
```

In the array represented by `a_cookie`, create or modify the element whose index is given by `index`. The `ARGV` and `ENVIRON` arrays may not be changed, although the `PROCINFO` array can be.

```
awk_bool_t set_array_element_by_elem(awk_array_t a_cookie,
                                     awk_element_t element);
```

Like `set_array_element()`, but take the `index` and `value` from `element`. This is a convenience macro.

```
awk_bool_t del_array_element(awk_array_t a_cookie,
                             const awk_value_t *const index);
```

Remove the element with the given index from the array represented by `a_cookie`. Return true if the element was removed, or false if the element did not exist in the array.

The following functions relate to arrays as a whole:

```
awk_array_t create_array(void);
```

Create a new array to which elements may be added. See [Section 16.4.11.4 \[How To Create and Populate Arrays\]](#), page 385, for a discussion of how to create a new array and add elements to it.

```
awk_bool_t clear_array(awk_array_t a_cookie);
```

Clear the array represented by `a_cookie`. Return false if there was some kind of problem, true otherwise. The array remains an array, but after calling this function, it has no elements. This is equivalent to using the `delete` statement (see [Section 8.4 \[The delete Statement\]](#), page 168).

```
awk_bool_t flatten_array(awk_array_t a_cookie, awk_flat_array_t **data);
```

For the array represented by `a_cookie`, create an `awk_flat_array_t` structure and fill it in. Set the pointer whose address is passed as `data` to point to this structure. Return true upon success, or false otherwise. See [Section 16.4.11.3 \[Working With All The Elements of an Array\]](#), page 381, for a discussion of how to flatten an array and work with it.

```
awk_bool_t release_flattened_array(awk_array_t a_cookie,
                                   awk_flat_array_t *data);
```

When done with a flattened array, release the storage using this function. You must pass in both the original array cookie and the address of the created `awk_flat_array_t` structure. The function returns true upon success, false otherwise.

16.4.11.3 Working With All The Elements of an Array

To *flatten* an array is to create a structure that represents the full array in a fashion that makes it easy for C code to traverse the entire array. Some of the code in `extension/testtext.c` does this, and also serves as a nice example showing how to use the APIs.

We walk through that part of the code one step at a time. First, the `gawk` script that drives the test extension:

```
@load "testtext"
BEGIN {
    n = split("blacky rusty sophie raincloud lucky", pets)
    printf("pets has %d elements\n", length(pets))
    ret = dump_array_and_delete("pets", "3")
    printf("dump_array_and_delete(pets) returned %d\n", ret)
    if ("3" in pets)
        printf("dump_array_and_delete() did NOT remove index \"3\"\n")
    else
        printf("dump_array_and_delete() did remove index \"3\"\n")
    print ""
}
```

This code creates an array with `split()` (see [Section 9.1.3 \[String-Manipulation Functions\]](#), [page 177](#)) and then calls `dump_array_and_delete()`. That function looks up the array whose name is passed as the first argument, and deletes the element at the index passed in the second argument. The `awk` code then prints the return value and checks if the element was indeed deleted. Here is the C code that implements `dump_array_and_delete()`. It has been edited slightly for presentation.

The first part declares variables, sets up the default return value in `result`, and checks that the function was called with the correct number of arguments:

```
static awk_value_t *
dump_array_and_delete(int nargs, awk_value_t *result)
{
    awk_value_t value, value2, value3;
    awk_flat_array_t *flat_array;
    size_t count;
    char *name;
    int i;

    assert(result != NULL);
    make_number(0.0, result);

    if (nargs != 2) {
        printf("dump_array_and_delete: nargs not right "
               "(%d should be 2)\n", nargs);
        goto out;
    }
}
```

The function then proceeds in steps, as follows. First, retrieve the name of the array, passed as the first argument, followed by the array itself. If either operation fails, print an error message and return:

```
/* get argument named array as flat array and print it */
if (get_argument(0, AWK_STRING, & value)) {
    name = value.str_value.str;
```



```

    if (sym_lookup(name, AWK_ARRAY, & value2))
        printf("dump_array_and_delete: sym_lookup of %s passed\n",
               name);
    else {
        printf("dump_array_and_delete: sym_lookup of %s failed\n",
               name);
        goto out;
    }
} else {
    printf("dump_array_and_delete: get_argument(0) failed\n");
    goto out;
}

```

For testing purposes and to make sure that the C code sees the same number of elements as the `awk` code, the second step is to get the count of elements in the array and print it:

```

    if (! get_element_count(value2.array_cookie, & count)) {
        printf("dump_array_and_delete: get_element_count failed\n");
        goto out;
    }

    printf("dump_array_and_delete: incoming size is %lu\n",
           (unsigned long) count);

```

The third step is to actually flatten the array, and then to double-check that the count in the `awk_flat_array_t` is the same as the count just retrieved:

```

    if (! flatten_array(value2.array_cookie, & flat_array)) {
        printf("dump_array_and_delete: could not flatten array\n");
        goto out;
    }

    if (flat_array->count != count) {
        printf("dump_array_and_delete: flat_array->count (%lu)"
               " != count (%lu)\n",
               (unsigned long) flat_array->count,
               (unsigned long) count);
        goto out;
    }

```

The fourth step is to retrieve the index of the element to be deleted, which was passed as the second argument. Remember that argument counts passed to `get_argument()` are zero-based, and thus the second argument is numbered one:

```

    if (! get_argument(1, AWK_STRING, & value3)) {
        printf("dump_array_and_delete: get_argument(1) failed\n");
        goto out;
    }

```

The fifth step is where the “real work” is done. The function loops over every element in the array, printing the index and element values. In addition, upon finding the element with the index that is supposed to be deleted, the function sets the `AWK_ELEMENT_DELETE` bit

in the `flags` field of the element. When the array is released, `gawk` traverses the flattened array, and deletes any elements that have this flag bit set:

```
for (i = 0; i < flat_array->count; i++) {
    printf("\t%s[\"%.s\"] = %s\n",
        name,
        (int) flat_array->elements[i].index.str_value.len,
        flat_array->elements[i].index.str_value.str,
        valrep2str(& flat_array->elements[i].value));

    if (strcmp(value3.str_value.str,
        flat_array->elements[i].index.str_value.str) == 0) {
        flat_array->elements[i].flags |= AWK_ELEMENT_DELETE;
        printf("dump_array_and_delete: marking element \"%s\" "
            "for deletion\n",
            flat_array->elements[i].index.str_value.str);
    }
}
```

The sixth step is to release the flattened array. This tells `gawk` that the extension is no longer using the array, and that it should delete any elements marked for deletion. `gawk` also frees any storage that was allocated, so you should not use the pointer (`flat_array` in this code) once you have called `release_flattened_array()`:

```
if (! release_flattened_array(value2.array_cookie, flat_array)) {
    printf("dump_array_and_delete: could not release flattened array\n");
    goto out;
}
```

Finally, because everything was successful, the function sets the return value to success, and returns:

```
make_number(1.0, result);
out:
return result;
}
```

Here is the output from running this part of the test:

```
pets has 5 elements
dump_array_and_delete: sym_lookup of pets passed
dump_array_and_delete: incoming size is 5
    pets["1"] = "blacky"
    pets["2"] = "rusty"
    pets["3"] = "sophie"
dump_array_and_delete: marking element "3" for deletion
    pets["4"] = "raincloud"
    pets["5"] = "lucky"
dump_array_and_delete(pets) returned 1
dump_array_and_delete() did remove index "3"!
```

16.4.11.4 How To Create and Populate Arrays

Besides working with arrays created by `awk` code, you can create arrays and populate them as you see fit, and then `awk` code can access them and manipulate them.

There are two important points about creating arrays from extension code:

- You must install a new array into `gawk`'s symbol table immediately upon creating it. Once you have done so, you can then populate the array.

Similarly, if installing a new array as a subarray of an existing array, you must add the new array to its parent before adding any elements to it.

Thus, the correct way to build an array is to work “top down.” Create the array, and immediately install it in `gawk`'s symbol table using `sym_update()`, or install it as an element in a previously existing array using `set_array_element()`. We show example code shortly.

- Due to `gawk` internals, after using `sym_update()` to install an array into `gawk`, you have to retrieve the array cookie from the value passed in to `sym_update()` before doing anything else with it, like so:

```
awk_value_t val;
awk_array_t new_array;

new_array = create_array();
val.val_type = AWK_ARRAY;
val.array_cookie = new_array;

/* install array in the symbol table */
sym_update("array", & val);

new_array = val.array_cookie;    /* YOU MUST DO THIS */
```

If installing an array as a subarray, you must also retrieve the value of the array cookie after the call to `set_element()`.

The following C code is a simple test extension to create an array with two regular elements and with a subarray. The leading `#include` directives and boilerplate variable declarations (see [Section 16.4.13 \[Boilerplate Code\]](#), page 388) are omitted for brevity. The first step is to create a new array and then install it in the symbol table:

```
/* create_new_array --- create a named array */

static void
create_new_array()
{
    awk_array_t a_cookie;
    awk_array_t subarray;
    awk_value_t index, value;

    a_cookie = create_array();
    value.val_type = AWK_ARRAY;
    value.array_cookie = a_cookie;
```

```

    if (! sym_update("new_array", & value))
        printf("create_new_array: sym_update(\"new_array\") failed!\n");
    a_cookie = value.array_cookie;

```

Note how `a_cookie` is reset from the `array_cookie` field in the `value` structure.

The second step is to install two regular values into `new_array`:

```

(void) make_const_string("hello", 5, & index);
(void) make_const_string("world", 5, & value);
if (! set_array_element(a_cookie, & index, & value)) {
    printf("fill_in_array: set_array_element failed\n");
    return;
}

(void) make_const_string("answer", 6, & index);
(void) make_number(42.0, & value);
if (! set_array_element(a_cookie, & index, & value)) {
    printf("fill_in_array: set_array_element failed\n");
    return;
}

```

The third step is to create the subarray and install it:

```

(void) make_const_string("subarray", 8, & index);
subarray = create_array();
value.val_type = AWK_ARRAY;
value.array_cookie = subarray;
if (! set_array_element(a_cookie, & index, & value)) {
    printf("fill_in_array: set_array_element failed\n");
    return;
}
subarray = value.array_cookie;

```

The final step is to populate the subarray with its own element:

```

(void) make_const_string("foo", 3, & index);
(void) make_const_string("bar", 3, & value);
if (! set_array_element(subarray, & index, & value)) {
    printf("fill_in_array: set_array_element failed\n");
    return;
}
}

```

Here is a sample script that loads the extension and then dumps the array:

```

@load "subarray"

function dumparray(name, array,    i)
{
    for (i in array)
        if (isarray(array[i]))
            dumparray(name "[" i "]", array[i])
}

```

```

        else
            printf("%s[\"%s\"] = %s\n", name, i, array[i])
    }

    BEGIN {
        dumparray("new_array", new_array);
    }

```

Here is the result of running the script:

```

$ AWKLIBPATH=$PWD ./gawk -f subarray.awk
+ new_array["subarray"]["foo"] = bar
+ new_array["hello"] = world
+ new_array["answer"] = 42

```

(See [Section 16.5 \[How gawk Finds Extensions\]](#), page 390, for more information on the AWKLIBPATH environment variable.)

16.4.12 API Variables

The API provides two sets of variables. The first provides information about the version of the API (both with which the extension was compiled, and with which **gawk** was compiled). The second provides information about how **gawk** was invoked.

16.4.12.1 API Version Constants and Variables

The API provides both a “major” and a “minor” version number. The API versions are available at compile time as C preprocessor defines to support conditional compilation, and as enum constants to facilitate debugging:

API Version	C preprocessor define	enum constant
Major	<code>gawk_api_major_version</code>	<code>GAWK_API_MAJOR_VERSION</code>
Minor	<code>gawk_api_minor_version</code>	<code>GAWK_API_MINOR_VERSION</code>

Table 16.2: gawk API version constants

The minor version increases when new functions are added to the API. Such new functions are always added to the end of the API **struct**.

The major version increases (and the minor version is reset to zero) if any of the data types change size or member order, or if any of the existing functions change signature.

It could happen that an extension may be compiled against one version of the API but loaded by a version of **gawk** using a different version. For this reason, the major and minor API versions of the running **gawk** are included in the API **struct** as read-only constant integers:

```

api->major_version
    The major version of the running gawk

api->minor_version
    The minor version of the running gawk

```

It is up to the extension to decide if there are API incompatibilities. Typically, a check like this is enough:

```
if (api->major_version != GAWK_API_MAJOR_VERSION
    || api->minor_version < GAWK_API_MINOR_VERSION) {
    fprintf(stderr, "foo_extension: version mismatch with gawk!\n");
    fprintf(stderr, "\tmy version (%d, %d), gawk version (%d, %d)\n",
        GAWK_API_MAJOR_VERSION, GAWK_API_MINOR_VERSION,
        api->major_version, api->minor_version);
    exit(1);
}
```

Such code is included in the boilerplate `dl_load_func()` macro provided in `gawkapi.h` (discussed in [Section 16.4.13 \[Boilerplate Code\]](#), page 388).

16.4.12.2 Informational Variables

The API provides access to several variables that describe whether the corresponding command-line options were enabled when `gawk` was invoked. The variables are:

`do_debug` This variable is true if `gawk` was invoked with `--debug` option.

`do_lint` This variable is true if `gawk` was invoked with `--lint` option.

`do_mpfr` This variable is true if `gawk` was invoked with `--bignum` option.

`do_profile`
This variable is true if `gawk` was invoked with `--profile` option.

`do_sandbox`
This variable is true if `gawk` was invoked with `--sandbox` option.

`do_traditional`
This variable is true if `gawk` was invoked with `--traditional` option.

The value of `do_lint` can change if `awk` code modifies the LINT predefined variable (see [Section 7.5 \[Predefined Variables\]](#), page 147). The others should not change during execution.

16.4.13 Boilerplate Code

As mentioned earlier (see [Section 16.3 \[How It Works at a High Level\]](#), page 357), the function definitions as presented are really macros. To use these macros, your extension must provide a small amount of boilerplate code (variables and functions) toward the top of your source file, using predefined names as described here. The boilerplate needed is also provided in comments in the `gawkapi.h` header file:

```
/* Boilerplate code: */
int plugin_is_GPL_compatible;

static gawk_api_t *const api;
static awk_ext_id_t ext_id;
static const char *ext_version = NULL; /* or ... = "some string" */

static awk_ext_func_t func_table[] = {
```

```

    { "name", do_name, 1 },
    /* ... */
};

/* EITHER: */

static awk_bool_t (*init_func)(void) = NULL;

/* OR: */

static awk_bool_t
init_my_extension(void)
{
    ...
}

static awk_bool_t (*init_func)(void) = init_my_extension;

dl_load_func(func_table, some_name, "name_space_in_quotes")

```

These variables and functions are as follows:

```
int plugin_is_GPL_compatible;
```

This asserts that the extension is compatible with the GNU GPL (see [\[GNU General Public License\]](#), page 479). If your extension does not have this, **gawk** will not load it (see [Section 16.2 \[Extension Licensing\]](#), page 357).

```
static gawk_api_t *const api;
```

This global **static** variable should be set to point to the **gawk_api_t** pointer that **gawk** passes to your **dl_load()** function. This variable is used by all of the macros.

```
static awk_ext_id_t ext_id;
```

This global **static** variable should be set to the **awk_ext_id_t** value that **gawk** passes to your **dl_load()** function. This variable is used by all of the macros.

```
static const char *ext_version = NULL; /* or ... = "some string" */
```

This global **static** variable should be set either to **NULL**, or to point to a string giving the name and version of your extension.

```
static awk_ext_func_t func_table[] = { ... };
```

This is an array of one or more **awk_ext_func_t** structures, as described earlier (see [Section 16.4.5.1 \[Registering An Extension Function\]](#), page 365). It can then be looped over for multiple calls to **add_ext_func()**.

```
static awk_bool_t (*init_func)(void) = NULL;
```

OR

```
static awk_bool_t init_my_extension(void) { ... }
```

```
static awk_bool_t (*init_func)(void) = init_my_extension;
```

If you need to do some initialization work, you should define a function that does it (creates variables, opens files, etc.) and then define the **init_func**

pointer to point to your function. The function should return `awk_false` upon failure, or `awk_true` if everything goes well.

If you don't need to do any initialization, define the pointer and initialize it to `NULL`.

```
dl_load_func(func_table, some_name, "name_space_in_quotes")
```

This macro expands to a `dl_load()` function that performs all the necessary initializations.

The point of all the variables and arrays is to let the `dl_load()` function (from the `dl_load_func()` macro) do all the standard work. It does the following:

1. Check the API versions. If the extension major version does not match `gawk`'s, or if the extension minor version is greater than `gawk`'s, it prints a fatal error message and exits.
2. Load the functions defined in `func_table`. If any of them fails to load, it prints a warning message but continues on.
3. If the `init_func` pointer is not `NULL`, call the function it points to. If it returns `awk_false`, print a warning message.
4. If `ext_version` is not `NULL`, register the version string with `gawk`.

16.5 How gawk Finds Extensions

Compiled extensions have to be installed in a directory where `gawk` can find them. If `gawk` is configured and built in the default fashion, the directory in which to find extensions is `/usr/local/lib/gawk`. You can also specify a search path with a list of directories to search for compiled extensions. See [Section 2.5.2 \[The AWKLIBPATH Environment Variable\]](#), [page 40](#), for more information.

16.6 Example: Some File Functions

No matter where you go, there you are.
—Buckaroo Banzai

Two useful functions that are not in `awk` are `chdir()` (so that an `awk` program can change its directory) and `stat()` (so that an `awk` program can gather information about a file). In order to illustrate the API in action, this section implements these functions for `gawk` in an extension.

16.6.1 Using `chdir()` and `stat()`

This section shows how to use the new functions at the `awk` level once they've been integrated into the running `gawk` interpreter. Using `chdir()` is very straightforward. It takes one argument, the new directory to change to:

```
@load "filefuncs"
...
newdir = "/home/arnold/funstuff"
ret = chdir(newdir)
if (ret < 0) {
    printf("could not change to %s: %s\n", newdir, ERRNO) > "/dev/stderr"
```



```

    exit 1
}
...

```

The return value is negative if the `chdir()` failed, and `ERRNO` (see [Section 7.5 \[Predefined Variables\]](#), page 147) is set to a string indicating the error.

Using `stat()` is a bit more complicated. The C `stat()` function fills in a structure that has a fair amount of information. The right way to model this in `awk` is to fill in an associative array with the appropriate information:

```

file = "/home/arnold/.profile"
ret = stat(file, fdata)
if (ret < 0) {
    printf("could not stat %s: %s\n",
           file, ERRNO) > "/dev/stderr"
    exit 1
}
printf("size of %s is %d bytes\n", file, fdata["size"])

```

The `stat()` function always clears the data array, even if the `stat()` fails. It fills in the following elements:

"name"	The name of the file that was <code>stat()</code> ed.
"dev"	
"ino"	The file's device and inode numbers, respectively.
"mode"	The file's mode, as a numeric value. This includes both the file's type and its permissions.
"nlink"	The number of hard links (directory entries) the file has.
"uid"	
"gid"	The numeric user and group ID numbers of the file's owner.
"size"	The size in bytes of the file.
"blocks"	The number of disk blocks the file actually occupies. This may not be a function of the file's size if the file has holes.
"atime"	
"mtime"	
"ctime"	The file's last access, modification, and inode update times, respectively. These are numeric timestamps, suitable for formatting with <code>strftime()</code> (see Section 9.1.5 [Time Functions] , page 192).
"pmode"	The file's "printable mode." This is a string representation of the file's type and permissions, such as is produced by <code>'ls -l'</code> —for example, <code>"drwxr-xr-x"</code> .
"type"	A printable string representation of the file's type. The value is one of the following:
	<pre> "blockdev" "chardev" </pre>

The file is a block or character device ("special file").

```

"directory"    The file is a directory.
"fifo"         The file is a named pipe (also known as a FIFO).
"file"         The file is just a regular file.
"socket"       The file is an AF_UNIX ("Unix domain") socket in the filesystem.
"symlink"      The file is a symbolic link.

"devbsize"     The size of a block for the element indexed by "blocks". This information is
                derived from either the DEV_BSIZE constant defined in <sys/param.h> on most
                systems, or the S_BLKSIZE constant in <sys/stat.h> on BSD systems. For
                some other systems, a priori knowledge is used to provide a value. Where no
                value can be determined, it defaults to 512.

Several additional elements may be present, depending upon the operating system and
the type of the file. You can test for them in your awk program by using the in operator
(see Section 8.1.2 \[Referring to an Array Element\], page 161):

"blksize"      The preferred block size for I/O to the file. This field is not present on all
                POSIX-like systems in the C stat structure.

"linkval"      If the file is a symbolic link, this element is the name of the file the link points
                to (i.e., the value of the link).

"rdev"
"major"
"minor"        If the file is a block or character device file, then these values represent the
                numeric device number and the major and minor components of that number,
                respectively.

```

16.6.2 C Code for `chdir()` and `stat()`

Here is the C code for these extensions.⁸

The file includes a number of standard header files, and then includes the `gawkapi.h` header file, which provides the API definitions. Those are followed by the necessary variable declarations to make use of the API macros and boilerplate code (see [Section 16.4.13 \[Boilerplate Code\]](#), page 388):

```

#ifdef HAVE_CONFIG_H
#include <config.h>
#endif

#include <stdio.h>
#include <assert.h>

```

⁸ This version is edited slightly for presentation. See `extension/filefuncs.c` in the `gawk` distribution for the complete version.

```

#include <errno.h>
#include <stdlib.h>
#include <string.h>
#include <unistd.h>

#include <sys/types.h>
#include <sys/stat.h>

#include "gawkapi.h"

#include "gettext.h"
#define _(msgid) gettext(msgid)
#define N_(msgid) msgid

#include "gawkfts.h"
#include "stack.h"

static const gawk_api_t *api;    /* for convenience macros to work */
static awk_ext_id_t *ext_id;
static awk_bool_t init_filefuncs(void);
static awk_bool_t (*init_func)(void) = init_filefuncs;
static const char *ext_version = "filefuncs extension: version 1.0";

int plugin_is_GPL_compatible;

```

By convention, for an `awk` function `foo()`, the C function that implements it is called `do_foo()`. The function should have two arguments. The first is an `int`, usually called `nargs`, that represents the number of actual arguments for the function. The second is a pointer to an `awk_value_t` structure, usually named `result`:

```

/* do_chdir --- provide dynamically loaded chdir() function for gawk */

static awk_value_t *
do_chdir(int nargs, awk_value_t *result)
{
    awk_value_t newdir;
    int ret = -1;

    assert(result != NULL);

    if (do_lint && nargs != 1)
        lintwarn(ext_id,
            _("chdir: called with incorrect number of arguments, "
              "expecting 1"));
}

```

The `newdir` variable represents the new directory to change to, which is retrieved with `get_argument()`. Note that the first argument is numbered zero.

If the argument is retrieved successfully, the function calls the `chdir()` system call. If the `chdir()` fails, `ERRNO` is updated:

```

    if (get_argument(0, AWK_STRING, & newdir)) {
        ret = chdir(newdir.str_value.str);
        if (ret < 0)
            update_ERRNO_int(errno);
    }

```

Finally, the function returns the return value to the `awk` level:

```

    return make_number(ret, result);
}

```

The `stat()` extension is more involved. First comes a function that turns a numeric mode into a printable representation (e.g., octal 0644 becomes `'-rw-r--r--'`). This is omitted here for brevity:

```

/* format_mode --- turn a stat mode field into something readable */

static char *
format_mode(unsigned long fmode)
{
    ...
}

```

Next comes a function for reading symbolic links, which is also omitted here for brevity:

```

/* read_symlink --- read a symbolic link into an allocated buffer.
... */

static char *
read_symlink(const char *fname, size_t bufsize, ssize_t *linksize)
{
    ...
}

```

Two helper functions simplify entering values in the array that will contain the result of the `stat()`:

```

/* array_set --- set an array element */

static void
array_set(awk_array_t array, const char *sub, awk_value_t *value)
{
    awk_value_t index;

    set_array_element(array,
                      make_const_string(sub, strlen(sub), & index),
                      value);
}

/* array_set_numeric --- set an array element with a number */

static void

```

```

array_set_numeric(awk_array_t array, const char *sub, double num)
{
    awk_value_t tmp;

    array_set(array, sub, make_number(num, & tmp));
}

```

The following function does most of the work to fill in the `awk_array_t` result array with values obtained from a valid `struct stat`. This work is done in a separate function to support the `stat()` function for `gawk` and also to support the `fts()` extension, which is included in the same file but whose code is not shown here (see [Section 16.7.1 \[File-Related Functions\]](#), page 400).

The first part of the function is variable declarations, including a table to map file types to strings:

```

/* fill_stat_array --- do the work to fill an array with stat info */

static int
fill_stat_array(const char *name, awk_array_t array, struct stat *sbuf)
{
    char *pmode;    /* printable mode */
    const char *type = "unknown";
    awk_value_t tmp;
    static struct ftype_map {
        unsigned int mask;
        const char *type;
    } ftype_map[] = {
        { S_IFREG, "file" },
        { S_IFBLK, "blockdev" },
        { S_IFCHR, "chardev" },
        { S_IFDIR, "directory" },
#ifdef S_IFSOCK
        { S_IFSOCK, "socket" },
#endif
#ifdef S_IFIFO
        { S_IFIFO, "fifo" },
#endif
#ifdef S_IFLNK
        { S_IFLNK, "symlink" },
#endif
#ifdef S_IFDOOR /* Solaris weirdness */
        { S_IFDOOR, "door" },
#endif /* S_IFDOOR */
    };
    int j, k;

```

The destination array is cleared, and then code fills in various elements based on values in the `struct stat`:

```

/* empty out the array */

```

```

clear_array(array);

/* fill in the array */
array_set(array, "name", make_const_string(name, strlen(name),
                                           & tmp));
array_set_numeric(array, "dev", sbuf->st_dev);
array_set_numeric(array, "ino", sbuf->st_ino);
array_set_numeric(array, "mode", sbuf->st_mode);
array_set_numeric(array, "nlink", sbuf->st_nlink);
array_set_numeric(array, "uid", sbuf->st_uid);
array_set_numeric(array, "gid", sbuf->st_gid);
array_set_numeric(array, "size", sbuf->st_size);
array_set_numeric(array, "blocks", sbuf->st_blocks);
array_set_numeric(array, "atime", sbuf->st_atime);
array_set_numeric(array, "mtime", sbuf->st_mtime);
array_set_numeric(array, "ctime", sbuf->st_ctime);

/* for block and character devices, add rdev,
   major and minor numbers */
if (S_ISBLK(sbuf->st_mode) || S_ISCHR(sbuf->st_mode)) {
    array_set_numeric(array, "rdev", sbuf->st_rdev);
    array_set_numeric(array, "major", major(sbuf->st_rdev));
    array_set_numeric(array, "minor", minor(sbuf->st_rdev));
}

```

The latter part of the function makes selective additions to the destination array, depending upon the availability of certain members and/or the type of the file. It then returns zero, for success:

```

#ifdef HAVE_STRUCT_STAT_ST_BLKSIZE
    array_set_numeric(array, "blksize", sbuf->st_blksize);
#endif /* HAVE_STRUCT_STAT_ST_BLKSIZE */

pmode = format_mode(sbuf->st_mode);
array_set(array, "pmode", make_const_string(pmode, strlen(pmode),
                                           & tmp));

/* for symbolic links, add a linkval field */
if (S_ISLNK(sbuf->st_mode)) {
    char *buf;
    ssize_t linksize;

    if ((buf = read_symlink(name, sbuf->st_size,
                           & linksize)) != NULL)
        array_set(array, "linkval",
                  make_malloced_string(buf, linksize, & tmp));
    else
        warning(ext_id, _("stat: unable to read symbolic link '%s'"),

```

```

        name);
    }

    /* add a type field */
    type = "unknown"; /* shouldn't happen */
    for (j = 0, k = sizeof(ftype_map)/sizeof(ftype_map[0]); j < k; j++) {
        if ((sbuf->st_mode & S_IFMT) == ftype_map[j].mask) {
            type = ftype_map[j].type;
            break;
        }
    }

    array_set(array, "type", make_const_string(type, strlen(type), & tmp));

    return 0;
}

```

The third argument to `stat()` was not discussed previously. This argument is optional. If present, it causes `do_stat()` to use the `stat()` system call instead of the `lstat()` system call. This is done by using a function pointer: `statfunc`. `statfunc` is initialized to point to `lstat()` (instead of `stat()`) to get the file information, in case the file is a symbolic link. However, if the third argument is included, `statfunc` is set to point to `stat()`, instead.

Here is the `do_stat()` function, which starts with variable declarations and argument checking:

```

/* do_stat --- provide a stat() function for gawk */

static awk_value_t *
do_stat(int nargs, awk_value_t *result)
{
    awk_value_t file_param, array_param;
    char *name;
    awk_array_t array;
    int ret;
    struct stat sbuf;
    /* default is lstat() */
    int (*statfunc)(const char *path, struct stat *sbuf) = lstat;

    assert(result != NULL);

    if (nargs != 2 && nargs != 3) {
        if (do_lint)
            lintwarn(ext_id,
                _("stat: called with wrong number of arguments"));
        return make_number(-1, result);
    }
}

```

Then comes the actual work. First, the function gets the arguments. Next, it gets the information for the file. If the called function (`lstat()` or `stat()`) returns an error, the code sets `ERRNO` and returns:

```
/* file is first arg, array to hold results is second */
if ( ! get_argument(0, AWK_STRING, & file_param)
    || ! get_argument(1, AWK_ARRAY, & array_param)) {
    warning(ext_id, _("stat: bad parameters"));
    return make_number(-1, result);
}

if (nargs == 3) {
    statfunc = stat;
}

name = file_param.str_value.str;
array = array_param.array_cookie;

/* always empty out the array */
clear_array(array);

/* stat the file; if error, set ERRNO and return */
ret = statfunc(name, & sbuf);
if (ret < 0) {
    update_ERRNO_int(errno);
    return make_number(ret, result);
}
```

The tedious work is done by `fill_stat_array()`, shown earlier. When done, the function returns the result from `fill_stat_array()`:

```
ret = fill_stat_array(name, array, & sbuf);

return make_number(ret, result);
}
```

Finally, it's necessary to provide the “glue” that loads the new function(s) into **gawk**.

The `filefuncs` extension also provides an `fts()` function, which we omit here (see [Section 16.7.1 \[File-Related Functions\]](#), page 400). For its sake, there is an initialization function:

```
/* init_filefuncs --- initialization routine */

static awk_bool_t
init_filefuncs(void)
{
    ...
}
```

We are almost done. We need an array of `awk_ext_func_t` structures for loading each function into **gawk**:


```
static awk_ext_func_t func_table[] = {
    { "chdir", do_chdir, 1 },
    { "stat",  do_stat,  2 },
#ifdef __MINGW32__
    { "fts",   do_fts,   3 },
#endif
};
```

Each extension must have a routine named `dl_load()` to load everything that needs to be loaded. It is simplest to use the `dl_load_func()` macro in `gawkapi.h`:

```
/* define the dl_load() function using the boilerplate macro */
```

```
dl_load_func(func_table, filefuncs, "")
```

And that's it!

16.6.3 Integrating the Extensions

Now that the code is written, it must be possible to add it at runtime to the running `gawk` interpreter. First, the code must be compiled. Assuming that the functions are in a file named `filefuncs.c`, and `idir` is the location of the `gawkapi.h` header file, the following steps⁹ create a GNU/Linux shared library:

```
$ gcc -fPIC -shared -DHAVE_CONFIG_H -c -O -g -Iidir filefuncs.c
$ gcc -o filefuncs.so -shared filefuncs.o
```

Once the library exists, it is loaded by using the `@load` keyword:

```
# file testff.awk
@load "filefuncs"

BEGIN {
    "pwd" | getline curdir # save current directory
    close("pwd")

    chdir("/tmp")
    system("pwd") # test it
    chdir(curdir) # go back

    print "Info for testff.awk"
    ret = stat("testff.awk", data)
    print "ret =", ret
    for (i in data)
        printf "data[\"%s\"] = %s\n", i, data[i]
    print "testff.awk modified:",
        strftime("%m %d %Y %H:%M:%S", data["mtime"])

    print "\nInfo for JUNK"
```

⁹ In practice, you would probably want to use the GNU Autotools (Automake, Autoconf, Libtool, and `gettext`) to configure and build your libraries. Instructions for doing so are beyond the scope of this book. See [Section 16.8 \[The gawkextlib Project\]](#), page 409, for Internet links to the tools.

```

    ret = stat("JUNK", data)
    print "ret =", ret
    for (i in data)
        printf "data[\"%s\"] = %s\n", i, data[i]
    print "JUNK modified:", strftime("%m %d %Y %H:%M:%S", data["mtime"])
}

```

The `AWKLIBPATH` environment variable tells `gawk` where to find extensions (see [Section 16.5 \[How gawk Finds Extensions\]](#), page 390). We set it to the current directory and run the program:

```

$ AWKLIBPATH=$PWD gawk -f testff.awk
+ /tmp
+ Info for testff.awk
+ ret = 0
+ data["blksize"] = 4096
+ data["devbsize"] = 512
+ data["mtime"] = 1412004710
+ data["mode"] = 33204
+ data["type"] = file
+ data["dev"] = 2053
+ data["gid"] = 1000
+ data["ino"] = 10358899
+ data["ctime"] = 1412004710
+ data["blocks"] = 8
+ data["nlink"] = 1
+ data["name"] = testff.awk
+ data["atime"] = 1412004716
+ data["pmode"] = -rw-rw-r--
+ data["size"] = 666
+ data["uid"] = 1000
+ testff.awk modified: 09 29 2014 18:31:50
+
+ Info for JUNK
+ ret = -1
+ JUNK modified: 01 01 1970 02:00:00

```

16.7 The Sample Extensions in the gawk Distribution

This section provides a brief overview of the sample extensions that come in the `gawk` distribution. Some of them are intended for production use (e.g., the `filefuncs`, `readdir`, and `inplace` extensions). Others mainly provide example code that shows how to use the extension API.

16.7.1 File-Related Functions

The `filefuncs` extension provides three different functions, as follows. The usage is:

```
@load "filefuncs"
```

This is how you load the extension.

```
result = chdir("/some/directory")
```

The `chdir()` function is a direct hook to the `chdir()` system call to change the current directory. It returns zero upon success or a value less than zero upon error. In the latter case, it updates `ERRNO`.

```
result = stat("/some/path", statdata [, follow])
```

The `stat()` function provides a hook into the `stat()` system call. It returns zero upon success or a value less than zero upon error. In the latter case, it updates `ERRNO`.

By default, it uses the `lstat()` system call. However, if passed a third argument, it uses `stat()` instead.

In all cases, it clears the `statdata` array. When the call is successful, `stat()` fills the `statdata` array with information retrieved from the filesystem, as follows:

Subscript	Field in struct stat	File type
"name"	The file name	All
"dev"	st_dev	All
"ino"	st_ino	All
"mode"	st_mode	All
"nlink"	st_nlink	All
"uid"	st_uid	All
"gid"	st_gid	All
"size"	st_size	All
"atime"	st_atime	All
"mtime"	st_mtime	All
"ctime"	st_ctime	All
"rdev"	st_rdev	Device files
"major"	st_major	Device files
"minor"	st_minor	Device files
"blksize"	st_blksize	All
"pmode"	A human-readable version of the mode value, like that printed by <code>ls</code> (for example, <code>"-rwxr-xr-x"</code>)	All
"linkval"	The value of the symbolic link	Symbolic links
"type"	The type of the file as a string—one of "file", "blockdev", "chardev", "directory", "socket", "fifo", "symlink", "door", or "unknown" (not all systems support all file types)	All

```
flags = or(FTS_PHYSICAL, ...)
```

```
result = fts(pathlist, flags, filedata)
```

Walk the file trees provided in `pathlist` and fill in the `filedata` array, as described next. `flags` is the bitwise OR of several predefined values, also described in a moment. Return zero if there were no errors, otherwise return `-1`.

The `fts()` function provides a hook to the C library `fts()` routines for traversing file hierarchies. Instead of returning data about one file at a time in a stream, it fills in a multidimensional array with data about each file and directory encountered in the requested hierarchies.

The arguments are as follows:

pathlist An array of file names. The element values are used; the index values are ignored.

flags This should be the bitwise OR of one or more of the following predefined constant flag values. At least one of `FTS_LOGICAL` or `FTS_PHYSICAL` must be provided; otherwise `fts()` returns an error value and sets `ERRNO`. The flags are:

FTS_LOGICAL

Do a “logical” file traversal, where the information returned for a symbolic link refers to the linked-to file, and not to the symbolic link itself. This flag is mutually exclusive with `FTS_PHYSICAL`.

FTS_PHYSICAL

Do a “physical” file traversal, where the information returned for a symbolic link refers to the symbolic link itself. This flag is mutually exclusive with `FTS_LOGICAL`.

FTS_NOCHDIR

As a performance optimization, the C library `fts()` routines change directory as they traverse a file hierarchy. This flag disables that optimization.

FTS_COMFOLLOW

Immediately follow a symbolic link named in `pathlist`, whether or not `FTS_LOGICAL` is set.

FTS_SEEDOT

By default, the C library `fts()` routines do not return entries for `.` (dot) and `..` (dot-dot). This option causes entries for dot-dot to also be included. (The extension always includes an entry for dot; more on this in a moment.)

FTS_XDEV During a traversal, do not cross onto a different mounted filesystem.

filedata The `filedata` array holds the results. `fts()` first clears it. Then it creates an element in `filedata` for every element in `pathlist`. The index is the name of the directory or file given in `pathlist`. The element for this index is itself an array. There are two cases:

The path is a file

In this case, the array contains two or three elements:

"path" The full path to this file, starting from the “root” that was given in the `pathlist` array.

"stat" This element is itself an array, containing the same information as provided by the `stat()` function described

earlier for its `statdata` argument. The element may not be present if the `stat()` system call for the file failed.

"error" If some kind of error was encountered, the array will also contain an element named **"error"**, which is a string describing the error.

The path is a directory

In this case, the array contains one element for each entry in the directory. If an entry is a file, that element is the same as for files, just described. If the entry is a directory, that element is (recursively) an array describing the subdirectory. If `FTS_SEEDOT` was provided in the flags, then there will also be an element named `".."`. This element will be an array containing the data as provided by `stat()`.

In addition, there will be an element whose index is `"."`. This element is an array containing the same two or three elements as for a file: `"path"`, `"stat"`, and `"error"`.

The `fts()` function returns zero if there were no errors. Otherwise, it returns `-1`.

NOTE: The `fts()` extension does not exactly mimic the interface of the C library `fts()` routines, choosing instead to provide an interface that is based on associative arrays, which is more comfortable to use from an `awk` program. This includes the lack of a comparison function, because `gawk` already provides powerful array sorting facilities. Although an `fts_read()`-like interface could have been provided, this felt less natural than simply creating a multidimensional array to represent the file hierarchy and its information.

See `test/fts.awk` in the `gawk` distribution for an example use of the `fts()` extension function.

16.7.2 Interface to `fnmatch()`

This extension provides an interface to the C library `fnmatch()` function. The usage is:

```
@load "fnmatch"
```

This is how you load the extension.

```
result = fnmatch(pattern, string, flags)
```

The return value is zero on success, `FNM_NOMATCH` if the string did not match the pattern, or a different nonzero value if an error occurred.

In addition to the `fnmatch()` function, the `fnmatch` extension adds one constant (`FNM_NOMATCH`), and an array of flag values named `FNM`.

The arguments to `fnmatch()` are:

pattern	The file name wildcard to match
string	The file name string
flag	Either zero, or the bitwise OR of one or more of the flags in the <code>FNM</code> array

The flags are as follows:

Array element	Corresponding flag defined by <code>fnmatch()</code>
<code>FNM["CASEFOLD"]</code>	<code>FNM_CASEFOLD</code>
<code>FNM["FILE_NAME"]</code>	<code>FNM_FILE_NAME</code>
<code>FNM["LEADING_DIR"]</code>	<code>FNM_LEADING_DIR</code>
<code>FNM["NOESCAPE"]</code>	<code>FNM_NOESCAPE</code>
<code>FNM["PATHNAME"]</code>	<code>FNM_PATHNAME</code>
<code>FNM["PERIOD"]</code>	<code>FNM_PERIOD</code>

Here is an example:

```
@load "fnmatch"
...
flags = or(FNM["PERIOD"], FNM["NOESCAPE"])
if (fnmatch("*.a", "foo.c", flags) == FNM_NOMATCH)
    print "no match"
```

16.7.3 Interface to `fork()`, `wait()`, and `waitpid()`

The `fork` extension adds three functions, as follows:

```
@load "fork"
```

This is how you load the extension.

```
pid = fork()
```

This function creates a new process. The return value is zero in the child and the process ID number of the child in the parent, or `-1` upon error. In the latter case, `ERRNO` indicates the problem. In the child, `PROCINFO["pid"]` and `PROCINFO["ppid"]` are updated to reflect the correct values.

```
ret = waitpid(pid)
```

This function takes a numeric argument, which is the process ID to wait for. The return value is that of the `waitpid()` system call.

```
ret = wait()
```

This function waits for the first child to die. The return value is that of the `wait()` system call.

There is no corresponding `exec()` function.

Here is an example:

```
@load "fork"
...
if ((pid = fork()) == 0)
    print "hello from the child"
else
    print "hello from the parent"
```

16.7.4 Enabling In-Place File Editing

The `inplace` extension emulates GNU `sed`'s `-i` option, which performs “in-place” editing of each input file. It uses the bundled `inplace.awk` include file to invoke the extension properly:

```

# inplace --- load and invoke the inplace extension.

@load "inplace"

# Please set INPLACE_SUFFIX to make a backup copy.  For example, you may
# want to set INPLACE_SUFFIX to .bak on the command line or in a BEGIN rule.

# By default, each filename on the command line will be edited inplace.
# But you can selectively disable this by adding an inplace=0 argument
# prior to files that you do not want to process this way.  You can then
# reenoble it later on the commandline by putting inplace=1 before files
# that you wish to be subject to inplace editing.

# N.B. We call inplace_end() in the BEGINFILE and END rules so that any
# actions in an ENDFILE rule will be redirected as expected.

BEGIN {
    inplace = 1 # enabled by default
}

BEGINFILE {
    if (_inplace_filename != "")
        inplace_end(_inplace_filename, INPLACE_SUFFIX)
    if (inplace)
        inplace_begin(_inplace_filename = FILENAME, INPLACE_SUFFIX)
    else
        _inplace_filename = ""
}

END {
    if (_inplace_filename != "")
        inplace_end(_inplace_filename, INPLACE_SUFFIX)
}

```

For each regular file that is processed, the extension redirects standard output to a temporary file configured to have the same owner and permissions as the original. After the file has been processed, the extension restores standard output to its original destination. If `INPLACE_SUFFIX` is not an empty string, the original file is linked to a backup file name created by appending that suffix. Finally, the temporary file is renamed to the original file name.

Note that the use of this feature can be controlled by placing `'inplace=0'` on the command-line prior to listing files that should not be processed this way. You can reenoble inplace editing by adding an `'inplace=1'` argument prior to files that should be subject to inplace editing.

The `_inplace_filename` variable serves to keep track of the current filename so as to not invoke `inplace_end()` before processing the first file.

If any error occurs, the extension issues a fatal error to terminate processing immediately without damaging the original file.

Here are some simple examples:

```
$ gawk -i inplace '{ gsub(/foo/, "bar") }; { print }' file1 file2 file3
```

To keep a backup copy of the original files, try this:

```
$ gawk -i inplace -v INPLACE_SUFFIX=.bak '{ gsub(/foo/, "bar") }
> { print }' file1 file2 file3
```

Please note that, while the extension does attempt to preserve ownership and permissions, it makes no attempt to copy the ACLs from the original file.

If the program dies prematurely, as might happen if an unhandled signal is received, a temporary file may be left behind.

16.7.5 Character and Numeric values: `ord()` and `chr()`

The `ordchr` extension adds two functions, named `ord()` and `chr()`, as follows:

```
@load "ordchr"
```

This is how you load the extension.

```
number = ord(string)
```

Return the numeric value of the first character in `string`.

```
char = chr(number)
```

Return a string whose first character is that represented by `number`.

These functions are inspired by the Pascal language functions of the same name. Here is an example:

```
@load "ordchr"
...
printf("The numeric value of 'A' is %d\n", ord("A"))
printf("The string value of 65 is %s\n", chr(65))
```

16.7.6 Reading Directories

The `readdir` extension adds an input parser for directories. The usage is as follows:

```
@load "readdir"
```

When this extension is in use, instead of skipping directories named on the command line (or with `getline`), they are read, with each entry returned as a record.

The record consists of three fields. The first two are the inode number and the file name, separated by a forward slash character. On systems where the directory entry contains the file type, the record has a third field (also separated by a slash), which is a single letter indicating the type of the file. The letters and their corresponding file types are shown in [Table 16.3](#).

Letter	File type
b	Block device
c	Character device
d	Directory
f	Regular file
l	Symbolic link
p	Named pipe (FIFO)
s	Socket
u	Anything else (unknown)

Table 16.3: File types returned by the `readdir` extension

On systems without the file type information, the third field is always ‘u’.

NOTE: On GNU/Linux systems, there are filesystems that don’t support the `d_type` entry (see the `readdir(3)` manual page), and so the file type is always ‘u’. You can use the `filefuncs` extension to call `stat()` in order to get correct type information.

Here is an example:

```
@load "readdir"
...
BEGIN { FS = "/" }
{ print "file name is", $2 }
```

16.7.7 Reversing Output

The `revoutput` extension adds a simple output wrapper that reverses the characters in each output line. Its main purpose is to show how to write an output wrapper, although it may be mildly amusing for the unwary. Here is an example:

```
@load "revoutput"

BEGIN {
    REVOUT = 1
    print "don't panic" > "/dev/stdout"
}
```

The output from this program is ‘cinap t’nod’.

16.7.8 Two-Way I/O Example

The `revtwoway` extension adds a simple two-way processor that reverses the characters in each line sent to it for reading back by the `awk` program. Its main purpose is to show how to write a two-way processor, although it may also be mildly amusing. The following example shows how to use it:

```
@load "revtwoway"

BEGIN {
    cmd = "/magic/mirror"
```

```

    print "don't panic" |& cmd
    cmd |& getline result
    print result
    close(cmd)
}

```

The output from this program also is: ‘cinap t’nod’.

16.7.9 Dumping and Restoring an Array

The `rwarray` extension adds two functions, named `writea()` and `reada()`, as follows:

```
@load "rwarray"
```

This is how you load the extension.

```
ret = writea(file, array)
```

This function takes a string argument, which is the name of the file to which to dump the array, and the array itself as the second argument. `writea()` understands arrays of arrays. It returns one on success, or zero upon failure.

```
ret = reada(file, array)
```

`reada()` is the inverse of `writea()`; it reads the file named as its first argument, filling in the array named as the second argument. It clears the array first. Here too, the return value is one on success, or zero upon failure.

The array created by `reada()` is identical to that written by `writea()` in the sense that the contents are the same. However, due to implementation issues, the array traversal order of the re-created array is likely to be different from that of the original array. As array traversal order in `awk` is by default undefined, this is (technically) not a problem. If you need to guarantee a particular traversal order, use the array sorting features in `gawk` to do so (see [Section 12.2 \[Controlling Array Traversal and Array Sorting\]](#), page 302).

The file contains binary data. All integral values are written in network byte order. However, double-precision floating-point values are written as native binary data. Thus, arrays containing only string data can theoretically be dumped on systems with one byte order and restored on systems with a different one, but this has not been tried.

Here is an example:

```

@load "rwarray"
...
ret = writea("arraydump.bin", array)
...
ret = reada("arraydump.bin", array)

```

16.7.10 Reading an Entire File

The `readfile` extension adds a single function named `readfile()`, and an input parser:

```
@load "readfile"
```

This is how you load the extension.

```
result = readfile("/some/path")
```

The argument is the name of the file to read. The return value is a string containing the entire contents of the requested file. Upon error, the function returns the empty string and sets `ERRNO`.

```
BEGIN { PROCINFO["readfile"] = 1 }
```

In addition, the extension adds an input parser that is activated if `PROCINFO["readfile"]` exists. When activated, each input file is returned in its entirety as `$0`. `RT` is set to the null string.

Here is an example:

```
@load "readfile"
...
contents = readfile("/path/to/file");
if (contents == "" && ERRNO != "") {
    print("problem reading file", ERRNO) > "/dev/stderr"
    ...
}
```

16.7.11 Extension Time Functions

The `time` extension adds two functions, named `gettimeofday()` and `sleep()`, as follows:

```
@load "time"
```

This is how you load the extension.

```
the_time = gettimeofday()
```

Return the time in seconds that has elapsed since 1970-01-01 UTC as a floating-point value. If the time is unavailable on this platform, return `-1` and set `ERRNO`. The returned time should have sub-second precision, but the actual precision may vary based on the platform. If the standard C `gettimeofday()` system call is available on this platform, then it simply returns the value. Otherwise, if on MS-Windows, it tries to use `GetSystemTimeAsFileTime()`.

```
result = sleep(seconds)
```

Attempt to sleep for *seconds* seconds. If *seconds* is negative, or the attempt to sleep fails, return `-1` and set `ERRNO`. Otherwise, return zero after sleeping for the indicated amount of time. Note that *seconds* may be a floating-point (non-integral) value. Implementation details: depending on platform availability, this function tries to use `nanosleep()` or `select()` to implement the delay.

16.7.12 API Tests

The `testtext` extension exercises parts of the extension API that are not tested by the other samples. The `extension/testtext.c` file contains both the C code for the extension and `awk` test code inside C comments that run the tests. The testing framework extracts the `awk` code and runs the tests. See the source file for more information.

16.8 The gawkextlib Project

The `gawkextlib` project provides a number of `gawk` extensions, including one for processing XML files. This is the evolution of the original `xgawk` (XML `gawk`) project.

As of this writing, there are seven extensions:

- `errno` extension
- GD graphics library extension

- PDF extension
- PostgreSQL extension
- MPFR library extension (this provides access to a number of MPFR functions that `gawk`'s native MPFR support does not)
- Redis extension
- XML parser extension, using the `Expat` XML parsing library

You can check out the code for the `gawkextlib` project using the `Git` distributed source code control system. The command is as follows:

```
git clone git://git.code.sf.net/p/gawkextlib/code gawkextlib-code
```

You will need to have the `Expat` XML parser library installed in order to build and use the XML extension.

In addition, you must have the GNU Autotools installed (`Autoconf`, `Automake`, `Libtool`, and `GNU gettext`).

The simple recipe for building and testing `gawkextlib` is as follows. First, build and install `gawk`:

```
cd ../path/to/gawk/code
./configure --prefix=/tmp/newgawk      Install in /tmp/newgawk for now
make && make check                     Build and check that all is OK
make install                           Install gawk
```

Next, go to <http://sourceforge.net/projects/gawkextlib/files> to download `gawkextlib` and any extensions that you would like to build. The `README` file at that site explains how to build the code. If you installed `gawk` in a non-standard location, you will need to specify `./configure --with-gawk=/path/to/gawk` to find it. You may need to use the `sudo` utility to install both `gawk` and `gawkextlib`, depending upon how your system works.

If you write an extension that you wish to share with other `gawk` users, consider doing so through the `gawkextlib` project. See the project's website for more information.

16.9 Summary

- You can write extensions (sometimes called plug-ins) for `gawk` in C or C++ using the application programming interface (API) defined by the `gawk` developers.
- Extensions must have a license compatible with the GNU General Public License (GPL), and they must assert that fact by declaring a variable named `plugin_is_GPL_compatible`.
- Communication between `gawk` and an extension is two-way. `gawk` passes a `struct` to the extension that contains various data fields and function pointers. The extension can then call into `gawk` via the supplied function pointers to accomplish certain tasks.
- One of these tasks is to “register” the name and implementation of new `awk`-level functions with `gawk`. The implementation takes the form of a C function pointer with a defined signature. By convention, implementation functions are named `do_XXXX()` for some `awk`-level function `XXXX()`.
- The API is defined in a header file named `gawkapi.h`. You must include a number of standard header files *before* including it in your source file.

- API function pointers are provided for the following kinds of operations:
 - Allocating, reallocating, and releasing memory
 - Registration functions (you may register extension functions, exit callbacks, a version string, input parsers, output wrappers, and two-way processors)
 - Printing fatal, warning, and “lint” warning messages
 - Updating `ERRNO`, or unsetting it
 - Accessing parameters, including converting an undefined parameter into an array
 - Symbol table access (retrieving a global variable, creating one, or changing one)
 - Creating and releasing cached values; this provides an efficient way to use values for multiple variables and can be a big performance win
 - Manipulating arrays (retrieving, adding, deleting, and modifying elements; getting the count of elements in an array; creating a new array; clearing an array; and flattening an array for easy C-style looping over all its indices and elements)
- The API defines a number of standard data types for representing `awk` values, array elements, and arrays.
- The API provides convenience functions for constructing values. It also provides memory management functions to ensure compatibility between memory allocated by `gawk` and memory allocated by an extension.
- *All* memory passed from `gawk` to an extension must be treated as read-only by the extension.
- *All* memory passed from an extension to `gawk` must come from the API’s memory allocation functions. `gawk` takes responsibility for the memory and releases it when appropriate.
- The API provides information about the running version of `gawk` so that an extension can make sure it is compatible with the `gawk` that loaded it.
- It is easiest to start a new extension by copying the boilerplate code described in this chapter. Macros in the `gawkapi.h` header file make this easier to do.
- The `gawk` distribution includes a number of small but useful sample extensions. The `gawkextlib` project includes several more (larger) extensions. If you wish to write an extension and contribute it to the community of `gawk` users, the `gawkextlib` project is the place to do so.

16.10 Exercises

1. Add functions to implement system calls such as `chown()`, `chmod()`, and `umask()` to the file operations extension presented in [Section 16.6.2 \[C Code for `chdir\(\)` and `stat\(\)`\]](#), [page 392](#).
2. Write an input parser that prints a prompt if the input is from a “terminal” device. You can use the `isatty()` function to tell if the input file is a terminal. (Hint: this function is usually expensive to call; try to call it just once.) The content of the prompt should come from a variable settable by `awk`-level code. You can write the prompt to standard error. However, for best results, open a new file descriptor (or file pointer) on `/dev/tty` and print the prompt there, in case standard error has been redirected.

Why is standard error a better choice than standard output for writing the prompt? Which reading mechanism should you replace, the one to get a record, or the one to read raw bytes?

3. (Hard.) How would you provide namespaces in **gawk**, so that the names of functions in different extensions don't conflict with each other? If you come up with a really good scheme, contact the **gawk** maintainer to tell him about it.
4. Write a wrapper script that provides an interface similar to '**sed -i**' for the "inplace" extension presented in [Section 16.7.4 \[Enabling In-Place File Editing\]](#), page 404.

Part IV:

Appendices

Appendix A The Evolution of the `awk` Language

This book describes the GNU implementation of `awk`, which follows the POSIX specification. Many longtime `awk` users learned `awk` programming with the original `awk` implementation in Version 7 Unix. (This implementation was the basis for `awk` in Berkeley Unix, through 4.3-Reno. Subsequent versions of Berkeley Unix, and, for a while, some systems derived from 4.4BSD-Lite, used various versions of `gawk` for their `awk`.) This chapter briefly describes the evolution of the `awk` language, with cross-references to other parts of the book where you can find more information.

A.1 Major Changes Between V7 and SVR3.1

The `awk` language evolved considerably between the release of Version 7 Unix (1978) and the new version that was first made generally available in System V Release 3.1 (1987). This section summarizes the changes, with cross-references to further details:

- The requirement for ‘;’ to separate rules on a line (see [Section 1.6 \[awk Statements Versus Lines\]](#), page 27)
- User-defined functions and the `return` statement (see [Section 9.2 \[User-Defined Functions\]](#), page 200)
- The `delete` statement (see [Section 8.4 \[The delete Statement\]](#), page 168)
- The `do-while` statement (see [Section 7.4.3 \[The do-while Statement\]](#), page 140)
- The built-in functions `atan2()`, `cos()`, `sin()`, `rand()`, and `srand()` (see [Section 9.1.2 \[Numeric Functions\]](#), page 176)
- The built-in functions `gsub()`, `sub()`, and `match()` (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177)
- The built-in functions `close()` and `system()` (see [Section 9.1.4 \[Input/Output Functions\]](#), page 189)
- The `ARGC`, `ARGV`, `FNR`, `RLENGTH`, `RSTART`, and `SUBSEP` predefined variables (see [Section 7.5 \[Predefined Variables\]](#), page 147)
- Assignable `$0` (see [Section 4.4 \[Changing the Contents of a Field\]](#), page 65)
- The conditional expression using the ternary operator ‘?:’ (see [Section 6.3.4 \[Conditional Expressions\]](#), page 125)
- The expression ‘`indx in array`’ outside of `for` statements (see [Section 8.1.2 \[Referring to an Array Element\]](#), page 161)
- The exponentiation operator ‘^’ (see [Section 6.2.1 \[Arithmetic Operators\]](#), page 114) and its assignment operator form ‘^=’ (see [Section 6.2.3 \[Assignment Expressions\]](#), page 116)
- C-compatible operator precedence, which breaks some old `awk` programs (see [Section 6.5 \[Operator Precedence \(How Operators Nest\)\]](#), page 128)
- Regexp as the value of `FS` (see [Section 4.5 \[Specifying How Fields Are Separated\]](#), page 67) and as the third argument to the `split()` function (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177), rather than using only the first character of `FS`
- Dynamic regexps as operands of the ‘~’ and ‘!~’ operators (see [Section 3.6 \[Using Dynamic Regexps\]](#), page 53)

- The escape sequences ‘\b’, ‘\f’, and ‘\r’ (see [Section 3.2 \[Escape Sequences\]](#), page 46)
- Redirection of input for the `getline` function (see [Section 4.9 \[Explicit Input with getline\]](#), page 78)
- Multiple `BEGIN` and `END` rules (see [Section 7.1.4 \[The BEGIN and END Special Patterns\]](#), page 134)
- Multidimensional arrays (see [Section 8.5 \[Multidimensional Arrays\]](#), page 169)

A.2 Changes Between SVR3.1 and SVR4

The System V Release 4 (1989) version of Unix `awk` added these features (some of which originated in `gawk`):

- The `ENVIRON` array (see [Section 7.5 \[Predefined Variables\]](#), page 147)
- Multiple `-f` options on the command line (see [Section 2.2 \[Command-Line Options\]](#), page 31)
- The `-v` option for assigning variables before program execution begins (see [Section 2.2 \[Command-Line Options\]](#), page 31)
- The `--` signal for terminating command-line options
- The ‘\a’, ‘\v’, and ‘\x’ escape sequences (see [Section 3.2 \[Escape Sequences\]](#), page 46)
- A defined return value for the `srand()` built-in function (see [Section 9.1.2 \[Numeric Functions\]](#), page 176)
- The `toupper()` and `tolower()` built-in string functions for case translation (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177)
- A cleaner specification for the ‘%c’ format-control letter in the `printf` function (see [Section 5.5.2 \[Format-Control Letters\]](#), page 93)
- The ability to dynamically pass the field width and precision (“%*.*d”) in the argument list of `printf` and `sprintf()` (see [Section 5.5.2 \[Format-Control Letters\]](#), page 93)
- The use of regexp constants, such as `/foo/`, as expressions, where they are equivalent to using the matching operator, as in ‘\$0 ~ /foo/’ (see [Section 6.1.2 \[Using Regular Expression Constants\]](#), page 109)
- Processing of escape sequences inside command-line variable assignments (see [Section 6.1.3.2 \[Assigning Variables on the Command Line\]](#), page 111)

A.3 Changes Between SVR4 and POSIX `awk`

The POSIX Command Language and Utilities standard for `awk` (1992) introduced the following changes into the language:

- The use of `-W` for implementation-specific options (see [Section 2.2 \[Command-Line Options\]](#), page 31)
- The use of `CONVFMT` for controlling the conversion of numbers to strings (see [Section 6.1.4 \[Conversion of Strings and Numbers\]](#), page 111)
- The concept of a numeric string and tighter comparison rules to go with it (see [Section 6.3.2 \[Variable Typing and Comparison Expressions\]](#), page 120)
- The use of predefined variables as function parameter names is forbidden (see [Section 9.2.1 \[Function Definition Syntax\]](#), page 200)

- More complete documentation of many of the previously undocumented features of the language

In 2012, a number of extensions that had been commonly available for many years were finally added to POSIX. They are:

- The `fflush()` built-in function for flushing buffered output (see Section 9.1.4 [Input/Output Functions], page 189)
- The `nextfile` statement (see Section 7.4.9 [The `nextfile` Statement], page 145)
- The ability to delete all of an array at once with ‘`delete array`’ (see Section 8.4 [The `delete` Statement], page 168)

See Section A.7 [Common Extensions Summary], page 425, for a list of common extensions not permitted by the POSIX standard.

The 2008 POSIX standard can be found online at <http://www.opengroup.org/onlinepubs/9699919799/>.

A.4 Extensions in Brian Kernighan’s `awk`

Brian Kernighan has made his version available via his home page (see Section B.5 [Other Freely Available `awk` Implementations], page 446).

This section describes common extensions that originally appeared in his version of `awk`:

- The ‘`**`’ and ‘`**=`’ operators (see Section 6.2.1 [Arithmetic Operators], page 114, and Section 6.2.3 [Assignment Expressions], page 116)
- The use of `func` as an abbreviation for `function` (see Section 9.2.1 [Function Definition Syntax], page 200)
- The `fflush()` built-in function for flushing buffered output (see Section 9.1.4 [Input/Output Functions], page 189)

See Section A.7 [Common Extensions Summary], page 425, for a full list of the extensions available in his `awk`.

A.5 Extensions in `gawk` Not in POSIX `awk`

The GNU implementation, `gawk`, adds a large number of features. They can all be disabled with either the `--traditional` or `--posix` options (see Section 2.2 [Command-Line Options], page 31).

A number of features have come and gone over the years. This section summarizes the additional features over POSIX `awk` that are in the current version of `gawk`.

- Additional predefined variables:
 - The `ARGIND`, `BINMODE`, `ERRNO`, `FIELDWIDTHS`, `FPAT`, `IGNORECASE`, `LINT`, `PROCINFO`, `RT`, and `TEXTDOMAIN` variables (see Section 7.5 [Predefined Variables], page 147)
- Special files in I/O redirections:
 - The `/dev/stdin`, `/dev/stdout`, `/dev/stderr`, and `/dev/fd/N` special file names (see Section 5.8 [Special File names in `gawk`], page 101)
 - The `/inet`, `/inet4`, and `/inet6` special files for TCP/IP networking using ‘`|&`’ to specify which version of the IP protocol to use (see Section 12.4 [Using `gawk` for Network Programming], page 311)

- Changes and/or additions to the language:
 - The ‘\x’ escape sequence (see [Section 3.2 \[Escape Sequences\]](#), page 46)
 - Full support for both POSIX and GNU regexps (see [Chapter 3 \[Regular Expressions\]](#), page 45)
 - The ability for FS and for the third argument to `split()` to be null strings (see [Section 4.5.3 \[Making Each Character a Separate Field\]](#), page 69)
 - The ability for RS to be a regexp (see [Section 4.1 \[How Input Is Split into Records\]](#), page 59)
 - The ability to use octal and hexadecimal constants in `awk` program source code (see [Section 6.1.1.2 \[Octal and Hexadecimal Numbers\]](#), page 107)
 - The ‘|&’ operator for two-way I/O to a coprocess (see [Section 12.3 \[Two-Way Communications with Another Process\]](#), page 308)
 - Indirect function calls (see [Section 9.3 \[Indirect Function Calls\]](#), page 209)
 - Directories on the command line produce a warning and are skipped (see [Section 4.11 \[Directories on the Command Line\]](#), page 86)
- New keywords:
 - The `BEGINFILE` and `ENDFILE` special patterns (see [Section 7.1.5 \[The BEGINFILE and ENDFILE Special Patterns\]](#), page 135)
 - The `switch` statement (see [Section 7.4.5 \[The switch Statement\]](#), page 141)
- Changes to standard `awk` functions:
 - The optional second argument to `close()` that allows closing one end of a two-way pipe to a coprocess (see [Section 12.3 \[Two-Way Communications with Another Process\]](#), page 308)
 - POSIX compliance for `gsub()` and `sub()` with `--posix`
 - The `length()` function accepts an array argument and returns the number of elements in the array (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177)
 - The optional third argument to the `match()` function for capturing text-matching subexpressions within a regexp (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177)
 - Positional specifiers in `printf` formats for making translations easier (see [Section 13.4.2 \[Rearranging printf Arguments\]](#), page 322)
 - The `split()` function’s additional optional fourth argument, which is an array to hold the text of the field separators (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177)
- Additional functions only in `gawk`:
 - The `gensub()`, `patsplit()`, and `strtonum()` functions for more powerful text manipulation (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177)
 - The `asort()` and `asorti()` functions for sorting arrays (see [Section 12.2 \[Controlling Array Traversal and Array Sorting\]](#), page 302)
 - The `mktime()`, `sysstime()`, and `strftime()` functions for working with time-stamps (see [Section 9.1.5 \[Time Functions\]](#), page 192)

- The `and()`, `compl()`, `lshift()`, `or()`, `rshift()`, and `xor()` functions for bit manipulation (see [Section 9.1.6 \[Bit-Manipulation Functions\]](#), page 197)
- The `isarray()` function to check if a variable is an array or not (see [Section 9.1.7 \[Getting Type Information\]](#), page 199)
- The `bindtextdomain()`, `dcgettext()`, and `dcngettext()` functions for internationalization (see [Section 13.3 \[Internationalizing awk Programs\]](#), page 319)
- Changes and/or additions in the command-line options:
 - The `AWKPATH` environment variable for specifying a path search for the `-f` command-line option (see [Section 2.2 \[Command-Line Options\]](#), page 31)
 - The `AWKLIBPATH` environment variable for specifying a path search for the `-l` command-line option (see [Section 2.2 \[Command-Line Options\]](#), page 31)
 - The `-b`, `-c`, `-C`, `-d`, `-D`, `-e`, `-E`, `-g`, `-h`, `-i`, `-l`, `-L`, `-M`, `-n`, `-N`, `-o`, `-O`, `-p`, `-P`, `-r`, `-S`, `-t`, and `-V` short options. Also, the ability to use GNU-style long-named options that start with `--`, and the `--assign`, `--bignum`, `--characters-as-bytes`, `--copyright`, `--debug`, `--dump-variables`, `--exec`, `--field-separator`, `--file`, `--gen-pot`, `--help`, `--include`, `--lint`, `--lint-old`, `--load`, `--non-decimal-data`, `--optimize`, `--posix`, `--pretty-print`, `--profile`, `--re-interval`, `--sandbox`, `--source`, `--traditional`, `--use-lc-numeric`, and `--version` long options (see [Section 2.2 \[Command-Line Options\]](#), page 31).
- Support for the following obsolete systems was removed from the code and the documentation for `gawk` version 4.0:
 - Amiga
 - Atari
 - BeOS
 - Cray
 - MIPS RiscOS
 - MS-DOS with the Microsoft Compiler
 - MS-Windows with the Microsoft Compiler
 - NeXT
 - SunOS 3.x, Sun 386 (Road Runner)
 - Tandem (non-POSIX)
 - Prestandard VAX C compiler for VAX/VMS
 - GCC for VAX and Alpha has not been tested for a while.
- Support for the following obsolete system was removed from the code for `gawk` version 4.1:
 - Ultrix

A.6 History of gawk Features

This section describes the features in `gawk` over and above those in POSIX `awk`, in the order they were added to `gawk`.

Version 2.10 of `gawk` introduced the following features:

- The `AWKPATH` environment variable for specifying a path search for the `-f` command-line option (see [Section 2.2 \[Command-Line Options\]](#), page 31).

- The IGNORECASE variable and its effects (see [Section 3.8 \[Case Sensitivity in Matching\]](#), page 55).
- The /dev/stdin, /dev/stdout, /dev/stderr and /dev/fd/*N* special file names (see [Section 5.8 \[Special File names in gawk\]](#), page 101).

Version 2.13 of **gawk** introduced the following features:

- The FIELDWIDTHS variable and its effects (see [Section 4.6 \[Reading Fixed-Width Data\]](#), page 72).
- The `system()` and `strftime()` built-in functions for obtaining and printing time-stamps (see [Section 9.1.5 \[Time Functions\]](#), page 192).
- Additional command-line options (see [Section 2.2 \[Command-Line Options\]](#), page 31):
 - The `-W lint` option to provide error and portability checking for both the source code and at runtime.
 - The `-W compat` option to turn off the GNU extensions.
 - The `-W posix` option for full POSIX compliance.

Version 2.14 of **gawk** introduced the following feature:

- The `nextfile` statement for skipping to the next data file (see [Section 7.4.9 \[The nextfile Statement\]](#), page 145).

Version 2.15 of **gawk** introduced the following features:

- New variables (see [Section 7.5 \[Predefined Variables\]](#), page 147):
 - ARGIND, which tracks the movement of FILENAME through ARGV.
 - ERRNO, which contains the system error message when `getline` returns `-1` or `close()` fails.
- The /dev/pid, /dev/ppid, /dev/pgrp, and /dev/user special file names. These have since been removed.
- The ability to delete all of an array at once with ‘`delete array`’ (see [Section 8.4 \[The delete Statement\]](#), page 168).
- Command-line option changes (see [Section 2.2 \[Command-Line Options\]](#), page 31):
 - The ability to use GNU-style long-named options that start with `--`.
 - The `--source` option for mixing command-line and library-file source code.

Version 3.0 of **gawk** introduced the following features:

- New or changed variables:
 - IGNORECASE changed, now applying to string comparison as well as regexp operations (see [Section 3.8 \[Case Sensitivity in Matching\]](#), page 55).
 - RT, which contains the input text that matched RS (see [Section 4.1 \[How Input Is Split into Records\]](#), page 59).
- Full support for both POSIX and GNU regexps (see [Chapter 3 \[Regular Expressions\]](#), page 45).
- The `gensub()` function for more powerful text manipulation (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177).
- The `strftime()` function acquired a default time format, allowing it to be called with no arguments (see [Section 9.1.5 \[Time Functions\]](#), page 192).

- The ability for `FS` and for the third argument to `split()` to be null strings (see [Section 4.5.3 \[Making Each Character a Separate Field\]](#), page 69).
- The ability for `RS` to be a regexp (see [Section 4.1 \[How Input Is Split into Records\]](#), page 59).
- The `next` file statement became `nextfile` (see [Section 7.4.9 \[The nextfile Statement\]](#), page 145).
- The `fflush()` function from BWK `awk` (then at Bell Laboratories; see [Section 9.1.4 \[Input/Output Functions\]](#), page 189).
- New command-line options:
 - The `--lint-old` option to warn about constructs that are not available in the original Version 7 Unix version of `awk` (see [Section A.1 \[Major Changes Between V7 and SVR3.1\]](#), page 415).
 - The `-m` option from BWK `awk`. (Brian was still at Bell Laboratories at the time.) This was later removed from both his `awk` and from `gawk`.
 - The `--re-interval` option to provide interval expressions in regexps (see [Section 3.3 \[Regular Expression Operators\]](#), page 48).
 - The `--traditional` option was added as a better name for `--compat` (see [Section 2.2 \[Command-Line Options\]](#), page 31).
- The use of GNU Autoconf to control the configuration process (see [Section B.2.1 \[Compiling gawk for Unix-Like Systems\]](#), page 435).
- Amiga support. This has since been removed.

Version 3.1 of `gawk` introduced the following features:

- New variables (see [Section 7.5 \[Predefined Variables\]](#), page 147):
 - `BINMODE`, for non-POSIX systems, which allows binary I/O for input and/or output files (see [Section B.3.1.4 \[Using gawk on PC Operating Systems\]](#), page 439).
 - `LINT`, which dynamically controls lint warnings.
 - `PROCINFO`, an array for providing process-related information.
 - `TEXTDOMAIN`, for setting an application's internationalization text domain (see [Chapter 13 \[Internationalization with gawk\]](#), page 317).
- The ability to use octal and hexadecimal constants in `awk` program source code (see [Section 6.1.1.2 \[Octal and Hexadecimal Numbers\]](#), page 107).
- The `'|&'` operator for two-way I/O to a coprocess (see [Section 12.3 \[Two-Way Communications with Another Process\]](#), page 308).
- The `/inet` special files for TCP/IP networking using `'|&'` (see [Section 12.4 \[Using gawk for Network Programming\]](#), page 311).
- The optional second argument to `close()` that allows closing one end of a two-way pipe to a coprocess (see [Section 12.3 \[Two-Way Communications with Another Process\]](#), page 308).
- The optional third argument to the `match()` function for capturing text-matching subexpressions within a regexp (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177).

- Positional specifiers in `printf` formats for making translations easier (see Section 13.4.2 [Rearranging `printf` Arguments], page 322).
- A number of new built-in functions:
 - The `asort()` and `asorti()` functions for sorting arrays (see Section 12.2 [Controlling Array Traversal and Array Sorting], page 302).
 - The `bindtextdomain()`, `dcgettext()` and `dcngettext()` functions for internationalization (see Section 13.3 [Internationalizing `awk` Programs], page 319).
 - The `extension()` function and the ability to add new built-in functions dynamically (see Chapter 16 [Writing Extensions for `gawk`], page 357).
 - The `mktime()` function for creating timestamps (see Section 9.1.5 [Time Functions], page 192).
 - The `and()`, `or()`, `xor()`, `compl()`, `lshift()`, `rshift()`, and `strtonum()` functions (see Section 9.1.6 [Bit-Manipulation Functions], page 197).
- The support for ‘next file’ as two words was removed completely (see Section 7.4.9 [The `nextfile` Statement], page 145).
- Additional command-line options (see Section 2.2 [Command-Line Options], page 31):
 - The `--dump-variables` option to print a list of all global variables.
 - The `--exec` option, for use in CGI scripts.
 - The `--gen-po` command-line option and the use of a leading underscore to mark strings that should be translated (see Section 13.4.1 [Extracting Marked Strings], page 321).
 - The `--non-decimal-data` option to allow non-decimal input data (see Section 12.1 [Allowing Nondecimal Input Data], page 301).
 - The `--profile` option and `pgawk`, the profiling version of `gawk`, for producing execution profiles of `awk` programs (see Section 12.5 [Profiling Your `awk` Programs], page 312).
 - The `--use-lc-numeric` option to force `gawk` to use the locale’s decimal point for parsing input data (see Section 6.1.4 [Conversion of Strings and Numbers], page 111).
- The use of GNU Automake to help in standardizing the configuration process (see Section B.2.1 [Compiling `gawk` for Unix-Like Systems], page 435).
- The use of GNU `gettext` for `gawk`’s own message output (see Section 13.6 [`gawk` Can Speak Your Language], page 325).
- BeOS support. This was later removed.
- Tandem support. This was later removed.
- The Atari port became officially unsupported and was later removed entirely.
- The source code changed to use ISO C standard-style function definitions.
- POSIX compliance for `sub()` and `gsub()` (see Section 9.1.3.1 [More about ‘\’ and ‘&’ with `sub()`, `gsub()`, and `gensub()`], page 186).
- The `length()` function was extended to accept an array argument and return the number of elements in the array (see Section 9.1.3 [String-Manipulation Functions], page 177).

- The `strftime()` function acquired a third argument to enable printing times as UTC (see [Section 9.1.5 \[Time Functions\]](#), page 192).

Version 4.0 of `gawk` introduced the following features:

- Variable additions:
 - `FPAT`, which allows you to specify a regexp that matches the fields, instead of matching the field separator (see [Section 4.7 \[Defining Fields by Content\]](#), page 74).
 - If `PROCINFO["sorted_in"]` exists, `for(iggy in foo)` loops sort the indices before looping over them. The value of this element provides control over how the indices are sorted before the loop traversal starts (see [Section 8.1.6 \[Using Predefined Array Scanning Orders with gawk\]](#), page 164).
 - `PROCINFO["strftime"]`, which holds the default format for `strftime()` (see [Section 9.1.5 \[Time Functions\]](#), page 192).
- The special files `/dev/pid`, `/dev/ppid`, `/dev/pgrp` and `/dev/user` were removed.
- Support for IPv6 was added via the `/inet6` special file. `/inet4` forces IPv4 and `/inet` chooses the system default, which is probably IPv4 (see [Section 12.4 \[Using gawk for Network Programming\]](#), page 311).
- The use of `'\s'` and `'\S'` escape sequences in regular expressions (see [Section 3.7 \[gawk-Specific Regexp Operators\]](#), page 54).
- Interval expressions became part of default regular expressions (see [Section 3.3 \[Regular Expression Operators\]](#), page 48).
- POSIX character classes work even with `--traditional` (see [Section 3.3 \[Regular Expression Operators\]](#), page 48).
- `break` and `continue` became invalid outside a loop, even with `--traditional` (see [Section 7.4.6 \[The break Statement\]](#), page 142, and also see [Section 7.4.7 \[The continue Statement\]](#), page 143).
- `fflush()`, `nextfile`, and `'delete array'` are allowed if `--posix` or `--traditional`, since they are all now part of POSIX.
- An optional third argument to `asort()` and `asorti()`, specifying how to sort (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177).
- The behavior of `fflush()` changed to match BWK `awk` and for POSIX; now both `'fflush()'` and `'fflush("")'` flush all open output redirections (see [Section 9.1.4 \[Input/Output Functions\]](#), page 189).
- The `isarray()` function which distinguishes if an item is an array or not, to make it possible to traverse arrays of arrays (see [Section 9.1.7 \[Getting Type Information\]](#), page 199).
- The `patsplit()` function which gives the same capability as `FPAT`, for splitting (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177).
- An optional fourth argument to the `split()` function, which is an array to hold the values of the separators (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177).
- Arrays of arrays (see [Section 8.6 \[Arrays of Arrays\]](#), page 171).
- The `BEGINFILE` and `ENDFILE` special patterns (see [Section 7.1.5 \[The BEGINFILE and ENDFILE Special Patterns\]](#), page 135).

- Indirect function calls (see [Section 9.3 \[Indirect Function Calls\]](#), page 209).
- `switch` / `case` are enabled by default (see [Section 7.4.5 \[The `switch` Statement\]](#), page 141).
- Command-line option changes (see [Section 2.2 \[Command-Line Options\]](#), page 31):
 - The `-b` and `--characters-as-bytes` options which prevent `gawk` from treating input as a multibyte string.
 - The redundant `--compat`, `--copyleft`, and `--usage` long options were removed.
 - The `--gen-po` option was finally renamed to the correct `--gen-pot`.
 - The `--sandbox` option which disables certain features.
 - All long options acquired corresponding short options, for use in ‘#!’ scripts.
- Directories named on the command line now produce a warning, not a fatal error, unless `--posix` or `--traditional` are used (see [Section 4.11 \[Directories on the Command Line\]](#), page 86).
- The `gawk` internals were rewritten, bringing the `dgawk` debugger and possibly improved performance (see [Chapter 14 \[Debugging `awk` Programs\]](#), page 327).
- Per the GNU Coding Standards, dynamic extensions must now define a global symbol indicating that they are GPL-compatible (see [Section 16.2 \[Extension Licensing\]](#), page 357).
- In POSIX mode, string comparisons use `strcoll()` / `wcscoll()` (see [Section 6.3.2.3 \[String Comparison with POSIX Rules\]](#), page 124).
- The option for raw sockets was removed, since it was never implemented (see [Section 12.4 \[Using `gawk` for Network Programming\]](#), page 311).
- Ranges of the form ‘[d-h]’ are treated as if they were in the C locale, no matter what kind of regexp is being used, and even if `--posix` (see [Section A.8 \[Regexp Ranges and Locales: A Long Sad Story\]](#), page 426).
- Support was removed for the following systems:
 - Atari
 - Amiga
 - BeOS
 - Cray
 - MIPS RiscOS
 - MS-DOS with Microsoft Compiler
 - MS-Windows with Microsoft Compiler
 - NeXT
 - SunOS 3.x, Sun 386 (Road Runner)
 - Tandem (non-POSIX)
 - Prestandard VAX C compiler for VAX/VMS

Version 4.1 of `gawk` introduced the following features:

- Three new arrays: `SYMTAB`, `FUNCTAB`, and `PROCINFO["identifiers"]` (see [Section 7.5.2 \[Built-in Variables That Convey Information\]](#), page 149).

- The three executables `gawk`, `pgawk`, and `dgawk`, were merged into one, named just `gawk`. As a result the command-line options changed.
- Command-line option changes (see [Section 2.2 \[Command-Line Options\]](#), page 31):
 - The `-D` option invokes the debugger.
 - The `-i` and `--include` options load `awk` library files.
 - The `-l` and `--load` options load compiled dynamic extensions.
 - The `-M` and `--bignum` options enable MPFR.
 - The `-o` option only does pretty-printing.
 - The `-p` option is used for profiling.
 - The `-R` option was removed.
- Support for high precision arithmetic with MPFR (see [Chapter 15 \[Arithmetic and Arbitrary-Precision Arithmetic with gawk\]](#), page 343).
- The `and()`, `or()` and `xor()` functions changed to allow any number of arguments, with a minimum of two (see [Section 9.1.6 \[Bit-Manipulation Functions\]](#), page 197).
- The dynamic extension interface was completely redone (see [Chapter 16 \[Writing Extensions for gawk\]](#), page 357).
- Redirected `getline` became allowed inside `BEGINFILE` and `ENDFILE` (see [Section 7.1.5 \[The BEGINFILE and ENDFILE Special Patterns\]](#), page 135).
- The `where` command was added to the debugger (see [Section 14.3.4 \[Working with the Stack\]](#), page 336).
- Support for Ultrix was removed.

A.7 Common Extensions Summary

The following table summarizes the common extensions supported by `gawk`, Brian Kernighan’s `awk`, and `mawk`, the three most widely used freely available versions of `awk` (see [Section B.5 \[Other Freely Available awk Implementations\]](#), page 446).

Feature	BWK <code>awk</code>	<code>mawk</code>	<code>gawk</code>	Now standard
<code>'\x'</code> escape sequence	X	X	X	
FS as null string	X	X	X	
<code>/dev/stdin</code> special file	X	X	X	
<code>/dev/stdout</code> special file	X	X	X	
<code>/dev/stderr</code> special file	X	X	X	
<code>delete</code> without subscript	X	X	X	X
<code>fflush()</code> function	X	X	X	X
<code>length()</code> of an array	X	X	X	
<code>nextfile</code> statement	X	X	X	X
<code>**</code> and <code>**=</code> operators	X		X	
<code>func</code> keyword	X		X	
<code>BINMODE</code> variable		X	X	
RS as regexp		X	X	
Time-related functions		X	X	

A.8 Regexp Ranges and Locales: A Long Sad Story

This section describes the confusing history of ranges within regular expressions and their interactions with locales, and how this affected different versions of **gawk**.

The original Unix tools that worked with regular expressions defined character ranges (such as `[a-z]`) to match any character between the first character in the range and the last character in the range, inclusive. Ordering was based on the numeric value of each character in the machine's native character set. Thus, on ASCII-based systems, `[a-z]` matched all the lowercase letters, and only the lowercase letters, as the numeric values for the letters from 'a' through 'z' were contiguous. (On an EBCDIC system, the range `[a-z]` includes additional nonalphabetic characters as well.)

Almost all introductory Unix literature explained range expressions as working in this fashion, and in particular, would teach that the "correct" way to match lowercase letters was with `[a-z]`, and that `[A-Z]` was the "correct" way to match uppercase letters. And indeed, this was true.¹

The 1992 POSIX standard introduced the idea of locales (see [Section 6.6 \[Where You Are Makes a Difference\]](#), page 129). Because many locales include other letters besides the plain 26 letters of the English alphabet, the POSIX standard added character classes (see [Section 3.4 \[Using Bracket Expressions\]](#), page 50) as a way to match different kinds of characters besides the traditional ones in the ASCII character set.

However, the standard *changed* the interpretation of range expressions. In the "C" and "POSIX" locales, a range expression like `[a-dx-z]` is still equivalent to `[abcdxyz]`, as in ASCII. But outside those locales, the ordering was defined to be based on *collation order*.

What does that mean? In many locales, 'A' and 'a' are both less than 'B'. In other words, these locales sort characters in dictionary order, and `[a-dx-z]` is typically not equivalent to `[abcdxyz]`; instead, it might be equivalent to `[ABCXYabcdxyz]`, for example.

This point needs to be emphasized: much literature teaches that you should use `[a-z]` to match a lowercase character. But on systems with non-ASCII locales, this also matches all of the uppercase characters except 'A' or 'Z'! This was a continuous cause of confusion, even well into the twenty-first century.

To demonstrate these issues, the following example uses the `sub()` function, which does text replacement (see [Section 9.1.3 \[String-Manipulation Functions\]](#), page 177). Here, the intent is to remove trailing uppercase characters:

```
$ echo something1234abc | gawk-3.1.8 '{ sub("[A-Z]*$", ""); print }'
- something1234a
```

This output is unexpected, as the 'bc' at the end of 'something1234abc' should not normally match `[A-Z]*`. This result is due to the locale setting (and thus you may not see it on your system).

Similar considerations apply to other ranges. For example, `["-/]'` is perfectly valid in ASCII, but is not valid in many Unicode locales, such as `en_US.UTF-8`.

Early versions of **gawk** used regexp matching code that was not locale-aware, so ranges had their traditional interpretation.

¹ And Life was good.

When `gawk` switched to using locale-aware regexp matchers, the problems began; especially as both GNU/Linux and commercial Unix vendors started implementing non-ASCII locales, *and making them the default*. Perhaps the most frequently asked question became something like, “Why does ‘[A-Z]’ match lowercase letters?!?”

This situation existed for close to 10 years, if not more, and the `gawk` maintainer grew weary of trying to explain that `gawk` was being nicely standards-compliant, and that the issue was in the user’s locale. During the development of version 4.0, he modified `gawk` to always treat ranges in the original, pre-POSIX fashion, unless `--posix` was used (see [Section 2.2 \[Command-Line Options\]](#), page 31).²

Fortunately, shortly before the final release of `gawk` 4.0, the maintainer learned that the 2008 standard had changed the definition of ranges, such that outside the “C” and “POSIX” locales, the meaning of range expressions was *undefined*.³

By using this lovely technical term, the standard gives license to implementors to implement ranges in whatever way they choose. The `gawk` maintainer chose to apply the pre-POSIX meaning both with the default regexp matching and when `--traditional` or `--posix` are used. In all cases `gawk` remains POSIX-compliant.

A.9 Major Contributors to `gawk`

Always give credit where credit is due.

—Anonymous

This section names the major contributors to `gawk` and/or this book, in approximate chronological order:

- Dr. Alfred V. Aho, Dr. Peter J. Weinberger, and Dr. Brian W. Kernighan, all of Bell Laboratories, designed and implemented Unix `awk`, from which `gawk` gets the majority of its feature set.
- Paul Rubin did the initial design and implementation in 1986, and wrote the first draft (around 40 pages) of this book.
- Jay Fenlason finished the initial implementation.
- Diane Close revised the first draft of this book, bringing it to around 90 pages.
- Richard Stallman helped finish the implementation and the initial draft of this book. He is also the founder of the FSF and the GNU Project.
- John Woods contributed parts of the code (mostly fixes) in the initial version of `gawk`.
- In 1988, David Trueman took over primary maintenance of `gawk`, making it compatible with “new” `awk`, and greatly improving its performance.
- Conrad Kwok, Scott Garfinkle, and Kent Williams did the initial ports to MS-DOS with various versions of MSC.
- Pat Rankin provided the VMS port and its documentation.
- Hal Peterson provided help in porting `gawk` to Cray systems. (This is no longer supported.)

² And thus was born the Campaign for Rational Range Interpretation (or RRI). A number of GNU tools have already implemented this change, or will soon. Thanks to Karl Berry for coining the phrase “Rational Range Interpretation.”

³ See [the standard](#) and [its rationale](#).

- Kai Uwe Rommel provided the initial port to OS/2 and its documentation.
- Michal Jaegermann provided the port to Atari systems and its documentation. (This port is no longer supported.) He continues to provide portability checking, and has done a lot of work to make sure **gawk** works on non-32-bit systems.
- Fred Fish provided the port to Amiga systems and its documentation. (With Fred's sad passing, this is no longer supported.)
- Scott Deifik maintained the MS-DOS port using DJGPP.
- Eli Zaretskii currently maintains the MS-Windows port using MinGW.
- Juan Grigera provided a port to Windows32 systems. (This is no longer supported.)
- For many years, Dr. Darrel Hankerson acted as coordinator for the various ports to different PC platforms and created binary distributions for various PC operating systems. He was also instrumental in keeping the documentation up to date for the various PC platforms.
- Christos Zoulas provided the **extension()** built-in function for dynamically adding new functions. (This was obsoleted at **gawk** 4.1.)
- Jürgen Kahrs contributed the initial version of the TCP/IP networking code and documentation, and motivated the inclusion of the **'|&'** operator.
- Stephen Davies provided the initial port to Tandem systems and its documentation. (However, this is no longer supported.) He was also instrumental in the initial work to integrate the byte-code internals into the **gawk** code base.
- Matthew Woehlke provided improvements for Tandem's POSIX-compliant systems.
- Martin Brown provided the port to BeOS and its documentation. (This is no longer supported.)
- Arno Peters did the initial work to convert **gawk** to use GNU Automake and GNU **gettext**.
- Alan J. Broder provided the initial version of the **asort()** function as well as the code for the optional third argument to the **match()** function.
- Andreas Buening updated the **gawk** port for OS/2.
- Isamu Hasegawa, of IBM in Japan, contributed support for multibyte characters.
- Michael Benzinger contributed the initial code for **switch** statements.
- Patrick T.J. McPhee contributed the code for dynamic loading in Windows32 environments. (This is no longer supported.)
- Anders Wallin helped keep the VMS port going for several years.
- Assaf Gordon contributed the code to implement the **--sandbox** option.
- John Haque made the following contributions:
 - The modifications to convert **gawk** into a byte-code interpreter, including the debugger
 - The addition of true arrays of arrays
 - The additional modifications for support of arbitrary-precision arithmetic
 - The initial text of [Chapter 15 \[Arithmetic and Arbitrary-Precision Arithmetic with **gawk**\]](#), page 343,

- The work to merge the three versions of `gawk` into one, for the 4.1 release
- Improved array internals for arrays indexed by integers
- The improved array sorting features were also driven by John, together with Pat Rankin
- Panos Papadopoulos contributed the original text for [Section 2.7 \[Including Other Files into Your Program\]](#), page 42.
- Efraim Yawitz contributed the original text for [Chapter 14 \[Debugging `awk` Programs\]](#), page 327.
- The development of the extension API first released with `gawk` 4.1 was driven primarily by Arnold Robbins and Andrew Schorr, with notable contributions from the rest of the development team.
- John Malmberg contributed significant improvements to the OpenVMS port and the related documentation.
- Antonio Giovanni Colombo rewrote a number of examples in the early chapters that were severely dated, for which I am incredibly grateful.
- Arnold Robbins has been working on `gawk` since 1988, at first helping David Trueman, and as the primary maintainer since around 1994.

A.10 Summary

- The `awk` language has evolved over time. The first release was with V7 Unix, circa 1978. In 1987, for System V Release 3.1, major additions, including user-defined functions, were made to the language. Additional changes were made for System V Release 4, in 1989. Since then, further minor changes have happened under the auspices of the POSIX standard.
- Brian Kernighan’s `awk` provides a small number of extensions that are implemented in common with other versions of `awk`.
- `gawk` provides a large number of extensions over POSIX `awk`. They can be disabled with either the `--traditional` or `--posix` options.
- The interaction of POSIX locales and regexp matching in `gawk` has been confusing over the years. Today, `gawk` implements Rational Range Interpretation, where ranges of the form ‘`[a-z]`’ match *only* the characters numerically between ‘a’ through ‘z’ in the machine’s native character set. Usually this is ASCII, but it can be EBCDIC on IBM S/390 systems.
- Many people have contributed to `gawk` development over the years. We hope that the list provided in this chapter is complete and gives the appropriate credit where credit is due.

Appendix B Installing gawk

This appendix provides instructions for installing **gawk** on the various platforms that are supported by the developers. The primary developer supports GNU/Linux (and Unix), whereas the other ports are contributed. See [Section B.4 \[Reporting Problems and Bugs\]](#), [page 445](#), for the email addresses of the people who maintain the respective ports.

B.1 The gawk Distribution

This section describes how to get the **gawk** distribution, how to extract it, and then what is in the various files and subdirectories.

B.1.1 Getting the gawk Distribution

There are two ways to get GNU software:

- Copy it from someone else who already has it.
- Retrieve **gawk** from the Internet host `ftp.gnu.org`, in the directory `/gnu/gawk`. Both anonymous `ftp` and `http` access are supported. If you have the `wget` program, you can use a command like the following:

```
wget http://ftp.gnu.org/gnu/gawk/gawk-4.1.4.tar.gz
```

The GNU software archive is mirrored around the world. The up-to-date list of mirror sites is available from [the main FSF website](#). Try to use one of the mirrors; they will be less busy, and you can usually find one closer to your site.

You may also retrieve the **gawk** source code from the official Git repository; for more information see [Section C.2.1 \[Accessing The gawk Git Repository\]](#), [page 451](#).

B.1.2 Extracting the Distribution

gawk is distributed as several `tar` files compressed with different compression programs: `gzip`, `bzip2`, and `xz`. For simplicity, the rest of these instructions assume you are using the one compressed with the GNU Gzip program (`gzip`).

Once you have the distribution (e.g., `gawk-4.1.4.tar.gz`), use `gzip` to expand the file and then use `tar` to extract it. You can use the following pipeline to produce the **gawk** distribution:

```
gzip -d -c gawk-4.1.4.tar.gz | tar -xvpf -
```

On a system with GNU `tar`, you can let `tar` do the decompression for you:

```
tar -xvpzf gawk-4.1.4.tar.gz
```

Extracting the archive creates a directory named `gawk-4.1.4` in the current directory.

The distribution file name is of the form `gawk-V.R.P.tar.gz`. The *V* represents the major version of **gawk**, the *R* represents the current release of version *V*, and the *P* represents a *patch level*, meaning that minor bugs have been fixed in the release. The current patch level is 4, but when retrieving distributions, you should get the version with the highest version, release, and patch level. (Note, however, that patch levels greater than or equal to 70 denote “beta” or nonproduction software; you might not want to retrieve such a version unless you don’t mind experimenting.) If you are not on a Unix or GNU/Linux system, you need to make other arrangements for getting and extracting the **gawk** distribution. You should consult a local expert.

B.1.3 Contents of the `gawk` Distribution

The `gawk` distribution has a number of C source files, documentation files, subdirectories, and files related to the configuration process (see [Section B.2 \[Compiling and Installing `gawk` on Unix-Like Systems\]](#), page 435), as well as several subdirectories related to different non-Unix operating systems:

Various `‘.c’`, `‘.y’`, and `‘.h’` files

These files contain the actual `gawk` source code.

`ABOUT-NLS`

A file containing information about GNU `gettext` and translations.

`AUTHORS`

A file with some information about the authorship of `gawk`. It exists only to satisfy the pedants at the Free Software Foundation.

`README`

`README_d/README.*`

Descriptive files: `README` for `gawk` under Unix and the rest for the various hardware and software combinations.

`INSTALL`

A file providing an overview of the configuration and installation process.

`ChangeLog`

A detailed list of source code changes as bugs are fixed or improvements made.

`ChangeLog.0`

An older list of source code changes.

`NEWS`

A list of changes to `gawk` since the last release or patch.

`NEWS.0`

An older list of changes to `gawk`.

`COPYING`

The GNU General Public License.

`POSIX.STD`

A description of behaviors in the POSIX standard for `awk` that are left undefined, or where `gawk` may not comply fully, as well as a list of things that the POSIX standard should describe but does not.

`doc/awkforai.txt`

Pointers to the original draft of a short article describing why `gawk` is a good language for artificial intelligence (AI) programming.

`doc/bc_notes`

A brief description of `gawk`’s “byte code” internals.

doc/README.card

doc/ad.block

doc/awkcard.in

doc/cardfonts

doc/colors

doc/macros

doc/no.colors

doc/setter.outline

The `troff` source for a five-color `awk` reference card. A modern version of `troff` such as GNU `troff` (`groff`) is needed to produce the color version. See the file `README.card` for instructions if you have an older `troff`.

doc/gawk.1

The `troff` source for a manual page describing `gawk`. This is distributed for the convenience of Unix users.

doc/gawktexi.in

doc/sidebar.awk

The Texinfo source file for this book. It should be processed by `doc/sidebar.awk` before processing with `texi2dvi` or `texi2pdf` to produce a printed document, and with `makeinfo` to produce an Info or HTML file. The Makefile takes care of this processing and produces printable output via `texi2dvi` or `texi2pdf`.

doc/gawk.texi

The file produced after processing `gawktexi.in` with `sidebar.awk`.

doc/gawk.info

The generated Info file for this book.

doc/gawkinet.texi

The Texinfo source file for *TCP/IP Internetworking with gawk*. It should be processed with `TEX` (via `texi2dvi` or `texi2pdf`) to produce a printed document and with `makeinfo` to produce an Info or HTML file.

doc/gawkinet.info

The generated Info file for *TCP/IP Internetworking with gawk*.

doc/igawk.1

The `troff` source for a manual page describing the `igawk` program presented in [Section 11.3.9 \[An Easy Way to Use Library Functions\]](#), page 287.

doc/Makefile.in

The input file used during the configuration process to generate the actual Makefile for creating the documentation.

Makefile.am

*/Makefile.am

Files used by the GNU Automake software for generating the `Makefile.in` files used by Autoconf and `configure`.

Makefile.in
 aclocal.m4
 bisonfix.awk
 config.guess
 configh.in
 configure.ac
 configure
 custom.h
 depcomp
 install-sh
 missing_d/*
 mkinstalldirs

m4/* These files and subdirectories are used when configuring and compiling **gawk** for various Unix systems. Most of them are explained in [Section B.2 \[Compiling and Installing gawk on Unix-Like Systems\]](#), page 435. The rest are there to support the main infrastructure.

po/* The po library contains message translations.

awklib/extract.awk
 awklib/Makefile.am
 awklib/Makefile.in
 awklib/eg/*

The **awklib** directory contains a copy of **extract.awk** (see [Section 11.3.7 \[Extracting Programs from Texinfo Source Files\]](#), page 283), which can be used to extract the sample programs from the Texinfo source file for this book. It also contains a **Makefile.in** file, which **configure** uses to generate a **Makefile**. **Makefile.am** is used by GNU Automake to create **Makefile.in**. The library functions from [Chapter 10 \[A Library of awk Functions\]](#), page 219, and the **igawk** program from [Section 11.3.9 \[An Easy Way to Use Library Functions\]](#), page 287, are included as ready-to-use files in the **gawk** distribution. They are installed as part of the installation process. The rest of the programs in this book are available in appropriate subdirectories of **awklib/eg**.

extension/*

The source code, manual pages, and infrastructure files for the sample extensions included with **gawk**. See [Chapter 16 \[Writing Extensions for gawk\]](#), page 357, for more information.

posix/* Files needed for building **gawk** on POSIX-compliant systems.

pc/* Files needed for building **gawk** under MS-Windows and OS/2 (see [Section B.3.1 \[Installation on PC Operating Systems\]](#), page 437, for details).

vms/* Files needed for building **gawk** under Vax/VMS and OpenVMS (see [Section B.3.2 \[Compiling and Installing gawk on Vax/VMS and OpenVMS\]](#), page 441, for details).

test/* A test suite for **gawk**. You can use ‘**make check**’ from the top-level **gawk** directory to run your version of **gawk** against the test suite. If **gawk** successfully passes ‘**make check**’, then you can be confident of a successful port.

B.2 Compiling and Installing gawk on Unix-Like Systems

Usually, you can compile and install **gawk** by typing only two commands. However, if you use an unusual system, you may need to configure **gawk** for your system yourself.

B.2.1 Compiling gawk for Unix-Like Systems

The normal installation steps should work on all modern commercial Unix-derived systems, GNU/Linux, BSD-based systems, and the Cygwin environment for MS-Windows.

After you have extracted the **gawk** distribution, **cd** to **gawk-4.1.4**. As with most GNU software, you configure **gawk** for your system by running the **configure** program. This program is a Bourne shell script that is generated automatically using GNU Autoconf. (The Autoconf software is described fully in *Autoconf—Generating Automatic Configuration Scripts*, which can be found online at [the Free Software Foundation's website](http://www.gnu.org).)

To configure **gawk**, simply run **configure**:

```
sh ./configure
```

This produces a **Makefile** and **config.h** tailored to your system. The **config.h** file describes various facts about your system. You might want to edit the **Makefile** to change the **CFLAGS** variable, which controls the command-line options that are passed to the C compiler (such as optimization levels or compiling for debugging).

Alternatively, you can add your own values for most **make** variables on the command line, such as **CC** and **CFLAGS**, when running **configure**:

```
CC=cc CFLAGS=-g sh ./configure
```

See the file **INSTALL** in the **gawk** distribution for all the details.

After you have run **configure** and possibly edited the **Makefile**, type:

```
make
```

Shortly thereafter, you should have an executable version of **gawk**. That's all there is to it! To verify that **gawk** is working properly, run **'make check'**. All of the tests should succeed. If these steps do not work, or if any of the tests fail, check the files in the **README_d** directory to see if you've found a known problem. If the failure is not described there, send in a bug report (see [Section B.4 \[Reporting Problems and Bugs\]](#), page 445).

Of course, once you've built **gawk**, it is likely that you will wish to install it. To do so, you need to run the command **'make install'**, as a user with the appropriate permissions. How to do this varies by system, but on many systems you can use the **sudo** command to do so. The command then becomes **'sudo make install'**. It is likely that you will be asked for your password, and you will have to have been set up previously as a user who is allowed to run the **sudo** command.

B.2.2 Additional Configuration Options

There are several additional options you may use on the **configure** command line when compiling **gawk** from scratch, including:

--disable-extensions

Disable configuring and building the sample extensions in the **extension** directory. This is useful for cross-compiling. The default action is to dynamically check if the extensions can be configured and compiled.

--disable-lint

Disable all lint checking within **gawk**. The **--lint** and **--lint-old** options (see [Section 2.2 \[Command-Line Options\]](#), page 31) are accepted, but silently do nothing. Similarly, setting the **LINT** variable (see [Section 7.5.1 \[Built-in Variables That Control awk\]](#), page 147) has no effect on the running **awk** program.

When used with the GNU Compiler Collection's (GCC's) automatic dead-code-elimination, this option cuts almost 23K bytes off the size of the **gawk** executable on GNU/Linux x86_64 systems. Results on other systems and with other compilers are likely to vary. Using this option may bring you some slight performance improvement.

CAUTION: Using this option will cause some of the tests in the test suite to fail. This option may be removed at a later date.

--disable-nls

Disable all message-translation facilities. This is usually not desirable, but it may bring you some slight performance improvement.

--with-whiny-user-strftime

Force use of the included version of the C **strftime()** function for deficient systems.

Use the command **'./configure --help'** to see the full list of options supplied by **configure**.

B.2.3 The Configuration Process

This section is of interest only if you know something about using the C language and Unix-like operating systems.

The source code for **gawk** generally attempts to adhere to formal standards wherever possible. This means that **gawk** uses library routines that are specified by the ISO C standard and by the POSIX operating system interface standard. The **gawk** source code requires using an ISO C compiler (the 1990 standard).

Many Unix systems do not support all of either the ISO or the POSIX standards. The **missing_d** subdirectory in the **gawk** distribution contains replacement versions of those functions that are most likely to be missing.

The **config.h** file that **configure** creates contains definitions that describe features of the particular operating system where you are attempting to compile **gawk**. The three things described by this file are: what header files are available, so that they can be correctly included, what (supposedly) standard functions are actually available in your C libraries, and various miscellaneous facts about your operating system. For example, there may not be an **st_blksize** element in the **stat** structure. In this case, **'HAVE_STRUCT_STAT_ST_BLKSIZE'** is undefined.

It is possible for your C compiler to lie to **configure**. It may do so by not exiting with an error when a library function is not available. To get around this, edit the **custom.h** file. Use an **'#ifdef'** that is appropriate for your system, and either **#define** any constants that **configure** should have defined but didn't, or **#undef** any constants that **configure** defined and should not have. The **custom.h** file is automatically included by the **config.h** file.

It is also possible that the `configure` program generated by Autoconf will not work on your system in some other fashion. If you do have a problem, the `configure.ac` file is the input for Autoconf. You may be able to change this file and generate a new version of `configure` that works on your system (see [Section B.4 \[Reporting Problems and Bugs\]](#), [page 445](#), for information on how to report problems in configuring gawk). The same mechanism may be used to send in updates to `configure.ac` and/or `custom.h`.

B.3 Installation on Other Operating Systems

This section describes how to install gawk on various non-Unix systems.

B.3.1 Installation on PC Operating Systems

This section covers installation and usage of gawk on Intel architecture machines running MS-DOS, any version of MS-Windows, or OS/2. In this section, the term “Windows32” refers to any of Microsoft Windows 95/98/ME/NT/2000/XP/Vista/7/8.

The limitations of MS-DOS (and MS-DOS shells under the other operating systems) have meant that various “DOS extenders” are often used with programs such as gawk. The varying capabilities of Microsoft Windows 3.1 and Windows32 can add to the confusion. For an overview of the considerations, refer to `README_d/README.pc` in the distribution.

B.3.1.1 Installing a Prepared Distribution for PC Systems

If you have received a binary distribution prepared by the MS-DOS maintainers, then gawk and the necessary support files appear under the `gnu` directory, with executables in `gnu/bin`, libraries in `gnu/lib/awk`, and manual pages under `gnu/man`. This is designed for easy installation to a `/gnu` directory on your drive—however, the files can be installed anywhere provided `AWKPATH` is set properly. Regardless of the installation directory, the first line of `igawk.cmd` and `igawk.bat` (in `gnu/bin`) may need to be edited.

The binary distribution contains a separate file describing the contents. In particular, it may include more than one version of the gawk executable.

OS/2 (32 bit, EMX) binary distributions are prepared for the `/usr` directory of your preferred drive. Set `UNIXROOT` to your installation drive (e.g., ‘`e:`’) if you want to install gawk onto another drive than the hardcoded default ‘`c:`’. Executables appear in `/usr/bin`, libraries under `/usr/share/awk`, manual pages under `/usr/man`, Texinfo documentation under `/usr/info`, and NLS files under `/usr/share/locale`. Note that the files can be installed anywhere provided `AWKPATH` is set properly.

If you already have a file `/usr/info/dir` from another package *do not overwrite it!* Instead enter the following commands at your prompt (replace ‘`x:`’ by your installation drive):

```
install-info --info-dir=x:/usr/info x:/usr/info/gawk.info
install-info --info-dir=x:/usr/info x:/usr/info/gawkinet.info
```

The binary distribution may contain a separate file containing additional or more detailed installation instructions.

B.3.1.2 Compiling gawk for PC Operating Systems

gawk can be compiled for MS-DOS, Windows32, and OS/2 using MinGW (Windows32) or Eberhard Mattes (EMX: MS-DOS, Windows32 and OS/2). The file `README_d/README.pc`

in the **gawk** distribution contains additional notes, and **pc/Makefile** contains important information on compilation options.

To build **gawk** for MS-DOS and Windows32, copy the files in the **pc** directory (*except* for **ChangeLog**) to the directory with the rest of the **gawk** sources, then invoke **make** with the appropriate target name as an argument to build **gawk**. The **Makefile** copied from the **pc** directory contains a configuration section with comments and may need to be edited in order to work with your **make** utility.

The **Makefile** supports a number of targets for building various MS-DOS and Windows32 versions. A list of targets is printed if the **make** command is given without a target. As an example, to build a native MS-Windows binary of **gawk** using the MinGW tools, type **'make mingw32'**.

The 32 bit EMX version of **gawk** works “out of the box” under OS/2. However, it is highly recommended to use GCC 2.95.3 for the compilation. In principle, it is possible to compile **gawk** the following way:

```
$ ./configure
$ make
```

This is not recommended, though. To get an OMF executable you should use the following commands at your **sh** prompt:

```
$ CFLAGS="-O2 -Zomf -Zmt"
$ export CFLAGS
$ LDFLAGS="-s -Zcrtldll -Zlinker /exepack:2 -Zlinker /pm:vio -Zstack 0x6000"
$ export LDFLAGS
$ RANLIB="echo"
$ export RANLIB
$ ./configure --prefix=c:/usr
$ make AR=emxomfar
```

These are just suggestions for use with GCC 2.x. You may use any other set of (self-consistent) environment variables and compiler flags.

If you use GCC 2.95 it is recommended to use also:

```
$ LIBS="-lgcc"
$ export LIBS
```

You can also get an **a.out** executable if you prefer:

```
$ CFLAGS="-O2 -Zmt"
$ export CFLAGS
$ LDFLAGS="-s -Zstack 0x6000"
$ LIBS="-lgcc"
$ unset RANLIB
$ ./configure --prefix=c:/usr
$ make
```

NOTE: Compilation of **a.out** executables also works with GCC 3.2. Versions later than GCC 3.2 have not been tested successfully.

'make install' works as expected with the EMX build.

NOTE: Ancient OS/2 ports of GNU **make** are not able to handle the **Makefiles** of this package. If you encounter any problems with **make**, try GNU Make 3.79.1

or later versions. You should find the latest version on <ftp://hobbes.nmsu.edu/pub/os2/>.¹

B.3.1.3 Testing gawk on PC Operating Systems

Using `make` to run the standard tests and to install `gawk` requires additional Unix-like tools, including `sh`, `sed`, and `cp`. In order to run the tests, the `test/*.ok` files may need to be converted so that they have the usual MS-DOS-style end-of-line markers. Alternatively, run `make check CMP="diff -a"` to use GNU `diff` in text mode instead of `cmp` to compare the resulting files.

Most of the tests work properly with Stewartson's shell along with the companion utilities or appropriate GNU utilities. However, some editing of `test/Makefile` is required. It is recommended that you copy the file `pc/Makefile.tst` over the file `test/Makefile` as a replacement. Details can be found in `README_d/README.pc` and in the file `pc/Makefile.tst`.

On OS/2 the `pid` test fails because `spawnl()` is used instead of `fork()/exec1()` to start child processes. Also the `mbfw1` and `mbprintf1` tests fail because the needed multibyte functionality is not available.

B.3.1.4 Using gawk on PC Operating Systems

Under MS-DOS and MS-Windows, the Cygwin and MinGW environments support both the `|&` operator and TCP/IP networking (see [Section 12.4 \[Using gawk for Network Programming\]](#), [page 311](#)). EMX (OS/2 only) supports at least the `|&` operator.

The MS-DOS and MS-Windows versions of `gawk` search for program files as described in [Section 2.5.1 \[The AWKPATH Environment Variable\]](#), [page 39](#). However, semicolons (rather than colons) separate elements in the `AWKPATH` variable. If `AWKPATH` is not set or is empty, then the default search path is `.;c:/lib/awk;c:/gnu/lib/awk`.

The search path for OS/2 (32 bit, EMX) is determined by the prefix directory (most likely `/usr` or `c:/usr`) that has been specified as an option of the `configure` script as is the case for the Unix versions. If `c:/usr` is the prefix directory then the default search path contains `.` and `c:/usr/share/awk`. Additionally, to support binary distributions of `gawk` for OS/2 systems whose drive `c:` might not support long file names or might not exist at all, there is a special environment variable. If `UNIXROOT` specifies a drive then this specific drive is also searched for program files. E.g., if `UNIXROOT` is set to `e:` the complete default search path is `.;c:/usr/share/awk;e:/usr/share/awk`.

An `sh`-like shell (as opposed to `command.com` under MS-DOS or `cmd.exe` under MS-Windows or OS/2) may be useful for `awk` programming. The DJGPP collection of tools² includes an MS-DOS port of Bash, and several shells are available for OS/2, including `ksh`.

Under MS-Windows, OS/2 and MS-DOS, `gawk` (and many other text programs) silently translates end-of-line `\r\n` to `\n` on input and `\n` to `\r\n` on output. A special `BINMODE` variable (c.e.) allows control over these translations and is interpreted as follows:

- If `BINMODE` is `"r"` or one, then binary mode is set on read (i.e., no translations on reads).
- If `BINMODE` is `"w"` or two, then binary mode is set on write (i.e., no translations on writes).

¹ As of November 2014, this site is still there, but the author could not find a package for GNU Make.

² Available from <ftp://ftp.delorie.com/pub/djgpp/current/v2gnu/>.

- If BINMODE is "rw" or "wr" or three, binary mode is set for both read and write.
- BINMODE=*non-null-string* is the same as 'BINMODE=3' (i.e., no translations on reads or writes). However, gawk issues a warning message if the string is not one of "rw" or "wr".

The modes for standard input and standard output are set one time only (after the command line is read, but before processing any of the awk program). Setting BINMODE for standard input or standard output is accomplished by using an appropriate '-v BINMODE=*N*' option on the command line. BINMODE is set at the time a file or pipe is opened and cannot be changed midstream.

The name BINMODE was chosen to match mawk (see [Section B.5 \[Other Freely Available awk Implementations\]](#), page 446). mawk and gawk handle BINMODE similarly; however, mawk adds a '-W BINMODE=*N*' option and an environment variable that can set BINMODE, RS, and ORS. The files binmode[1-3].awk (under gnu/lib/awk in some of the prepared binary distributions) have been chosen to match mawk's '-W BINMODE=*N*' option. These can be changed or discarded; in particular, the setting of RS giving the fewest "surprises" is open to debate. mawk uses 'RS = "\r\n"' if binary mode is set on read, which is appropriate for files with the MS-DOS-style end-of-line.

To illustrate, the following examples set binary mode on writes for standard output and other files, and set ORS as the "usual" MS-DOS-style end-of-line:

```
gawk -v BINMODE=2 -v ORS="\r\n" ...
```

or:

```
gawk -v BINMODE=w -f binmode2.awk ...
```

These give the same result as the '-W BINMODE=2' option in mawk. The following changes the record separator to "\r\n" and sets binary mode on reads, but does not affect the mode on standard input:

```
gawk -v RS="\r\n" -e "BEGIN { BINMODE = 1 }" ...
```

or:

```
gawk -f binmode1.awk ...
```

With proper quoting, in the first example the setting of RS can be moved into the BEGIN rule.

B.3.1.5 Using gawk In The Cygwin Environment

gawk can be built and used "out of the box" under MS-Windows if you are using the [Cygwin environment](#). This environment provides an excellent simulation of GNU/Linux, using Bash, GCC, GNU Make, and other GNU programs. Compilation and installation for Cygwin is the same as for a Unix system:

```
tar -xvpzf gawk-4.1.4.tar.gz
cd gawk-4.1.4
./configure
make && make check
```

When compared to GNU/Linux on the same system, the 'configure' step on Cygwin takes considerably longer. However, it does finish, and then the 'make' proceeds as usual.

B.3.1.6 Using gawk In The MSYS Environment

In the MSYS environment under MS-Windows, **gawk** automatically uses binary mode for reading and writing files. Thus, there is no need to use the `BINMODE` variable.

This can cause problems with other Unix-like components that have been ported to MS-Windows that expect **gawk** to do automatic translation of `"\r\n"`, because it won't.

B.3.2 Compiling and Installing gawk on Vax/VMS and OpenVMS

This subsection describes how to compile and install **gawk** under VMS. The older designation "VMS" is used throughout to refer to OpenVMS.

B.3.2.1 Compiling gawk on VMS

To compile **gawk** under VMS, there is a DCL command procedure that issues all the necessary `CC` and `LINK` commands. There is also a `Makefile` for use with the `MMS` and `MMK` utilities. From the source directory, use either:

```
$ @[.vms]vmsbuild.com
```

or:

```
$ MMS/DESCRIPTION=[.vms]descrip.mms gawk
```

or:

```
$ MMK/DESCRIPTION=[.vms]descrip.mms gawk
```

`MMK` is an open source, free, near-clone of `MMS` and can better handle ODS-5 volumes with upper- and lowercase file names. `MMK` is available from <https://github.com/endlesssoftware/mmk>.

With ODS-5 volumes and extended parsing enabled, the case of the target parameter may need to be exact.

gawk has been tested under VAX/VMS 7.3 and Alpha/VMS 7.3-1 using Compaq C V6.4, and under Alpha/VMS 7.3, Alpha/VMS 7.3-2, and IA64/VMS 8.3. The most recent builds used HP C V7.3 on Alpha VMS 8.3 and both Alpha and IA64 VMS 8.4 used HP C 7.3.³

See [Section B.3.2.5 \[The VMS GNV Project\]](#), page 444, for information on building **gawk** as a PCSI kit that is compatible with the GNV product.

B.3.2.2 Compiling gawk Dynamic Extensions on VMS

The extensions that have been ported to VMS can be built using one of the following commands:

```
$ MMS/DESCRIPTION=[.vms]descrip.mms extensions
```

or:

```
$ MMK/DESCRIPTION=[.vms]descrip.mms extensions
```

gawk uses `AWKLIBPATH` as either an environment variable or a logical name to find the dynamic extensions.

Dynamic extensions need to be compiled with the same compiler options for floating-point, pointer size, and symbol name handling as were used to compile **gawk** itself. Alpha

³ The IA64 architecture is also known as "Itanium."

and Itanium should use IEEE floating point. The pointer size is 32 bits, and the symbol name handling should be exact case with CRC shortening for symbols longer than 32 bits.

For Alpha and Itanium:

```
/name=(as_is,short)
/float=ieee/ieee_mode=denorm_results
```

For VAX:

```
/name=(as_is,short)
```

Compile-time macros need to be defined before the first VMS-supplied header file is included, as follows:

```
#if (__CRTL_VER >= 70200000) && !defined (__VAX)
#define _LARGEFILE 1
#endif

#ifdef __VAX
#ifdef __CRTL_VER
#if __CRTL_VER >= 80200000
#define _USE_STD_STAT 1
#endif
#endif
#endif
```

If you are writing your own extensions to run on VMS, you must supply these definitions yourself. The `config.h` file created when building `gawk` on VMS does this for you; if instead you use that file or a similar one, then you must remember to include it before any VMS-supplied header files.

B.3.2.3 Installing gawk on VMS

To use `gawk`, all you need is a “foreign” command, which is a DCL symbol whose value begins with a dollar sign. For example:

```
$ GAWK := $disk1:[gnubin]gawk
```

Substitute the actual location of `gawk.exe` for ‘`$disk1:[gnubin]`’. The symbol should be placed in the `login.com` of any user who wants to run `gawk`, so that it is defined every time the user logs on. Alternatively, the symbol may be placed in the system-wide `sylogin.com` procedure, which allows all users to run `gawk`.

If your `gawk` was installed by a PCSI kit into the `GNV$GNU:` directory tree, the program will be known as `GNV$GNU:[bin]gnv$gawk.exe` and the help file will be `GNV$GNU:[vms_help]gawk.hlp`.

The PCSI kit also installs a `GNV$GNU:[vms_bin]gawk_verb.cld` file that can be used to add `gawk` and `awk` as DCL commands.

For just the current process you can use:

```
$ set command gnv$gnu:[vms_bin]gawk_verb.cld
```

Or the system manager can use `GNV$GNU:[vms_bin]gawk_verb.cld` to add the `gawk` and `awk` to the system-wide ‘`DCLTABLES`’.

The DCL syntax is documented in the `gawk.hlp` file.

Optionally, the `gawk.hlp` entry can be loaded into a VMS help library:

```
$ LIBRARY/HELP sys$help:helplib [.vms]gawk.hlp
```

(You may want to substitute a site-specific help library rather than the standard VMS library `HELPLIB`.) After loading the help text, the command:

```
$ HELP GAWK
```

provides information about both the `gawk` implementation and the `awk` programming language.

The logical name `AWK_LIBRARY` can designate a default location for `awk` program files. For the `-f` option, if the specified file name has no device or directory path information in it, `gawk` looks in the current directory first, then in the directory specified by the translation of `AWK_LIBRARY` if the file is not found. If, after searching in both directories, the file still is not found, `gawk` appends the suffix `.awk` to the file name and retries the file search. If `AWK_LIBRARY` has no definition, a default value of `SYS$LIBRARY:` is used for it.

B.3.2.4 Running gawk on VMS

Command-line parsing and quoting conventions are significantly different on VMS, so examples in this book or from other sources often need minor changes. They *are* minor though, and all `awk` programs should run correctly.

Here are a couple of trivial tests:

```
$ gawk -- "BEGIN {print \"Hello, World!\"}"
$ gawk -"W" version
! could also be -"W version" or "-W version"
```

Note that uppercase and mixed-case text must be quoted.

The VMS port of `gawk` includes a DCL-style interface in addition to the original shell-style interface (see the help entry for details). One side effect of dual command-line parsing is that if there is only a single parameter (as in the quoted string program), the command becomes ambiguous. To work around this, the normally optional `--` flag is required to force Unix-style parsing rather than DCL parsing. If any other dash-type options (or multiple parameters such as data files to process) are present, there is no ambiguity and `--` can be omitted.

The `exit` value is a Unix-style value and is encoded into a VMS exit status value when the program exits.

The VMS severity bits will be set based on the `exit` value. A failure is indicated by 1, and VMS sets the `ERROR` status. A fatal error is indicated by 2, and VMS sets the `FATAL` status. All other values will have the `SUCCESS` status. The exit value is encoded to comply with VMS coding standards and will have the `C_FACILITY_NO` of `0x350000` with the constant `0xA000` added to the number shifted over by 3 bits to make room for the severity codes.

To extract the actual `gawk` exit code from the VMS status, use:

```
unix_status = (vms_status .and. %x7f8) / 8
```

A C program that uses `exec()` to call `gawk` will get the original Unix-style exit value.

Older versions of `gawk` for VMS treated a Unix exit code 0 as 1, a failure as 2, a fatal error as 4, and passed all the other numbers through. This violated the VMS exit status coding requirements.

VAX/VMS floating point uses unbiased rounding. See [Section 10.2.3 \[Rounding Numbers\]](#), page 224.

VMS reports time values in GMT unless one of the `SYS$TIMEZONE_RULE` or `TZ` logical names is set. Older versions of VMS, such as VAX/VMS 7.3, do not set these logical names.

The default search path, when looking for `awk` program files specified by the `-f` option, is `"SYS$DISK: [], AWK_LIBRARY: "`. The logical name `AWKPATH` can be used to override this default. The format of `AWKPATH` is a comma-separated list of directory specifications. When defining it, the value should be quoted so that it retains a single translation and not a multitranslation RMS searchlist.

This restriction also applies to running `gawk` under GNV, as redirection is always to a DCL command.

If you are redirecting data to a VMS command or utility, the current implementation requires that setting up a VMS foreign command that runs a command file before invoking `gawk`. (This restriction may be removed in a future release of `gawk` on VMS.)

Without this command file, the input data will also appear prepended to the output data.

This also allows simulating POSIX commands that are not found on VMS or the use of GNV utilities.

The example below is for `gawk` redirecting data to the VMS `sort` command.

```
$ sort = "@device:[dir]vms_gawk_sort.com"
```

The command file needs to be of the format in the example below.

The first line inhibits the passed input data from also showing up in the output. It must be in the format in the example.

The next line creates a foreign command that overrides the outer foreign command which prevents an infinite recursion of command files.

The next to the last command redirects `sys$input` to be `sys$command`, in order to pick up the data that is being redirected to the command.

The last line runs the actual command. It must be the last command as the data redirected from `gawk` will be read when the command file ends.

```
$!'f$verify(0,0)'
$ sort := sort
$ define/user sys$input sys$command:
$ sort sys$input: sys$output:
```

B.3.2.5 The VMS GNV Project

The VMS GNV package provides a build environment similar to POSIX with ports of a collection of open source tools. The `gawk` found in the GNV base kit is an older port. Currently, the GNV project is being reorganized to supply individual PCSI packages for each component. See <https://sourceforge.net/p/gnv/wiki/InstallingGNVPackages/>.

The normal build procedure for `gawk` produces a program that is suitable for use with GNV.

The file `vms/gawk_build_steps.txt` in the distribution documents the procedure for building a VMS PCSI kit that is compatible with GNV.

B.3.2.6 Some VMS Systems Have An Old Version of gawk

Some versions of VMS have an old version of **gawk**. To access it, define a symbol, as follows:

```
$ gawk ::= $sys$common:[syshlp.examples.tcpip.snmp]gawk.exe
```

This is apparently version 2.15.6, which is extremely old. We recommend compiling and using the current version.

B.4 Reporting Problems and Bugs

There is nothing more dangerous than a bored archaeologist.

—Douglas Adams, *The Hitchhiker's Guide to the Galaxy*

If you have problems with **gawk** or think that you have found a bug, report it to the developers; we cannot promise to do anything, but we might well want to fix it.

Before reporting a bug, make sure you have really found a genuine bug. Carefully reread the documentation and see if it says you can do what you're trying to do. If it's not clear whether you should be able to do something or not, report that too; it's a bug in the documentation!

Before reporting a bug or trying to fix it yourself, try to isolate it to the smallest possible **awk** program and input data file that reproduce the problem. Then send us the program and data file, some idea of what kind of Unix system you're using, the compiler you used to compile **gawk**, and the exact results **gawk** gave you. Also say what you expected to occur; this helps us decide whether the problem is really in the documentation.

Make sure to include the version number of **gawk** you are using. You can get this information with the command '**gawk --version**'.

Once you have a precise problem description, send email to bug-gawk@gnu.org.

The **gawk** maintainers subscribe to this address, and thus they will receive your bug report. Although you can send mail to the maintainers directly, the bug reporting address is preferred because the email list is archived at the GNU Project. *All email must be in English. This is the only language understood in common by all the maintainers.* In addition, please be sure to send all mail in *plain text*, not (or not exclusively) in HTML.

CAUTION: Do *not* try to report bugs in **gawk** by posting to the Usenet/Internet newsgroup `comp.lang.awk`. The **gawk** developers do occasionally read this newsgroup, but there is no guarantee that we will see your posting. The steps described here are the only officially recognized way for reporting bugs. Really.

NOTE: Many distributions of GNU/Linux and the various BSD-based operating systems have their own bug reporting systems. If you report a bug using your distribution's bug reporting system, you should also send a copy to bug-gawk@gnu.org.

This is for two reasons. First, although some distributions forward bug reports "upstream" to the GNU mailing list, many don't, so there is a good chance that the **gawk** maintainers won't even see the bug report! Second, mail to the GNU list is archived, and having everything at the GNU Project keeps things self-contained and not dependent on other organizations.

Non-bug suggestions are always welcome as well. If you have questions about things that are unclear in the documentation or are just obscure features, ask on the bug list; we will try to help you out if we can.

If you find bugs in one of the non-Unix ports of **gawk**, send an email to the bug list, with a copy to the person who maintains that port. The maintainers are named in the following list, as well as in the **README** file in the **gawk** distribution. Information in the **README** file should be considered authoritative if it conflicts with this book.

The people maintaining the various **gawk** ports are:

Unix and POSIX systems	Arnold Robbins, arnold@skeeve.com
MS-Windows with MinGW	Eli Zaretskii, eliz@gnu.org
OS/2	Andreas Buening, andreas.buening@nexgo.de
VMS	John Malmberg, wb8tyw@qsl.net
z/OS (OS/390)	Daniel Richard G. skunk@iSKUNK.ORG Dave Pitts (Maintainer Emeritus), dpitts@cozx.com

If your bug is also reproducible under Unix, send a copy of your report to the bug-gawk@gnu.org email list as well.

The DJGPP port is no longer supported; it will remain in the code base for a while in case a volunteer wishes to take it over. If this does not happen, then eventually code for this port will be removed.

B.5 Other Freely Available awk Implementations

It's kind of fun to put comments like this in your awk code:

```
// Do C++ comments work? answer: yes! of course
—Michael Brennan
```

There are a number of other freely available **awk** implementations. This section briefly describes where to get them:

Unix awk Brian Kernighan, one of the original designers of Unix **awk**, has made his implementation of **awk** freely available. You can retrieve this version via [his home page](#). It is available in several archive formats:

Shell archive

<http://www.cs.princeton.edu/~bwk/btl.mirror/awk.shar>

Compressed **tar** file

<http://www.cs.princeton.edu/~bwk/btl.mirror/awk.tar.gz>

Zip file

<http://www.cs.princeton.edu/~bwk/btl.mirror/awk.zip>

You can also retrieve it from GitHub:

```
git clone git://github.com/onetrueawk/awk bwkawk
```

This command creates a copy of the **Git** repository in a directory named **bwkawk**. If you leave that argument off the **git** command line, the repository copy is created in a directory named **awk**.

This version requires an ISO C (1990 standard) compiler; the C compiler from GCC (the GNU Compiler Collection) works quite nicely.

See [Section A.7 \[Common Extensions Summary\]](#), page 425, for a list of extensions in this `awk` that are not in POSIX `awk`.

As a side note, Dan Bornstein has created a Git repository tracking all the versions of BWK `awk` that he could find. It's available at [git://github.com/danfuzz/one-true-awk](https://github.com/danfuzz/one-true-awk).

mawk Michael Brennan wrote an independent implementation of `awk`, called `mawk`. It is available under the GPL (see [\[GNU General Public License\]](#), page 479), just as `gawk` is.

The original distribution site for the `mawk` source code no longer has it. A copy is available at <http://www.skeeve.com/gawk/mawk1.3.3.tar.gz>.

In 2009, Thomas Dickey took on `mawk` maintenance. Basic information is available on [the project's web page](#). The download URL is <http://invisible-island.net/datafiles/release/mawk.tar.gz>.

Once you have it, `gunzip` may be used to decompress this file. Installation is similar to `gawk`'s (see [Section B.2 \[Compiling and Installing gawk on Unix-Like Systems\]](#), page 435).

See [Section A.7 \[Common Extensions Summary\]](#), page 425, for a list of extensions in `mawk` that are not in POSIX `awk`.

awka Written by Andrew Sumner, `awka` translates `awk` programs into C, compiles them, and links them with a library of functions that provide the core `awk` functionality. It also has a number of extensions.

The `awk` translator is released under the GPL, and the library is under the LGPL.

To get `awka`, go to <http://sourceforge.net/projects/awka>.

The project seems to be frozen; no new code changes have been made since approximately 2001.

pawk Nelson H.F. Beebe at the University of Utah has modified BWK `awk` to provide timing and profiling information. It is different from `gawk` with the `--profile` option (see [Section 12.5 \[Profiling Your awk Programs\]](#), page 312) in that it uses CPU-based profiling, not line-count profiling. You may find it at either <ftp://ftp.math.utah.edu/pub/pawk/pawk-20030606.tar.gz> or <http://www.math.utah.edu/pub/pawk/pawk-20030606.tar.gz>.

BusyBox `awk`

BusyBox is a GPL-licensed program providing small versions of many applications within a single executable. It is aimed at embedded systems. It includes a full implementation of POSIX `awk`. When building it, be careful not to do `'make install'` as it will overwrite copies of other applications in your `/usr/local/bin`. For more information, see the [project's home page](#).

The OpenSolaris POSIX `awk`

The versions of `awk` in `/usr/xpg4/bin` and `/usr/xpg6/bin` on Solaris are more or less POSIX-compliant. They are based on the `awk` from Mortice Kern Systems for PCs. We were able to make this code compile and work under GNU/Linux with 1–2 hours of work. Making it more generally portable (using

GNU Autoconf and/or Automake) would take more work, and this has not been done, at least to our knowledge.

The source code used to be available from the OpenSolaris website. However, that project was ended and the website shut down. Fortunately, the [Illumos project](https://github.com/joyent/illumos-joyent/blob/master/usr/src/cmd/awk_xpg4) makes this implementation available. You can view the files one at a time from https://github.com/joyent/illumos-joyent/blob/master/usr/src/cmd/awk_xpg4.

- jawk** This is an interpreter for **awk** written in Java. It claims to be a full interpreter, although because it uses Java facilities for I/O and for regexp matching, the language it supports is different from POSIX **awk**. More information is available on the [project's home page](#).
 - Libmawk** This is an embeddable **awk** interpreter derived from **mawk**. For more information, see <http://repo.hu/projects/libmawk/>.
 - pawk** This is a Python module that claims to bring **awk**-like features to Python. See <https://github.com/alecthomas/pawk> for more information. (This is not related to Nelson Beebe's modified version of BWK **awk**, described earlier.)
 - QSE awk** This is an embeddable **awk** interpreter. For more information, see <http://code.google.com/p/qse/> and <http://awk.info/?tools/qse>.
 - QTawk** This is an independent implementation of **awk** distributed under the GPL. It has a large number of extensions over standard **awk** and may not be 100% syntactically compatible with it. See <http://www.quiktrim.org/QTawk.html> for more information, including the manual. The download link there is out of date; see <http://www.quiktrim.org/#AdditionalResources> for the latest download link.
- The project may also be frozen; no new code changes have been made since approximately 2014.

Other versions

See also the “Versions and implementations” section of the [Wikipedia article](#) on **awk** for information on additional versions.

B.6 Summary

- The **gawk** distribution is available from the GNU Project's main distribution site, <ftp.gnu.org>. The canonical build recipe is:


```
wget http://ftp.gnu.org/gnu/gawk/gawk-4.1.4.tar.gz
tar -xvpzf gawk-4.1.4.tar.gz
cd gawk-4.1.4
./configure && make && make check
```
- **gawk** may be built on non-POSIX systems as well. The currently supported systems are MS-Windows using MSYS, MinGW, and Cygwin, OS/2 using EMX, and both Vax/VMS and OpenVMS. Instructions for each system are included in this appendix.
- Bug reports should be sent via email to bug-gawk@gnu.org. Bug reports should be in English and should include the version of **gawk**, how it was compiled, and a short program and data file that demonstrate the problem.

- There are a number of other freely available `awk` implementations. Many are POSIX-compliant; others are less so.

Appendix C Implementation Notes

This appendix contains information mainly of interest to implementers and maintainers of **gawk**. Everything in it applies specifically to **gawk** and not to other implementations.

C.1 Downward Compatibility and Debugging

See [Section A.5 \[Extensions in **gawk** Not in POSIX **awk**\]](#), page 417, for a summary of the GNU extensions to the **awk** language and program. All of these features can be turned off by invoking **gawk** with the `--traditional` option or with the `--posix` option.

If **gawk** is compiled for debugging with ‘`-DDEBUG`’, then there is one more option available on the command line:

`-Y`

`--parsedebug`

Print out the parse stack information as the program is being parsed.

This option is intended only for serious **gawk** developers and not for the casual user. It probably has not even been compiled into your version of **gawk**, since it slows down execution.

C.2 Making Additions to **gawk**

If you find that you want to enhance **gawk** in a significant fashion, you are perfectly free to do so. That is the point of having free software; the source code is available and you are free to change it as you want (see [\[GNU General Public License\]](#), page 479).

This section discusses the ways you might want to change **gawk** as well as any considerations you should bear in mind.

C.2.1 Accessing The **gawk** Git Repository

As **gawk** is Free Software, the source code is always available. [Section B.1 \[The **gawk** Distribution\]](#), page 431, describes how to get and build the formal, released versions of **gawk**.

However, if you want to modify **gawk** and contribute back your changes, you will probably wish to work with the development version. To do so, you will need to access the **gawk** source code repository. The code is maintained using the [Git distributed version control system](#). You will need to install it if your system doesn’t have it. Once you have done so, use the command:

```
git clone git://git.savannah.gnu.org/gawk.git
```

This clones the **gawk** repository. If you are behind a firewall that does not allow you to use the Git native protocol, you can still access the repository using:

```
git clone http://git.savannah.gnu.org/r/gawk.git
```

Once you have made changes, you can use ‘`git diff`’ to produce a patch, and send that to the **gawk** maintainer; see [Section B.4 \[Reporting Problems and Bugs\]](#), page 445, for how to do that.

Once upon a time there was Git–CVS gateway for use by people who could not install Git. However, this gateway no longer works, so you may have better luck using a more

modern version control system like Bazaar, that has a Git plug-in for working with Git repositories.

C.2.2 Adding New Features

You are free to add any new features you like to **gawk**. However, if you want your changes to be incorporated into the **gawk** distribution, there are several steps that you need to take in order to make it possible to include them:

1. Before building the new feature into **gawk** itself, consider writing it as an extension (see [Chapter 16 \[Writing Extensions for gawk\]](#), page 357). If that's not possible, continue with the rest of the steps in this list.
2. Be prepared to sign the appropriate paperwork. In order for the FSF to distribute your changes, you must either place those changes in the public domain and submit a signed statement to that effect, or assign the copyright in your changes to the FSF. Both of these actions are easy to do and *many* people have done so already. If you have questions, please contact me (see [Section B.4 \[Reporting Problems and Bugs\]](#), page 445), or assign@gnu.org.
3. Get the latest version. It is much easier for me to integrate changes if they are relative to the most recent distributed version of **gawk**, or better yet, relative to the latest code in the Git repository. If your version of **gawk** is very old, I may not be able to integrate your changes at all. (See [Section B.1.1 \[Getting the gawk Distribution\]](#), page 431, for information on getting the latest version of **gawk**.)
4. Follow the *GNU Coding Standards*. This document describes how GNU software should be written. If you haven't read it, please do so, preferably *before* starting to modify **gawk**. (The *GNU Coding Standards* are available from the GNU Project's [website](#). Texinfo, Info, and DVI versions are also available.)
5. Use the **gawk** coding style. The C code for **gawk** follows the instructions in the *GNU Coding Standards*, with minor exceptions. The code is formatted using the traditional "K&R" style, particularly as regards to the placement of braces and the use of TABs. In brief, the coding rules for **gawk** are as follows:
 - Use ANSI/ISO style (prototype) function headers when defining functions.
 - Put the name of the function at the beginning of its own line.
 - Use `#elif` instead of nesting `#if` inside `#else`.
 - Put the return type of the function, even if it is `int`, on the line above the line with the name and arguments of the function.
 - Put spaces around parentheses used in control structures (`if`, `while`, `for`, `do`, `switch`, and `return`).
 - Do not put spaces in front of parentheses used in function calls.
 - Put spaces around all C operators and after commas in function calls.
 - Do not use the comma operator to produce multiple side effects, except in `for` loop initialization and increment parts, and in macro bodies.
 - Use real TABs for indenting, not spaces.
 - Use the "K&R" brace layout style.

- Use comparisons against `NULL` and `'\0'` in the conditions of `if`, `while`, and `for` statements, as well as in the `cases` of `switch` statements, instead of just the plain pointer or character value.
- Use `true` and `false` for `bool` values, the `NULL` symbolic constant for pointer values, and the character constant `'\0'` where appropriate, instead of 1 and 0.
- Provide one-line descriptive comments for each function.
- Do not use the `alloca()` function for allocating memory off the stack. Its use causes more portability trouble than is worth the minor benefit of not having to free the storage. Instead, use `malloc()` and `free()`.
- Do not use comparisons of the form `'! strcmp(a, b)'` or similar. As Henry Spencer once said, “`strcmp()` is not a boolean!” Instead, use `'strcmp(a, b) == 0'`.
- If adding new bit flag values, use explicit hexadecimal constants (`0x001`, `0x002`, `0x004`, and so on) instead of shifting one left by successive amounts (`'(1<<0)'`, `'(1<<1)'`, and so on).

NOTE: If I have to reformat your code to follow the coding style used in `gawk`, I may not bother to integrate your changes at all.

6. Update the documentation. Along with your new code, please supply new sections and/or chapters for this book. If at all possible, please use real Texinfo, instead of just supplying unformatted ASCII text (although even that is better than no documentation at all). Conventions to be followed in *GAWK: Effective AWK Programming* are provided after the `@bye` at the end of the Texinfo source file. If possible, please update the `man` page as well.

You will also have to sign paperwork for your documentation changes.

7. Submit changes as unified diffs. Use `'diff -u -r -N'` to compare the original `gawk` source tree with your version. I recommend using the GNU version of `diff`, or best of all, `'git diff'` or `'git format-patch'`. Send the output produced by `diff` to me when you submit your changes. (See [Section B.4 \[Reporting Problems and Bugs\]](#), page 445, for the electronic mail information.)

Using this format makes it easy for me to apply your changes to the master version of the `gawk` source code (using `patch`). If I have to apply the changes manually, using a text editor, I may not do so, particularly if there are lots of changes.

8. Include an entry for the `ChangeLog` file with your submission. This helps further minimize the amount of work I have to do, making it easier for me to accept patches. It is simplest if you just make this part of your diff.

Although this sounds like a lot of work, please remember that while you may write the new code, I have to maintain it and support it. If it isn't possible for me to do that with a minimum of extra work, then I probably will not.

C.2.3 Porting `gawk` to a New Operating System

If you want to port `gawk` to a new operating system, there are several steps:

1. Follow the guidelines in the previous section concerning coding style, submission of diffs, and so on.
2. Be prepared to sign the appropriate paperwork. In order for the FSF to distribute your code, you must either place your code in the public domain and submit a signed

statement to that effect, or assign the copyright in your code to the FSF. Both of these actions are easy to do and *many* people have done so already. If you have questions, please contact me, or gnu@gnu.org.

3. When doing a port, bear in mind that your code must coexist peacefully with the rest of **gawk** and the other ports. Avoid gratuitous changes to the system-independent parts of the code. If at all possible, avoid sprinkling `#ifdef`'s just for your port throughout the code.

If the changes needed for a particular system affect too much of the code, I probably will not accept them. In such a case, you can, of course, distribute your changes on your own, as long as you comply with the GPL (see [\[GNU General Public License\]](#), page 479).

4. A number of the files that come with **gawk** are maintained by other people. Thus, you should not change them unless it is for a very good reason; i.e., changes are not out of the question, but changes to these files are scrutinized extra carefully. The files are `dfa.c`, `dfa.h`, `getopt.c`, `getopt.h`, `getopt1.c`, `getopt_int.h`, `gettext.h`, `regcomp.c`, `regex.c`, `regex.h`, `regex_internal.c`, `regex_internal.h`, and `regexec.c`.
5. A number of other files are provided by the GNU Autotools (Autoconf, Automake, and GNU `gettext`). You should not change them either, unless it is for a very good reason. The files are `ABOUT-NLS`, `config.guess`, `config.rpath`, `config.sub`, `depcomp`, `INSTALL`, `install-sh`, `missing`, `mkinstalldirs`, `xalloc.h`, and `ylwrap`.
6. Be willing to continue to maintain the port. Non-Unix operating systems are supported by volunteers who maintain the code needed to compile and run **gawk** on their systems. If no-one volunteers to maintain a port, it becomes unsupported and it may be necessary to remove it from the distribution.
7. Supply an appropriate `gawkmisc.??? file`. Each port has its own `gawkmisc.??? file` that implements certain operating system specific functions. This is cleaner than a plethora of `#ifdef`'s scattered throughout the code. The `gawkmisc.c` in the main source directory includes the appropriate `gawkmisc.??? file` from each subdirectory. Be sure to update it as well.

Each port's `gawkmisc.??? file` has a suffix reminiscent of the machine or operating system for the port—for example, `pc/gawkmisc.pc` and `vms/gawkmisc.vms`. The use of separate suffixes, instead of plain `gawkmisc.c`, makes it possible to move files from a port's subdirectory into the main subdirectory, without accidentally destroying the real `gawkmisc.c` file. (Currently, this is only an issue for the PC operating system ports.)

8. Supply a **Makefile** as well as any other C source and header files that are necessary for your operating system. All your code should be in a separate subdirectory, with a name that is the same as, or reminiscent of, either your operating system or the computer system. If possible, try to structure things so that it is not necessary to move files out of the subdirectory into the main source directory. If that is not possible, then be sure to avoid using names for your files that duplicate the names of files in the main source directory.
9. Update the documentation. Please write a section (or sections) for this book describing

the installation and compilation steps needed to compile and/or install **gawk** for your system.

Following these steps makes it much easier to integrate your changes into **gawk** and have them coexist happily with other operating systems' code that is already there.

In the code that you supply and maintain, feel free to use a coding style and brace layout that suits your taste.

C.2.4 Why Generated Files Are Kept In Git

If you look at the **gawk** source in the Git repository, you will notice that it includes files that are automatically generated by GNU infrastructure tools, such as **Makefile.in** from Automake and even **configure** from Autoconf.

This is different from many Free Software projects that do not store the derived files, because that keeps the repository less cluttered, and it is easier to see the substantive changes when comparing versions and trying to understand what changed between commits.

However, there are several reasons why the **gawk** maintainer likes to have everything in the repository.

First, because it is then easy to reproduce any given version completely, without relying upon the availability of (older, likely obsolete, and maybe even impossible to find) other tools.

As an extreme example, if you ever even think about trying to compile, oh, say, the V7 **awk**, you will discover that not only do you have to bootstrap the V7 **yacc** to do so, but you also need the V7 **lex**. And the latter is pretty much impossible to bring up on a modern GNU/Linux system.¹

(Or, let's say **gawk** 1.2 required **bison** whatever-it-was in 1989 and that there was no **awkgram.c** file in the repository. Is there a guarantee that we could find that **bison** version? Or that *it* would build?)

If the repository has all the generated files, then it's easy to just check them out and build. (Or *easier*, depending upon how far back we go.)

And that brings us to the second (and stronger) reason why all the files really need to be in Git. It boils down to who do you cater to—the **gawk** developer(s), or the user who just wants to check out a version and try it out?

The **gawk** maintainer wants it to be possible for any interested **awk** user in the world to just clone the repository, check out the branch of interest and build it. Without their having to have the correct version(s) of the autotools.² That is the point of the **bootstrap.sh** file. It touches the various other files in the right order such that

```
# The canonical incantation for building GNU software:
./bootstrap.sh && ./configure && make
```

¹ We tried. It was painful.

² There is one GNU program that is (in our opinion) severely difficult to bootstrap from the Git repository. For example, on the author's old (but still working) PowerPC Macintosh with Mac OS X 10.5, it was necessary to bootstrap a ton of software, starting with Git itself, in order to try to work with the latest code. It's not pleasant, and especially on older systems, it's a big waste of time.

Starting with the latest tarball was no picnic either. The maintainers had dropped **.gz** and **.bz2** files and only distribute **.tar.xz** files. It was necessary to bootstrap **xz** first!

will *just work*.

This is extremely important for the `master` and `gawk-X.Y-stable` branches.

Further, the `gawk` maintainer would argue that it's also important for the `gawk` developers. When he tried to check out the `xgawk` branch³ to build it, he couldn't. (No `ltmain.sh` file, and he had no idea how to create it, and that was not the only problem.)

He felt *extremely* frustrated. With respect to that branch, the maintainer is no different than Jane User who wants to try to build `gawk-4.1-stable` or `master` from the repository.

Thus, the maintainer thinks that it's not just important, but critical, that for any given branch, the above incantation *just works*.

A third reason to have all the files is that without them, using '`git bisect`' to try to find the commit that introduced a bug is exceedingly difficult. The maintainer tried to do that on another project that requires running bootstrapping scripts just to create `configure` and so on; it was really painful. When the repository is self-contained, using `git bisect` in it is very easy.

What are some of the consequences and/or actions to take?

1. We don't mind that there are differing files in the different branches as a result of different versions of the autotools.
 - A. It's the maintainer's job to merge them and he will deal with it.
 - B. He is really good at '`git diff x y > /tmp/diff1 ; gvim /tmp/diff1`' to remove the diffs that aren't of interest in order to review code.
2. It would certainly help if everyone used the same versions of the GNU tools as he does, which in general are the latest released versions of Automake, Autoconf, `bison`, and GNU `gettext`.

Installing from source is quite easy. It's how the maintainer worked for years (and still works). He had `/usr/local/bin` at the front of his `PATH` and just did:

```
wget http://ftp.gnu.org/gnu/package/package-x.y.z.tar.gz
tar -xpvf package-x.y.z.tar.gz
cd package-x.y.z
./configure && make && make check
make install      # as root
```

Most of the above was originally written by the maintainer to other `gawk` developers. It raised the objection from one of the developers "... that anybody pulling down the source from Git is not an end user."

However, this is not true. There are "power `awk` users" who can build `gawk` (using the magic incantation shown previously) but who can't program in C. Thus, the major branches should be kept buildable all the time.

It was then suggested that there be a `cron` job to create nightly tarballs of "the source." Here, the problem is that there are source trees, corresponding to the various branches! So, nightly tarballs aren't the answer, especially as the repository can go for weeks without significant change being introduced.

³ A branch (since removed) created by one of the other developers that did not include the generated files.

Fortunately, the Git server can meet this need. For any given branch named *branchname*, use:

```
wget http://git.savannah.gnu.org/cgiit/gawk.git/snapshot/gawk-branchname.tar.gz
```

to retrieve a snapshot of the given branch.

C.3 Probable Future Extensions

AWK is a language similar to PERL, only considerably more elegant.

—Arnold Robbins

Hey!

—Larry Wall

The `TODO` file in the `master` branch of the `gawk` Git repository lists possible future enhancements. Some of these relate to the source code, and others to possible new features. Please see that file for the list. See [Section C.2 \[Making Additions to gawk\]](#), page 451, if you are interested in tackling any of the projects listed there.

C.4 Some Limitations of the Implementation

This following table describes limits of `gawk` on a Unix-like system (although it is variable even then). Other systems may have different limits.

Item	Limit
Characters in a character class	$2^{(\text{number of bits per byte})}$
Length of input record	<code>MAX_INT</code>
Length of output record	Unlimited
Length of source line	Unlimited
Number of fields in a record	<code>MAX_LONG</code>
Number of file redirections	Unlimited
Number of input records in one file	<code>MAX_LONG</code>
Number of input records total	<code>MAX_LONG</code>
Number of pipe redirections	$\min(\text{number of processes per user}, \text{number of open files})$
Numeric values	Double-precision floating point (if not using MPFR)
Size of a field	<code>MAX_INT</code>
Size of a literal string	<code>MAX_INT</code>
Size of a printf string	<code>MAX_INT</code>

C.5 Extension API Design

This section documents the design of the extension API, including a discussion of some of the history and problems that needed to be solved.

The first version of extensions for `gawk` was developed in the mid-1990s and released with `gawk` 3.1 in the late 1990s. The basic mechanisms and design remained unchanged for close to 15 years, until 2012.

The old extension mechanism used data types and functions from `gawk` itself, with a “clever hack” to install extension functions.

gawk included some sample extensions, of which a few were really useful. However, it was clear from the outset that the extension mechanism was bolted onto the side and was not really well thought out.

C.5.1 Problems With The Old Mechanism

The old extension mechanism had several problems:

- It depended heavily upon **gawk** internals. Any time the **NODE** structure⁴ changed, an extension would have to be recompiled. Furthermore, to really write extensions required understanding something about **gawk**'s internal functions. There was some documentation in this book, but it was quite minimal.
- Being able to call into **gawk** from an extension required linker facilities that are common on Unix-derived systems but that did not work on MS-Windows systems; users wanting extensions on MS-Windows had to statically link them into **gawk**, even though MS-Windows supports dynamic loading of shared objects.
- The API would change occasionally as **gawk** changed; no compatibility between versions was ever offered or planned for.

Despite the drawbacks, the **xgawk** project developers forked **gawk** and developed several significant extensions. They also enhanced **gawk**'s facilities relating to file inclusion and shared object access.

A new API was desired for a long time, but only in 2012 did the **gawk** maintainer and the **xgawk** developers finally start working on it together. More information about the **xgawk** project is provided in [Section 16.8 \[The **gawkextlib** Project\]](#), page 409.

C.5.2 Goals For A New Mechanism

Some goals for the new API were:

- The API should be independent of **gawk** internals. Changes in **gawk** internals should not be visible to the writer of an extension function.
- The API should provide *binary* compatibility across **gawk** releases as long as the API itself does not change.
- The API should enable extensions written in C or C++ to have roughly the same “appearance” to **awk**-level code as **awk** functions do. This means that extensions should have:
 - The ability to access function parameters.
 - The ability to turn an undefined parameter into an array (call by reference).
 - The ability to create, access and update global variables.
 - Easy access to all the elements of an array at once (“array flattening”) in order to loop over all the element in an easy fashion for C code.
 - The ability to create arrays (including **gawk**'s true arrays of arrays).

Some additional important goals were:

- The API should use only features in ISO C 90, so that extensions can be written using the widest range of C and C++ compilers. The header should include the appropriate

⁴ A critical central data structure inside **gawk**.

‘`#ifdef __cplusplus`’ and ‘`extern "C"`’ magic so that a C++ compiler could be used. (If using C++, the runtime system has to be smart enough to call any constructors and destructors, as **gawk** is a C program. As of this writing, this has not been tested.)

- The API mechanism should not require access to **gawk**’s symbols⁵ by the compile-time or dynamic linker, in order to enable creation of extensions that also work on MS-Windows.

During development, it became clear that there were other features that should be available to extensions, which were also subsequently provided:

- Extensions should have the ability to hook into **gawk**’s I/O redirection mechanism. In particular, the **xgawk** developers provided a so-called “open hook” to take over reading records. During development, this was generalized to allow extensions to hook into input processing, output processing, and two-way I/O.
- An extension should be able to provide a “call back” function to perform cleanup actions when **gawk** exits.
- An extension should be able to provide a version string so that **gawk**’s `--version` option can provide information about extensions as well.

The requirement to avoid access to **gawk**’s symbols is, at first glance, a difficult one to meet.

One design, apparently used by Perl and Ruby and maybe others, would be to make the mainline **gawk** code into a library, with the **gawk** utility a small C `main()` function linked against the library.

This seemed like the tail wagging the dog, complicating build and installation and making a simple copy of the **gawk** executable from one system to another (or one place to another on the same system!) into a chancy operation.

Pat Rankin suggested the solution that was adopted. See [Section 16.3 \[How It Works at a High Level\]](#), page 357, for the details.

C.5.3 Other Design Decisions

As an arbitrary design decision, extensions can read the values of predefined variables and arrays (such as `ARGV` and `FS`), but cannot change them, with the exception of `PROCINFO`.

The reason for this is to prevent an extension function from affecting the flow of an **awk** program outside its control. While a real **awk** function can do what it likes, that is at the discretion of the programmer. An extension function should provide a service or make a C API available for use within **awk**, and not mess with `FS` or `ARGC` and `ARGV`.

In addition, it becomes easy to start down a slippery slope. How much access to **gawk** facilities do extensions need? Do they need `getline`? What about calling `gsub()` or compiling regular expressions? What about calling into **awk** functions? (*That* would be messy.)

In order to avoid these issues, the **gawk** developers chose to start with the simplest, most basic features that are still truly useful.

⁵ The *symbols* are the variables and functions defined inside **gawk**. Access to these symbols by code external to **gawk** loaded dynamically at runtime is problematic on MS-Windows.

Another decision is that although **gawk** provides nice things like MPFR, and arrays indexed internally by integers, these features are not being brought out to the API in order to keep things simple and close to traditional **awk** semantics. (In fact, arrays indexed internally by integers are so transparent that they aren't even documented!)

Additionally, all functions in the API check that their pointer input parameters are not NULL. If they are, they return an error. (It is a good idea for extension code to verify that pointers received from **gawk** are not NULL. Such a thing should not happen, but the **gawk** developers are only human, and they have been known to occasionally make mistakes.)

With time, the API will undoubtedly evolve; the **gawk** developers expect this to be driven by user needs. For now, the current API seems to provide a minimal yet powerful set of features for creating extensions.

C.5.4 Room For Future Growth

The API can later be expanded, in two ways:

- **gawk** passes an “extension id” into the extension when it first loads the extension. The extension then passes this id back to **gawk** with each function call. This mechanism allows **gawk** to identify the extension calling into it, should it need to know.
- Similarly, the extension passes a “name space” into **gawk** when it registers each extension function. This accommodates a possible future mechanism for grouping extension functions and possibly avoiding name conflicts.

Of course, as of this writing, no decisions have been made with respect to any of the above.

C.6 Compatibility For Old Extensions

[Chapter 16 \[Writing Extensions for gawk\], page 357](#), describes the supported API and mechanisms for writing extensions for **gawk**. This API was introduced in version 4.1. However, for many years **gawk** provided an extension mechanism that required knowledge of **gawk** internals and that was not as well designed.

In order to provide a transition period, **gawk** version 4.1 continues to support the original extension mechanism. This will be true for the life of exactly one major release. This support will be withdrawn, and removed from the source code, at the next major release.

Briefly, original-style extensions should be compiled by including the **awk.h** header file in the extension source code. Additionally, you must define the identifier ‘**GAWK**’ when building (use ‘**-DGAWK**’ with Unix-style compilers). Otherwise, the definitions in **gawkapi.h** will cause conflicts with those in **awk.h** and your extension will not compile.

Just as in previous versions, you load an old-style extension with the **extension()** built-in function (which is not otherwise documented). This function in turn finds and loads the shared object file containing the extension and calls its **d1_load()** C routine.

Because original-style and new-style extensions use different initialization routines (**d1_load()** versus **dload()**), they may safely be installed in the same directory (to be found by **AWKLIBPATH**) without conflict.

The **gawk** development team strongly recommends that you convert any old extensions that you may have to use the new API described in [Chapter 16 \[Writing Extensions for gawk\], page 357](#).

C.7 Summary

- **gawk**'s extensions can be disabled with either the `--traditional` option or with the `--posix` option. The `--parsedebug` option is available if **gawk** is compiled with `'-DDEBUG'`.
- The source code for **gawk** is maintained in a publicly accessible Git repository. Anyone may check it out and view the source.
- Contributions to **gawk** are welcome. Following the steps outlined in this chapter will make it easier to integrate your contributions into the code base. This applies both to new feature contributions and to ports to additional operating systems.
- **gawk** has some limits—generally those that are imposed by the machine architecture.
- The extension API design was intended to solve a number of problems with the previous extension mechanism, enable features needed by the **xgawk** project, and provide binary compatibility going forward.
- The previous extension mechanism is still supported in version 4.1 of **gawk**, but it *will* be removed in the next major release.

Appendix D Basic Programming Concepts

This appendix attempts to define some of the basic concepts and terms that are used throughout the rest of this book. As this book is specifically about `awk`, and not about computer programming in general, the coverage here is by necessity fairly cursory and simplistic. (If you need more background, there are many other introductory texts that you should refer to instead.)

D.1 What a Program Does

At the most basic level, the job of a program is to process some input data and produce results. See [Figure D.1](#).

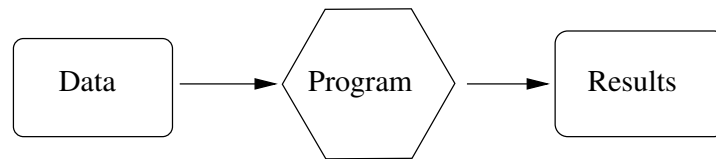


Figure D.1: General Program Flow

The “program” in the figure can be either a compiled program¹ (such as `ls`), or it may be *interpreted*. In the latter case, a machine-executable program such as `awk` reads your program, and then uses the instructions in your program to process the data.

When you write a program, it usually consists of the following, very basic set of steps, as shown in [Figure D.2](#):

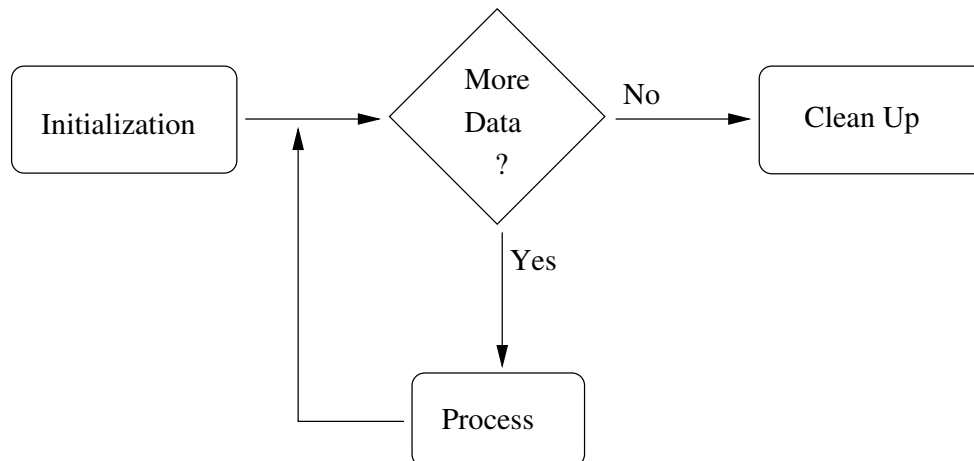


Figure D.2: Basic Program Steps

¹ Compiled programs are typically written in lower-level languages such as C, C++, or Ada, and then translated, or *compiled*, into a form that the computer can execute directly.

Initialization

These are the things you do before actually starting to process data, such as checking arguments, initializing any data you need to work with, and so on. This step corresponds to `awk`'s `BEGIN` rule (see [Section 7.1.4 \[The `BEGIN` and `END` Special Patterns\]](#), page 134).

If you were baking a cake, this might consist of laying out all the mixing bowls and the baking pan, and making sure you have all the ingredients that you need.

Processing This is where the actual work is done. Your program reads data, one logical chunk at a time, and processes it as appropriate.

In most programming languages, you have to manually manage the reading of data, checking to see if there is more each time you read a chunk. `awk`'s pattern-action paradigm (see [Chapter 1 \[Getting Started with `awk`\]](#), page 17) handles the mechanics of this for you.

In baking a cake, the processing corresponds to the actual labor: breaking eggs, mixing the flour, water, and other ingredients, and then putting the cake into the oven.

Clean Up Once you've processed all the data, you may have things you need to do before exiting. This step corresponds to `awk`'s `END` rule (see [Section 7.1.4 \[The `BEGIN` and `END` Special Patterns\]](#), page 134).

After the cake comes out of the oven, you still have to wrap it in plastic wrap to keep anyone from tasting it, as well as wash the mixing bowls and utensils.

An *algorithm* is a detailed set of instructions necessary to accomplish a task, or process data. It is much the same as a recipe for baking a cake. Programs implement algorithms. Often, it is up to you to design the algorithm and implement it, simultaneously.

The “logical chunks” we talked about previously are called *records*, similar to the records a company keeps on employees, a school keeps for students, or a doctor keeps for patients. Each record has many component parts, such as first and last names, date of birth, address, and so on. The component parts are referred to as the *fields* of the record.

The act of reading data is termed *input*, and that of generating results, not too surprisingly, is termed *output*. They are often referred to together as “input/output,” and even more often, as “I/O” for short. (You will also see “input” and “output” used as verbs.)

`awk` manages the reading of data for you, as well as the breaking it up into records and fields. Your program's job is to tell `awk` what to do with the data. You do this by describing *patterns* in the data to look for, and *actions* to execute when those patterns are seen. This *data-driven* nature of `awk` programs usually makes them both easier to write and easier to read.

D.2 Data Values in a Computer

In a program, you keep track of information and values in things called *variables*. A variable is just a name for a given value, such as `first_name`, `last_name`, `address`, and so on. `awk` has several predefined variables, and it has special names to refer to the current input record and the fields of the record. You may also group multiple associated values under one name, as an array.

Data, particularly in **awk**, consists of either numeric values, such as 42 or 3.1415927, or string values. String values are essentially anything that's not a number, such as a name. Strings are sometimes referred to as *character data*, since they store the individual characters that comprise them. Individual variables, as well as numeric and string variables, are referred to as *scalar* values. Groups of values, such as arrays, are not scalars.

Section 15.1 [A General Description of Computer Arithmetic], page 343, provided a basic introduction to numeric types (integer and floating-point) and how they are used in a computer. Please review that information, including a number of caveats that were presented.

While you are probably used to the idea of a number without a value (i.e., zero), it takes a bit more getting used to the idea of zero-length character data. Nevertheless, such a thing exists. It is called the *null string*. The null string is character data that has no value. In other words, it is empty. It is written in **awk** programs like this: "".

Humans are used to working in decimal; i.e., base 10. In base 10, numbers go from 0 to 9, and then “roll over” into the next column. (Remember grade school? $42 = 4 \times 10 + 2$.)

There are other number bases though. Computers commonly use base 2 or *binary*, base 8 or *octal*, and base 16 or *hexadecimal*. In binary, each column represents two times the value in the column to its right. Each column may contain either a 0 or a 1. Thus, binary 1010 represents $(1 \times 8) + (0 \times 4) + (1 \times 2) + (0 \times 1)$, or decimal 10. Octal and hexadecimal are discussed more in Section 6.1.1.2 [Octal and Hexadecimal Numbers], page 107.

At the very lowest level, computers store values as groups of binary digits, or *bits*. Modern computers group bits into groups of eight, called *bytes*. Advanced applications sometimes have to manipulate bits directly, and **gawk** provides functions for doing so.

Programs are written in programming languages. Hundreds, if not thousands, of programming languages exist. One of the most popular is the C programming language. The C language had a very strong influence on the design of the **awk** language.

There have been several versions of C. The first is often referred to as “K&R” C, after the initials of Brian Kernighan and Dennis Ritchie, the authors of the first book on C. (Dennis Ritchie created the language, and Brian Kernighan was one of the creators of **awk**.)

In the mid-1980s, an effort began to produce an international standard for C. This work culminated in 1989, with the production of the ANSI standard for C. This standard became an ISO standard in 1990. In 1999, a revised ISO C standard was approved and released. Where it makes sense, POSIX **awk** is compatible with 1999 ISO C.

Glossary

- Action** A series of `awk` statements attached to a rule. If the rule's pattern matches an input record, `awk` executes the rule's action. Actions are always enclosed in braces. (See [Section 7.3 \[Actions\]](#), page 137.)
- Ada** A programming language originally defined by the U.S. Department of Defense for embedded programming. It was designed to enforce good Software Engineering practices.
- Amazing `awk` Assembler**
Henry Spencer at the University of Toronto wrote a retargetable assembler completely as `sed` and `awk` scripts. It is thousands of lines long, including machine descriptions for several eight-bit microcomputers. It is a good example of a program that would have been better written in another language. You can get it from <http://awk.info/?awk100/aaa>.
- Amazingly Workable Formatter (`awf`)**
Henry Spencer at the University of Toronto wrote a formatter that accepts a large subset of the '`nroff -ms`' and '`nroff -man`' formatting commands, using `awk` and `sh`. It is available from <http://awk.info/?tools/awf>.
- Anchor** The regexp metacharacters '^' and '\$', which force the match to the beginning or end of the string, respectively.
- ANSI** The American National Standards Institute. This organization produces many standards, among them the standards for the C and C++ programming languages. These standards often become international standards as well. See also "ISO."
- Argument** An argument can be two different things. It can be an option or a file name passed to a command while invoking it from the command line, or it can be something passed to a *function* inside a program, e.g. inside `awk`.
In the latter case, an argument can be passed to a function in two ways. Either it is given to the called function by value, i.e., a copy of the value of the variable is made available to the called function, but the original variable cannot be modified by the function itself; or it is given by reference, i.e., a pointer to the interested variable is passed to the function, which can then directly modify it. In `awk` scalars are passed by value, and arrays are passed by reference. See "Pass By Value/Reference."
- Array** A grouping of multiple values under the same name. Most languages just provide sequential arrays. `awk` provides associative arrays.
- Assertion** A statement in a program that a condition is true at this point in the program. Useful for reasoning about how a program is supposed to behave.
- Assignment**
An `awk` expression that changes the value of some `awk` variable or data object. An object that you can assign to is called an *lvalue*. The assigned values are called *rvalues*. See [Section 6.2.3 \[Assignment Expressions\]](#), page 116.

Associative Array

Arrays in which the indices may be numbers or strings, not just sequential integers in a fixed range.

awk Language

The language in which **awk** programs are written.

awk Program

An **awk** program consists of a series of *patterns* and *actions*, collectively known as *rules*. For each input record given to the program, the program's rules are all processed in turn. **awk** programs may also contain function definitions.

awk Script Another name for an **awk** program.

Bash The GNU version of the standard shell (the **B**ourne-**A**gain **S**hell). See also “Bourne Shell.”

Binary Base-two notation, where the digits are 0–1. Since electronic circuitry works “naturally” in base 2 (just think of Off/On), everything inside a computer is calculated using base 2. Each digit represents the presence (or absence) of a power of 2 and is called a *bit*. So, for example, the base-two number 10101 is the same as decimal 21, $((1 \times 16) + (1 \times 4) + (1 \times 1))$.

Since base-two numbers quickly become very long to read and write, they are usually grouped by 3 (i.e., they are read as octal numbers), or by 4 (i.e., they are read as hexadecimal numbers). There is no direct way to insert base 2 numbers in a C program. If need arises, such numbers are usually inserted as octal or hexadecimal numbers. The number of base-two digits that fit into registers used for representing integer numbers in computers is a rough indication of the computing power of the computer itself. Most computers nowadays use 64 bits for representing integer numbers in their registers, but 32-bit, 16-bit and 8-bit registers have been widely used in the past. See [Section 6.1.1.2 \[Octal and Hexadecimal Numbers\]](#), page 107.

Bit Short for “Binary Digit.” All values in computer memory ultimately reduce to binary digits: values that are either zero or one. Groups of bits may be interpreted differently—as integers, floating-point numbers, character data, addresses of other memory objects, or other data. **awk** lets you work with floating-point numbers and strings. **gawk** lets you manipulate bit values with the built-in functions described in [Section 9.1.6 \[Bit-Manipulation Functions\]](#), page 197.

Computers are often defined by how many bits they use to represent integer values. Typical systems are 32-bit systems, but 64-bit systems are becoming increasingly popular, and 16-bit systems have essentially disappeared.

Boolean Expression

Named after the English mathematician Boole. See also “Logical Expression.”

Bourne Shell

The standard shell (**/bin/sh**) on Unix and Unix-like systems, originally written by Steven R. Bourne at Bell Laboratories. Many shells (**Bash**, **ksh**, **pdsh**, **zsh**) are generally upwardly compatible with the Bourne shell.

Braces The characters ‘{’ and ‘}’. Braces are used in **awk** for delimiting actions, compound statements, and function bodies.

Bracket Expression

Inside a *regular expression*, an expression included in square brackets, meant to designate a single character as belonging to a specified character class. A bracket expression can contain a list of one or more characters, like ‘[abc]’, a range of characters, like ‘[A-Z]’, or a name, delimited by ‘:’, that designates a known set of characters, like ‘[:digit:]’. The form of bracket expression enclosed between ‘:’ is independent of the underlying representation of the character themselves, which could utilize the ASCII, ECBDIC, or Unicode codesets, depending on the architecture of the computer system, and on localization. See also “Regular Expression.”

Built-in Function

The **awk** language provides built-in functions that perform various numerical, I/O-related, and string computations. Examples are **sqrt()** (for the square root of a number) and **substr()** (for a substring of a string). **gawk** provides functions for timestamp management, bit manipulation, array sorting, type checking, and runtime string translation. (See [Section 9.1 \[Built-in Functions\]](#), [page 175](#).)

Built-in Variable

ARGC, **ARGV**, **CONVFMT**, **ENVIRON**, **FILENAME**, **FNR**, **FS**, **NF**, **NR**, **OFMT**, **OFS**, **ORS**, **RLENGTH**, **RSTART**, **RS**, and **SUBSEP** are the variables that have special meaning to **awk**. In addition, **ARGIND**, **BINMODE**, **ERRNO**, **FIELDWIDTHS**, **FPAT**, **IGNORECASE**, **LINT**, **PROCINFO**, **RT**, and **TEXTDOMAIN** are the variables that have special meaning to **gawk**. Changing some of them affects **awk**’s running environment. (See [Section 7.5 \[Predefined Variables\]](#), [page 147](#).)

C The system programming language that most GNU software is written in. The **awk** programming language has C-like syntax, and this book points out similarities between **awk** and C when appropriate.

In general, **gawk** attempts to be as similar to the 1990 version of ISO C as makes sense.

C Shell The C Shell (**csh** or its improved version, **tcsh**) is a Unix shell that was created by Bill Joy in the late 1970s. The C shell was differentiated from other shells by its interactive features and overall style, which looks more like C. The C Shell is not backward compatible with the Bourne Shell, so special attention is required when converting scripts written for other Unix shells to the C shell, especially with regard to the management of shell variables. See also “Bourne Shell.”

C++ A popular object-oriented programming language derived from C.

Character Class

See “Bracket Expression.”

Character List

See “Bracket Expression.”

Character Set

The set of numeric codes used by a computer system to represent the characters (letters, numbers, punctuation, etc.) of a particular country or place. The most common character set in use today is ASCII (American Standard Code for Information Interchange). Many European countries use an extension of ASCII known as ISO-8859-1 (ISO Latin-1). The **Unicode character set** is increasingly popular and standard, and is particularly widely used on GNU/Linux systems.

CHEM A preprocessor for **pic** that reads descriptions of molecules and produces **pic** input for drawing them. It was written in **awk** by Brian Kernighan and Jon Bentley, and is available from <http://netlib.org/typesetting/chem>.

Comparison Expression

A relation that is either true or false, such as ‘**a < b**’. Comparison expressions are used in **if**, **while**, **do**, and **for** statements, and in patterns to select which input records to process. (See [Section 6.3.2 \[Variable Typing and Comparison Expressions\]](#), page 120.)

Compiler A program that translates human-readable source code into machine-executable object code. The object code is then executed directly by the computer. See also “Interpreter.”

Complemented Bracket Expression

The negation of a *bracket expression*. All that is *not* described by a given bracket expression. The symbol ‘**^**’ precedes the negated bracket expression. E.g.: ‘**[!^:digit:]**’ designates whatever character is not a digit. ‘**[^bad]**’ designates whatever character is not one of the letters ‘**b**’, ‘**a**’, or ‘**d**’. See “Bracket Expression.”

Compound Statement

A series of **awk** statements, enclosed in curly braces. Compound statements may be nested. (See [Section 7.4 \[Control Statements in Actions\]](#), page 138.)

Computed Regexp

See “Dynamic Regular Expressions.”

Concatenation

Concatenating two strings means sticking them together, one after another, producing a new string. For example, the string ‘**foo**’ concatenated with the string ‘**bar**’ gives the string ‘**foobar**’. (See [Section 6.2.2 \[String Concatenation\]](#), page 115.)

Conditional Expression

An expression using the ‘**?:**’ ternary operator, such as ‘**expr1 ? expr2 : expr3**’. The expression *expr1* is evaluated; if the result is true, the value of the whole expression is the value of *expr2*; otherwise the value is *expr3*. In either case, only one of *expr2* and *expr3* is evaluated. (See [Section 6.3.4 \[Conditional Expressions\]](#), page 125.)

Control Statement

A control statement is an instruction to perform a given operation or a set of operations inside an **awk** program, if a given condition is true. Control

statements are: `if`, `for`, `while`, and `do` (see [Section 7.4 \[Control Statements in Actions\]](#), page 138).

Cookie A peculiar goodie, token, saying or remembrance produced by or presented to a program. (With thanks to Professor Doug McIlroy.)

Coprocess A subordinate program with which two-way communications is possible.

Curly Braces
See “Braces.”

Dark Corner
An area in the language where specifications often were (or still are) not clear, leading to unexpected or undesirable behavior. Such areas are marked in this book with the picture of a flashlight in the margin and are indexed under the heading “dark corner.”

Data Driven
A description of `awk` programs, where you specify the data you are interested in processing, and what to do when that data is seen.

Data Objects
These are numbers and strings of characters. Numbers are converted into strings and vice versa, as needed. (See [Section 6.1.4 \[Conversion of Strings and Numbers\]](#), page 111.)

Deadlock The situation in which two communicating processes are each waiting for the other to perform an action.

Debugger A program used to help developers remove “bugs” from (de-bug) their programs.

Double Precision
An internal representation of numbers that can have fractional parts. Double precision numbers keep track of more digits than do single precision numbers, but operations on them are sometimes more expensive. This is the way `awk` stores numeric values. It is the C type `double`.

Dynamic Regular Expression
A dynamic regular expression is a regular expression written as an ordinary expression. It could be a string constant, such as `"foo"`, but it may also be an expression whose value can vary. (See [Section 3.6 \[Using Dynamic Regexp\]](#), page 53.)

Empty String
See “Null String.”

Environment
A collection of strings, of the form `'name=val'`, that each program has available to it. Users generally place values into the environment in order to provide information to various programs. Typical examples are the environment variables `HOME` and `PATH`.

- Epoch** The date used as the “beginning of time” for timestamps. Time values in most systems are represented as seconds since the epoch, with library functions available for converting these values into standard date and time formats. The epoch on Unix and POSIX systems is 1970-01-01 00:00:00 UTC. See also “GMT” and “UTC.”
- Escape Sequences** A special sequence of characters used for describing nonprinting characters, such as ‘\n’ for newline or ‘\033’ for the ASCII ESC (Escape) character. (See [Section 3.2 \[Escape Sequences\]](#), page 46.)
- Extension** An additional feature or change to a programming language or utility not defined by that language’s or utility’s standard. `gawk` has (too) many extensions over POSIX `awk`.
- FDL** See “Free Documentation License.”
- Field** When `awk` reads an input record, it splits the record into pieces separated by whitespace (or by a separator regexp that you can change by setting the predefined variable `FS`). Such pieces are called fields. If the pieces are of fixed length, you can use the built-in variable `FIELDWIDTHS` to describe their lengths. If you wish to specify the contents of fields instead of the field separator, you can use the predefined variable `FPAT` to do so. (See [Section 4.5 \[Specifying How Fields Are Separated\]](#), page 67, [Section 4.6 \[Reading Fixed-Width Data\]](#), page 72, and [Section 4.7 \[Defining Fields by Content\]](#), page 74.)
- Flag** A variable whose truth value indicates the existence or nonexistence of some condition.
- Floating-Point Number** Often referred to in mathematical terms as a “rational” or real number, this is just a number that can have a fractional part. See also “Double Precision” and “Single Precision.”
- Format** Format strings control the appearance of output in the `strftime()` and `sprintf()` functions, and in the `printf` statement as well. Also, data conversions from numbers to strings are controlled by the format strings contained in the predefined variables `CONVFMT` and `OFMT`. (See [Section 5.5.2 \[Format-Control Letters\]](#), page 93.)
- Fortran** Shorthand for FORMula TRANslator, one of the first programming languages available for scientific calculations. It was created by John Backus, and has been available since 1957. It is still in use today.
- Free Documentation License** This document describes the terms under which this book is published and may be copied. (See [\[GNU Free Documentation License\]](#), page 491.)
- Free Software Foundation** A nonprofit organization dedicated to the production and distribution of freely distributable software. It was founded by Richard M. Stallman, the author of the original Emacs editor. GNU Emacs is the most widely used version of Emacs today.

- FSF** See “Free Software Foundation.”
- Function** A part of an **awk** program that can be invoked from every point of the program, to perform a task. **awk** has several built-in functions. Users can define their own functions in every part of the program. Function can be recursive, i.e., they may invoke themselves. See [Chapter 9 \[Functions\]](#), page 175. In **gawk** it is also possible to have functions shared among different programs, and included where required using the `@include` directive (see [Section 2.7 \[Including Other Files into Your Program\]](#), page 42). In **gawk** the name of the function that should be invoked can be generated at run time, i.e., dynamically. The **gawk** extension API provides constructor functions (see [Section 16.4.4 \[Constructor Functions\]](#), page 365).
- gawk** The GNU implementation of **awk**.
- General Public License**
This document describes the terms under which **gawk** and its source code may be distributed. (See [\[GNU General Public License\]](#), page 479.)
- GMT** “Greenwich Mean Time.” This is the old term for UTC. It is the time of day used internally for Unix and POSIX systems. See also “Epoch” and “UTC.”
- GNU** “GNU’s not Unix”. An on-going project of the Free Software Foundation to create a complete, freely distributable, POSIX-compliant computing environment.
- GNU/Linux**
A variant of the GNU system using the Linux kernel, instead of the Free Software Foundation’s Hurd kernel. The Linux kernel is a stable, efficient, full-featured clone of Unix that has been ported to a variety of architectures. It is most popular on PC-class systems, but runs well on a variety of other systems too. The Linux kernel source code is available under the terms of the GNU General Public License, which is perhaps its most important aspect.
- GPL** See “General Public License.”
- Hexadecimal**
Base 16 notation, where the digits are 0–9 and A–F, with ‘A’ representing 10, ‘B’ representing 11, and so on, up to ‘F’ for 15. Hexadecimal numbers are written in C using a leading ‘0x’, to indicate their base. Thus, 0x12 is 18 ((1 x 16) + 2). See [Section 6.1.1.2 \[Octal and Hexadecimal Numbers\]](#), page 107.
- I/O** Abbreviation for “Input/Output,” the act of moving data into and/or out of a running program.
- Input Record**
A single chunk of data that is read in by **awk**. Usually, an **awk** input record consists of one line of text. (See [Section 4.1 \[How Input Is Split into Records\]](#), page 59.)
- Integer** A whole number, i.e., a number that does not have a fractional part.
- Internationalization**
The process of writing or modifying a program so that it can use multiple languages without requiring further source code changes.

Interpreter

A program that reads human-readable source code directly, and uses the instructions in it to process data and produce results. `awk` is typically (but not always) implemented as an interpreter. See also “Compiler.”

Interval Expression

A component of a regular expression that lets you specify repeated matches of some part of the regexp. Interval expressions were not originally available in `awk` programs.

ISO

The International Organization for Standardization. This organization produces international standards for many things, including programming languages, such as C and C++. In the computer arena, important standards like those for C, C++, and POSIX become both American national and ISO international standards simultaneously. This book refers to Standard C as “ISO C” throughout. See [the ISO website](#) for more information about the name of the organization and its language-independent three-letter acronym.

Java

A modern programming language originally developed by Sun Microsystems (now Oracle) supporting Object-Oriented programming. Although usually implemented by compiling to the instructions for a standard virtual machine (the JVM), the language can be compiled to native code.

Keyword

In the `awk` language, a keyword is a word that has special meaning. Keywords are reserved and may not be used as variable names.

`gawk`’s keywords are: `BEGIN`, `BEGINFILE`, `END`, `ENDFILE`, `break`, `case`, `continue`, `default delete`, `do...while`, `else`, `exit`, `for...in`, `for`, `function`, `func`, `if`, `next`, `nextfile`, `switch`, and `while`.

Korn Shell

The Korn Shell (`ksh`) is a Unix shell which was developed by David Korn at Bell Laboratories in the early 1980s. The Korn Shell is backward-compatible with the Bourne shell and includes many features of the C shell. See also “Bourne Shell.”

Lesser General Public License

This document describes the terms under which binary library archives or shared objects, and their source code may be distributed.

LGPL

See “Lesser General Public License.”

Linux

See “GNU/Linux.”

Localization

The process of providing the data necessary for an internationalized program to work in a particular language.

Logical Expression

An expression using the operators for logic, AND, OR, and NOT, written ‘`&&`’, ‘`||`’, and ‘`!`’ in `awk`. Often called Boolean expressions, after the mathematician who pioneered this kind of mathematical logic.

Lvalue	An expression that can appear on the left side of an assignment operator. In most languages, lvalues can be variables or array elements. In awk , a field designator can also be used as an lvalue.
Matching	The act of testing a string against a regular expression. If the regexp describes the contents of the string, it is said to <i>match</i> it.
Metacharacters	Characters used within a regexp that do not stand for themselves. Instead, they denote regular expression operations, such as repetition, grouping, or alternation.
Nesting	Nesting is where information is organized in layers, or where objects contain other similar objects. In gawk the @include directive can be nested. The “natural” nesting of arithmetic and logical operations can be changed using parentheses (see Section 6.5 [Operator Precedence (How Operators Nest)] , page 128).
No-op	An operation that does nothing.
Null String	A string with no characters in it. It is represented explicitly in awk programs by placing two double quote characters next to each other (<code>""</code>). It can appear in input data by having two successive occurrences of the field separator appear next to each other.
Number	A numeric-valued data object. Modern awk implementations use double precision floating-point to represent numbers. Ancient awk implementations used single precision floating-point.
Octal	Base-eight notation, where the digits are 0–7. Octal numbers are written in C using a leading ‘0’, to indicate their base. Thus, 013 is 11 ((1 x 8) + 3). See Section 6.1.1.2 [Octal and Hexadecimal Numbers] , page 107.
Output Record	A single chunk of data that is written out by awk . Usually, an awk output record consists of one or more lines of text. See Section 4.1 [How Input Is Split into Records] , page 59.
Pattern	Patterns tell awk which input records are interesting to which rules. A pattern is an arbitrary conditional expression against which input is tested. If the condition is satisfied, the pattern is said to <i>match</i> the input record. A typical pattern might compare the input record against a regular expression. (See Section 7.1 [Pattern Elements] , page 131.)
PEBKAC	An acronym describing what is possibly the most frequent source of computer usage problems. (Problem Exists Between Keyboard And Chair.)
Plug-in	See “Extensions.”
POSIX	The name for a series of standards that specify a Portable Operating System interface. The “IX” denotes the Unix heritage of these standards. The main standard of interest for awk users is <i>IEEE Standard for Information Technology, Standard 1003.1-2008</i> . The 2008 POSIX standard can be found online at http://www.opengroup.org/onlinepubs/9699919799/ .

Precedence

The order in which operations are performed when operators are used without explicit parentheses.

Private

Variables and/or functions that are meant for use exclusively by library functions and not for the main `awk` program. Special care must be taken when naming such variables and functions. (See [Section 10.1 \[Naming Library Function Global Variables\]](#), page 220.)

Range (of input lines)

A sequence of consecutive lines from the input file(s). A pattern can specify ranges of input lines for `awk` to process or it can specify single lines. (See [Section 7.1 \[Pattern Elements\]](#), page 131.)

Record

See “Input record” and “Output record.”

Recursion

When a function calls itself, either directly or indirectly. If this is clear, stop, and proceed to the next entry. Otherwise, refer to the entry for “recursion.”

Redirection

Redirection means performing input from something other than the standard input stream, or performing output to something other than the standard output stream.

You can redirect input to the `getline` statement using the ‘<’, ‘|’, and ‘|&’ operators. You can redirect the output of the `print` and `printf` statements to a file or a system command, using the ‘>’, ‘>>’, ‘|’, and ‘|&’ operators. (See [Section 4.9 \[Explicit Input with getline\]](#), page 78, and [Section 5.6 \[Redirecting Output of print and printf\]](#), page 97.)

Reference Counts

An internal mechanism in `gawk` to minimize the amount of memory needed to store the value of string variables. If the value assumed by a variable is used in more than one place, only one copy of the value itself is kept, and the associated reference count is increased when the same value is used by an additional variable, and decreased when the related variable is no longer in use. When the reference count goes to zero, the memory space used to store the value of the variable is freed.

Regexp

See “Regular Expression.”

Regular Expression

A regular expression (“regexp” for short) is a pattern that denotes a set of strings, possibly an infinite set. For example, the regular expression ‘`R.*xp`’ matches any string starting with the letter ‘`R`’ and ending with the letters ‘`xp`’. In `awk`, regular expressions are used in patterns and in conditional expressions. Regular expressions may contain escape sequences. (See [Chapter 3 \[Regular Expressions\]](#), page 45.)

Regular Expression Constant

A regular expression constant is a regular expression written within slashes, such as `/foo/`. This regular expression is chosen when you write the `awk` program

and cannot be changed during its execution. (See [Section 3.1 \[How to Use Regular Expressions\]](#), page 45.)

Regular Expression Operators

See “Metacharacters.”

Rounding Rounding the result of an arithmetic operation can be tricky. More than one way of rounding exists, and in **gawk** it is possible to choose which method should be used in a program. See [Section 15.4.5 \[Setting the Rounding Mode\]](#), page 351.

Rule A segment of an **awk** program that specifies how to process single input records. A rule consists of a *pattern* and an *action*. **awk** reads an input record; then, for each rule, if the input record satisfies the rule’s pattern, **awk** executes the rule’s action. Otherwise, the rule does nothing for that input record.

Rvalue A value that can appear on the right side of an assignment operator. In **awk**, essentially every expression has a value. These values are rvalues.

Scalar A single value, be it a number or a string. Regular variables are scalars; arrays and functions are not.

Search Path

In **gawk**, a list of directories to search for **awk** program source files. In the shell, a list of directories to search for executable programs.

sed See “Stream Editor.”

Seed The initial value, or starting point, for a sequence of random numbers.

Shell The command interpreter for Unix and POSIX-compliant systems. The shell works both interactively, and as a programming language for batch files, or shell scripts.

Short-Circuit

The nature of the **awk** logical operators ‘&&’ and ‘||’. If the value of the entire expression is determinable from evaluating just the lefthand side of these operators, the righthand side is not evaluated. (See [Section 6.3.3 \[Boolean Expressions\]](#), page 124.)

Side Effect

A side effect occurs when an expression has an effect aside from merely producing a value. Assignment expressions, increment and decrement expressions, and function calls have side effects. (See [Section 6.2.3 \[Assignment Expressions\]](#), page 116.)

Single Precision

An internal representation of numbers that can have fractional parts. Single precision numbers keep track of fewer digits than do double precision numbers, but operations on them are sometimes less expensive in terms of CPU time. This is the type used by some ancient versions of **awk** to store numeric values. It is the C type **float**.

Space The character generated by hitting the space bar on the keyboard.

Special File

A file name interpreted internally by **gawk**, instead of being handed directly to the underlying operating system—for example, `/dev/stderr`. (See [Section 5.8 \[Special File names in gawk\]](#), page 101.)

Statement An expression inside an **awk** program in the action part of a pattern–action rule, or inside an **awk** function. A statement can be a variable assignment, an array operation, a loop, etc.

Stream Editor

A program that reads records from an input stream and processes them one or more at a time. This is in contrast with batch programs, which may expect to read their input files in entirety before starting to do anything, as well as with interactive programs which require input from the user.

String A datum consisting of a sequence of characters, such as ‘`I am a string`’. Constant strings are written with double quotes in the **awk** language and may contain escape sequences. (See [Section 3.2 \[Escape Sequences\]](#), page 46.)

Tab The character generated by hitting the **TAB** key on the keyboard. It usually expands to up to eight spaces upon output.

Text Domain

A unique name that identifies an application. Used for grouping messages that are translated at runtime into the local language.

Timestamp

A value in the “seconds since the epoch” format used by Unix and POSIX systems. Used for the **gawk** functions `mktime()`, `strftime()`, and `systemtime()`. See also “Epoch,” “GMT,” and “UTC.”

Unix A computer operating system originally developed in the early 1970’s at AT&T Bell Laboratories. It initially became popular in universities around the world and later moved into commercial environments as a software development system and network server system. There are many commercial versions of Unix, as well as several work-alike systems whose source code is freely available (such as GNU/Linux, [NetBSD](#), [FreeBSD](#), and [OpenBSD](#)).

UTC The accepted abbreviation for “Universal Coordinated Time.” This is standard time in Greenwich, England, which is used as a reference time for day and date calculations. See also “Epoch” and “GMT.”

Variable A name for a value. In **awk**, variables may be either scalars or arrays.

Whitespace

A sequence of space, **TAB**, or newline characters occurring inside an input record or a string.

GNU General Public License

Version 3, 29 June 2007

Copyright © 2007 Free Software Foundation, Inc. <http://fsf.org/>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program—to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps: (1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

“This License” refers to version 3 of the GNU General Public License.

“Copyright” also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

“The Program” refers to any copyrightable work licensed under this License. Each licensee is addressed as “you”. “Licensees” and “recipients” may be individuals or organizations.

To “modify” a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a “modified version” of the earlier work or a work “based on” the earlier work.

A “covered work” means either the unmodified Program or a work based on the Program.

To “propagate” a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To “convey” a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays “Appropriate Legal Notices” to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The “source code” for a work means the preferred form of the work for making modifications to it. “Object code” means any non-source form of a work.

A “Standard Interface” means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The “System Libraries” of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A “Major Component”, in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The “Corresponding Source” for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work’s System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users’ Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a. The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b. The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c. You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d. If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a. Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.
- b. Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.
- c. Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.
- d. Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.
- e. Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A “User Product” is either (1) a “consumer product”, which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, “normally used” refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

“Installation Information” for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source.

The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

“Additional permissions” are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a. Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b. Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c. Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or

- d. Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e. Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f. Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered “further restrictions” within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance.

However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An “entity transaction” is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party’s predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A “contributor” is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor’s “contributor version”.

A contributor’s “essential patent claims” are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, “control” includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor’s essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a “patent license” is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To “grant” such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so

available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. “Knowingly relying” means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient’s use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is “discriminatory” if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others’ Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License “or any later version” applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy’s public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM “AS IS” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17. Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the “copyright” line and a pointer to where the full notice is found.

```
one line to give the program's name and a brief idea of what it does.
Copyright (C) year name of author
```

```
This program is free software: you can redistribute it and/or modify
it under the terms of the GNU General Public License as published by
the Free Software Foundation, either version 3 of the License, or (at
your option) any later version.
```

```
This program is distributed in the hope that it will be useful, but
WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU
General Public License for more details.
```

```
You should have received a copy of the GNU General Public License
along with this program. If not, see http://www.gnu.org/licenses/.
```

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
program Copyright (C) year name of author
This program comes with ABSOLUTELY NO WARRANTY; for details type 'show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type 'show c' for details.
```

The hypothetical commands ‘show w’ and ‘show c’ should show the appropriate parts of the General Public License. Of course, your program’s commands might be different; for a GUI interface, you would use an “about box”.

You should also get your employer (if you work as a programmer) or school, if any, to sign a “copyright disclaimer” for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <http://www.gnu.org/philosophy/why-not-lgpl.html>.

GNU Free Documentation License

Version 1.3, 3 November 2008

Copyright © 2000, 2001, 2002, 2007, 2008 Free Software Foundation, Inc.

<http://fsf.org/>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

0. PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document *free* in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or non-commercially. Secondly, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of “copyleft”, which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

1. APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The “Document”, below, refers to any such manual or work. Any member of the public is a licensee, and is addressed as “you”. You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A “Modified Version” of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A “Secondary Section” is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document’s overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The “Invariant Sections” are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released

under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The “Cover Texts” are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A “Transparent” copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not “Transparent” is called “Opaque”.

Examples of suitable formats for Transparent copies include plain ASCII without markup, Texinfo input format, LaTeX input format, SGML or XML using a publicly available DTD, and standard-conforming simple HTML, PostScript or PDF designed for human modification. Examples of transparent image formats include PNG, XCF and JPG. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, SGML or XML for which the DTD and/or processing tools are not generally available, and the machine-generated HTML, PostScript or PDF produced by some word processors for output purposes only.

The “Title Page” means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, “Title Page” means the text near the most prominent appearance of the work’s title, preceding the beginning of the body of the text.

The “publisher” means any person or entity that distributes copies of the Document to the public.

A section “Entitled XYZ” means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as “Acknowledgements”, “Dedications”, “Endorsements”, or “History”.) To “Preserve the Title” of such a section when you modify the Document means that it remains a section “Entitled XYZ” according to this definition.

The Document may include Warranty Disclaimers next to the notice which states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

2. VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

3. COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible. You may add other material on the covers in addition. Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

4. MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

- A. Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any,

be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.

- B. List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.
- C. State on the Title page the name of the publisher of the Modified Version, as the publisher.
- D. Preserve all the copyright notices of the Document.
- E. Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.
- F. Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.
- G. Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.
- H. Include an unaltered copy of this License.
- I. Preserve the section Entitled "History", Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled "History" in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.
- J. Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the "History" section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.
- K. For any section Entitled "Acknowledgements" or "Dedications", Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.
- L. Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.
- M. Delete any section Entitled "Endorsements". Such a section may not be included in the Modified Version.
- N. Do not retitle any existing section to be Entitled "Endorsements" or to conflict in title with any Invariant Section.
- O. Preserve any Warranty Disclaimers.

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their

titles to the list of Invariant Sections in the Modified Version’s license notice. These titles must be distinct from any other section titles.

You may add a section Entitled “Endorsements”, provided it contains nothing but endorsements of your Modified Version by various parties—for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

5. COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled “History” in the various original documents, forming one section Entitled “History”; likewise combine any sections Entitled “Acknowledgements”, and any sections Entitled “Dedications”. You must delete all sections Entitled “Endorsements.”

6. COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

7. AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called an “aggregate” if the copyright resulting from the compilation is not used to limit the legal rights of the compilation’s users beyond what the individual works permit. When the Document is included in an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document’s Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

8. TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled “Acknowledgements”, “Dedications”, or “History”, the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

9. TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, or distribute it is void, and will automatically terminate your rights under this License.

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, receipt of a copy of some or all of the same material does not give you any rights to use it.

10. FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See <http://www.gnu.org/copyleft/>.

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License “or any later version” applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation. If the Document specifies that a proxy can decide which future versions of this License can be used, that proxy’s public statement of acceptance of a version permanently authorizes you to choose that version for the Document.

11. RELICENSING

“Massive Multiauthor Collaboration Site” (or “MMC Site”) means any World Wide Web server that publishes copyrightable works and also provides prominent facilities for anybody to edit those works. A public wiki that anybody can edit is an example of such a server. A “Massive Multiauthor Collaboration” (or “MMC”) contained in the site means any set of copyrightable works thus published on the MMC site.

“CC-BY-SA” means the Creative Commons Attribution-Share Alike 3.0 license published by Creative Commons Corporation, a not-for-profit corporation with a principal place of business in San Francisco, California, as well as future copyleft versions of that license published by that same organization.

“Incorporate” means to publish or republish a Document, in whole or in part, as part of another Document.

An MMC is “eligible for relicensing” if it is licensed under this License, and if all works that were first published under this License somewhere other than this MMC, and subsequently incorporated in whole or in part into the MMC, (1) had no cover texts or invariant sections, and (2) were thus incorporated prior to November 1, 2008.

The operator of an MMC Site may republish an MMC contained in the site under CC-BY-SA on the same site at any time before August 1, 2009, provided the MMC is eligible for relicensing.

ADDENDUM: How to use this License for your documents

To use this License in a document you have written, include a copy of the License in the document and put the following copyright and license notices just after the title page:

```
Copyright (C)  year  your name.
Permission is granted to copy, distribute and/or modify this document
under the terms of the GNU Free Documentation License, Version 1.3
or any later version published by the Free Software Foundation;
with no Invariant Sections, no Front-Cover Texts, and no Back-Cover
Texts. A copy of the license is included in the section entitled “GNU
Free Documentation License”.
```

If you have Invariant Sections, Front-Cover Texts and Back-Cover Texts, replace the “with...Texts.” line with this:

with the Invariant Sections being *list their titles*, with the Front-Cover Texts being *list*, and with the Back-Cover Texts being *list*.

If you have Invariant Sections without Cover Texts, or some other combination of the three, merge those two alternatives to suit the situation.

If your document contains nontrivial examples of program code, we recommend releasing these examples in parallel under your choice of free software license, such as the GNU General Public License, to permit their use in free software.

Index

!

- ! (exclamation point), ! operator ... 125, 128, 133, 261
- ! (exclamation point), != operator 122, 128
- ! (exclamation point), !~ operator 45, 53, 56, 108, 122, 123, 129, 132

"

- " (double quote), in regexp constants 53
- " (double quote), in shell commands 22

#

- # (number sign), #! (executable scripts) 19
- # (number sign), commenting 20

\$

- \$ (dollar sign), \$ field operator 63, 128
- \$ (dollar sign), incrementing fields and arrays 119
- \$ (dollar sign), regexp operator 48

%

- % (percent sign), % operator 128
- % (percent sign), %= operator 118, 129

&

- & (ampersand), && operator 125, 129
- & (ampersand), gsub()/gensub()/sub() functions and 186

,

- ' (single quote) 17
- ' (single quote) in **gawk** command lines 19
- ' (single quote), in shell commands 21
- ' (single quote), vs. apostrophe 20
- ' (single quote), with double quotes 22

(

- () (parentheses), in a profile 314
- () (parentheses), regexp operator 49

*

- * (asterisk), * operator, as multiplication operator 128
- * (asterisk), * operator, as regexp operator 49
- * (asterisk), * operator, null strings, matching 186
- * (asterisk), ** operator 115, 128
- * (asterisk), **= operator 118, 129
- * (asterisk), *= operator 118, 129

+

- + (plus sign), + operator 128
- + (plus sign), ++ operator 119, 128
- + (plus sign), += operator 117, 129
- + (plus sign), regexp operator 49

,

- , (comma), in range patterns 133

-

- (hyphen), - operator 128
- (hyphen), -- operator 119, 128
- (hyphen), -= operator 118, 129
- (hyphen), filenames beginning with 32
- (hyphen), in bracket expressions 51
- assign option 32
- bignum option 35
- characters-as-bytes option 32
- copyright option 32
- debug option 33
- disable-extensions configuration option... 435
- disable-lint configuration option 435
- disable-nls configuration option 436
- dump-variables option 33
- dump-variables option, using for library functions 220
- exec option 33
- field-separator option 31
- file option 31
- gen-pot option 34, 321
- help option 34
- include option 34
- lint option 31, 34
- lint-old option 36
- load option 34
- non-decimal-data option 35, 301
- non-decimal-data option, strtonum() function and 301
- optimize option 35
- posix option 35
- posix option, --traditional option and 36

--pretty-print option	35	/	
--profile option	35, 312	/ (forward slash) to enclose	
--re-interval option	36	regular expressions	45
--sandbox option	36	/ (forward slash), / operator	128
--sandbox option, disabling		/ (forward slash), /= operator	118, 129
system() function	191	/ (forward slash), /= operator, vs.	
--sandbox option, input		/=.../ regexp constant	118
redirection with getline	78	/ (forward slash), patterns and	132
--sandbox option, output redirection		/= operator vs. /=.../ regexp constant	118
with print , printf	97	/dev/... special files	101
--source option	33	/dev/fd/ <i>N</i> special files (gawk)	101
--traditional option	32	/inet/... special files (gawk)	311
--traditional option, --posix option and	36	/inet4/... special files (gawk)	311
--use-lc-numeric option	35	/inet6/... special files (gawk)	311
--version option	36		
--with-whiny-user-strftime		;	
configuration option	436	; (semicolon), AWKPATH variable and	439
-b option	32	; (semicolon), separating	
-c option	32	statements in actions	29, 137, 138
-C option	32		
-d option	33	<	
-D option	33	< (left angle bracket), < operator	122, 128
-e option	33, 37	< (left angle bracket), < operator (I/O)	80
-E option	33	< (left angle bracket), <= operator	122, 128
-f option	18, 31		
-f option, multiple uses	36	=	
-F option	31	= (equals sign), = operator	116
-F option, -Ft sets FS to TAB	36	= (equals sign), == operator	122, 128
-F option, command-line	69		
-g option	34	>	
-h option	34	> (right angle bracket), > operator	122, 128
-i option	34	> (right angle bracket), > operator (I/O)	98
-l option	34	> (right angle bracket), >= operator	122, 128
-L option	36	> (right angle bracket), >>	
-M option	35	operator (I/O)	98, 128
-n option	35		
-N option	35	?	
-o option	35	? (question mark), ?: operator	129
-O option	35	? (question mark), regexp operator	49, 55
-p option	35		
-P option	35	@	
-r option	36	@-notation for indirect function calls	209
-S option	36	@include directive	42
-v option	32, 111	@load directive	43
-V option	36		
-W option	32	[
		[(square brackets), regexp operator	49
.			
. (period), regexp operator	48		
.gmo files	318		
.gmo files, specifying directory of	318, 320		
.mo files, converting from .po	325		
.po files	317, 321		
.po files, converting to .mo	325		
.pot files	317		

- ^
 - ^ (caret), ^ operator 128
 - ^ (caret), ^= operator 118, 129
 - ^ (caret), in bracket expressions 51
 - ^ (caret), in FS 69
 - ^ (caret), regexp operator 48, 55
 - _
 - _ (underscore), C macro 318
 - _ (underscore), in names of private variables .. 220
 - _ (underscore), translatable string 320
 - _gr_init() user-defined function 246
 - _ord_init() user-defined function 225
 - _pw_init() user-defined function 242
 - \
 - \ (backslash) 21
 - \ (backslash), \" escape sequence 47
 - \ (backslash), \' operator (**gawk**) 55
 - \ (backslash), \/ escape sequence 47
 - \ (backslash), \< operator (**gawk**) 54
 - \ (backslash), \> operator (**gawk**) 54
 - \ (backslash), \' operator (**gawk**) 55
 - \ (backslash), \a escape sequence 46
 - \ (backslash), \b escape sequence 46
 - \ (backslash), \B operator (**gawk**) 54
 - \ (backslash), \f escape sequence 46
 - \ (backslash), \n escape sequence 46
 - \ (backslash), \nnn escape sequence 46
 - \ (backslash), \r escape sequence 46
 - \ (backslash), \s operator (**gawk**) 54
 - \ (backslash), \S operator (**gawk**) 54
 - \ (backslash), \t escape sequence 46
 - \ (backslash), \v escape sequence 46
 - \ (backslash), \w operator (**gawk**) 54
 - \ (backslash), \W operator (**gawk**) 54
 - \ (backslash), \x escape sequence 46
 - \ (backslash), \y operator (**gawk**) 54
 - \ (backslash), as field separator 70
 - \ (backslash), continuing lines and 27
 - \ (backslash), continuing lines and,
 - comments and 28
 - \ (backslash), continuing lines and, in **cs**h 28
 - \ (backslash),
 - gsub()**/**gensub()**/**sub()** functions and 186
 - \ (backslash), in bracket expressions 51
 - \ (backslash), in escape sequences 46, 47
 - \ (backslash), in escape
 - sequences, POSIX and 47
 - \ (backslash), in regexp constants 53
 - \ (backslash), in shell commands 21
 - \ (backslash), regexp operator 48
 - {
 - { (braces) 314
 - { (braces), actions and 137
 - { (braces), statements, grouping 138
 - |
 - | (vertical bar) 49
 - | (vertical bar), | operator (I/O) 81, 98, 128
 - | (vertical bar), |& operator (I/O) .. 82, 99, 128, 309
 - | (vertical bar), |& operator
 - (I/O), pipes, closing 104
 - | (vertical bar), || operator 125, 129
 - ~
 - ~ (tilde), ~ operator 45, 53, 56, 108, 122, 123, 129, 132
- ## A
- accessing fields 63
 - accessing global variables from extensions 375
 - account information 241, 245
 - actions 137
 - actions, control statements in 138
 - actions, default 24
 - actions, empty 24
 - Ada programming language 467
 - adding, features to **gawk** 452
 - adding, fields 65
 - advanced features, fixed-width data 72
 - advanced features, **gawk** 301
 - advanced features, network programming 311
 - advanced features, nondecimal input data 301
 - advanced features, processes,
 - communicating with 308
 - advanced features, specifying field content 74
 - Aho, Alfred 6, 427
 - alarm clock example program 274
 - alarm.awk** program 274
 - algorithms 464
 - allocating memory for extensions 364
 - amazing **awk** assembler (**aaa**) 467
 - amazingly workable formatter (**awf**) 467
 - ambiguity, syntactic: /= operator vs.
 - /=.../ regexp constant 118
 - ampersand (&), && operator 125, 129
 - ampersand (&),
 - gsub()**/**gensub()**/**sub()** functions and 186
 - anagram.awk** program 294
 - anagrams, finding 294
 - and Boolean-logic operator 124
 - and()** function (**gawk**) 197
 - AND bitwise operation 197
 - ANSI 467

API informational variables	388
API version	387
arbitrary precision	343
arbitrary precision integers	352
archaeologists	445
arctangent	176
ARGC/ARGV variables	149
ARGC/ARGV variables, command-line arguments	37
ARGC/ARGV variables, how to use	155
ARGC/ARGV variables, portability and	20
ARGIND variable	150
ARGIND variable, command-line arguments	37
arguments, command-line	37, 149, 155
arguments, command-line, invoking awk	31
arguments, in function calls	126
arguments, processing	236
ARGV array, indexing into	37
arithmetic operators	114
array manipulation in extensions	379
array members	161
array scanning order, controlling	164
array, number of elements	180
arrays	159
arrays of arrays	171
arrays, an example of using	162
arrays, and IGNORECASE variable	161
arrays, as parameters to functions	206
arrays, associative	160
arrays, associative, library functions and	220
arrays, deleting entire contents	169
arrays, elements that don't exist	161
arrays, elements, assigning values	162
arrays, elements, deleting	168
arrays, elements, order of access by in operator	163
arrays, elements, retrieving number of	178
arrays, for statement and	163
arrays, indexing	160
arrays, merging into strings	227
arrays, multidimensional	169
arrays, multidimensional, scanning	171
arrays, numeric subscripts	167
arrays, referencing elements	161
arrays, scanning	163
arrays, sorting	306
arrays, sorting, and IGNORECASE variable	307
arrays, sparse	160
arrays, subscripts, uninitialized variables as ...	167
arrays, unassigned elements	161
artificial intelligence, gawk and	432
ASCII	226, 469
asort() function (gawk)	178, 306
asort() function (gawk), arrays, sorting	306
asorti() function (gawk)	178, 306
asorti() function (gawk), arrays, sorting	306
assert() function (C library)	222
assert() user-defined function	223
assertions	222
assign values to variables, in debugger	336
assignment operators	116
assignment operators, evaluation order	118
assignment operators, lvalues/rvalues	116
assignments as filenames	235
associative arrays	160
asterisk (*), * operator, as multiplication operator	128
asterisk (*), * operator, as regexp operator	49
asterisk (*), * operator, null strings, matching	186
asterisk (*), ** operator	115, 128
asterisk (*), **= operator	118, 129
asterisk (*), *= operator	118, 129
atan2() function	176
automatic displays, in debugger	337
awf (amazingly workable formatter) program ..	467
awk debugging, enabling	33
awk language, POSIX version	118
awk profiling, enabling	35
awk programs	17, 19, 26
awk programs, complex	29
awk programs, documenting	20, 220
awk programs, examples of	253
awk programs, execution of	144
awk programs, internationalizing	199, 319
awk programs, lengthy	18
awk programs, lengthy, assertions	222
awk programs, location of	31, 33, 34
awk programs, one-line examples	25
awk programs, profiling	312
awk programs, running	17, 18
awk programs, running, from shell scripts	17
awk programs, running, without input files	18
awk programs, shell variables in	136
awk, function of	17
awk, gawk and	5, 7
awk, history of	6
awk, implementation issues, pipes	99
awk, implementations	446
awk, implementations, limits	83
awk, invoking	31
awk, new vs. old	6
awk, new vs. old, OFMT variable	112
awk, POSIX and	5
awk, POSIX and, See Also POSIX awk	5
awk, regexp constants and	123
awk, See Also gawk	5
awk, terms describing	7
awk, uses for	5, 17, 29
awk, versions of	415
awk, versions of, changes between SVR3.1 and SVR4	416
awk, versions of, changes between SVR4 and POSIX awk	416
awk, versions of, changes between V7 and SVR3.1	415

awk, versions of, See Also Brian

 Kernighan's **awk** 417, 446
awka compiler for **awk** 447
AWKLIBPATH environment variable 40
AWKPATH environment variable 39, 439
awkprof.out file 312
awksed.awk program 286
awkvars.out file 33

B

b debugger command (alias for **break**) 332
backslash (\) 21
backslash (\), \" escape sequence 47
backslash (\), \' operator (**gawk**) 55
backslash (\), \\ escape sequence 47
backslash (\), \< operator (**gawk**) 54
backslash (\), \> operator (**gawk**) 54
backslash (\), \' operator (**gawk**) 55
backslash (\), \a escape sequence 46
backslash (\), \b escape sequence 46
backslash (\), \B operator (**gawk**) 54
backslash (\), \f escape sequence 46
backslash (\), \n escape sequence 46
backslash (\), \nnn escape sequence 46
backslash (\), \r escape sequence 46
backslash (\), \s operator (**gawk**) 54
backslash (\), \S operator (**gawk**) 54
backslash (\), \t escape sequence 46
backslash (\), \v escape sequence 46
backslash (\), \w operator (**gawk**) 54
backslash (\), \W operator (**gawk**) 54
backslash (\), \x escape sequence 46
backslash (\), \y operator (**gawk**) 54
backslash (\), as field separator 70
backslash (\), continuing lines and 27
backslash (\), continuing lines and,
 comments and 28
backslash (\), continuing lines and, in **csh** 28
backslash (\),
 gsub()/**gensub()**/**sub()** functions and 186
backslash (\), in bracket expressions 51
backslash (\), in escape sequences 46, 47
backslash (\), in escape
 sequences, POSIX and 47
backslash (\), in regexp constants 53
backslash (\), in shell commands 21
backslash (\), regexp operator 48
backtrace debugger command 337
Beebe, Nelson H.F. 12, 447
BEGIN pattern 67, 134
BEGIN pattern, and profiling 313
BEGIN pattern, **assert()**
 user-defined function and 224
BEGIN pattern, Boolean patterns and 133
BEGIN pattern, **exit** statement and 146
BEGIN pattern, **getline** and 83
BEGIN pattern, headings, adding 90

BEGIN pattern, **next/nextfile**
 statements and 135, 145
BEGIN pattern, OFS/ORS variables,
 assigning values to 91
BEGIN pattern, operators and 134
BEGIN pattern, **print** statement and 135
BEGIN pattern, **pwcat** program 243
BEGIN pattern, running **awk** programs and 254
BEGIN pattern, **TEXTDOMAIN** variable and 320
beginfile() user-defined function 232
BEGINFILE pattern 135
BEGINFILE pattern, Boolean patterns and 133
Bentley, Jon 470
Benzinger, Michael 428
Berry, Karl 12, 427
binary input/output 147
bindtextdomain() function (C library) 318
bindtextdomain() function (**gawk**) 199, 320
bindtextdomain() function (**gawk**),
 portability and 323
BINMODE variable 147, 439
bit-manipulation functions 197
bits2str() user-defined function 198
bitwise AND 197
bitwise complement 197
bitwise OR 197
bitwise XOR 197
bitwise, complement 197
bitwise, operations 197
bitwise, shift 197
body, in actions 138
body, in loops 139
Boolean expressions 124
Boolean expressions, as patterns 132
Boolean operators, See Boolean expressions ... 124
Bourne shell, quoting rules for 21
braces {} 314
braces {}, actions and 137
braces {}, statements, grouping 138
bracket expressions 49, 50
bracket expressions, character classes 51
bracket expressions, collating elements 52
bracket expressions, collating symbols 52
bracket expressions, complemented 49
bracket expressions, equivalence classes 52
bracket expressions, non-ASCII 52
bracket expressions, range expressions 50
break debugger command 332
break statement 142
breakpoint 328
breakpoint at location, how to delete 333
breakpoint commands 334
breakpoint condition 333
breakpoint, delete by number 333
breakpoint, how to disable or enable 333
breakpoint, setting 332
Brennan, Michael 2, 3, 12, 169, 286, 446, 447

Brian Kernighan's awk	29, 47, 55, 69, 82, 115, 135, 143, 144, 146, 169, 185, 186, 189
Brian Kernighan's awk , extensions	417
Brian Kernighan's awk , source code	446
Brini, Davide	295
Brink, Jeroen	23
Broder, Alan J.	428
Brown, Martin	428
BSD-based operating systems	478
bt debugger command (alias for backtrace) ...	337
Buening, Andreas	12, 428, 446
buffering, input/output	192, 309
buffering, interactive vs. noninteractive	190
buffers, flushing	189, 192
buffers, operators for	55
bug reports, email address, bug-gawk@gnu.org	445
bug-gawk@gnu.org bug reporting address	445
built-in functions	175
built-in functions, evaluation order	175
BusyBox Awk	447

C

c.e., See common extensions	10
call by reference	206
call by value	206
call stack, display in debugger	337
caret (^), ^ operator	128
caret (^), ^= operator	118, 129
caret (^), in bracket expressions	51
caret (^), regexp operator	48, 55
case keyword	141
case sensitivity, and regexps	148
case sensitivity, and string comparisons	148
case sensitivity, array indices and	161
case sensitivity, converting case	186
case sensitivity, example programs	219
case sensitivity, gawk	56
case sensitivity, regexps and	55
CGI, awk scripts for	33
character classes, See bracket expressions	49
character lists in regular expression	50
character lists, See bracket expressions	49
character sets (machine character encodings)	226, 469
character sets, See Also bracket expressions	49
characters, counting	271
characters, transliterating	276
characters, values of as numbers	225
Chassell, Robert J.	12
chdir() extension function	400
chem utility	470
chr() extension function	406
chr() user-defined function	225
clear debugger command	333
Cliff random numbers	225
cliff_rand() user-defined function	225

close file or coprocess	189
close() function	102, 189
close() function, portability	103
close() function, return value	104
close() function, two-way pipes and	309
Close, Diane	10, 427
Collado, Manuel	12
collating elements	52
collating symbols	52
Colombo, Antonio	12, 429
columns, aligning	90
columns, cutting	253
comma (,), in range patterns	133
command completion, in debugger	340
command line, arguments	37, 149, 155
command line, directories on	86
command line, formats	17
command line, FS on, setting	69
command line, invoking awk from	31
command line, option -f	18
command line, options	31
command line, options, end of	32
command line, variables, assigning on	111
command-line options, processing	236
command-line options, string extraction	321
commands debugger command	334
commands to execute at breakpoint	334
commenting	20
commenting, backslash continuation and	28
common extensions, ** operator	114
common extensions, **= operator	118
common extensions, /dev/stderr special file ..	101
common extensions, /dev/stdin special file ..	101
common extensions, /dev/stdout special file ..	101
common extensions, \x escape sequence	46
common extensions, BINMODE variable	439
common extensions, delete to delete entire arrays	169
common extensions, func keyword	201
common extensions, length() applied to an array	180
common extensions, RS as a regexp	61
common extensions, single character fields	69
comp.lang.awk newsgroup	445
comparison expressions	120
comparison expressions, as patterns	132
comparison expressions, string vs. regexp	123
compatibility mode (gawk), extensions	417
compatibility mode (gawk), file names	102
compatibility mode (gawk), hexadecimal numbers	108
compatibility mode (gawk), octal numbers	108
compatibility mode (gawk), specifying	32
compiled programs	463, 470
compiling gawk for Cygwin	440
compiling gawk for MS-DOS and MS-Windows	438
compiling gawk for VMS	441

compiling **gawk** with EMX for OS/2..... 438
compl() function (**gawk**)..... 197
 complement, bitwise..... 197
 compound statements, control
 statements and..... 138
 concatenating..... 115
condition debugger command..... 333
 conditional expressions..... 125
 configuration option, **--disable-extensions**.. 435
 configuration option, **--disable-lint**..... 435
 configuration option, **--disable-nls**..... 436
 configuration option,
 --with-whiny-user-strftime..... 436
 configuration options, **gawk**..... 435
 constant regexps..... 46
 constants, nondecimal..... 301
 constants, numeric..... 107
 constants, types of..... 107
 continue program, in debugger..... 334
continue statement..... 143
 control statements..... 138
 controlling array scanning order..... 164
 convert string to lower case..... 186
 convert string to number..... 183
 convert string to upper case..... 186
 converting integer array subscripts..... 167
 converting, dates to timestamps..... 193
 converting, numbers to strings..... 111, 198
 converting, strings to numbers..... 111, 198
CONVFMT variable..... 112, 147
CONVFMT variable, and array subscripts..... 167
 cookie..... 471
 coprocesses..... 99, 309
 coprocesses, closing..... 102
 coprocesses, **getline** from..... 82
cos() function..... 176
 cosine..... 176
 counting..... 271
csh utility..... 28
csh utility, **|&** operator, comparison with..... 309
csh utility, **POSIXLY_CORRECT**
 environment variable..... 37
ctime() user-defined function..... 203
 currency symbols, localization..... 318
 current system time..... 193
custom.h file..... 436
 customized input parser..... 367
 customized output wrapper..... 370
 customized two-way processor..... 372
cut utility..... 253
cut.awk program..... 254

D

d debugger command (alias for **delete**)..... 333
 d.c., See dark corner..... 10
 dark corner..... 10, 471
 dark corner, "0" is actually true..... 120
 dark corner, **/=** operator vs. **/=.../**
 regex constant..... 118
 dark corner, **^**, in **FS**..... 69
 dark corner, array subscripts..... 168
 dark corner, **break** statement..... 143
 dark corner, **close()** function..... 104
 dark corner, command-line arguments..... 111
 dark corner, **continue** statement..... 144
 dark corner, **CONVFMT** variable..... 112
 dark corner, escape sequences..... 38
 dark corner, escape sequences, for
 metacharacters..... 48
 dark corner, **exit** statement..... 146
 dark corner, field separators..... 71
 dark corner, **FILENAME** variable..... 83, 150
 dark corner, **FNR/NR** variables..... 155
 dark corner, format-control characters..... 93, 94
 dark corner, **FS** as null string..... 69
 dark corner, input files..... 61
 dark corner, invoking **awk**..... 31
 dark corner, **length()** function..... 180
 dark corner, locale's decimal point character... 112
 dark corner, multiline records..... 76
 dark corner, **NF** variable, decrementing..... 66
 dark corner, **OFMT** variable..... 92
 dark corner, regexp as second
 argument to **index()**..... 180
 dark corner, regexp constants..... 109
 dark corner, regexp constants,
 /= operator and..... 118
 dark corner, regexp constants, as arguments to
 user-defined functions..... 109
 dark corner, **split()** function..... 183
 dark corner, strings, storing..... 63
 dark corner, value of **ARGV[0]**..... 150
 data, fixed-width..... 72
 data-driven languages..... 464
 database, group, reading..... 245
 database, users, reading..... 241
date utility, GNU..... 192
date utility, POSIX..... 196
 dates, converting to timestamps..... 193
 dates, information related to, localization..... 319
 Davies, Stephen..... 12, 428
 Day, Robert P.J..... 12
dcgettext() function (**gawk**)..... 199, 319
dcgettext() function (**gawk**),
 portability and..... 323
dcngettext() function (**gawk**)..... 199, 320
dcngettext() function (**gawk**),
 portability and..... 323
 deadlocks..... 309

debugger commands, b (break)	332
debugger commands, backtrace	337
debugger commands, break	332
debugger commands, bt (backtrace)	337
debugger commands, c (continue)	334
debugger commands, clear	333
debugger commands, commands	334
debugger commands, condition	333
debugger commands, continue	334
debugger commands, d (delete)	333
debugger commands, delete	333
debugger commands, disable	333
debugger commands, display	335
debugger commands, down	337
debugger commands, dump	339
debugger commands, e (enable)	333
debugger commands, enable	333
debugger commands, end	334
debugger commands, eval	335
debugger commands, f (frame)	337
debugger commands, finish	334
debugger commands, frame	337
debugger commands, h (help)	340
debugger commands, help	340
debugger commands, i (info)	337
debugger commands, ignore	333
debugger commands, info	337
debugger commands, l (list)	340
debugger commands, list	340
debugger commands, n (next)	334
debugger commands, next	334
debugger commands, nexti	334
debugger commands, ni (nexti)	334
debugger commands, o (option)	338
debugger commands, option	338
debugger commands, p (print)	335
debugger commands, print	335
debugger commands, printf	336
debugger commands, q (quit)	340
debugger commands, quit	340
debugger commands, r (run)	334
debugger commands, return	334
debugger commands, run	334
debugger commands, s (step)	335
debugger commands, set	336
debugger commands, si (stepi)	335
debugger commands, silent	334
debugger commands, step	335
debugger commands, stepi	335
debugger commands, t (tbreak)	333
debugger commands, tbreak	333
debugger commands, trace	340
debugger commands, u (until)	335
debugger commands, undisplay	336
debugger commands, until	335
debugger commands, unwatch	336
debugger commands, up	337
debugger commands, w (watch)	336
debugger commands, watch	336
debugger commands, where (backtrace)	337
debugger default list amount	338
debugger history file	338
debugger history size	338
debugger options	338
debugger prompt	338
debugger, how to start	329
debugger, read commands from a file	338
debugging awk programs	327
debugging gawk , bug reports	445
decimal point character, locale specific	36
decrement operators	119
default keyword	141
Deifik, Scott	12, 428, 446
delete array	169
delete breakpoint at location	333
delete breakpoint by number	333
delete debugger command	333
delete statement	168
delete watchpoint	336
deleting elements in arrays	168
deleting entire arrays	169
Demaille, Akim	12
describe call stack frame, in debugger	337
differences between gawk and awk	180
differences in awk and gawk , ARGC / ARGV variables	156
differences in awk and gawk , ARGIND variable	150
differences in awk and gawk , array elements, deleting	169
differences in awk and gawk , AWKLIBPATH environment variable	40
differences in awk and gawk , AWKPATH environment variable	39
differences in awk and gawk , BEGIN / END patterns	135
differences in awk and gawk , BEGINFILE / ENDFILE patterns	135
differences in awk and gawk , BINMODE variable	147, 439
differences in awk and gawk , close() function	103, 104
differences in awk and gawk , command-line directories	86
differences in awk and gawk , ERRNO variable	150
differences in awk and gawk , error messages	100
differences in awk and gawk , FIELDWIDTHS variable	147
differences in awk and gawk , FPAT variable	147
differences in awk and gawk , FUNCTAB variable	151
differences in awk and gawk , function arguments (gawk)	175
differences in awk and gawk , getline command	78

differences in **awk** and **gawk**,
 IGNORECASE variable 148
 differences in **awk** and **gawk**,
 implementation limitations 83, 99
 differences in **awk** and **gawk**,
 indirect function calls 209
 differences in **awk** and **gawk**,
 input/output operators 82, 99
 differences in **awk** and **gawk**, line
 continuations 126
 differences in **awk** and **gawk**, LINT variable 148
 differences in **awk** and **gawk**,
 match() function 181
 differences in **awk** and **gawk**,
 print/printf statements 94
 differences in **awk** and **gawk**, PROCINFO array ... 151
 differences in **awk** and **gawk**, read timeouts 84
 differences in **awk** and **gawk**, record separators .. 61
 differences in **awk** and **gawk**,
 regexp constants 109
 differences in **awk** and **gawk**,
 regular expressions 56
 differences in **awk** and **gawk**, RS/RT variables 62
 differences in **awk** and **gawk**, RT variable 153
 differences in **awk** and **gawk**,
 single-character fields 69
 differences in **awk** and **gawk**,
 split() function 183
 differences in **awk** and **gawk**, strings 107
 differences in **awk** and **gawk**, strings, storing 63
 differences in **awk** and **gawk**, SYMTAB variable ... 154
 differences in **awk** and **gawk**,
 TEXTDOMAIN variable 149
 differences in **awk** and **gawk**,
 trunc-mod operation 114
 directories, command-line 86
 directories, searching 297
 directories, searching for loadable extensions 40
 directories, searching for source files 39
 disable breakpoint 333
 disable debugger command 333
 display debugger command 335
 display debugger options 338
 division 114
 do-while statement 140
 do-while statement, use of regexps in 45
 documentation, of **awk** programs 220
 documentation, online 10
 documents, searching 273
 dollar sign (\$), \$ field operator 63, 128
 dollar sign (\$), incrementing
 fields and arrays 119
 dollar sign (\$), regexp operator 48
 double quote ("), in regexp constants 53
 double quote ("), in shell commands 22
 down debugger command 337
 Drepper, Ulrich 12

Duman, Patrice 12
 dump all variables of a program 33
 dump debugger command 339
 dupword.awk program 273
 dynamic profiling 315
 dynamically loaded extensions 357

E

e debugger command (alias for **enable**) 333
 EBCDIC 226
 effective group ID of **gawk** user 151
 effective user ID of **gawk** user 151
 egrep utility 51, 258
 egrep.awk program 259
 elements in arrays, assigning values 162
 elements in arrays, deleting 168
 elements in arrays, order of access
 by in operator 163
 elements in arrays, scanning 163
 elements of arrays 161
 email address for bug reports,
 bug-gawk@gnu.org 445
 empty array elements 161
 empty pattern 136
 empty strings 61
 empty strings, See null strings 68
 EMRED 311
 enable breakpoint 333
 enable debugger command 333
 end debugger command 334
 END pattern 134
 END pattern, and profiling 313
 END pattern, assert()
 user-defined function and 223
 END pattern, Boolean patterns and 133
 END pattern, exit statement and 146
 END pattern, next/nextfile
 statements and 135, 145
 END pattern, operators and 134
 END pattern, print statement and 135
 endfile() user-defined function 232
 ENDFILE pattern 135
 ENDFILE pattern, Boolean patterns and 133
 endgrent() function (C library) 249
 endgrent() user-defined function 249
 endpwent() function (C library) 244
 endpwent() user-defined function 244
 English, Steve 301
 ENVIRON array 150
 environment variables used by **gawk** 39
 environment variables, in ENVIRON array 150
 epoch, definition of 471
 equals sign (=), = operator 116
 equals sign (=), == operator 122, 128
 EREs (Extended Regular Expressions) 51
 ERRNO variable 150, 311
 ERRNO variable, with BEGINFILE pattern 136

ERRNO variable, with <code>close()</code> function	104
ERRNO variable, with <code>getline</code> command	78
error handling	100
error handling, ERRNO variable and	150
error output	100
escape processing,	
<code>gsub()</code> / <code>gensub()</code> / <code>sub()</code> functions	186
escape sequences, in strings	46
<code>eval</code> debugger command	335
evaluate expressions, in debugger	335
evaluation order	120
evaluation order, concatenation	115
evaluation order, functions	175
examining fields	63
exclamation point (!), ! operator	125, 128, 261
exclamation point (!), != operator	122, 128
exclamation point (!), !~ operator	45, 53, 56, 108, 122, 123, 129, 132
<code>exit</code> debugger command	340
<code>exit</code> statement	146
exit status, of <code>gawk</code>	41
exit status, of VMS	443
exit the debugger	340
<code>exp()</code> function	176
<code>expand</code> utility	25
Expat XML parser library	410
exponent	176
expressions	107
expressions, as patterns	131
expressions, assignment	116
expressions, Boolean	124
expressions, comparison	120
expressions, conditional	125
expressions, matching, See	
comparison expressions	120
expressions, selecting	125
Extended Regular Expressions (EREs)	51
extension API	359
extension API informational variables	388
extension API version	387
extension API, version number	153
extension example	390
extension registration	365
extension search path	390
extensions distributed with <code>gawk</code>	400
extensions, allocating memory	364
extensions, Brian Kernighan's <code>awk</code>	417, 425
extensions, common, ** operator	114
extensions, common, *** operator	118
extensions, common,	
<code>/dev/stderr</code> special file	101
extensions, common, <code>/dev/stdin</code> special file ..	101
extensions, common,	
<code>/dev/stdout</code> special file	101
extensions, common, \x escape sequence	46
extensions, common, BINMODE variable	439
extensions, common, <code>delete</code> to	
delete entire arrays	169

extensions, common, <code>fflush()</code> function	189
extensions, common, <code>func</code> keyword	201
extensions, common, <code>length()</code>	
applied to an array	180
extensions, common, RS as a regexp	61
extensions, common, single character fields	69
extensions, in <code>gawk</code> , not in POSIX <code>awk</code>	417
extensions, loading, <code>@load</code> directive	43
extensions, <code>mawk</code>	425
extensions, where to find	409
<code>extract.awk</code> program	284
extraction, of marked strings	
(internationalization)	321

F

<code>f</code> debugger command (alias for <code>frame</code>)	337
false, logical	120
FDL (Free Documentation License)	491
features, adding to <code>gawk</code>	452
features, deprecated	44
features, undocumented	44
Fenlason, Jay	6, 427
<code>fflush()</code> function	189
field numbers	64
field operator \$	63
field operators, dollar sign as	63
field separator, in multiline records	76
field separator, on command line	69
field separator, POSIX and	71
field separators	67, 147, 148
field separators, choice of	67
field separators, FIELDWIDTHS variable and	147
field separators, FPAT variable and	147
field separators, POSIX and	63
field separators, regular expressions as	67, 68
field separators, See Also OFS	66
field separators, spaces as	255
fields	59, 63, 464
fields, adding	65
fields, changing contents of	65
fields, cutting	253
fields, examining	63
fields, number of	63
fields, numbers	64
fields, printing	89
fields, separating	67
fields, single-character	69
FIELDWIDTHS variable	72, 147
file descriptors	100
file inclusion, <code>@include</code> directive	42
file names, distinguishing	150
file names, in compatibility mode	102
file names, standard streams in <code>gawk</code>	101
FILENAME variable	59, 150
FILENAME variable, <code>getline</code> , setting with	83
filenames, assignments as	235
files, <code>.gmo</code>	318

- files, `.gmo`, specifying directory of..... 318, 320
- files, `.mo`, converting from `.po`..... 325
- files, `.po`..... 317, 321
- files, `.po`, converting to `.mo`..... 325
- files, `.pot`..... 317
- files, `/dev/...` special files..... 101
- files, `/inet/...` (`gawk`)..... 311
- files, `/inet4/...` (`gawk`)..... 311
- files, `/inet6/...` (`gawk`)..... 311
- files, `awk` programs in..... 18
- files, `awkprof.out`..... 312
- files, `awkvars.out`..... 33
- files, closing..... 189
- files, descriptors, See file descriptors..... 100
- files, group..... 245
- files, initialization and cleanup..... 231
- files, input, See input files..... 18
- files, log, timestamps in..... 192
- files, managing..... 231
- files, managing, data file boundaries..... 231
- files, message object..... 318
- files, message object, converting from
 - portable object files..... 325
- files, message object,
 - specifying directory of..... 318, 320
- files, multiple passes over..... 38
- files, multiple, duplicating output into..... 265
- files, output, See output files..... 102
- files, password..... 241
- files, portable object..... 317, 321
- files, portable object template..... 317
- files, portable object, converting to
 - message object files..... 325
- files, portable object, generating..... 34
- files, processing, `ARGIND` variable and..... 150
- files, reading..... 232
- files, reading, multiline records..... 76
- files, searching for regular expressions..... 258
- files, skipping..... 234
- files, source, search path for..... 297
- files, splitting..... 264
- files, Texinfo, extracting programs from..... 283
- find substring in string..... 180
- finding extensions..... 390
- `finish` debugger command..... 334
- Fish, Fred..... 428
- fixed-width data..... 72
- flag variables..... 125, 266
- floating-point, numbers, arbitrary precision.... 343
- floating-point, VAX/VMS..... 443
- flush buffered output..... 189
- `fnmatch()` extension function..... 403
- `FNR` variable..... 59, 151
- `FNR` variable, changing..... 155
- `for` statement..... 140
- `for` statement, looping over arrays..... 163
- `fork()` extension function..... 404
- format specifiers..... 92
- format specifiers, mixing regular with
 - positional specifiers..... 322
- format specifiers, `printf` statement..... 93
- format specifiers, `strftime()`
 - function (`gawk`)..... 194
- format time string..... 193
- formats, numeric output..... 92
- formatting output..... 92
- formatting strings..... 183
- forward slash (/) to enclose
 - regular expressions..... 45
- forward slash (/), / operator..... 128
- forward slash (/), /= operator..... 118, 129
- forward slash (/), /= operator, vs.
 - /=.../ regexp constant..... 118
- forward slash (/), patterns and..... 132
- `FPAT` variable..... 74, 147
- `frame` debugger command..... 337
- Free Documentation License (FDL)..... 491
- Free Software Foundation (FSF) .. 10, 431, 472, 473
- FreeBSD..... 478
- `FS` variable..... 67, 147
- `FS` variable, `--field-separator` option and.... 31
- `FS` variable, as null string..... 69
- `FS` variable, as TAB character..... 36
- `FS` variable, changing value of..... 67
- `FS` variable, running `awk` programs and..... 254
- `FS` variable, setting from command line..... 69
- `FS`, containing ^..... 69
- `FS`, in multiline records..... 76
- FSF (Free Software Foundation) .. 10, 431, 472, 473
- `fts()` extension function..... 401
- `FUNCTAB` array..... 151
- function calls..... 126
- function calls, indirect..... 209
- function calls, indirect, @-notation for..... 209
- function definition example..... 202
- function pointers..... 209
- functions, arrays as parameters to..... 206
- functions, built-in..... 126, 175
- functions, built-in, evaluation order..... 175
- functions, defining..... 200
- functions, library..... 219
- functions, library, assertions..... 222
- functions, library, associative arrays and..... 220
- functions, library, C library..... 236
- functions, library, character
 - values as numbers..... 225
- functions, library, Cliff random numbers..... 225
- functions, library, command-line options..... 236
- functions, library, example program for using.. 287
- functions, library, group database, reading.... 245
- functions, library, managing data files..... 231
- functions, library, managing time..... 227
- functions, library, merging
 - arrays into strings..... 227
- functions, library, rounding numbers..... 224
- functions, library, user database, reading..... 241

functions, names of	200
functions, recursive	201
functions, string-translation	199
functions, undefined	207
functions, user-defined	200
functions, user-defined, calling	203
functions, user-defined, counts, in a profile	314
functions, user-defined, library of	219
functions, user-defined, next/nextfile statements and	145, 146

G

G-d	12
G., Daniel Richard	12, 446
Garfinkle, Scott	427
gawk program, dynamic profiling	315
gawk version	152
gawk, ARGIND variable in	37
gawk, awk and	5, 7
gawk, bitwise operations in	197
gawk, break statement in	143
gawk, character classes and	52
gawk, coding style in	452
gawk, command-line options, and regular expressions	55
gawk, configuring	436
gawk, configuring, options	435
gawk, continue statement in	144
gawk, distribution	432
gawk, ERRNO variable in	78, 104, 136, 150, 311
gawk, escape sequences	47
gawk, extensions, disabling	35
gawk, features, adding	452
gawk, features, advanced	301
gawk, field separators and	148
gawk, FIELDWIDTHS variable in	72, 147
gawk, file names in	101
gawk, format-control characters	93, 94
gawk, FPAT variable in	74, 147
gawk, FUNCTAB array in	151
gawk, function arguments and	175
gawk, hexadecimal numbers and	108
gawk, IGNORECASE variable in ..	56, 148, 161, 178, 307
gawk, implementation issues	451
gawk, implementation issues, debugging	451
gawk, implementation issues, downward compatibility	451
gawk, implementation issues, limits	83
gawk, implementation issues, pipes	99
gawk, installing	431
gawk, internationalization and, See internationalization	317
gawk, interpreter, adding code to	399
gawk, interval expressions and	50
gawk, line continuation in	126
gawk, LINT variable in	148
gawk, list of contributors to	427

gawk, MS-DOS version of	439
gawk, MS-Windows version of	439
gawk, newlines in	27
gawk, octal numbers and	108
gawk, OS/2 version of	439
gawk, predefined variables and	147
gawk, PROCINFO array in	151, 193, 310
gawk, regexp constants and	109
gawk, regular expressions, case sensitivity	56
gawk, regular expressions, operators	54
gawk, regular expressions, precedence	50
gawk, RT variable in	61, 78, 153
gawk, See Also awk	5
gawk, source code, obtaining	431
gawk, splitting fields and	73
gawk, string-translation functions	199
gawk, SYMTAB array in	154
gawk, TEXTDOMAIN variable in	149
gawk, timestamps	192
gawk, uses for	5
gawk, versions of, information about, printing ..	36
gawk, VMS version of	441
gawk, word-boundary operator	55
gawkextlib	409
gawkextlib project	409
General Public License (GPL)	473
General Public License, See GPL	10
generate time values	193
gensub() function (gawk)	109, 178
gensub() function (gawk), escape processing ..	186
getaddrinfo() function (C library)	311
getgrent() function (C library)	245, 248
getgrent() user-defined function	245, 248
getgrgid() function (C library)	248
getgrgid() user-defined function	248
getgrnam() function (C library)	248
getgrnam() user-defined function	248
getgruser() function (C library)	248
getgruser() function, user-defined	248
getline command	59
getline command, _gr_init() user-defined function	246
getline command, _pw_init() function	243
getline command, coprocesses, using from	82, 102
getline command, deadlock and	309
getline command, explicit input with	78
getline command, FILENAME variable and	83
getline command, return values	78
getline command, variants	84
getline from a file	80
getline into a variable	79
getline statement, BEGINFILE/ENDFILE patterns and	136
getlocaltime() user-defined function	227
getopt() function (C library)	236
getopt() user-defined function	237, 238
getpwent() function (C library)	241, 244

getpwent() user-defined function..... 241, 244
 getpwnam() function (C library)..... 244
 getpwnam() user-defined function 244
 getpwuid() function (C library)..... 244
 getpwuid() user-defined function 244
 gettext library..... 317
 gettext library, locale categories..... 318
 gettext() function (C library)..... 318
 gettimeofday() extension function 409
 git utility..... 410, 446, 451, 453
 Git, use of for **gawk** source code..... 455
 GNITS mailing list 12
 GNU **awk**, See **gawk**..... 5
 GNU Free Documentation License 491
 GNU General Public License..... 473
 GNU Lesser General Public License..... 474
 GNU long options 31
 GNU long options, printing list of..... 34
 GNU Project..... 10, 473
 GNU/Linux 10, 325, 478
 Gordon, Assaf 428
 GPL (General Public License)..... 10, 473
 GPL (General Public License), printing 32
grcat program..... 245
 Grigera, Juan..... 428
 group database, reading..... 245
 group file..... 245
 group ID of **gawk** user..... 151
 groups, information about..... 245
gsub() function 109, 179
gsub() function, arguments of 185
gsub() function, escape processing 186

H

h debugger command (alias for **help**)..... 340
 Hankerson, Darrel..... 12, 428
 Haque, John..... 428
 Hartholz, Elaine 12
 Hartholz, Marshall 12
 Hasegawa, Isamu 428
help debugger command..... 340
 hexadecimal numbers 107
 hexadecimal values, enabling interpretation of.. 35
 history expansion, in debugger 340
histsort.awk program 282
 Hughes, Phil..... 12
 HUP signal, for dynamic profiling 315
 hyphen (-), - operator 128
 hyphen (-), -- operator 119, 128
 hyphen (-), -= operator 118, 129
 hyphen (-), filenames beginning with..... 32
 hyphen (-), in bracket expressions..... 51

I

i debugger command (alias for **info**)..... 337
 id utility 262
id.awk program 262
 if statement..... 138
 if statement, actions, changing 133
 if statement, use of regexps in 45
igawk.sh program 289
 ignore breakpoint..... 333
 ignore debugger command 333
 IGNORECASE variable 148
 IGNORECASE variable, and array indices 161
 IGNORECASE variable, and array
 sorting functions..... 307
 IGNORECASE variable, in example programs 219
 IGNORECASE variable, with ~ and !~ operators .. 56
 Illumos 448
 Illumos, POSIX-compliant **awk**..... 448
 implementation issues, **gawk**..... 451
 implementation issues, **gawk**, limits 83, 99
 implementation issues, **gawk**, debugging 451
 in operator 122, 129, 141
 in operator, index existence in
 multidimensional arrays 170
 in operator, order of array access 163
 in operator, testing if array element exists 161
 in operator, use in loops..... 163
 including files, @include directive 42
 increment operators..... 119
index() function 180
 indexing arrays 160
 indirect function calls..... 209
 indirect function calls, @-notation 209
 infinite precision 343
 info debugger command..... 337
 initialization, automatic..... 27
inplace extension..... 404
 input files..... 59
 input files, closing 102
 input files, counting elements in..... 271
 input files, examples 23
 input files, reading..... 59
 input files, running **awk** without..... 18
 input files, variable assignments and..... 38
 input pipeline..... 81
 input record, length of 180
 input redirection 80
 input, data, nondecimal..... 301
 input, explicit..... 78
 input, files, See input files..... 76
 input, multiline records 76
 input, splitting into records 59
 input, standard 18, 100
 input/output functions..... 189
 input/output, binary..... 147
 input/output, from BEGIN and END 135
 input/output, two-way 309
 insomnia, cure for..... 274

installation, VMS	441
installing gawk	431
instruction tracing, in debugger	338
int() function	176
INT signal (MS-Windows)	315
integer array indices	167
integers, arbitrary precision	352
integers, unsigned	343
interacting with other programs	190
internationalization	199, 317
internationalization, localization	149, 317
internationalization, localization, character classes	52
internationalization, localization, gawk and	317
internationalization, localization, locale categories	318
internationalization, localization, marked strings	319
internationalization, localization, portability and	323
internationalizing a program	317
interpreted programs	463, 473
interval expressions, regexp operator	50
inventory-shipped file	23
invoke shell command	190
isarray() function (gawk)	199
ISO	474
ISO 8859-1	469
ISO Latin-1	469

J

Jacobs, Andrew	242
Jaegermann, Michal	12, 428
Java implementation of awk	448
Java programming language	474
jawk	448
Jedi knights	44
Johansen, Chris	296
join() user-defined function	227

K

Kahrs, Jürgen	12, 428
Kasal, Stepan	12
Kenobi, Obi-Wan	44
Kernighan, Brian	6, 10, 12, 81, 115, 219, 417, 427, 446, 465, 470
kill command, dynamic profiling	315
Knights, jedi	44
Kwok, Conrad	427

L

l debugger command (alias for list)	340
labels.awk program	279
Langston, Peter	301
LANGUAGE environment variable	319
languages, data-driven	464
LC_ALL locale category	319
LC_COLLATE locale category	318
LC_CTYPE locale category	318
LC_MESSAGES locale category	318
LC_MESSAGES locale category, bindtextdomain() function (gawk)	321
LC_MONETARY locale category	318
LC_NUMERIC locale category	319
LC_TIME locale category	319
left angle bracket (<), < operator	122, 128
left angle bracket (<), < operator (I/O)	80
left angle bracket (<), <= operator	122, 128
left shift	197
left shift, bitwise	197
leftmost longest match	76
length of input record	180
length of string	180
length() function	180
Lesser General Public License (LGPL)	474
LGPL (Lesser General Public License)	474
libmawk	448
libraries of awk functions	219
libraries of awk functions, assertions	222
libraries of awk functions, associative arrays and	220
libraries of awk functions, character values as numbers	225
libraries of awk functions, command-line options	236
libraries of awk functions, example program for using	287
libraries of awk functions, group database, reading	245
libraries of awk functions, managing, data files	231
libraries of awk functions, managing, time	227
libraries of awk functions, merging arrays into strings	227
libraries of awk functions, rounding numbers	224
libraries of awk functions, user database, reading	241
line breaks	27
line continuations	125
line continuations, gawk	126
line continuations, in print statement	90
line continuations, with C shell	27
lines, blank, printing	89
lines, counting	271
lines, duplicate, removing	282
lines, matching ranges of	133
lines, skipping between markers	133

- lint checking 148
- lint checking, array elements 168
- lint checking, array subscripts 168
- lint checking, empty programs 31
- lint checking, issuing warnings 34
- lint checking, `POSIXLY_CORRECT`
 - environment variable 37
- lint checking, undefined functions 207
- `LINT` variable 148
- Linux 10, 325, 478
- list all global variables, in debugger 338
- `list` debugger command 340
- list function definitions, in debugger 337
- loading extensions, `@load` directive 43
- loading, extensions 34
- local variables, in a function 203
- locale categories 318
- locale decimal point character 36
- locale, definition of 129
- localization 317
- localization, See
 - internationalization, localization 317
- log files, timestamps in 192
- `log()` function 176
- logarithm 176
- logical false/true 120
- logical operators, See Boolean expressions 124
- login information 241
- long options 31
- loops 139
- loops, `break` statement and 142
- loops, `continue` statements and 141
- loops, count for header, in a profile 314
- loops, `do-while` 140
- loops, exiting 142
- loops, `for`, array scanning 163
- loops, `for`, iterative 140
- loops, See Also `while` statement 139
- loops, `while` 139
- `ls` utility 26
- `lshift()` function (`gawk`) 197
- lvalues/rvalues 116

M

- `mail-list` file 23
- mailing labels, printing 278
- mailing list, GNITS 12
- Malmberg, John 12, 446
- Malmberg, John E. 429
- mark parity 226
- marked string extraction
 - (internationalization) 321
- marked strings, extracting 321
- Marx, Groucho 120
- match regexp in string 180
- `match()` function 180
- `match()` function, `RSTART`/`RLENGTH` variables... 181

- matching, expressions, See
 - comparison expressions 120
- matching, leftmost longest 76
- matching, null strings 186
- `mawk` utility 47, 82, 115, 146, 447
- maximum precision supported by
 - MPFR library 153
- McIlroy, Doug 471
- McPhee, Patrick 428
- message object files 318
- message object files, converting from
 - portable object files 325
- message object files,
 - specifying directory of 318, 320
- messages from extensions 373
- metacharacters in regular expressions 48
- metacharacters, escape sequences for 48
- minimum precision required by
 - MPFR library 153
- `mktime()` function (`gawk`) 193
- modifiers, in format specifiers 94
- monetary information, localization 318
- Moore, Duncan 83
- `msgfmt` utility 325
- multiple precision 343
- multiple-line records 76

N

- `n` debugger command (alias for `next`) 334
- names, arrays/variables 220
- names, functions 200, 220
- namespace issues 220
- namespace issues, functions 200
- NetBSD 478
- networks, programming 311
- networks, support for 101
- newlines 27, 36, 125
- newlines, as field separators 68
- newlines, as record separators 59
- newlines, in dynamic regexps 54
- newlines, in regexp constants 54
- newlines, printing 89
- newlines, separating
 - statements in actions 137, 138
- `next` debugger command 334
- `next file` statement 422
- `next` statement 125, 144
- `next` statement, `BEGIN`/`END` patterns and 135
- `next` statement,
 - `BEGINFILE`/`ENDFILE` patterns and 136
- `next` statement, user-defined functions and 145
- `nextfile` statement 145
- `nextfile` statement,
 - `BEGIN`/`END` patterns and 135
- `nextfile` statement,
 - `BEGINFILE`/`ENDFILE` patterns and 136

<code>nextfile</code> statement, user-defined	
functions and	146
<code>nexti</code> debugger command	334
NF variable	63, 151
NF variable, decrementing	66
<code>ni</code> debugger command (alias for <code>nexti</code>)	334
<code>noassign.awk</code> program	235
non-existent array elements	161
not Boolean-logic operator	124
NR variable	59, 151
NR variable, changing	155
null strings	61, 68, 120, 465
null strings in <code>gawk</code> arguments, quoting and	22
null strings, and deleting array elements	168
null strings, as array subscripts	168
null strings, converting numbers to strings	112
null strings, matching	186
number as string of bits	198
number of array elements	180
number sign (#), #! (executable scripts)	19
number sign (#), commenting	20
numbers, as array subscripts	167
numbers, as values of characters	225
numbers, Cliff random	225
numbers, converting	111, 198
numbers, converting, to strings	147, 148
numbers, hexadecimal	107
numbers, octal	107
numbers, rounding	224
numeric constants	107
numeric functions	176
numeric, output format	92
numeric, strings	121

O

<code>o</code> debugger command (alias for <code>option</code>)	338
obsolete features	44
octal numbers	107
octal values, enabling interpretation of	35
OFMT variable	92, 112, 148
OFMT variable, POSIX <code>awk</code> and	92
OFS variable	66, 91, 148
OpenBSD	478
OpenSolaris	447
operating systems, BSD-based	10
operating systems, PC, <code>gawk</code> on	439
operating systems, PC, <code>gawk</code> on, installing	437
operating systems, porting <code>gawk</code> to	453
operating systems, See Also GNU/Linux, PC	
operating systems, Unix	431
operations, bitwise	197
operators, arithmetic	114
operators, assignment	116
operators, assignment, evaluation order	118
operators, Boolean, See Boolean expressions	124
operators, decrement/increment	119
operators, GNU-specific	54

operators, input/output	80, 81, 82, 98, 99, 128
operators, logical, See Boolean expressions	124
operators, precedence	120, 128
operators, relational, See	
operators, comparison	120
operators, short-circuit	125
operators, string	115
operators, string-matching	45
operators, string-matching, for buffers	55
operators, word-boundary (<code>gawk</code>)	55
<code>option</code> debugger command	338
options, command-line	31
options, command-line, end of	32
options, command-line, invoking <code>awk</code>	31
options, command-line, processing	236
options, deprecated	44
options, long	31
options, printing list of	34
or Boolean-logic operator	124
<code>or()</code> function (<code>gawk</code>)	197
OR bitwise operation	197
<code>ord()</code> extension function	406
<code>ord()</code> user-defined function	225
order of evaluation, concatenation	115
ORS variable	91, 148
output field separator, See OFS variable	66
output record separator, See ORS variable	91
output redirection	97
output wrapper	370
output, buffering	189, 192
output, duplicating into files	265
output, files, closing	102
output, format specifier, OFMT	92
output, formatted	92
output, pipes	98
output, printing, See printing	89
output, records	91
output, standard	100

P

<code>p</code> debugger command (alias for <code>print</code>)	335
Papadopoulos, Panos	429
parent process ID of <code>gawk</code> process	152
parentheses (), in a profile	314
parentheses (), regexp operator	49
password file	241
<code>patsplit()</code> function (<code>gawk</code>)	182
patterns	131
patterns, comparison expressions as	132
patterns, counts, in a profile	314
patterns, default	24
patterns, empty	136
patterns, expressions as	131
patterns, ranges in	133
patterns, regexp constants as	132
patterns, types of	131

- pawk** (profiling version of Brian Kernighan's **awk**) 447
- pawk**, **awk**-like facilities for Python 448
- PC operating systems, **gawk** on 439
- PC operating systems, **gawk** on, installing 437
- percent sign (%), % operator 128
- percent sign (%), %= operator 118, 129
- period (.), regexp operator 48
- Perl 457
- Peters, Arno 428
- Peterson, Hal 427
- pipe, closing 102
- pipe, input 81
- pipe, output 98
- Pitts, Dave 12, 446
- Plauger, P.J. 219
- plug-in 357
- plus sign (+), + operator 128
- plus sign (+), ++ operator 119, 128
- plus sign (+), += operator 117, 129
- plus sign (+), regexp operator 49
- pointers to functions 209
- portability 47
- portability, #! (executable scripts) 20
- portability, ** operator and 115
- portability, **= operator and 118
- portability, ARGV variable 20
- portability, backslash continuation and 28
- portability, backslash in escape sequences 47
- portability, close() function and 103
- portability, data files as single record 63
- portability, deleting array elements 169
- portability, example programs 219
- portability, functions, defining 201
- portability, **gawk** 453
- portability, gettext library and 317
- portability, internationalization and 323
- portability, length() function 180
- portability, new **awk** vs. old **awk** 112
- portability, next statement in
 - user-defined functions 207
- portability, NF variable, decrementing 66
- portability, operators 120
- portability, operators, not in POSIX **awk** 129
- portability, POSIXLY_CORRECT
 - environment variable 37
- portability, substr() function 185
- portable object files 317, 321
- portable object files, converting to
 - message object files 325
- portable object files, generating 34
- portable object template files 317
- porting **gawk** 453
- positional specifiers, printf statement 94, 322
- positional specifiers, printf statement, mixing
 - with regular formats 322
- POSIX **awk** 7, 118
- POSIX **awk**, ** operator and 129
- POSIX **awk**, **= operator and 118
- POSIX **awk**, < operator and 80
- POSIX **awk**, | I/O operator and 82
- POSIX **awk**, arithmetic operators and 114
- POSIX **awk**, backslashes in string constants 47
- POSIX **awk**, BEGIN/END patterns 135
- POSIX **awk**, bracket expressions and 51
- POSIX **awk**, bracket expressions and,
 - character classes 51, 52
- POSIX **awk**, break statement and 143
- POSIX **awk**, changes in **awk** versions 416
- POSIX **awk**, continue statement and 144
- POSIX **awk**, CONVFMT variable and 147
- POSIX **awk**, date utility and 196
- POSIX **awk**, field separators and 63, 71
- POSIX **awk**, FS variable and 148
- POSIX **awk**, function keyword in 201
- POSIX **awk**, functions and, gsub()/sub() 187
- POSIX **awk**, functions and, length() 180
- POSIX **awk**, GNU long options and 31
- POSIX **awk**, interval expressions in 50
- POSIX **awk**, next/nextfile statements and 145
- POSIX **awk**, numeric strings and 121
- POSIX **awk**, OFMT variable and 92, 112
- POSIX **awk**, period (.), using 49
- POSIX **awk**, printf format strings and 96
- POSIX **awk**, regular expressions and 50
- POSIX **awk**, timestamps and 192
- POSIX mode 35, 37
- POSIX, **awk** and 5
- POSIX, **gawk** extensions not included in 417
- POSIX, programs, implementing in **awk** 253
- POSIXLY_CORRECT environment variable 37
- PREC variable 149
- precedence 120, 128
- precedence, regexp operators 50
- predefined variables 147
- predefined variables, -v option, setting with 32
- predefined variables, conveying information 149
- predefined variables, user-modifiable 147
- print debugger command 335
- print statement 89
- print statement, BEGIN/END patterns and 135
- print statement, commas, omitting 90
- print statement, I/O operators in 128
- print statement, line continuations and 90
- print statement, OFMT variable and 148
- print statement, See Also
 - redirection, of output 98
- print statement, sprintf() function and 224
- print variables, in debugger 335
- printf debugger command 336
- printf statement 89, 92
- printf statement, columns, aligning 90
- printf statement, format-control characters 93
- printf statement, I/O operators in 128
- printf statement, modifiers 94
- printf statement, positional specifiers 94, 322

printf statement, positional specifiers, mixing with regular formats	322
printf statement, See Also	
redirection, of output	98
printf statement, sprintf() function and	224
printf statement, syntax of	92
printing	89
printing messages from extensions	373
printing, list of options	34
printing, mailing labels	278
printing, unduplicated lines of text	267
printing, user information	262
private variables	220
process group ID of gawk process	152
process ID of gawk process	152
processes, two-way communications with	308
processing data	463
PROCINFO array	151, 193, 241
PROCINFO array, and	
communications via ptys	310
PROCINFO array, and group membership	245
PROCINFO array, and user and	
group ID numbers	262
PROCINFO array, testing the field splitting	243
PROCINFO, values of sorted_in	165
profiling awk programs	312
profiling awk programs, dynamically	315
program identifiers	152
program, definition of	17
programming conventions,	
--non-decimal-data option	301
programming conventions,	
ARGC/ARGV variables	150
programming conventions, exit statement	146
programming conventions,	
function parameters	208
programming conventions, functions, calling ..	175
programming conventions, functions, writing ..	201
programming conventions, gawk extensions ..	393
programming conventions, private	
variable names	220
programming language, recipe for	6
programming languages, Ada	467
programming languages, Java	474
programming languages,	
data-driven vs. procedural	17
programming, basic steps	463
programming, concepts	463
pwcat program	241

Q

q debugger command (alias for quit)	340
QSE awk	448
Quannstrom, Erik	274
question mark (?), ?: operator	129
question mark (?), regexp operator	49, 55
QuikTrim Awk	448
quit debugger command	340
QUIT signal (MS-Windows)	315
quoting in gawk command lines	19
quoting in gawk command lines, tricks for	22
quoting, for small awk programs	20

R

r debugger command (alias for run)	334
Rakitzis, Byron	282
Ramey, Chet	12, 361
rand() function	176
random numbers, Cliff	225
random numbers, rand() / srand() functions ..	176
random numbers, seed of	176
range expressions (regexps)	50
range patterns	133
range patterns, line continuation and	134
Rankin, Pat	12, 117, 427
reada() extension function	408
readable data files, checking	234
readable.awk program	234
readdir extension	406
readfile() extension function	408
readfile() user-defined function	229
reading input files	59
recipe for a programming language	6
record separators	59, 149
record separators, changing	60
record separators, regular expressions as	61
record separators, with multiline records	76
records	59, 464
records, multiline	76
records, printing	89
records, splitting input into	59
records, terminating	61
records, treating files as	63
recursive functions	201
redirect gawk output, in debugger	338
redirection of input	80
redirection of output	97
redirection on VMS	444
reference counting, sorting arrays	307
regexp	45
regexp constants	46, 108, 123
regexp constants, /=.../, /= operator and	118
regexp constants, as patterns	132
regexp constants, in gawk	109
regexp constants, slashes vs. quotes	53
regexp constants, vs. string constants	53
register extension	365

regular expressions 45
 regular expressions as field separators 67
 regular expressions, anchors in 48
 regular expressions, as field separators 68
 regular expressions, as patterns 45, 131
 regular expressions, as record separators 61
 regular expressions, case sensitivity 55, 148
 regular expressions, computed 53
 regular expressions, constants, See
 regex constants 46
 regular expressions, dynamic 53
 regular expressions, dynamic, with
 embedded newlines 54
 regular expressions, **gawk**,
 command-line options 55
 regular expressions, interval expressions and 36
 regular expressions, leftmost longest match 52
 regular expressions, operators 45, 48
 regular expressions, operators, for buffers 55
 regular expressions, operators, for words 54
 regular expressions, operators, **gawk** 54
 regular expressions, operators, precedence of 50
 regular expressions, searching for 258
 relational operators, See
 comparison operators 120
 replace in string 184
return debugger command 334
return statement, user-defined functions 207
 return value, **close()** function 104
rev() user-defined function 202
revoutput extension 407
revtwo extension 407
rewind() user-defined function 232
 right angle bracket (>), > operator 122, 128
 right angle bracket (>), > operator (I/O) 98
 right angle bracket (>), >= operator 122, 128
 right angle bracket (>), >>
 operator (I/O) 98, 128
 right shift 197
 right shift, bitwise 197
 Ritchie, Dennis 465
RLENGTH variable 153
RLENGTH variable, **match()** function and 181
 Robbins, Arnold ... 70, 82, 242, 274, 361, 429, 446,
 457
 Robbins, Bill 82
 Robbins, Harry 12
 Robbins, Jean 12
 Robbins, Miriam 12, 82, 242
 Rommel, Kai Uwe 428
 round to nearest integer 176
round() user-defined function 224
 rounding numbers 224
ROUNDMODE variable 149
RS variable 59, 149
RS variable, multiline records and 76
rshift() function (**gawk**) 197
RSTART variable 153

RSTART variable, **match()** function and 181
RT variable 61, 78, 153
 Rubin, Paul 6, 427
 rule, definition of 17
run debugger command 334
 rvalues/lvalues 116

S

s debugger command (alias for **step**) 335
 sample debugging session 328
 sandbox mode 36
 save debugger options 338
 scalar or array 199
 scalar values 464
 scanning arrays 163
 scanning multidimensional arrays 171
 Schorr, Andrew 12, 154, 429
 Schreiber, Bert 12
 Schreiber, Rita 12
 search and replace in strings 178
 search in string 180
 search paths 297, 439, 444
 search paths, for loadable extensions 40
 search paths, for source files 39, 297, 439, 444
 searching, files for regular expressions 258
 searching, for words 273
sed utility 71, 286, 467
 seeding random number generator 176
 semicolon (;), **AWKPATH** variable and 439
 semicolon (;), separating
 statements in actions 29, 137, 138
 separators, field 147, 148
 separators, field, **FIELDWIDTHS** variable and 147
 separators, field, **FPAT** variable and 147
 separators, field, **POSIX** and 63
 separators, for records 59, 60, 149
 separators, for records, regular expressions as ... 61
 separators, for statements in actions 137
 separators, subscript 149
 set breakpoint 332
set debugger command 336
 set directory of message catalogs 199
 set watchpoint 336
 shadowing of variable values 201
 shell quoting, rules for 21
 shells, piping commands into 100
 shells, quoting 136
 shells, quoting, rules for 21
 shells, scripts 17
 shells, sea 44
 shells, variables 136
 shift, bitwise 197
 short-circuit operators 125
 show all source files, in debugger 338
 show breakpoints 337
 show function arguments, in debugger 337
 show local variables, in debugger 337

show name of current source		
file, in debugger	337	
show watchpoints	338	
si debugger command (alias for stepi)	335	
side effects	115, 119, 120	
side effects, array indexing	161	
side effects, asort() function	306	
side effects, assignment expressions	116	
side effects, Boolean operators	124	
side effects, conditional expressions	126	
side effects, decrement/increment operators ..	119	
side effects, FILENAME variable	83	
side effects, function calls	127	
side effects, statements	138	
sidebar, A Constant's Base Does Not		
Affect Its Value	108	
sidebar, Backslash Before Regular Characters...	47	
sidebar, Changing FS Does Not		
Affect the Fields	71	
sidebar, Changing NR and FNR	155	
sidebar, Controlling Output		
Buffering with system()	191	
sidebar, Escape Sequences for Metacharacters ..	48	
sidebar, FS and IGNORECASE	72	
sidebar, Interactive Versus		
Noninteractive Buffering	190	
sidebar, Matching the Null String	186	
sidebar, Operator Evaluation Order	120	
sidebar, Piping into sh	100	
sidebar, Pre-POSIX awk Used OFMT for		
String Conversion	112	
sidebar, Recipe for a Programming Language	6	
sidebar, RS = "\0" Is Not Portable	62	
sidebar, So Why Does gawk Have		
BEGINFILE and ENDFILE ?	232	
sidebar, Syntactic Ambiguities Between '/' and		
Regular Expressions	118	
sidebar, Understanding '#'	19	
sidebar, Understanding \$0	67	
sidebar, Using \n in Bracket Expressions of		
Dynamic Regexp.	54	
sidebar, Using close() 's Return Value	104	
SIGHUP signal, for dynamic profiling	315	
SIGINT signal (MS-Windows)	315	
signals, HUP/SIGHUP, for profiling	315	
signals, INT/SIGINT (MS-Windows)	315	
signals, QUIT/SIGQUIT (MS-Windows)	315	
signals, USR1/SIGUSR1, for profiling	315	
signature program	295	
SIGQUIT signal (MS-Windows)	315	
SIGUSR1 signal, for dynamic profiling	315	
silent debugger command	334	
sin() function	177	
sine	177	
single quote (')	17	
single quote (') in gawk command lines	19	
single quote ('), in shell commands	21	
single quote ('), vs. apostrophe	20	
single quote ('), with double quotes	22	
single-character fields	69	
single-step execution, in the debugger	334	
Skywalker, Luke	44	
sleep utility	276	
sleep() extension function	409	
Solaris, POSIX-compliant awk	447	
sort array	178	
sort array indices	178	
sort function, arrays, sorting	306	
sort utility	281	
sort utility, coprocesses and	309	
sorting characters in different languages	318	
source code, awka	447	
source code, Brian Kernighan's awk	446	
source code, BusyBox Awk	447	
source code, gawk	431	
source code, Illumos awk	448	
source code, jawk	448	
source code, libmawk	448	
source code, mawk	447	
source code, mixing	33	
source code, pawk	447	
source code, pawk (Python version)	448	
source code, QSE awk	448	
source code, QuikTrim Awk	448	
source code, Solaris awk	447	
source files, search path for	297	
sparse arrays	160	
Spencer, Henry	467	
split string into array	182	
split utility	264	
split() function	182	
split() function, array elements, deleting	169	
split.awk program	264	
sprintf() function	92, 183	
sprintf() function, OFMT variable and	148	
sprintf() function, print/printf		
statements and	224	
sqrt() function	177	
square brackets ([]), regexp operator	49	
square root	177	
srand() function	177	
stack frame	327	
Stallman, Richard	10, 11, 427, 472	
standard error	100	
standard input	18, 100	
standard output	100	
starting the debugger	329	
stat() extension function	401	
statements, compound, control		
statements and	138	
statements, control, in actions	138	
statements, multiple	29	
step debugger command	335	
stepi debugger command	335	
stop automatic display, in debugger	336	
stream editors	71, 286	

strftime() function (**gawk**) 193
 string constants 107
 string constants, vs. regexp constants 53
 string extraction (internationalization) 321
 string length 180
 string operators 115
 string, regular expression match 180
 string-manipulation functions 177
 string-matching operators 45
 string-translation functions 199
 strings splitting, example 183
 strings, converting 111, 198
 strings, converting letter case 186
 strings, converting, numbers to 147, 148
 strings, empty, See null strings 61
 strings, extracting 321
 strings, for localization 319
 strings, length limitations 107
 strings, merging arrays into 227
 strings, null 68
 strings, numeric 121
strtonum() function (**gawk**) 183
strtonum() function (**gawk**),
 --non-decimal-data option and 301
sub() function 109, 184
sub() function, arguments of 185
sub() function, escape processing 186
 subscript separators 149
 subscripts in arrays, multidimensional 169
 subscripts in arrays,
 multidimensional, scanning 171
 subscripts in arrays, numbers as 167
 subscripts in arrays,
 uninitialized variables as 167
SUBSEP variable 149
SUBSEP variable, and
 multidimensional arrays 169
 substitute in string 178
substr() function 185
 substring 185
 Sumner, Andrew 447
 supplementary groups of **gawk** process 153
switch statement 141
SYMTAB array 154
 syntactic ambiguity: /= operator vs.
 /=/.../ regexp constant 118
system() function 190
sysvtime() function (**gawk**) 193

T

t debugger command (alias for **tbreak**) 333
tbreak debugger command 333
Tcl 220
TCP/IP 311
TCP/IP, support for 101
tee utility 265
tee.awk program 266

temporary breakpoint 333
 terminating records 61
testbits.awk program 198
testtext extension 409
Texinfo 9, 219, 273, 283, 433, 453
Texinfo, chapter beginnings in files 48
Texinfo, extracting programs
 from source files 283
 text, printing 89
 text, printing, unduplicated lines of 267
textdomain() function (C library) 317
TEXTDOMAIN variable 149, 319
TEXTDOMAIN variable, **BEGIN** pattern and 320
TEXTDOMAIN variable, portability and 323
 tilde (~), ~ operator 45, 53, 56, 108, 122, 123,
 129, 132
 time functions 192
 time, alarm clock example program 274
 time, localization and 319
 time, managing 227
 time, retrieving 192
 timeout, reading input 84
 timestamps 192, 193
 timestamps, converting dates to 193
 timestamps, formatted 227
tolower() function 186
toupper() function 186
tr utility 276
trace debugger command 340
 traceback, display in debugger 337
 translate string 199
translate.awk program 277
 treating files, as single records 63
 troubleshooting, --non-decimal-data option .. 35
 troubleshooting, == operator 122
 troubleshooting, **awk** uses **FS** not **IFS** 67
 troubleshooting, backslash before
 nonspecial character 47
 troubleshooting, division 114
 troubleshooting, fatal errors, field
 widths, specifying 72
 troubleshooting, fatal errors,
 printf format strings 96
 troubleshooting, **fflush()** function 189
 troubleshooting, function call syntax 126
 troubleshooting, **gawk** 451
 troubleshooting, **gawk**, bug reports 445
 troubleshooting, **gawk**, fatal errors,
 function arguments 175
 troubleshooting, **getline** function 234
 troubleshooting, **gsub()/sub()** functions 185
 troubleshooting, **match()** function 182
 troubleshooting, **print** statement,
 omitting commas 90
 troubleshooting, printing 99
 troubleshooting, quotes with file names 101
 troubleshooting, readable data files 234

troubleshooting, regexp constants vs.	
string constants.....	53
troubleshooting, string concatenation.....	115
troubleshooting, substr() function.....	185
troubleshooting, system() function.....	191
troubleshooting, typographical errors,	
global variables.....	33
true, logical.....	120
Trueman, David.....	6, 12, 427
trunc-mod operation.....	114
truth values.....	120
type conversion.....	112

U

u debugger command (alias for until).....	335
unassigned array elements.....	161
undefined functions.....	207
underscore (_), C macro.....	318
underscore (_), in names of private variables ..	220
underscore (_), translatable string.....	320
undisplay debugger command.....	336
undocumented features.....	44
Unicode.....	226, 426, 469
uninitialized variables, as array subscripts.....	167
uniq utility.....	267
uniq.awk program.....	268
Unix.....	478
Unix awk , backslashes in escape sequences.....	47
Unix awk , close() function and.....	104
Unix awk , password files, field separators and...	70
Unix, awk scripts and.....	19
UNIXROOT variable, on OS/2 systems.....	439
unsigned integers.....	343
until debugger command.....	335
unwatch debugger command.....	336
up debugger command.....	337
user database, reading.....	241
user-defined functions.....	200
user-defined, functions, counts, in a profile	314
user-defined, variables.....	110
user-modifiable variables.....	147
users, information about, printing.....	262
users, information about, retrieving.....	241
USR1 signal, for dynamic profiling.....	315

V

values, numeric.....	464
values, string.....	464
variable assignments and input files.....	38
variable typing.....	120
variables.....	29, 464
variables, assigning on command line.....	111
variables, built-in.....	110
variables, flag.....	125
variables, getline command into, using....	79, 80,
	82, 83

variables, global, for library functions.....	220
variables, global, printing list of.....	33
variables, initializing.....	110
variables, local to a function.....	203
variables, predefined.....	147
variables, predefined -v option, setting with....	32
variables, predefined conveying information....	149
variables, private.....	220
variables, setting.....	32
variables, shadowing.....	201
variables, types of.....	116
variables, types of, comparison	
expressions and.....	120
variables, uninitialized, as array subscripts	167
variables, user-defined.....	110
version of gawk	152
version of gawk extension API.....	153
version of GNU MP library.....	152
version of GNU MPFR library.....	152
vertical bar ().....	49
vertical bar (), operator (I/O).....	81, 128
vertical bar (), & operator (I/O)....	82, 128, 309
vertical bar (), operator.....	125, 129
Vinschen, Corinna.....	12

W

w debugger command (alias for watch).....	336
w utility.....	72
wait() extension function.....	404
waitpid() extension function.....	404
walk_array() user-defined function.....	249
Wall, Larry.....	159, 457
Wallin, Anders.....	428
warnings, issuing.....	34
watch debugger command.....	336
watchpoint.....	328
wc utility.....	271
wc.awk program.....	271
Weinberger, Peter.....	6, 427
where debugger command.....	337
where debugger command (alias	
for backtrace).....	337
while statement.....	139
while statement, use of regexps in.....	45
whitespace, as field separators.....	68
whitespace, functions, calling.....	175
whitespace, newlines as.....	36
Williams, Kent.....	427
Woehlke, Matthew.....	428
Woods, John.....	427
word boundaries, matching.....	54
word, regexp definition of.....	54
word-boundary operator (gawk).....	55
wordfreq.awk program.....	281
words, counting.....	271
words, duplicate, searching for.....	273

words, usage counts, generating 280
`writea()` extension function 408

X

`xgettext` utility 321
`xor()` function (`gawk`) 197
XOR bitwise operation 197

Y

Yawitz, Efraim 429

Z

Zaretskii, Eli 12, 428, 446
`zerofile.awk` program 234
Zoulas, Christos 428

